

Submit 1 Copy To Appropriate District Office

District I - (575) 393-6161

1625 N. French Dr., Hobbs, NM 88240

District II - (575) 748-1283

811 S. First St., Artesia, NM 88210

District III - (505) 334-6178

1000 Rio Brazos Rd., Aztec, NM 87410

District IV - (505) 476-3460

1220 S. St. Francis Dr., Santa Fe, NM

87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-103

Revised July 18, 2013

HOBBS OCD

SEP 21 2016

RECEIVED

WELL API NO.

30-025-24317

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

10264

7. Lease Name or Unit Agreement Name

State P

8. Well Number

4

9. OGRID Number

192463

10. Pool name or Wildcat

Brunson Drinkard ABO, South

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

OXY USA WTP LP

3. Address of Operator

P.O. Box 50250 Midland, TX 79710

4. Well Location

Unit Letter M : 660 feet from the South line and 660 feet from the west line

Section 32 Township 22S Range 38E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3364'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐

TEMPORARILY ABANDON ☐

PULL OR ALTER CASING ☐

DOWNHOLE COMMINGLE ☐

CLOSED-LOOP SYSTEM ☐

OTHER: ☐

PLUG AND ABANDON ☒

CHANGE PLANS ☐

MULTIPLE COMPL ☐

SUBSEQUENT F

REMEDIAL WORK ☐

COMMENCE DRILLING OPNS. ☐

CASING/CEMENT JOB ☐

OTHER: ☐

INT TO PA Im

P&A NR

P&A R

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-7937' PBTD-6870' Perfs-6916-7437' CIBP-6870'

8-5/8" 24# csg @ 1334' w/ 600sx, 11" hole, TOC-Surf-Circ

5-1/2" 14-15.5-17# csg @ 7935' w/ 600sx, 7-7/8" hole, TOC-4500'-TS

1. RIH & tag CIBP @ 6870', M&P 25sx cmt to 6695'

2. M&P 25sx cmt @ 6160-5985' WOC-Tag

3. M&P 25sx cmt @ 5240-5065' WOC-Tag

4. Perf @ 4070', sqz 35sx cmt to 3970' WOC-Tag

5. Perf @ 2560', sqz 35sx cmt to 2460' WOC-Tag

6. Perf @ 1384', sqz 55sx cmt to 1206' WOC-Tag

7. Perf @ 250', sqz 75sx cmt to surface

10# MLF between plugs

Above ground steel tanks will be utilized

cut of wellhead, verify cmt to surface, install dry hole marker

Spud Date:

NOTIFY OCD 24 HOURS PRIOR TO BEGINNING
PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 9/19/16

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Mark L. Pritchett TITLE Petroleum Engr. Specialist DATE 9-21-2016

Conditions of Approval (if any):

OXY USA WTP LP - Proposed
State P #4
API No. 30-025-24817

75sx @ 250'-Surface

55sx @ 1384-1206' WOC-Tag

35sx @ 2560-2460' WOC-Tag


35sx @ 4070-3970' WOC-Tag

25sx @ 5240-5065' WOC-Tag

25sx @ 6160-5985' WOC-Tag

25sx @ 6870-6705'
CIBP @ 6870'

CR @ 7622'

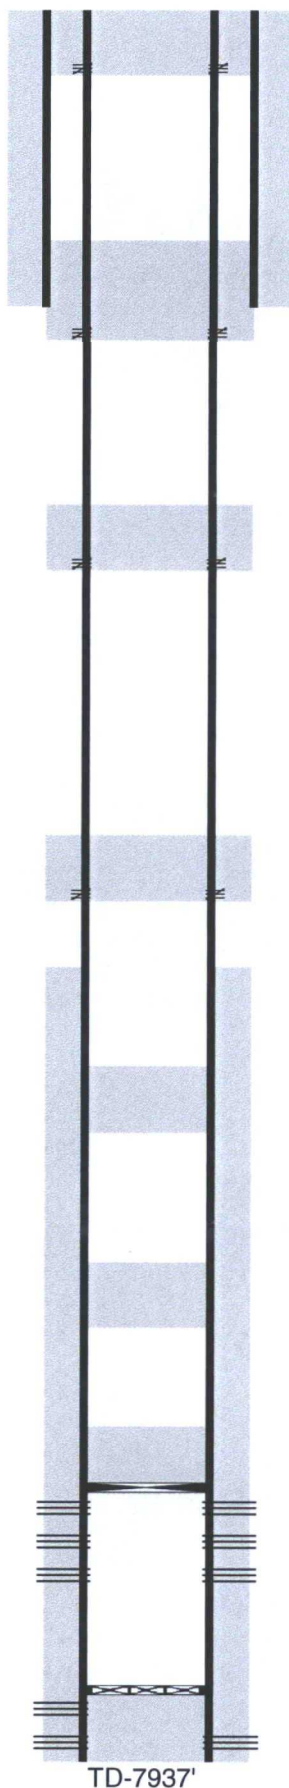

Perf @ 250'

Perf @ 1384'

Perf @ 2560'

Perf @ 4070'

Perfs @ 6916-7437'

Perfs @ 7746-7922' sqz w/ 170sx

11" hole @ 1334'
8-5/8" csg @ 1334'
w/ 600sx-TOC-Surf-Cir

7-7/8" hole @ 7937'
5-1/2" csg @ 7935'
w/ 600sx-TOC-4500'-TS

TD-7937'

OXY USA WTP LP - Current
State P #4
API No. 30-025-24817

11" hole @ 1334'
8-5/8" csg @ 1334'
w/ 600sx-TOC-Surf-Cir

CIBP @ 6870'

Perfs @ 6916-7437'

7-7/8" hole @ 7937'
5-1/2" csg @ 7935'
w/ 600sx-TOC-4500'-TS

CR @ 7622'

Perfs @ 7746-7922' sqz w/ 170sx

TD-7937'