

30-025-43500

Permit Information:

Well Name: Persimmon 24 State Com No. 501H

Location:

SL: 2367' FSL & 440' FEL, Section 24, T-21-S, R-33-E, Lea Co., N.M.

BHL: 230' FSL & 440' FEL, Section 25, T-21-S, R-33-E, Lea Co., N.M.

Casing Program:

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
17.5"	0 - 1,994'	13.375"	54.5#	J55	STC	1.125	1.25	1.60
12.25"	0-4,000'	9.625"	40#	J-55	LTC	1.125	1.25	1.60
12.25"	4,000'-5,200'	9.625"	40#	HCK-55	LTC	1.125	1.25	1.60
8.75"	0' - 18,475'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

Cement Program:

Depth	No. Sacks	Wt. ppg	Yld Ft ³ /ft	Slurry Description
1,994'	600	13.5	1.75	Class C + 2% CaCl ₂ + 4% Gel + 0.25 pps Celloflake
	300	14.8	1.34	Class C + 2% CaCl ₂
5,200'	1200	12.7	1.90	35:65 Poz:Class C + 6% Gel + 3% CaCl ₂ + 0.5% CPT-45 + 0.45% CPT-20
	450	14.8	1.33	Class C + 0.20% CPT-19
18,475'	750	11.0	3.21	50:50 Poz:Class H + 0.4% CPT-503P + 3.0% CPT-45 + 5.0% Gypsum + 5.0% Salt + 0.15% Citric Acid + 0.15% CPT-20A + 1.0% CPT-19
	1400	14.4	1.20	50:50 Poz:Class H + 0.25% CPT-503P + 0.80% CPT-16A + 0.20% CPT-35 + 0.40% CPT-49 + 0.25% CPT-20A

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 - 1,994'	Fresh - Gel	8.6-8.8	28-34	N/c
1,994' - 5,200'	Brine	8.8-10.0	28-34	N/c
5,200' - 18,475' Lateral	Brine	8.8-10.0	28-34	N/c


Persimmon 24 State Com #501H

Lea County, New Mexico
Proposed Wellbore

2367' FSL
440' FEL
Section 24
T-21-S, R-33-E

API: 30-025-*****

KB: 3,781'
GL: 3,756'

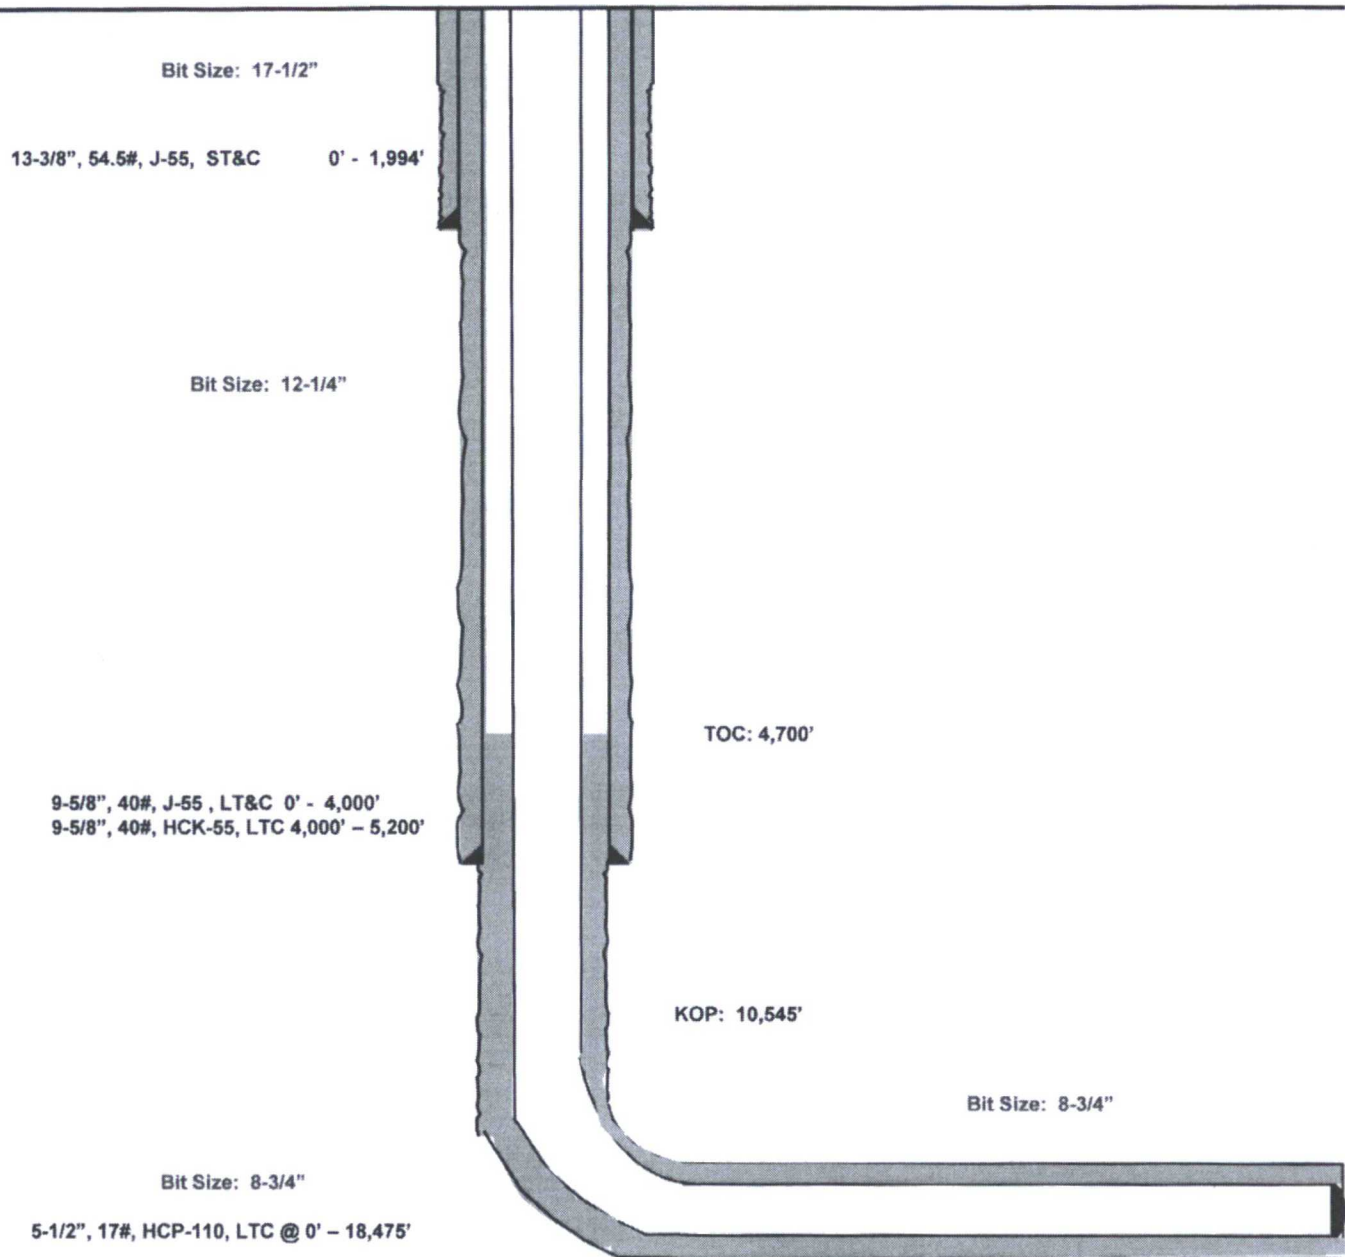

Lateral: 18,475' MD, 11,162' TVD

BH Location: 230' FSL & 440' FEL
Section 25
T-21-S, R-33-E