

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
HOBBS OCD
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-06902
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☐ FEE ☒
2. Name of Operator Chevron U.S.A. INC.		6. State Oil & Gas Lease No.
3. Address of Operator 6301 DEAUVILLE BLVD, MIDLAND, TX 79706 RMN3002		7. Lease Name or Unit Agreement Name H.T. MATTERN (NCT-B)
4. Well Location Unit Letter <u>O</u> : <u>810</u> feet from the <u>SOUTH</u> line and <u>1980</u> feet from the <u>EAST</u> line Section <u>30</u> Township <u>21S</u> Range <u>37E</u> NMPM County <u>Lea</u>		8. Well Number: <u>5</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3487'		9. OGRID Number 4323
		10. Pool name or Wildcat PENROSE SKELLY; GRAYBURG

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT RE	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	INT TO PA ☒
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P&A NR ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	P&A R ☐
DOWNHOLE COMMINGLE ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Call and notify NMOCDD 24 hrs. before operations begin.
 2. MIRU. NDWH. NU BOPE.
 3. Set CIBP@3,645', circulate well w/9.5 ppg mud and spot 65sx of cement on top. Pressure test csg.
 4. Perf and Sqz. 40sx of Class "C" cement from 2,620'-2,420', WOC&Tag. (B.Salt)
 5. Spot 40sx of Class "C" cement from ~~1,385'~~ 1,185', WOC&Tag. (T.Salt) 1250'-1050'
 6. Perf and squeeze 120sx of Class "C" cement from 350' to surface. (Shoe/FW/surface).
 7. Verify cement to surface on all casings. Cut off wellhead and anchors 3' below grade. Weld on dryhole marker and clean location.
- Closed loop above ground tank system will be used for fluids.

**NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS**

I hereby certify that the information above is true and complete to the best of my knowledge.

SIGNATURE M. Lee Roark TITLE Project Manager DATE 12/20/16

Type or print name M. Lee Roark E-mail address: LRoark@Chevron.com PHONE: (432)-687-7279

For State Use Only

APPROVED BY: Mark Whitaker TITLE Petroleum Engr. Specialist DATE 12/21/2016


Conditions of Approval (if any):

CURRENT

Chevron U.S.A. Inc. Wellbore Diagram : MATB5



[Lease] OEU EUNICE FMT [Well No.] MATTERN H T /NCT-B/ 5 [Field] PENROSE SKELLY
 [Location] 660FSL1980FEL [Sec.] N/A [Blk] [Survey] N/A
 [County] Lea [St.] New Mexico [Refno] FA7999 [API] 3002506902 [Cost Center] UCU490300
 [Section] E037 [Township] 30 S [Range] S021 E
 [Current Status] ACTIVE [Dead Man Anchors Test Date] NONE
 [Directions]

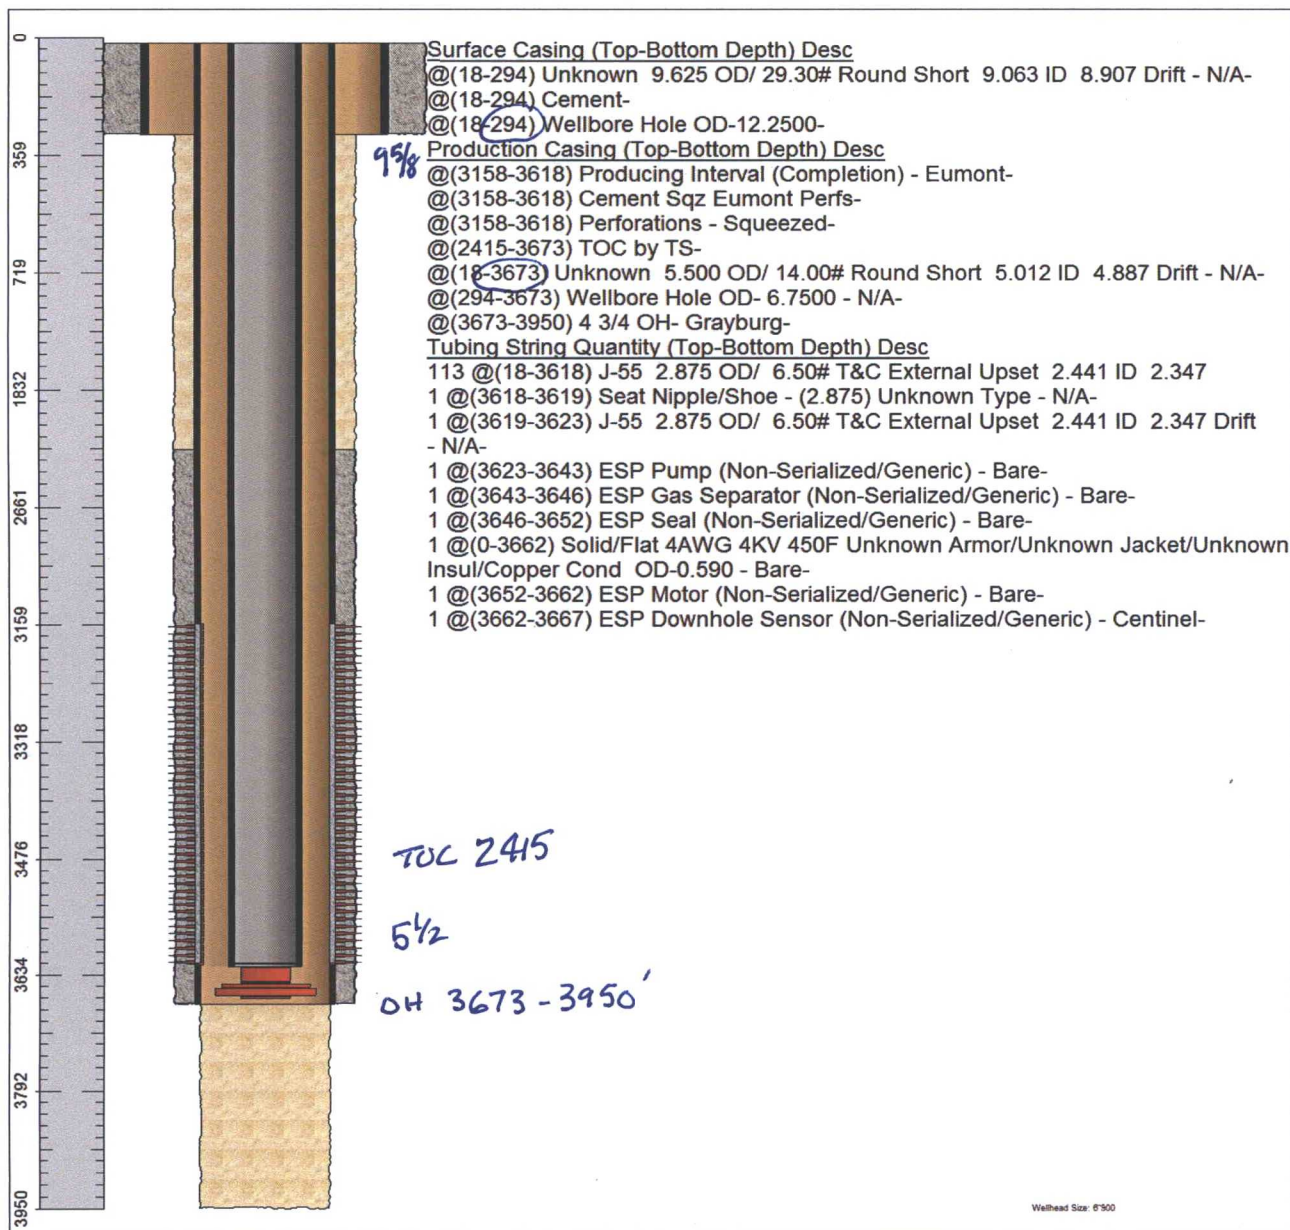

[Ground Elevation (MSL)] 3487.00 [Spud Date] 11/09/1970 [Compl. Date] 12/14/1970
 [Well Depth Datum] Kelly Bushing [Elevation (MSL)] 0.00 [Correction Factor] 18.00
 [Last Updated by] jackssl [Date] 01/16/2010
 [null] null [null] null

**PROPOSED
WELLBORE DIAGRAM**

Lease: H.T. MATTERN (NCT-B) Well No: 5 Field: PENROSE SKELLY; GRAYBURG
Location: 810' FSL & 1980' FEL 30-T21S-37E
County: Lea St: NM Refno: API: 30-025-06902 Cost Center:

Surface Csg.


Size: 9-5/8"
Wt.: 29.3#
Set @: 294'
Sxs cmt: 550
Circ: Yes
TOC: Surf
Hole Size: 12-1/4"

Production Csg.

Size: 5-1/2"
Wt.: 14#
Set @: 3673'
Sxs Cmt: 200
Circ: No
TOC: 2415' TS
Hole Size: 6-3/4"
PBSD:
TD: 3950'

OH 4-3/4" 3673'-3950'

SQZD.Perfs:
3158'-3618'

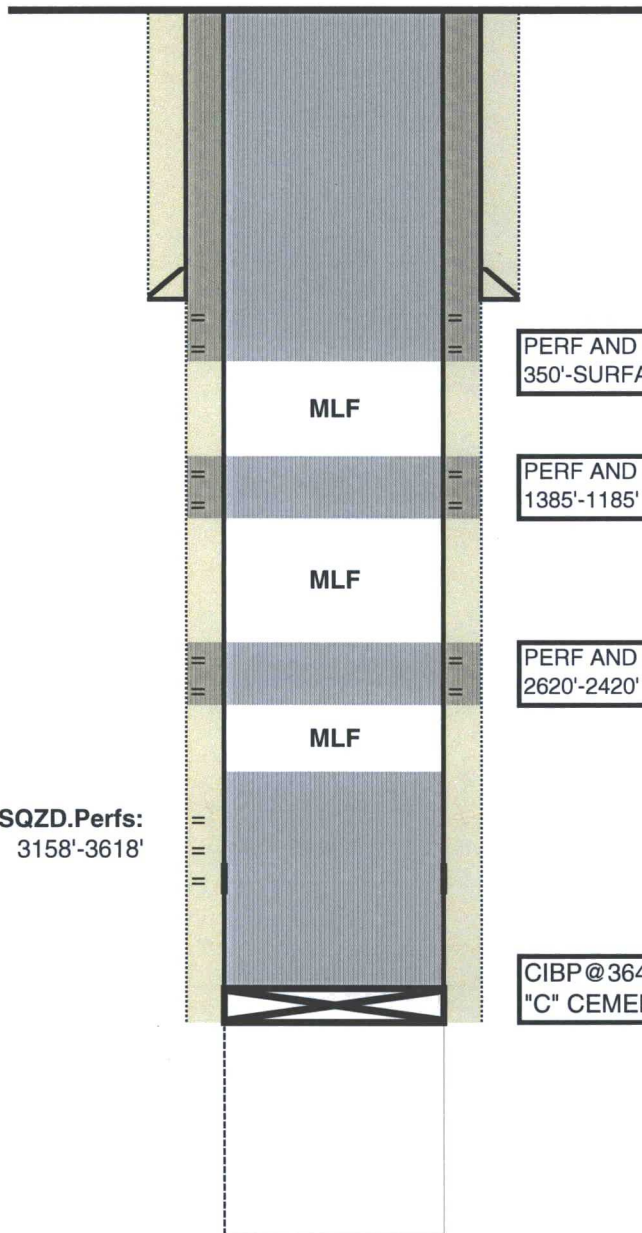

PERF AND SQZ. 120SX CLASS "C" FROM
350'-SURFAC (SHOE/FW/SURFACE)

PERF AND SQZ. 40SX CLASS "C" FROM
1385'-1185' (T.SALT) WOC&TAG

PERF AND SQZ. 40SX CLASS "C" FROM
2620'-2420' (B.SALT) WOC&TAG

CIBP@3645' AND SPOT 65SX CLASS
"C" CEMENT ON TOP

Remarks: _____

Updated by: LRQS
Date: 12/20/2016

Prepared by: _____
Date: _____