

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
NMNM98826

6. If Indian, Allottee or Tribe Name

7. Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

HOBBS OCD
RECEIVED
JAN 03 2017

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
DEVON ENERGY PRODUCTION COMPANY
Contact: RONNIE SLACK
Email: ronnie.slack@dvn.com

3a. Address
6488 SEVEN RIVERS HIGHWAY
ARTESIA, NM 88211

3b. Phone No. (include area code)
Ph: 405-552-4615

8. Well Name and No.
TOMCAT 8 FEDERAL 1

9. API Well No.
30-025-38367-00-S1

10. Field and Pool, or Exploratory
WILDCAT

11. County or Parish, and State
LEA COUNTY, NM

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 8 T23S R32E SWSW 950FSL 570FEL
32.314377 N Lat, 103.690042 W Lon

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Dispo.

INT TO PA Pm X ff
P&A NR _____
P&A R _____

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomple in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

- MIRU P&A UNIT
- Retrieve rod pump and 2-7/8" production tubing assembly from 8,596'.
- Set CIBP @ 7,260'.
- Spot 25 sx (250') CI C @ 7,260' - 7,010'. Tag TOC.
- Spot 25 sx (250') CI C @ ~~4,700'~~ 4,450'. Tag TOC. (T. Delaware @ 4,678'; B. Salt @ 4,550')
- Spot 45 sx (450') CI C @ 1,500' - 1,050'. Tag TOC. (T. Salt @ 1,440')
- Perf 5-1/2" casing @ 120'.
- Pump 30 sx CI C in/out from 120' to surface.
- Cut wellhead off. Set dry hole marker.

4730-4450

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

LPC STIPS Attached

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #354586 verified by the BLM Well Information System
For DEVON ENERGY PRODUCTION COM LP, sent to the Hobbs
Committed to AFMSS for processing by PRISCILLA PEREZ on 10/14/2016 (17PP0050SE)

Name (Printed/Typed) RONNIE SLACK Title PRODUCTION TECHNOLOGIST

Signature (Electronic Submission) Date 10/13/2016

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By Chris Hobbs Title Eng Date 12/29/16

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office CFO

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

** BLM REVISED **

FOR RECORD ONLY
MW/OCD 1/5/2017

DEVON ENERGY PRODUCTION COMPANY, LP

Well Name: TOMCAT 8 FEDERAL #1		Field: DIAMONDTAIL DELAWARE SOUTHWEST	
Location: 950' FSL & 570' FEL; SEC 8-T23S-R32E		County: LEA	State: NM
Elevation: 3641' KB; 3624' GL; 17' KB to GL		Spud Date: 7/24/07	Compl Date: 1/1/08
API#: 30-025-38367	Prepared by: Ronnie Slack	Date: 10/12/16	Rev:

PROPOSED PLUG & ABANDONMENT

TOC @ 210' (CBL-8/15/07))

17-1/2" hole
13-3/8", 48#, H40, @ 1,135'
 Cmt'd w/940 sx to surface

11" Hole
8-5/8", 32#, J55, @ 4,534'
 Cmt'd w/1560 sx to surface

DELAWARE
7306' - 7316', 3 spf (10/2/07) Sqzd w/250 sx-11/07 →
 7306' - 7316', 500 gals 7.5% HCl, 31K# 20/40 + 19K# 20/40 resin

Cmt sqzd csg from 7,348 to 7,444 w/14 bbl. (4/14/15) →

DELAWARE
7400' - 7410', 3 spf, (9/28/07) Sqzd- (11/07) →

DELAWARE
8482' - 8492'
 8482-8492", 1000 gals 15% HCl, 89K# 20/40 + 47K# resin sand

7-7/8" Hole
5-1/2", 15.5# & 17#, J55, @ 8,800'
 Cmt'd w/950 sx. TOC @ 210'-CBL (8/15/07)



Proposed:
 3. Cut wellhead off. Set dry hole marker.
 2. Pump 30 sx CI C in/out to surface.
 1. Perf 5-1/2 csg @ 120'

Proposed:
 1. Spot 45 sx (450') CI C @ 1,500' - 1,050'. Tag.
 (T.Salt @ 1,440')

Proposed: ³⁰ ⁴⁷⁵⁰
 1. Spot 25 sx (250') CI C @ 4,700' - 4,450'. Tag.
 (T.Delware @ 4,678'; B.Salt @ 4,550')

Proposed:
 2. Spot 25 sx (250') CI C @ 7,260' - 7,010'. Tag.
 1. Set CIBP @ 7,260'

Tagged @ 8,656' (4/22/15)
 8721' PBD

DEVON ENERGY PRODUCTION COMPANY, LP

Well Name: TOMCAT 8 FEDERAL #1		Field: DIAMONDTAIL DELAWARE SOUTHWEST	
Location: 950' FSL & 570' FEL; SEC 8-T23S-R32E		County: LEA	State: NM
Elevation: 3641' KB; 3624' GL; 17' KB to GL		Spud Date: 7/24/07	Compl Date: 1/1/08
API#: 30-025-38367	Prepared by: Ronnie Slack	Date: 1/28/16	Rev:

CURRENT WELLBORE

TOC @ 210' (CBL-8/15/07)

17-1/2" hole
13-3/8", 48#, H40, @ 1,135'
 Cmt'd w/940 sx to surface

11" Hole
8-5/8", 32#, J55, @ 4,534'
 Cmt'd w/1560 sx to surface

Rustler-1,047'
 T.Salt--1,440' (est)
 B.Salt--4,550 (est)
 Delaware-4,678'
 Bone Spring-8,594'

DELAWARE

7306' - 7316', 3 spf (10/2/07) Sqzd w/250 sx- 11/07 →

7306' - 7316', 500 gals 7.5% HCl, 31K# 20/40 + 19K# 20/40 resin

Cmt sazid csq from 7,348 to 7,444 w/14 bbl. (4/14/15) →

DELAWARE

7400' - 7410', 3 spf, (9/28/07) Sqzd- (11/07) →

7400'-7410', 500 gals 7.5% HCl

DELAWARE


8482' - 8492'

8482-8492", 1000 gals 15% HCl, 89K# 20/40 + 47K# resin sand

7-7/8" Hole

5-1/2", 15.5# & 17#, J55, @ 8,800'

Cmt'd w/950 sx. TOC @ 210'-CBL (8/15/07)

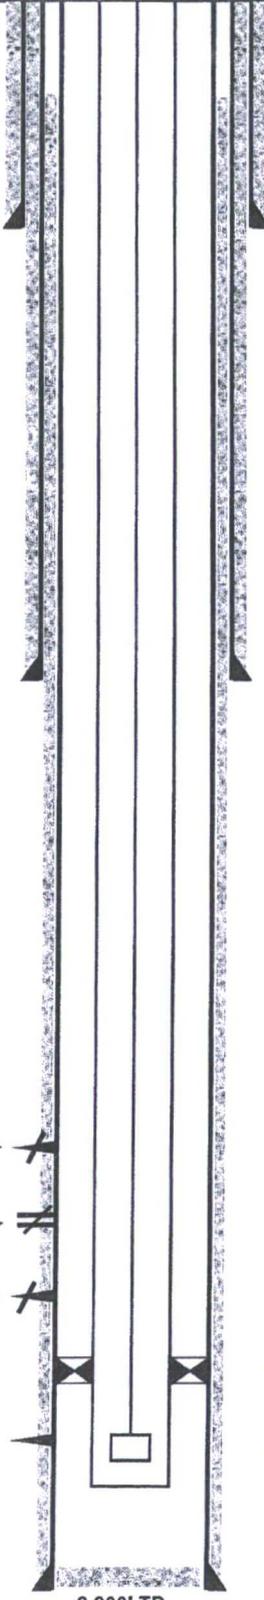

8,800' TD

256 Jts, 2-7/8", 6.5#, C75 production tubing (1/13/16)

Watson Nickel coated Pkr @ 8,330'. (1/13/16)

6 Jts, 2-7/8", 6.5#, C75 production tubing (1/13/16)
 SN @ 8,558. 2-1/2" x 24' rod pump. (1/13/16)
 Bull plug @ 8,596' (1/13/16)

Tagged @ 8,656' (4/22/15)
 8721' PBDT

BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972

**Permanent Abandonment of Federal Wells
Conditions of Approval (LPC Habitat)**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.** Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:

From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted