

Submit Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-37412
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☐ FEE ☒
2. Name of Operator Chevron U.S.A. INC.		6. State Oil & Gas Lease No.
3. Address of Operator 6301 DEAUVILLE BLVD, MIDLAND, TX 79706 RMN3002		7. Lease Name or Unit Agreement Name V.M. HENDERSON
4. Well Location Unit Letter <u>F</u> : <u>1360</u> feet from the <u>NORTH</u> line and <u>1360</u> feet from the <u>WEST</u> line Section <u>30</u> Township <u>21S</u> Range <u>37E</u> NMPM County <u>Lea</u>		8. Well Number: 20
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3497'		9. OGRID Number 4323
		10. Pool name or Wildcat PENROSE SKELLY; GRAYBURG

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐ INT TO PA INT
CASING/CEMENT JOB ☐ P&A NR INT
P&A R INT

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Call and notify NMOCD 24 hrs. before operations begin.
2. MIRU. NDWH. NU BOPE.
3. Set CIBP@3,600', circulate well w/9.5 ppg mud and spot 25sx of cmt. on top. Pressure test casing.
4. Spot 25sx of Class "C" cement from 2,310'-2,110', WOC&Tag. (B.Salt) 2600'
5. Spot 25sx of Class "C" cement from 1,250-1,050', WOC&Tag. (T.Salt)
6. Spot 60sx of Class "C" cement from 525' to surface. (Shoe/FW/surface).
7. Verify cement to surface on all casings. Cut off wellhead and anchors 3' below grade. Weld on dryhole marker and clean location.
Closed loop above ground tank system will be used for fluids.

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge.

SIGNATURE M. Lee Roark TITLE Project Manager DATE 01/16/17

Type or print name M. Lee Roark E-mail address: LRoark@Chevron.com PHONE: (432)-687-7279

For State Use Only

APPROVED BY: M. Lee Roark TITLE Petroleum Engr. Specialist DATE 01/17/2017


Conditions of Approval (if any):



Chevron U.S.A. Inc. Wellbore Diagram : VMHENDERSON20G

Lease: OEU EUNICE FMT **Well No.:** HENDERSON V. M. 20G **Field:** PENROSE SKELLY
Location: 1360FNL1360FWL **Sec.:** N/A **Blk:** **Survey:** N/A
County: Lea **St.:** New Mexico **Refno:** HU6621 **API:** 3002537412 **Cost Center:** UCU493800
Section: E037 **Township:** 30 **Range:** S021
Current Status: ACTIVE **Dead Man Anchors Test Date:** NONE

Directions:

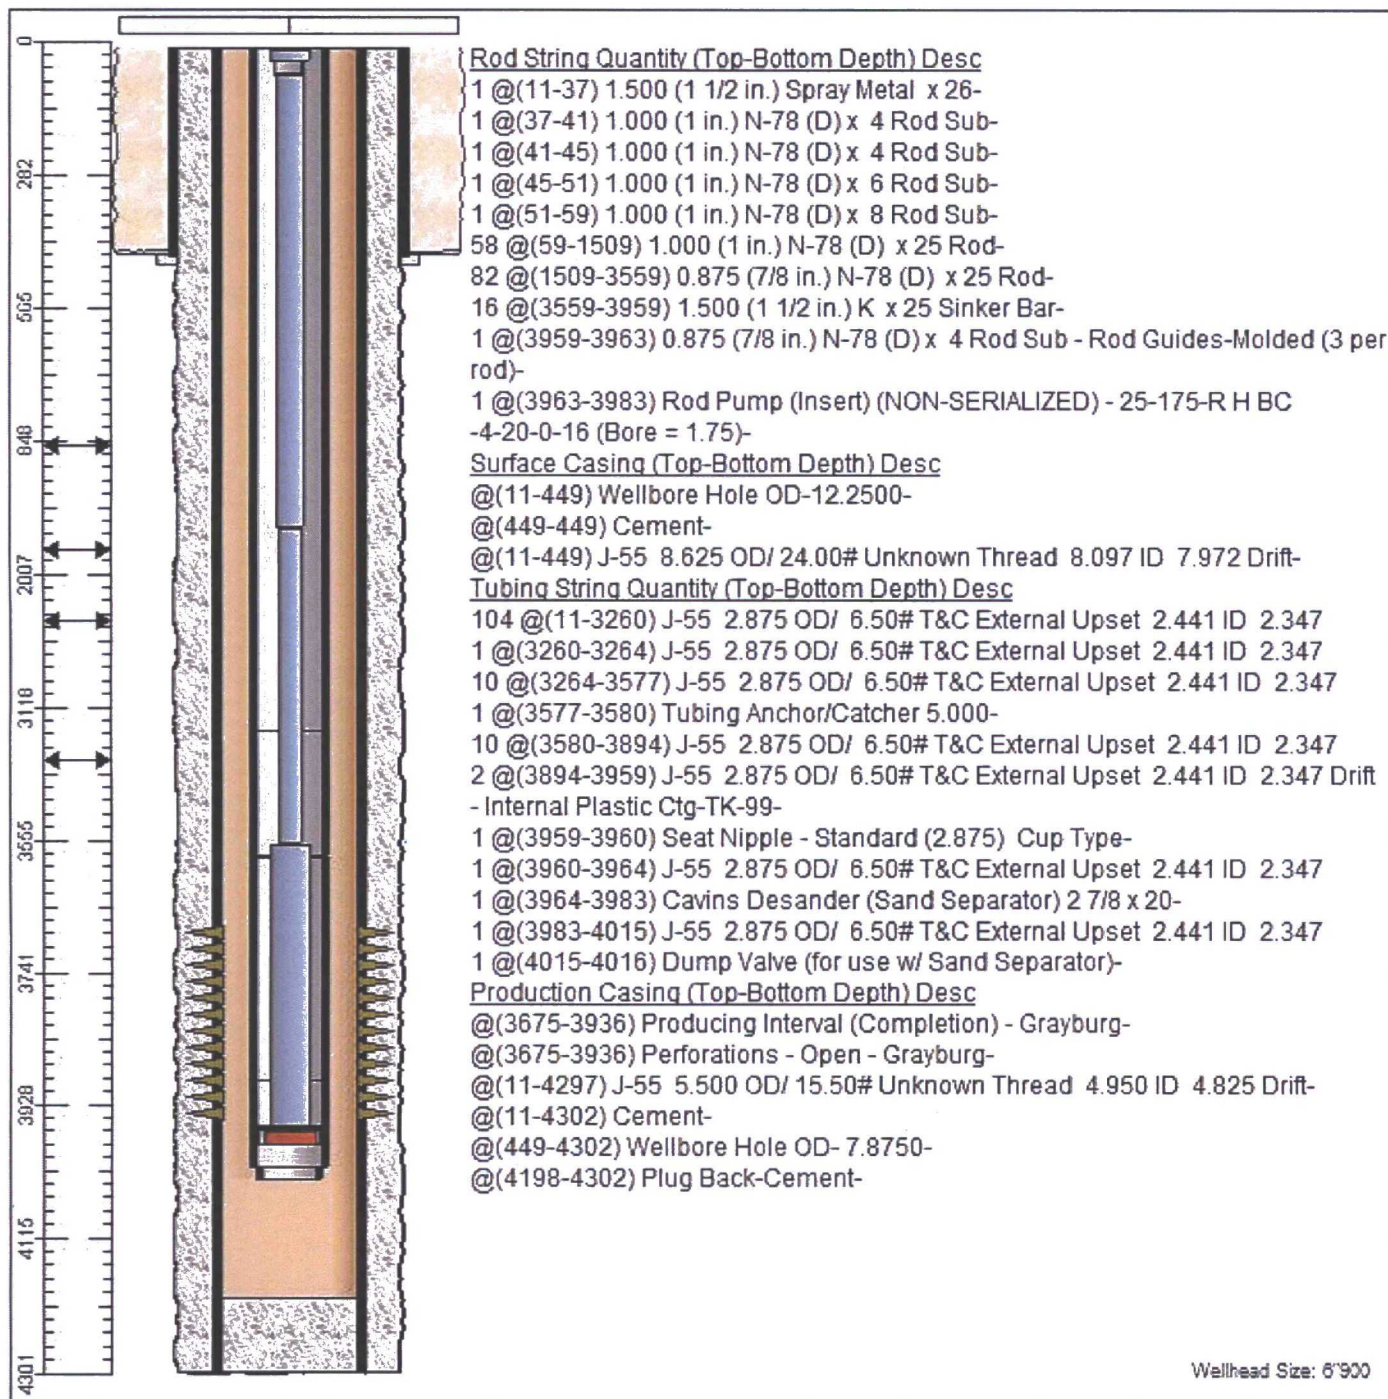

Ground Elevation (MSL): 3497.00
Well Depth Datum: Kelly Bushing
Last Updated by: bqvh

Spud Date: 11/22/2005
Elevation (MSL): 0.00
Date: 07/10/2012

Compl. Date: 12/01/2005
Correction Factor: 11.00

**PROPOSED
WELLBORE DIAGRAM**


Lease: V.M. HENDERSON Well No: 20 Field: PENROSE SKELLY; GRAYBURG
Location: 1360'FNL & 1360'N FWL 30-T21S-37E
County: Lea St: NM Refno: API: 30-025-37412 Cost Center:

Surface Csg.

Size: 8-5/8"
Wt.: 24#
Set @: 449'
Sxs cmt: 475
Circ: Yes
TOC: Surf
Hole Size: 11"

Production Csg.

Size: 5-1/2"
Wt.: 15.5#
Set @: 4297'
Sxs Cmt: 1075
Circ: Yes
TOC: Surf
Hole Size: 7-7/8"
PBSD:
TD: 4302'

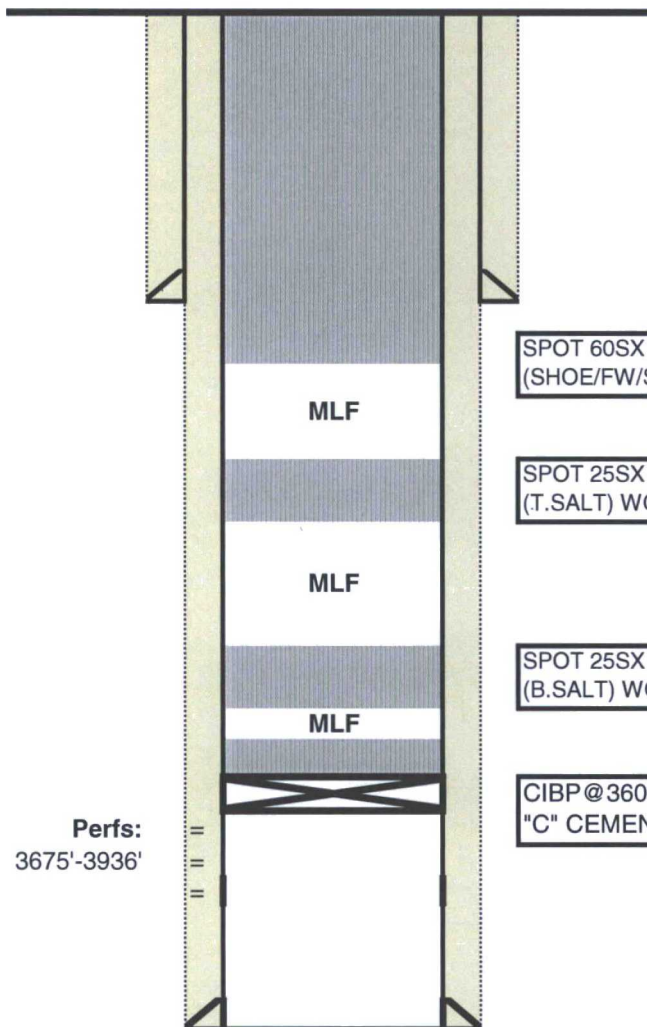

*RUSTLER 1186'
YATES 2628'*

SPOT 60SX CLASS "C" FROM 525'-SURFAC
(SHOE/FW/SURFACE)

SPOT 25SX CLASS "C" FROM 1250'-1185'
(T.SALT) WOC&TAG

SPOT 25SX CLASS "C" FROM 2310'-2110'
(B.SALT) WOC&TAG

CIBP@3600' AND SPOT 25SX CLASS
"C" CEMENT ON TOP

Perfs:
3675'-3936'

Remarks:

Updated by: LRQS
Date: 01/16/17

Prepared by:
Date: