

Submit 1 Copy To Appropriate District Office

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBS OCD
JAN 24 2017
RECEIVED

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

WELL API NO.
30-025-35298

5. Indicate Type of Lease
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.
302600

7. Lease Name or Unit Agreement Name
New Mexico AT State

8. Well Number **26**

9. OGRID Number
213190

10. Pool name or Wildcat
Saunders; Permo Upper Penn

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
CrownQuest Operating, LLC

3. Address of Operator
P.O. Box 53310, Midland, TX 79710

4. Well Location

Unit Letter **N** : **560** feet from the **SOUTH** line and **1880** feet from the **WEST** line
Section **15** Township **14S** Range **33E** NMPM County **Lea**

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
GR 4208

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT

REMEDIAL WORK
COMMENCE DRILLING OPNS
CASING/CEMENT JOB

INT TO PA

P&A NR pm

P&A R

OTHER: ☐

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Set CIBP @ 9600' w/ 35 sx cmt. Pressure test csg & circulate hole w/ mud laden fluid.
2. Spot 25 sxs @ 7000-6900'
3. Spot 85 sxs @ 4161-4000'. WOC & TAG
4. Cut 5 1/2 csg @ 3300'. POH
5. *40 sx cmt @ 3350-3250'. WOC & TAG
6. *40 sx @ 1650-1550'.
7. *50 sx cmt @ 460-285' WOC & TAG
8. *20 sx @ 60-surface.
9. Cut off well head, verify cmt to surface, weld on Dry Hole Marker.

*PERF & SQA if 5 1/2 not pulled. TAG all Perf & Sqz

Spud Date:

**NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS**

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ben Montgomery TITLE Agent DATE 11/24/17

Type or print name Ben Montgomery E-mail address: Benm@bcmandassociates.com PHONE: 432-580-7161

For State Use Only

APPROVED BY: Mark Whitman TITLE Petroleum Engr. Specialist DATE 01/24/2017

Conditions of Approval (if any):

Wellbore Schematic (From Surface to TD)


Printed: 1/17/2017

Page 1

New Mexico AT State # 26

Property#: 10051

API # 3002535298

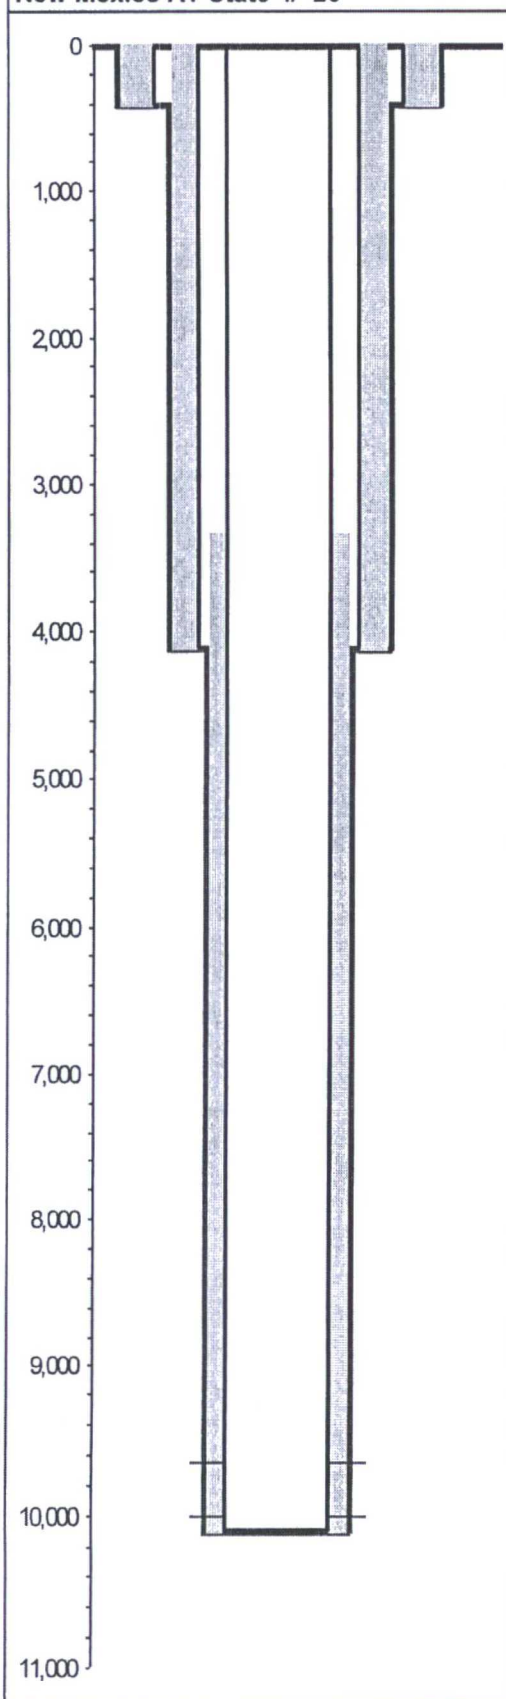

560' FSL & 1880' FWL	GL Elev: 4,208.00	KOP:	
		EOC:	
County, State: Lea, NM		Fill Depth:	
Aux ID: 200754-26		PBTD:	10,100.00
KB = ; DF = ; All Depths Corr To:		TD:	10,100.00
		BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	410.00	4/28/2001
12.0000	410.00	4,111.00	5/5/2001
7.8750	4,111.00	10,100.00	5/25/2001

Surface Casing

Date Ran: 4/28/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	15	13.3750	54.50	J55	410.00	0.00	410.00

Intermediate Casing

Date Ran: 5/5/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	95	8.6250	32.00	J55	4,111.00	0.00	4,111.00

24# J-55 ST&C and 32# J-55 ST&C

Production Casing String 1

Date Ran: 5/25/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	268	5.5000	17.00	J55	10,100.00	0.00	10,100.00

N-80 and J-55

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
420	C		13.375	17.500	0.00	410.00	Circ
1475	C		8.625	12.000	0.00	4,111.00	Circ
1300	C		5.500	7.875	3,345.00	10,100.00	Calc

Zone and Perfs

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,654.00	10,004.00	PENN	A			3	204

(3 spf, 204 holes) 9654'-63', 9704'-12', 9716'-19', 9721'-23', 9748'-51', 9760'-64', 9776'-82', 9808'-15', 9831', 9870'-74', 9897', 9908'-10', 9990'-94', 10,002'-04'

Wellbore Plugs and Junk

Top	Bottom	Type	Diameter	Solid	Date
9,000.00	9,850.00	Tbg	2.785	No	1/11/2017

Tubing stuck below 9000'.

33.098896

-103.6047745


Wellbore Schematic (From Surface to TD)

Printed: 3/9/2015

New Mexico AT State # 26

Property#: 200754-26

API # 3002535298

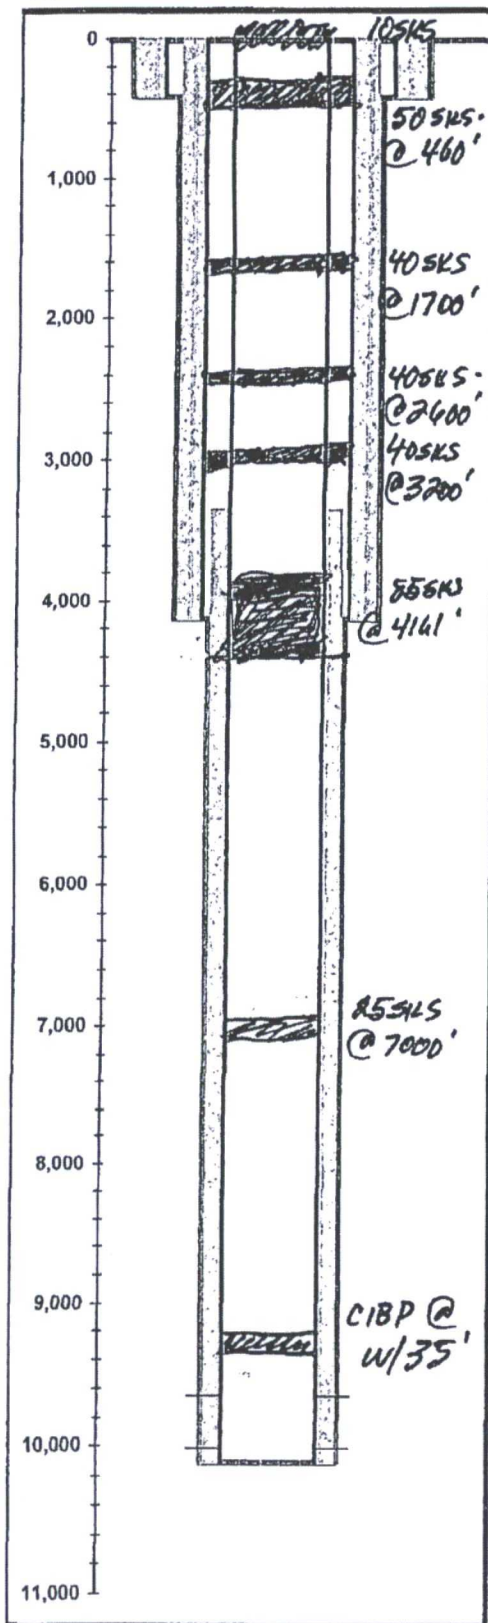

560' FSL & 1880' FWL	GL Elev: 4,208.00	KOP:	
Sec, Blk, Sur (Lbr, Lge, Sur) or (Sec, Twn, Rng): 15, ,		Fill Depth:	
County, State: Lea, NM		PBTD:	10,100.00
Aux ID:		TD:	10,100.00
KB = ; DF = ; All Depths Corr To:		BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	410.00	4/28/2001
12.0000	410.00	4,111.00	5/5/2001
7.8750	4,111.00	10,100.00	5/25/2001

Surface Casing

Date Ran: 4/28/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	15	13.3750	54.50	J55	410.00	0.00	410.00

Intermediate Casing

Date Ran: 5/5/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	95	8.6250	32.00	J55	4,111.00	0.00	4,111.00
24# J-55 ST&C and 32# J-55 ST&C							

Production Casing String 1

Date Ran: 5/25/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	268	5.5000	17.00	J55	10,100.00	0.00	10,100.00
N-80 and J-55							

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
420	C		13.375	17.500	0.00	410.00	Circ
1475	C		8.625	12.000	0.00	4,111.00	Circ
1300	C		5.500	7.875	3,345.00	10,100.00	Calc

Zone and Perfs

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,654.00	10,004.00	PENN	A			3	204
(3 spf, 204 holes) 9654'-63', 9704'-12', 9716'-19', 9721'-23', 9748'-51', 9760'-64', 9776'-82', 9801'-15', 9831', 9870'-74', 9897', 9908'-10', 9990'-94', 10,002'-04'							

NO TUBING