

OCD Hobbs

HOBBS OCD
FEB 27 2017
RECEIVED

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.
NMNM0359292

6. If Indian, Allottee or Tribe Name

1a. Type of work: DRILL REENTER

7. If Unit or CA Agreement, Name and No.

1b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

8. Lease Name and Well No.,
Calm Breeze 2 Fed Com 701H (317458)

2. Name of Operator EOG Resources, Inc (7377)

9. API Well No.
30-025- 43645 (98094)

3a. Address P.O. Box 2267 Midland, TX 79702

3b. Phone No. (include area code)
432-686-3689

10. Field and Pool, or Exploratory
WC-025 G-09 S253336D; Upper WC

4. Location of Well (Report location clearly and in accordance with any State requirements.)*
At surface 2331' FSL & 1547' FWL, NESW (K), Sec 2, 26S, 33E
At proposed prod. zone 230' FSL & 2313' FWL, SESW (N), Sec 11

11. Sec., T. R. M. or Blk. and Survey or Area
Section 2, T26S, R33E

14. Distance in miles and direction from nearest town or post office*
Approximately +/- 35 miles Southwest from Jal, New Mexico

12. County or Parish
Lea

13. State
NM

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)
230', 330' PP

16. No. of acres in lease
720 ac.

17. Spacing Unit dedicated to this well
240 ac.

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.
662' from 702H

19. Proposed Depth
19932' MD, 12439' TVD

20. BLM/BIA Bond No. on file
NM 2308

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
3324' GL

22. Approximate date work will start*
01/01/2017

23. Estimated duration
25 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification
- 6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature *Stan Wagner* Name (Printed/Typed) Stan Wagner Date 8/17/16

Title Regulatory Specialist

Approved by (Signature) *Cody Layton* Name (Printed/Typed) Cody Layton Date 02/27/17

Title *for* FIELD MANAGER Office BLM-CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

Kz
02/27/17
Carlsbad Controlled Water Basin

**Approval Subject to General Requirements
& Special Stipulations Attached**

**Witness Surface &
Intermediate Casing**

EOG RESOURCES, INC.
CALM BREEZE 2 FED COM NO. 701H

1. GEOLOGIC NAME OF SURFACE FORMATION:

Permian

2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:

| | |
|-----------------------------------|---------|
| Rustler | 779' |
| Top of Salt | 1,237' |
| Base of Salt / Top Anhydrite | 4,827' |
| Base Anhydrite | 5,036' |
| Lamar | 5,036' |
| Bell Canyon | 5,070' |
| Cherry Canyon | 6,112' |
| Brushy Canyon | 7,736' |
| Bone Spring Lime | 9,236' |
| 1 st Bone Spring Sand | 10,175' |
| 2 nd Bone Spring Shale | 10,429' |
| 2 nd Bone Spring Sand | 10,724' |
| 3 rd Bone Spring Carb | 11,216' |
| 3 rd Bone Spring Sand | 11,805' |
| Wolfcamp | 12,270' |
| TD | 12,439' |

3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

| | | |
|-----------------------------------|---------|-------------|
| Upper Permian Sands | 0- 400' | Fresh Water |
| Cherry Canyon | 6,112' | Oil |
| Brushy Canyon | 7,736' | Oil |
| 1 st Bone Spring Sand | 10,175' | Oil |
| 2 nd Bone Spring Shale | 10,429' | Oil |
| 2 nd Bone Spring Sand | 11,724' | Oil |
| 3 rd Bone Spring Carb | 11,216' | Oil |
| 3 rd Bone Spring Sand | 11,805' | Oil |
| Wolfcamp | 12,439' | Oil |

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 10.75" casing at 805' and circulating cement back to surface.

EOG RESOURCES, INC.
CALM BREEZE 2 FED COM NO. 701H

4. CASING PROGRAM - NEW

| Hole Size | Interval | Csg OD | Weight | Grade | Conn | DF _{min} Collapse | DF _{min} Burst | DF _{min} Tension |
|-----------|-----------------|--------|--------|---------|--------------|----------------------------|-------------------------|---------------------------|
| 14.75" | 0 – 805' | 10.75" | 40.5# | J55 | STC | 1.125 | 1.25 | 1.60 |
| 8.75" | 0' – 11,300' | 7.625" | 29.7# | HCP-110 | FlushMax III | 1.125 | 1.25 | 1.60 |
| 6.75" | 0' – 10,800' | 5.5" | 23# | HCP-110 | VAM Top HT | 1.125 | 1.25 | 1.60 |
| 6.75" | 10,800'-19,932' | 5.5" | 23# | HCP-110 | VAM SG | 1.125 | 1.25 | 1.60 |

Variance is requested to wave the centralizer requirements for the 7-5/8" FJ casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to wave any centralizer requirements for the 5-1/2" FJ casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Cementing Program:

| Depth | No. Sacks | Wt. ppg | Yld Ft ³ /ft | Mix Water Gal/sk | Slurry Description |
|-------------------|-----------|---------|-------------------------|------------------|---|
| 10-3/4" 805' | 325 | 13.5 | 1.73 | 9.13 | Class C + 4.0% Bentonite + 0.6% CD-32 + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface) |
| | 200 | 14.8 | 1.34 | 6.34 | Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate |
| 7-5/8" 11,300' | 250 | 14.8 | 1.38 | 6.48 | Class C + 5% Gypsum + 3% CaCl ₂ |
| | 2000 | 14.8 | 1.38 | 6.48 | Class C + 5% Gypsum + 3% CaCl ₂ |
| TOC @ surface | 550 | 14.4 | 1.20 | 4.81 | 50:50 Class H:Poz + 0.25% CPT20A + 0.40% CPT49 + 0.20% CPT35 + 0.80% CPT16A + 0.25% CPT503P |
| 5-1/2" 19,932' | 725 | 14.1 | 1.26 | 5.80 | Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 10,800') |

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

EOG RESOURCES, INC.
CALM BREEZE 2 FED COM NO. 701H

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5000-psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 5000/ 250 psig and the annular preventer to 3500/ 250 psig. The surface casing will be tested to 1500 psi for 30 minutes.

Before drilling out of the intermediate casing, the ram-type BOP and accessory equipment will be tested to 5000/ 250 psig and the annular preventer to 3500/ 250 psig. The intermediate casing will be tested to 2000 psi for 30 minutes.

Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.

6. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows.

| Depth | Type | Weight (ppg) | Viscosity | Water Loss |
|------------------------------|-------------|---------------------|------------------|-------------------|
| 0 – 805' | Fresh - Gel | 8.6-8.8 | 28-34 | N/c |
| 805' – 11,300' | Brine | 8.8-10.0 | 28-34 | N/c |
| 11,300' – 19,932' Lateral | Oil Base | 10.0-11.5 | 58-68 | 3 - 6 |

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

EOG RESOURCES, INC.
CALM BREEZE 2 FED COM NO. 701H

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H₂S monitoring and detection equipment will be utilized from surface casing point to TD.

8. LOGGING, TESTING AND CORING PROGRAM:

Open-hole logs are not planned for this well.

9. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

The estimated bottom-hole temperature (BHT) at TD is 182 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 7438 psig. No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from 7,300' to Intermediate casing point.

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

11. WELLHEAD:

A multi-bowl wellhead system will be utilized.

After running the 10-3/4" surface casing, a 13-5/8" BOP/BOPE system with a minimum working pressure of 5000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Onshore Order No. 2

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 5000 psi.

EOG RESOURCES, INC.
CALM BREEZE 2 FED COM NO. 701H

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the installation instructions for the Stream Flo FBD100 Multi-Bowl WH system has been sent to the NM BLM office in Carlsbad, NM.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. Prior to running the intermediate casing, the rams will be changed out to accommodate the 7-5/8" casing. The bonnet seals will be tested to 1500 psi. After installing the intermediate casing the casing rams will be removed and replaced with variable bore rams. The remaining BOPE will not be retested after installing the intermediate casing.

Both the surface and intermediate casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1500 psi, whichever is greater.

Wellhead drawing Attached.


Calm Breeze 2 Fed Com #701H

Lea County, New Mexico
Proposed Wellbore

2331' FSL
1547' FWL
Section 2
T-26-S, R-33-E

API: 30-025-*****

KB: 3,349'
GL: 3,324'

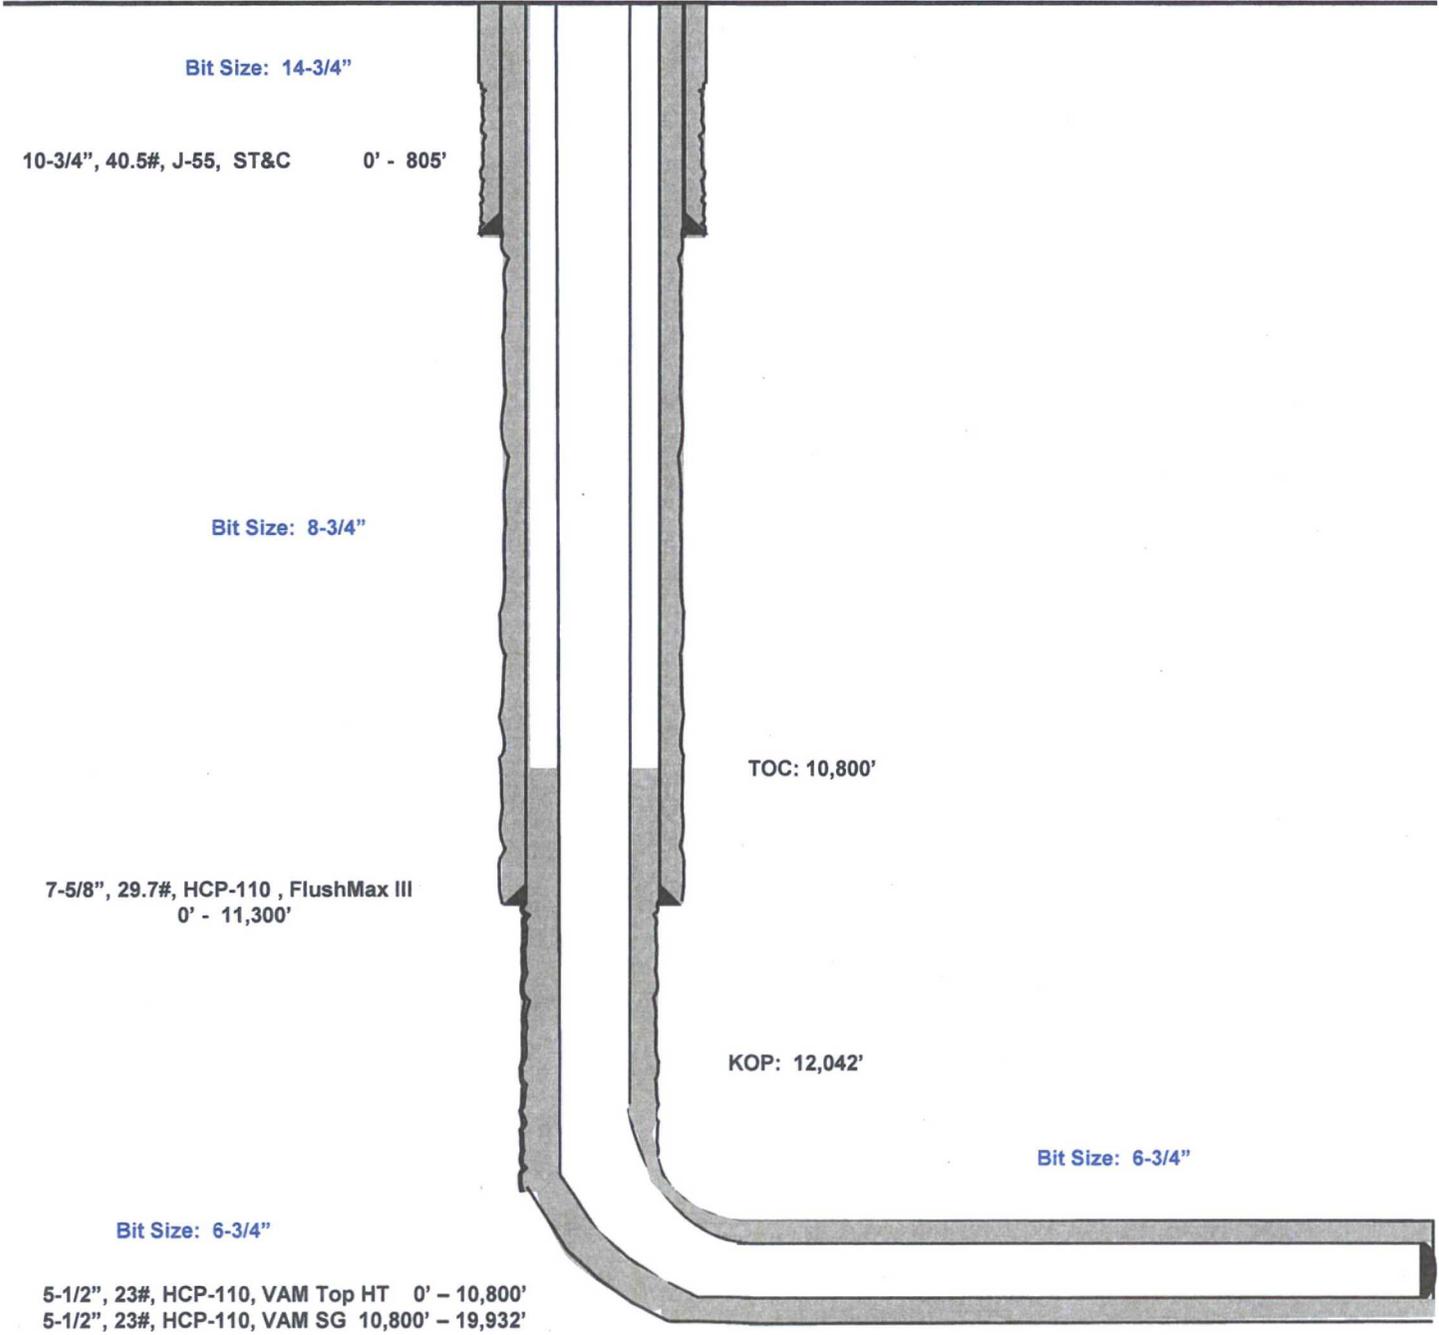

Lateral: 19,932' MD, 12,439' TVD
Upper Most Perf:
2309' FSL & 2313' FWL Sec. 2
Lower Most Perf:
330' FSL & 2313' FWL Sec. 11
BH Location: 230' FSL & 2313' FWL
Section 11
T-26-S, R-33-E

Exhibit 1 EOG Resources 5M BOPE

Rig Floor

- | |
|--|
| 1. 13 5/8" Rotating Head |
| 2. NOV 13 5/8" 5,000 PSI WP GK Annular Preventor |
| 3. 13 5/8" Cameron Type "U" 10,000 PSI WP Ram Preventors |
| 4. 2 1/16" - 10,000 PSI WP Check Valve |
| 5. 10,000 PSI WP - 1502 Union to kill line |
| 6. 2 1/16" - 10,000 PSI WP Manual Valves |
| 7. 13 5/8" 3,000 PSI WP x 13 5/8" 5,000 PSI WP Spacer Spool |
| 8. 4 1/16" 10,000 PSI WP HCR Valve |
| 9. 4 1/16" 10,000 PSI WP Manual Valve |
| 10. 6" OD x 3" ID 10,000 PSI WP Steel Armoured Flex Choke Line |
| 11. DSA - 13 5/8" 10,000 PSI WP x 13 5/8" 5,000 PSI WP |
| 12. Mud Cross - 13 5/8" 10,000 PSI WP |
| 13. Blind Rams |
| 14. Pipe Rams |
| 15. 13 5/8" Cameron Type "U" 10,000 PSI WP Pipe Rams |
| 16. Flow Line |
| 17. 2" Fill Line |


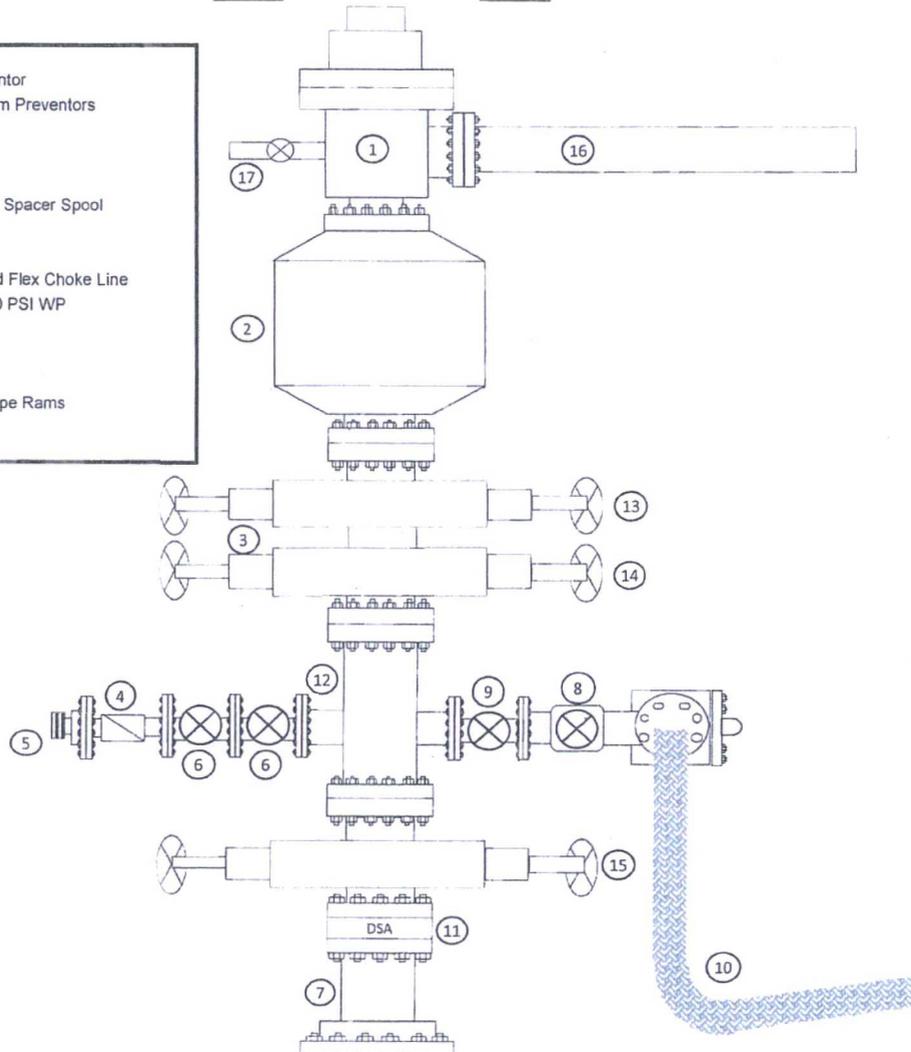


Exhibit 1a

EOG Resources 5M BOPE

1. Cameron 2 1/16" 10,000 PSI WP Gate Valve
2. 4 1/16" 10,000 PSI WP Manual Choke
3. Cameron 4 1/16" 10,000 PSI WP Manual Valve
4. 8" OD x 4" ID 10,000 PSI WP Flex Choke Line
5. Cameron 4 1/16" 10,000 PSI WP Manual Valve & Pressure Gauge on Pressure Block
6. 10,000 PSI WP Hyrdraulic Choke Valve
7. 8" Expansion Chamber
8. LP Butterfly Valve
9. LP Valve
10. 4" Panic Line
11. 6" Butterfly Valve
12. 10-3/4" Butterfly Valve
13. 6" Butterfly Valve

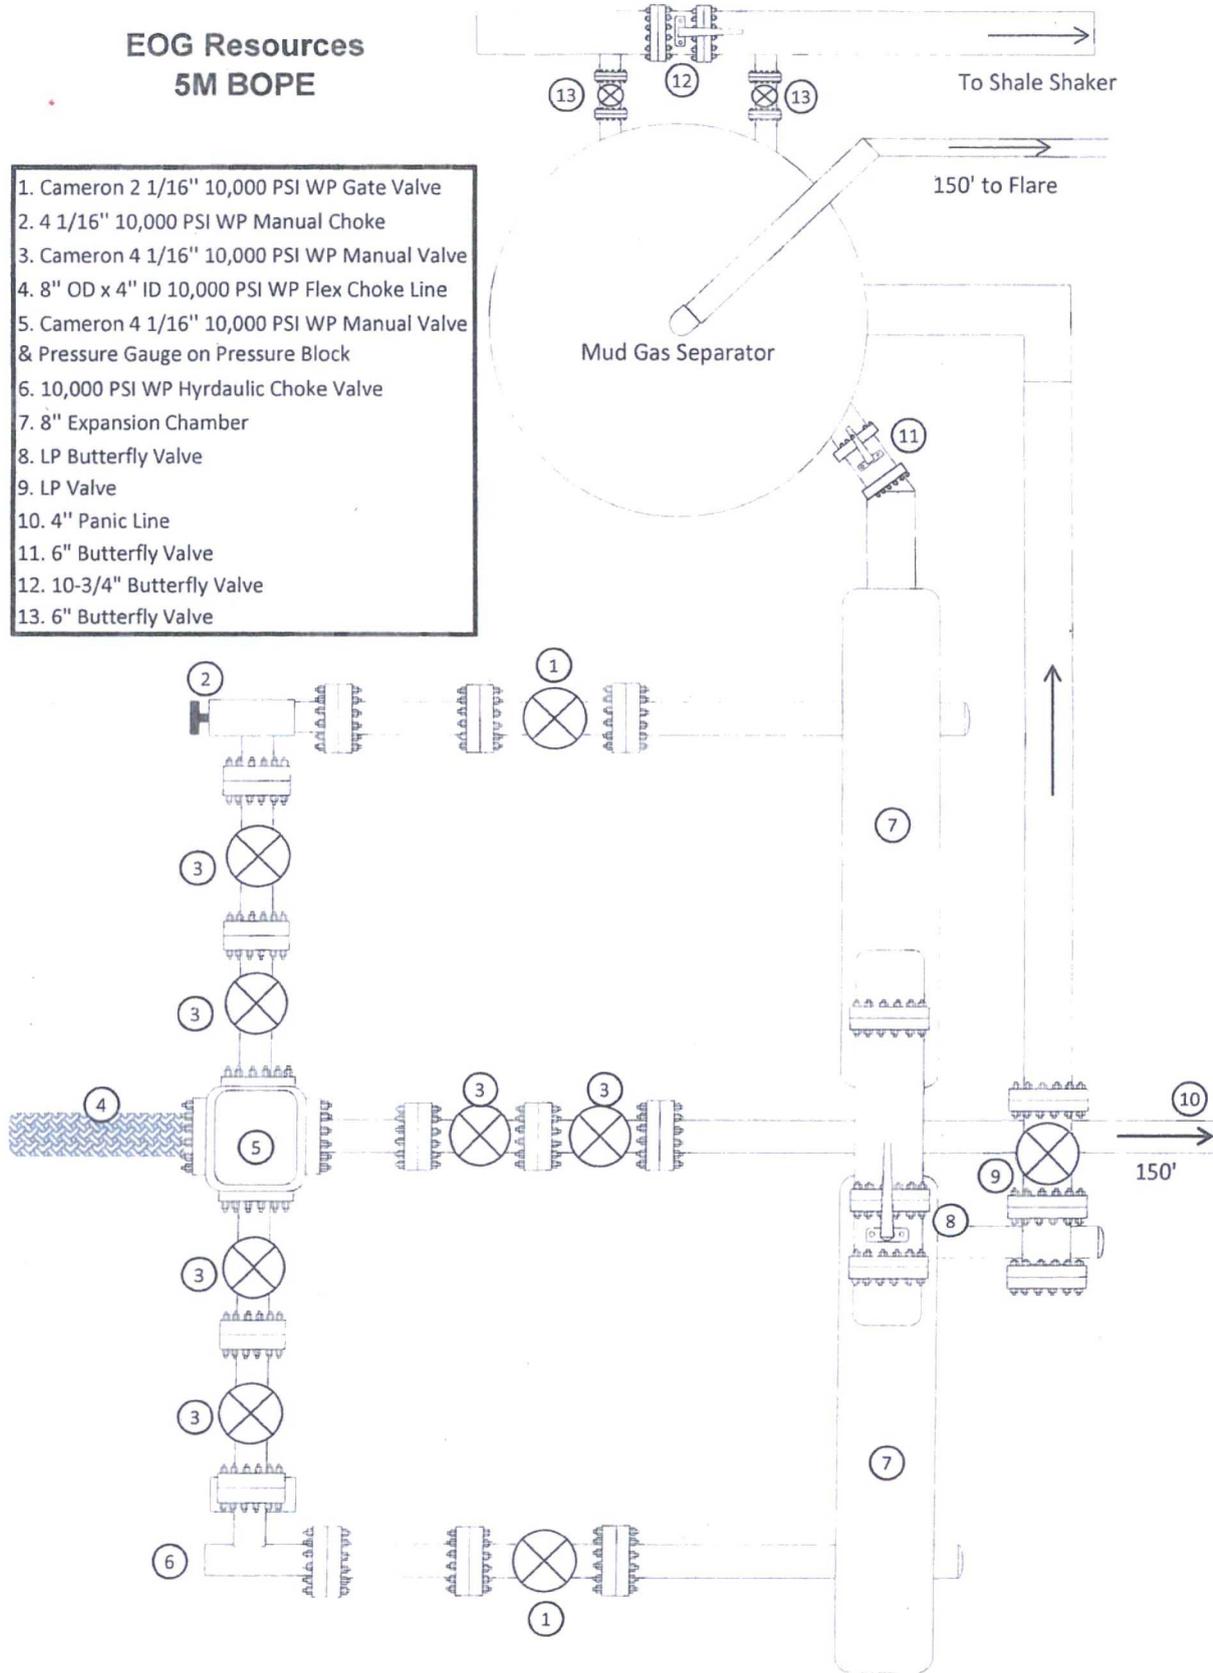

EOG 5M Choke Manifold Diagram (rev. 3/21/14)

Manufacturer: Midwest Hose & Specialty

Serial Number: SN#90067

Length: 35'

Size: OD = 8" ID = 4"

Ends: Flanges Size: 4-1/16"

WP Rating: 10,000 psi Anchors required by manufacturer: No

**MIDWEST
HOSE AND SPECIALTY INC.**

| INTERNAL HYDROSTATIC TEST REPORT | | |
|--|--|---|
| Customer: CACTUS | | P.O. Number: RIG #123 Asset # M10761 |
| HOSE SPECIFICATIONS | | |
| Type: CHOKE LINE | Length: 35' | |
| I.D. 4" INCHES | O.D. 8" INCHES | |
| WORKING PRESSURE 10,000 PSI | TEST PRESSURE 15,000 PSI | BURST PRESSURE PSI |
| COUPLINGS | | |
| Type of End Fitting 4 1/16 10K FLANGE | | |
| Type of Coupling: SWEDGED | MANUFACTURED BY MIDWEST HOSE & SPECIALTY | |
| PROCEDURE | | |
| <i>Hose assembly pressure tested with water at ambient temperature.</i> | | |
| TIME HELD AT TEST PRESSURE 1 MIN. | ACTUAL BURST PRESSURE: 0 PSI | |
| COMMENTS: SN#90067 M10761 Hose is covered with stainless steel armour cover and wrapped with fire resistant vermiculite coated fiberglass insulation rated for 1500 degrees complete with lifting eyes | | |
| Date: 6/6/2011 | Tested By: BOBBY FINK | Approved: MENDI JACKSON |



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Graph

Customer: CACTUS


SALES ORDER# 90067

Hose Specifications

| | |
|-------------------------|------------------------------------|
| <u>Hose Type</u> | <u>Length</u> |
| C & K | 35' |
| <u>I.D.</u> | <u>O.D.</u> |
| 4" | 8" |
| <u>Working Pressure</u> | <u>Burst Pressure</u> |
| 10000 PSI | Standard Safety Multiplier Applies |

Verification

| | |
|------------------------|-------------------------------|
| <u>Type of Fitting</u> | <u>Coupling Method</u> |
| 4 1/16 10K | Swage |
| <u>Die Size</u> | <u>Final O.D.</u> |
| 6.62" | 6.68" |
| <u>Hose Serial #</u> | <u>Hose Assembly Serial #</u> |
| | 90067 |

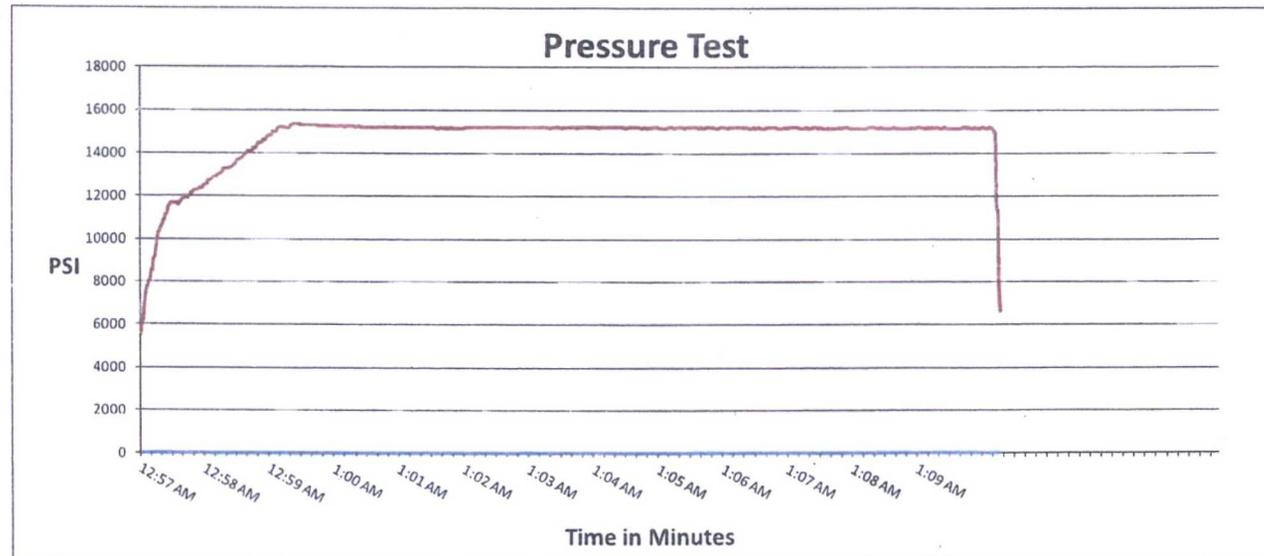

Test Pressure
15000 PSI

Time Held at Test Pressure
11 1/4 Minutes

Actual Burst Pressure

Peak Pressure
15439 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.


Tested By: Bobby Fink

Approved By: Mendi Jackson





**FLUSHMAX-III
Connection Data Sheet**

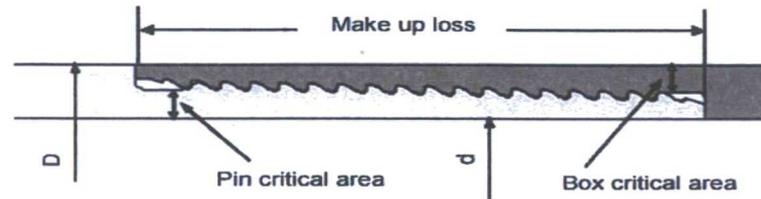

| Pipe Body | Imperial | | S.I. | |
|-------------------------|----------|-----------------|--------|-----------------|
| Grade | P110 | | P110 | |
| Pipe OD (D) | 7 5/8 | in | 193.68 | mm |
| Weight | 29.7 | lb/ft | 44.25 | kg/m |
| Actual weight | 29.0 | lb/ft | 43.26 | kg/m |
| Wall thickness (t) | 0.375 | in | 9.53 | mm |
| Pipe ID (d) | 6.875 | in | 174.63 | mm |
| Pipe body cross section | 8.537 | in ² | 5,508 | mm ² |
| Drift Dia. | 6.750 | in | 171.45 | mm |

| Connection | | | | |
|-----------------------|------------------------|-----------------|--------|-----------------|
| Box OD (W) | 7.625 | in | 193.68 | mm |
| PIN ID | 6.875 | in | 174.63 | mm |
| Pin critical area | 4.420 | in ² | 2,852 | mm ² |
| Box critical area | 4.424 | in ² | 2,854 | mm ² |
| Joint load efficiency | 60 | % | 60 | % |
| Make up loss | 3.040 | in | 77.22 | mm |
| Thread taper | 1/16 (3/4 in per ft) | | | |
| Number of threads | 5 thread per in. | | | |

| Connection Performance Properties | | | | |
|-----------------------------------|-------|------|-------|-----|
| Tensile Yield load | 563.4 | kips | 2,506 | kN |
| M.I.Y.P. | 7,574 | psi | 52.2 | MPa |
| Collapse strength | 5,350 | psi | 36.9 | MPa |


Note

M.I.Y.P. = Minimum Internal Yield Pressure of the connection

| Torque Recommended | | | | |
|--------------------|--------|-------|--------|-----|
| Min. | 8,700 | ft-lb | 11,700 | N-m |
| Opti. | 9,700 | ft-lb | 13,100 | N-m |
| Max. | 10,700 | ft-lb | 14,500 | N-m |
| Operational Max. | 23,600 | ft-lb | 32,000 | N-m |

Note : Operational Max. torque can be applied for high torque application

VAM® TOP HT

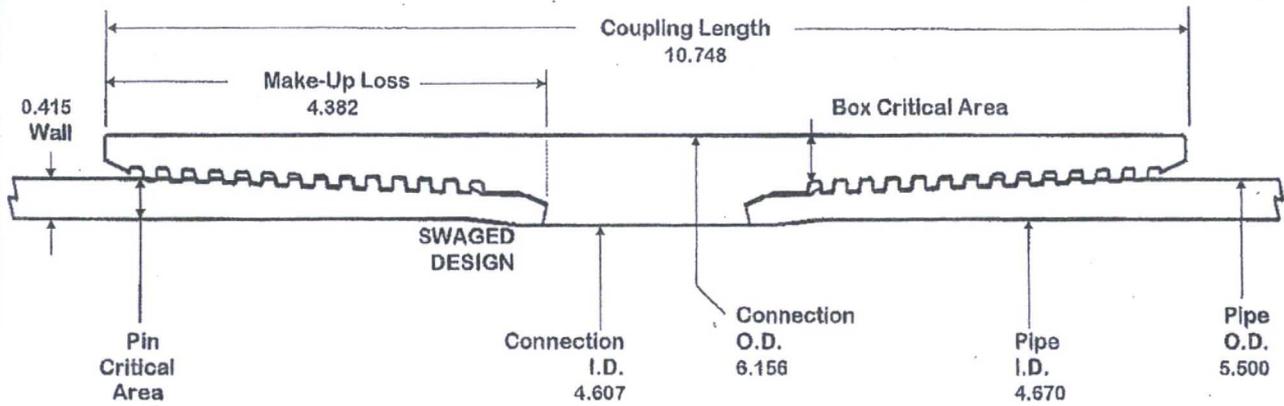

O.D. 5.500 WEIGHT 23.00 WALL 0.415 GRADE NSSMC P110HC DRIFT 4.545

PIPE BODY PROPERTIES

| | |
|-----------------------|--------------|
| Material Grade | NSSMC P110HC |
| Min. Yield Strength | 125 ksi |
| Min. Tensile Strength | 125 ksi |
| Outside Diameter | 5.500 in |
| Inside Diameter | 4.670 in |
| Nominal Area | 6.630 sq.in. |
| Yield Strength | 829 kips |
| Ultimate Strength | 829 kips |
| Min Internal Yield | 16,510 psi |
| *High Collapse | 16,220 psi |

CONNECTION PROPERTIES

| | |
|--------------------|--------------|
| Connection OD | 6.156 in |
| Connection ID | 4.607 in |
| Make up Loss | 4.382 in |
| Coupling Length | 10.748 in |
| Box Critical Area | 6.757 sq.in. |
| %PB Section Area | 101.9% |
| Pin Critical Area | 6.630 sq.in. |
| %PB Section Area | 100.0% |
| Yield Strength | 829 kips |
| Parting Load | 829 kips |
| Min Internal Yield | 16,510 psi |
| *High Collapse | 16,220 psi |
| Wk Compression | 663 kips |
| Max Pure Bending | 30 °/100 ft |

Contact: tech.support@vam-usa.com
 Ref. Drawing: SI-PD 100526 Rev.B
 Date: 30-Apr-15
 Time: 10:24 AM

TORQUE DATA ft-lb

| min | opt | max |
|--------|--------|--------|
| 13,700 | 15,200 | 16,700 |

Max. Liner Torque : 20,000 ft-lb



All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

VAM SG

Connection Data Sheet

| O.D (in) | WEIGHT (lb/ft) | WALL (in) | GRADE | DRIFT | CONNECTION |
|----------|----------------|-----------|------------|-------|------------|
| 5.500 | 23.00 | 0.415 | VST P110EC | 4.545 | VAM® SG |

| PIPE PROPERTIES | |
|-----------------------|--------------|
| Material Grade | VST P110EC |
| Min. Yield Strength | 125 ksi |
| Min. Tensile Strength | 135 ksi |
| Nominal OD | 5.500 in |
| Nominal ID | 4.670 in |
| Nominal Area | 6.630 sq. in |
| Yield Strength | 829 kips |
| Ultimate Strength | 895 kips |
| Min Internal Yield | 16,510 psi |
| *High Collapse | 16,220 psi |


| CONNECTION PROPERTIES | |
|-----------------------------|--------------|
| Connection OD | 5.720 in |
| Connection ID | 4.603 in |
| Make up Loss | 6.503 in |
| Connection Critical Area | 5.967 sq. in |
| %PB Section Area | 90.0% |
| Yield Strength | 746 kips |
| Parting Load | 805 kips |
| Min Internal Yield | 16,510 psi |
| *High Collapse | 11,350 psi |
| Working Compression | 522 kips |
| Max. Bending w/ Sealability | 40 °/100 ft |

| DOCUMENTATION | |
|---------------|--|
| Ref. Drawing | SI-PD 100835 Rev.A |
| Date | 11-Aug-14 |
| Time | 1:21 PM |
| Email | tech.support@vam-usa.com |

| TORQUE VALUES | |
|---------------------------|--------------|
| Min Make Up Torque | 9,100 ft-lb |
| Opt Make Up Torque | 11,200 ft-lb |
| Max Make Up Torque | 13,300 ft-lb |
| Max Torque w/ Sealability | 14,500 ft-lb |

The single solution for Shale Play needs

VAM® SG brings VAM® premium sealing performance to a semi-flush connection with extremely high Tension performance and increased Torque capacity, validated to the specific Shale drilling requirements, while remaining highly competitive in North American Shale play economics.

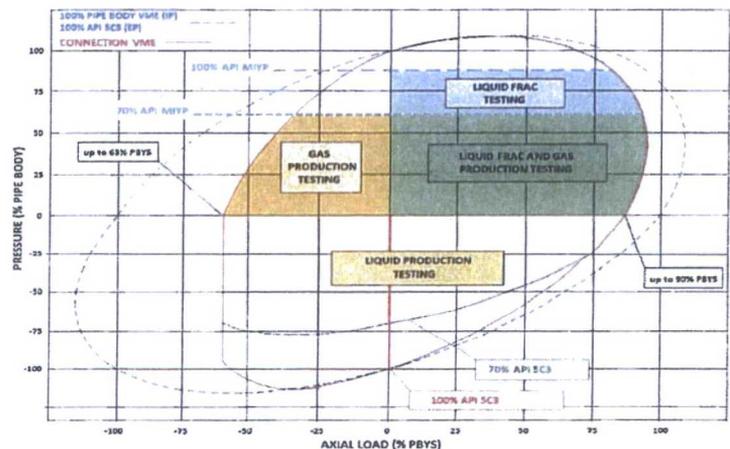

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.



| O.D (in) | WEIGHT (lb/ft) | WALL (in) | GRADE | DRIFT | CONNECTION |
|----------|----------------|-----------|------------|-------|------------|
| 5.500 | 23.00 | 0.415 | VST P110EC | 4.545 | VAM® SG |

| PIPE PROPERTIES | |
|-----------------------|--------------|
| Material Grade | VST P110EC |
| Min. Yield Strength | 125 ksi |
| Min. Tensile Strength | 135 ksi |
| Nominal OD | 5.500 in |
| Nominal ID | 4.670 in |
| Nominal Area | 6.630 sq. in |
| Yield Strength | 829 kips |
| Ultimate Strength | 895 kips |
| Min Internal Yield | 16,510 psi |
| *High Collapse | 16,220 psi |


| CONNECTION PROPERTIES | |
|-----------------------------|--------------|
| Connection OD | 5.720 in |
| Connection ID | 4.603 in |
| Make up Loss | 6.503 in |
| Connection Critical Area | 5.967 sq. in |
| %PB Section Area | 90.0% |
| Yield Strength | 746 kips |
| Parting Load | 805 kips |
| Min Internal Yield | 16,510 psi |
| *High Collapse | 11,350 psi |
| Working Compression | 522 kips |
| Max. Bending w/ Sealability | 40 °/100 ft |

| DOCUMENTATION | |
|---------------|--|
| Ref. Drawing | SI-PD 100835 Rev.A |
| Date | 11-Aug-14 |
| Time | 1:21 PM |
| Email | tech.support@vam-usa.com |

| TORQUE VALUES | |
|---------------------------|--------------|
| Min Make Up Torque | 9,100 ft-lb |
| Opt Make Up Torque | 11,200 ft-lb |
| Max Make Up Torque | 13,300 ft-lb |
| Max Torque w/ Sealability | 14,500 ft-lb |

The single solution for Shale Play needs

VAM® SG brings VAM® premium sealing performance to a semi-flush connection with extremely high Tension performance and increased Torque capacity, validated to the specific Shale drilling requirements, while remaining highly competitive in North American Shale play economics.

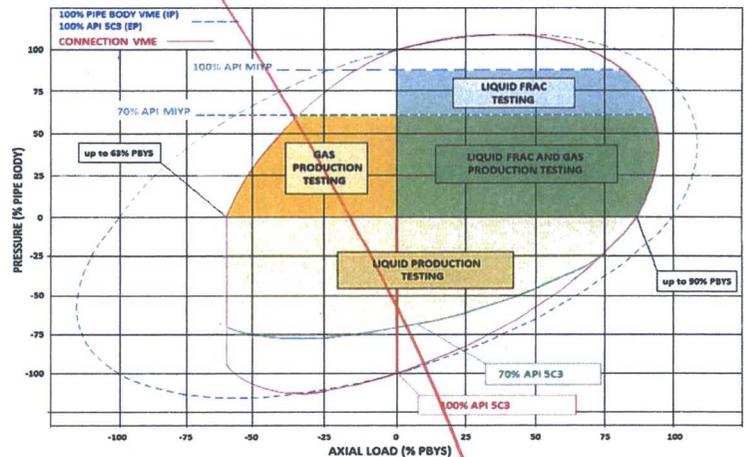

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.