

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

WELL API NO. 30-025-36081	
5. Indicate Type of Lease STATE ☐ FEE ☒	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name Bills Hopper	
8. Well Number 2	
9. OGRID Number 5898	
10. Pool name or Wildcat Edison; Morrow, North (gas)	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4029 GL	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT F
REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐

INT TO PA Pm
P&A NR
P&A R

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

SET CIBP @ 12,900'. DUMP BAIL 35' OR CAP w/ 25 SX CLASS 'H'

1. 5 1/2 CIBP @ 10900' w/ 25 sx. P&S @ 7500' w/ 40 sx.

2. 20 sx across DV Tool 6341-6241', tag

3. P&S 50 sx 5790-5690'. Tag

4. P&S 50 sx 542-442'. Tag

5. Perf 5 1/2 @ 60'. Cmt to surf ~~20~~ Verify cmt

6. cut off WH & mast anchors. Install DHM RDMO

CIRCULATE MUD LADEN FLUID
BETWEEN PLUGS

SPOT 25 SX cmt at 2930'
(Casing part & B. SALT)
PERF at 1900' ATTEMPT TO SQZ
WITH 50 SX. WOL. Tag at 1800' OR BETTER
(T. SALT)

Spud Date:

Rig Release

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE ENGINEERING TECH

DATE 02/22/2017

Type or print name DEBBIE WHITING

E-mail address: DEBBIE.WHITING@ARRINGTON.NM.GOV

For State Use Only

APPROVED BY:

TITLE P.E.S.

DATE 02/28/2017

Conditions of Approval (if any):

Bill's Hopper No. 2
Edison North Field
Lea County, NM

KB: 4048'
GL: 4029'

1815' FSL
1980' FEL
S18
T15S
R35E

API: 30-025-36081

Current Wellbore

Spud: 07/13/03
Rig Rel: 08/30/03

Bit Size: 17-1/2"

13-3/8" 48# H40 STC @ 492'
w/ 525 sx C w/ 2% CaCl₂
Cement Circulated

Bit Size: 11"

8-5/8" 32# J55 STC ~0' - 3500'
32# N80 STC ~3500' - 5740'
w/ ??? sx Interfill C and ??? Sx C w/ 1%
CaCl₂ (2200 sx total)
Not Circulated - TOC @ 2840' (TS)

Bit Size: 7-7/8"

5-1/2" 17# LTC @ 13203'
w/ 1.) 320 sx Interfill H and
400 sx H - TOC @ 10170' (CBL)
2.) 100 sx Interfill C and
100 sx H - Not Circ

Rig: Patterson 511
Cmt: Halliburton
Mud: Horizon
Wellhead:

RUSTLER 1857
YATES 3012
SA 4543

TOC @ 2840' (TS)

Parted csg: 2876' - 2880'
Sqz'd w/ 500 sx C w/ 2% CaCl₂
Cmt Circulated 9/28/05

TOC not noted

DV Tool @ 6291'

Tubing Assembly

407 jts 2 3/8" N80 tbg
SN @ 12,912', Don-Nan gas
separator (20'), Watson CRP, 2
3/8" x 5 1/2" TAC @ 12,937' 4' perf
sub w/BP @ 12'941'

Rod Assembly

1-1/4" x 26' PR w/ 1-1/2" x 16' PRL
2', 6', 6', & 8' T97 pony rods
174 7/8" steel grade T97 rods
335 3/4" steel grade T97 rods
4 1-1/2" x 25' K-Bars
2" x 1-1/16" x 24' Don-Nan pump

TOC @ 10170'

Cisco Perfs:

10956' - 10960' (24 holes)
10962' - 10964' (12 holes)
10970' - 10986' (96 holes)
132 holes .45 dia., 60° phasing
PERFS: Squeezed w/ 75 sxs
9/19/07

Morrow Perfs:

12958' - 12968' (60 JH's)
12982' - 12992' (60 JH's)

TD: 13210'
PBTD: 11610'

1815' FSL
1980' FEL
S18
T15S
R35E


Bill's Hopper No. 2
Edison North Field
Lea County, NM

API: 30-025-36081

KB: 4048'
GL: 4029'

Spud: 07/13/03
Rig Rel: 08/30/03

P&A Wellbore

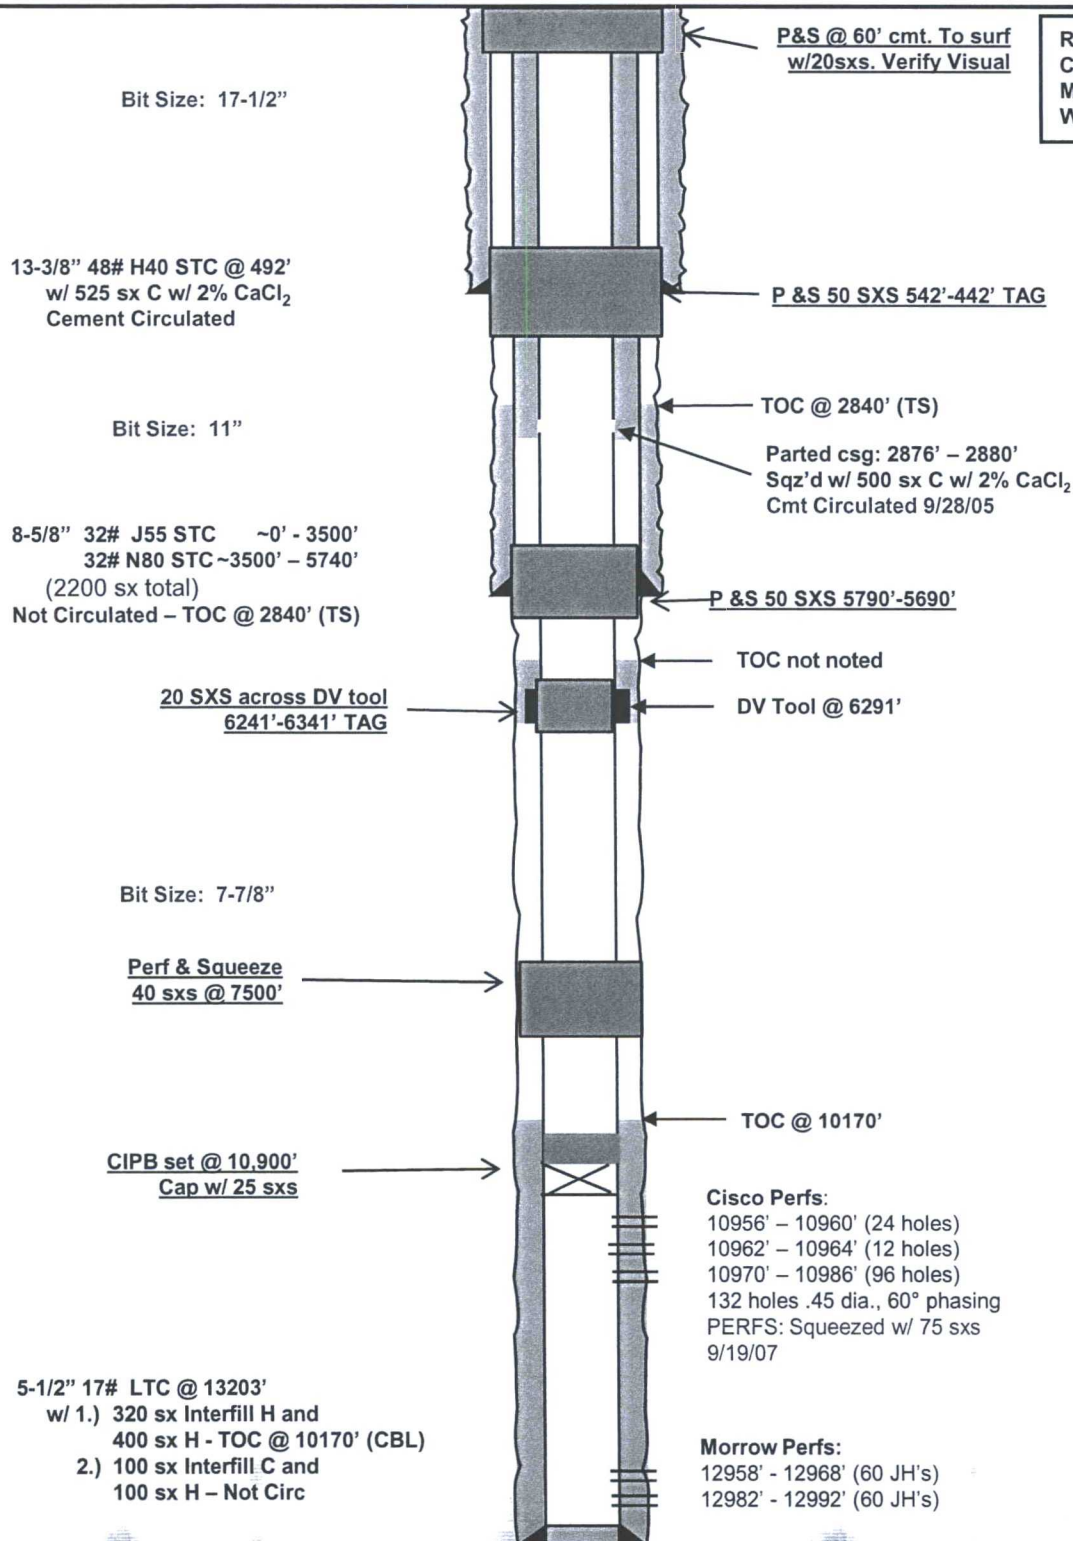

Rig:	Patterson 511
Cmt:	Halliburton
Mud:	Horizon
Wellhead:	

TD: 13210'
PBTD: 11610'