



BLOWOUT PREVENTER ARRANGEMENT - 11" 5M BOPE
per Onshore Oil and Gas Order No. 2 utilizing 5M Rated Equipment

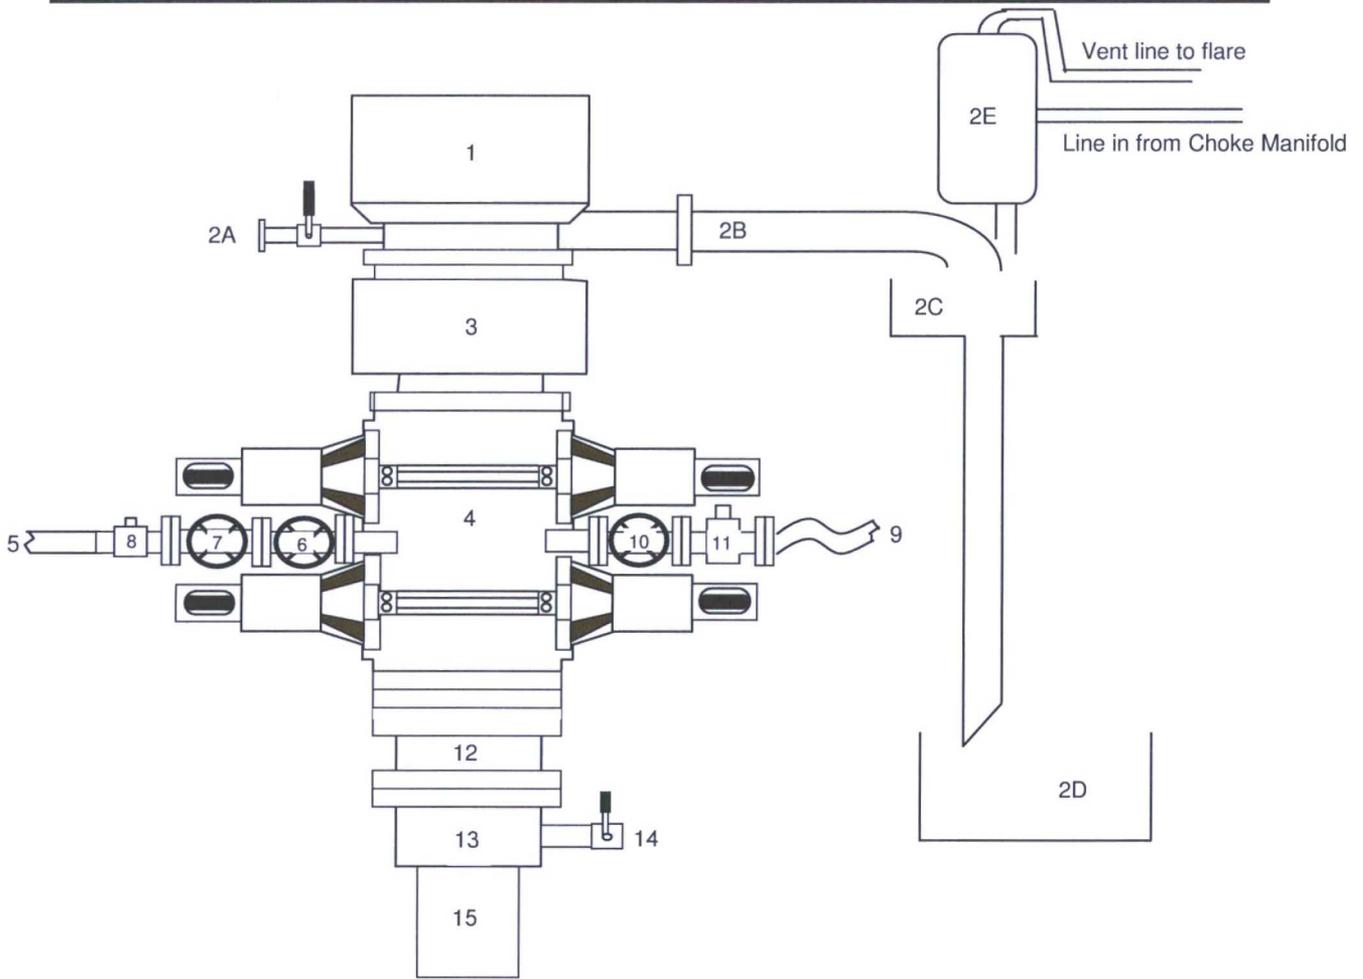

Item	Description
1	Rotating Head, 11"
2A	Fill up Line and Valve
2B	Flow Line (10")
2C	Shale Shakers and Solids Settling Tank
2D	Cuttings Bins for Zero Discharge
2E	Rental Mud Gas Separator with vent line to flare and return line to mud system
3	Annular BOP (11", 5M)
4	Double Ram (11", 5M, Blind Ram top x Pipe Ram bottom)
5	Kill Line Connection
6	Kill Line Valve, Inner (2-1/16", 5M)
7	Kill Line Valve, Outer (2-1/16", 5M)
8	Kill Line Check Valve (2-1/16", 5M)
9	Choke Line (3-1/8" 5M Coflex Line)
10	Choke Line Valve, Inner (3-1/8", 5M)
11	Choke Line Valve, Outer, (3-1/8", Hydraulically operated, 5M)
12	Spacer Spool (11", 5M)
13	Casing Head (11" 5M)
14	Casing Head Valve Outlet (2" 5M)
15	Surface Casing

A variance is requested to permit the use of flexible hose. The testing certificate for the specific hose will be available on the rig prior to commencing drilling operations.


CHOKE MANIFOLD ARRANGEMENT - 3M Choke
per Onshore Oil and Gas Order No. 2 utilizing 3M/5M Equipment

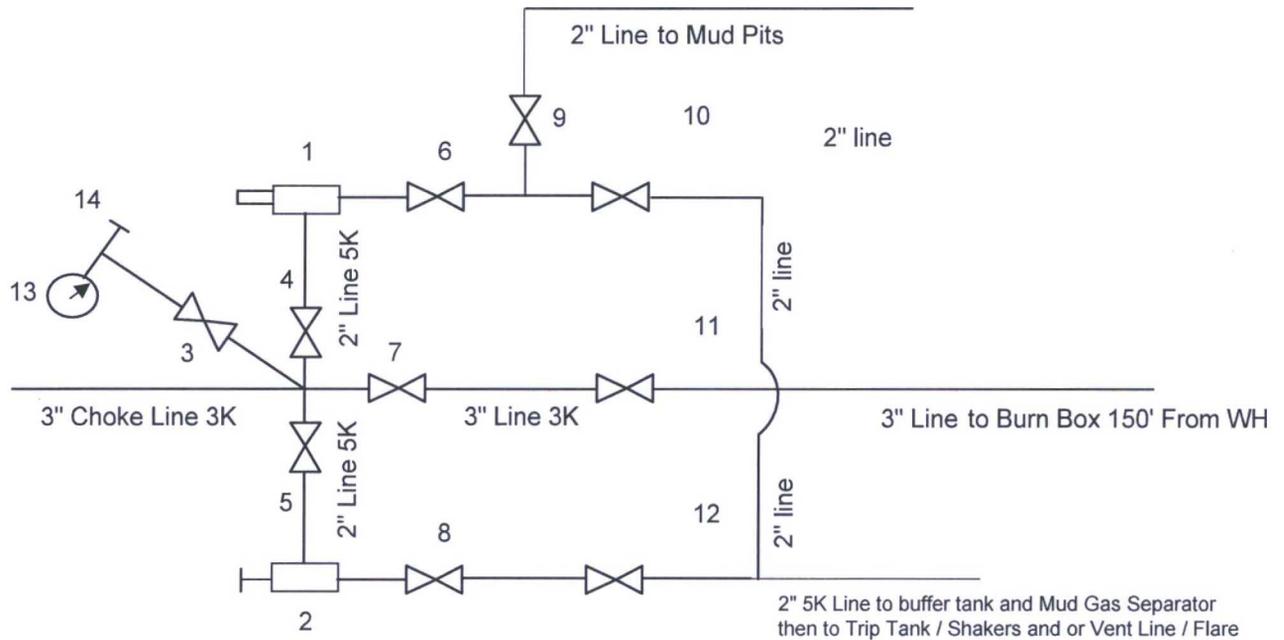


All Tees must be Targeted

Item	Description
1	Remote Controlled Hydraulically Operated Adjustable Choke, 2-1/16", 3M
2	Manual Adjustable Choke, 2-1/16", 3M
3	Gate Valve, 2-1/16" 5M
4	Gate Valve, 2-1/16" 5M
5	Gate Valve, 2-1/16" 5M
6	Gate Valve, 2-1/16" 5M
7	Gate Valve, 3-1/8" 3M
8	Gate Valve, 2-1/16" 5M
9	Gate Valve, 2-1/16" 5M
10	Gate Valve, 2-1/16" 5M
11	Gate Valve, 3-1/8" 3M
12	Gate Valve, 2-1/16" 5M
13	Pressure Gauge
14	2" hammer union tie-in point for BOP Tester


The 3M Choke Manifold & Valves will be tested to rated working pressure.

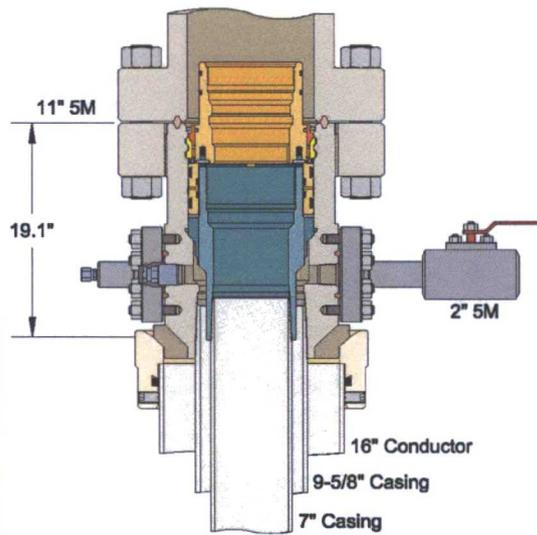

DRILL CONFIGURATION

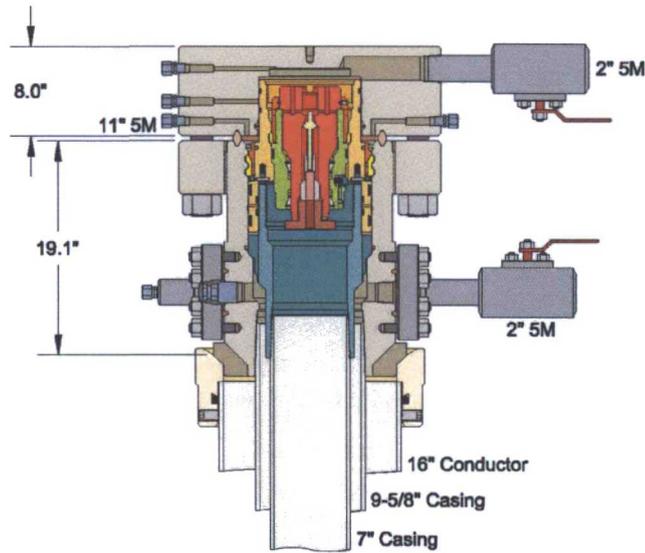

SKID CONFIGURATION

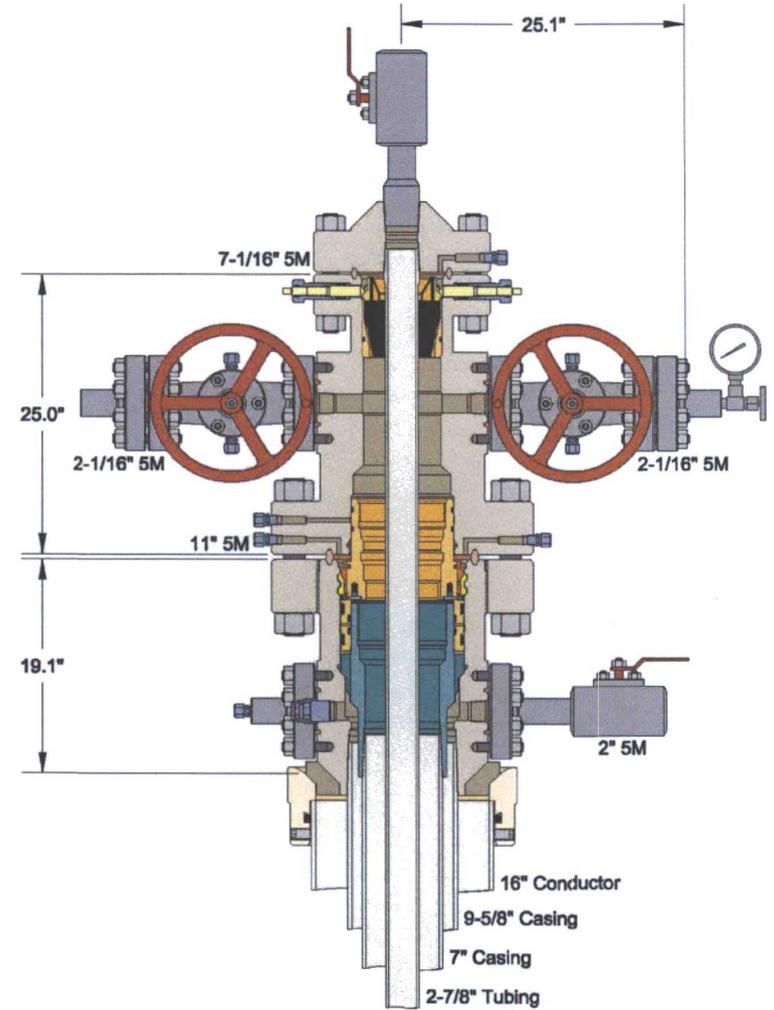

PRODUCTION CONFIGURATION

CACTUS WELLHEAD LLC

16" x 9-5/8" x 7" x 2-7/8" 5M CTF-RP WELLHEAD SYSTEM WITH CTF-RP PACKOFF PROFILED FOR 6-3/4" LR BPV, CTH-HPS-F TUBING HEAD, STRIPPER RUBBER AND B5 ADAPTER FLANGE

CONOCO PHILLIPS
HOWARD CLASSCOCK 5M-
PERMIAN CONVENTIONAL

DRAWN	THH	22JUN15
APPRV		

DRAWING NO. ODE0000681

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, L.L.C. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, L.L.C.



2904 SCR 1250
MIDLAND, TX
79706

T E S T C E R T I F I C A T E

Customer Information

Customer:	TRINIDAD DRILLING
P.O. #:	PO22132
Rig #	RIG# 435
Cust Tracking #	

Material Information

Hose Type	3.1/2" FIREGUARD H
Hose ID	3.1/2"
Assembly Length	8' 6"
Fireguard Yes/No	YES

Test Information

Cert No.:	105-013482/001	H-01
Date: (YYYY-MM-DD)	#2016-11-11#	
Working Pressure :	5000 PSI	
Test Pressure:	10000 PSI	
Duration (mins):	20	

Material Tracking - Coupling #1

Coupling #1:	R35 FIXD FLANGE
MTR# - Stem	
MTR# - Shell	
NACE#	

Material Tracking - Coupling #2


Coupling #2:	R35 FLOATING FLAN
MTR# - Stem	
MTR# - Shell	
NACE#	

Traceability

NEW
 RECERT 13482 H-01
Previous Reference #

Comments

TESTED AND CERTIFIED @ 10000 PSI FOR 10 MINUTES CERT TAG SN# 13482-H01

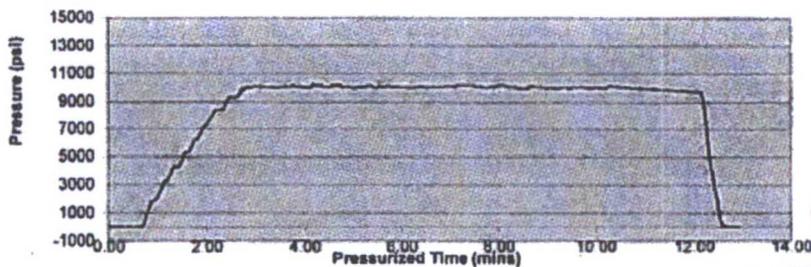

- Acceptable
 Not Acceptable

RIP-HAFM 006
VER II

ISIDRO SANCHEZ

Test Technician (Print Name)

Supervisor Signature

Test Technician Signature