

Submit 1 Copy To Appropriate District Office

State of New Mexico

Form C-103

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

Energy, Minerals and Natural Resources

Revised July 18, 2013

HOBBS OCD

OIL CONSERVATION DIVISION

JUL 06 2017
1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

WELL API NO. 30-025-08580
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. E-1932
7. Lease Name or Unit Agreement Name Jalmat Field Yates Sand Unit
8. Well Number 103
9. OGRID Number 370080
10. Pool name or Wildcat Jalmat;Tan-Yates-7 Rrs (Oil)

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator: Breitburn Operating LP

3. Address of Operator:
1111 Bagby Street, Suite 1600 Houston, Texas 77002

4. Well Location
Unit Letter: B 660 feet from the North line and 1980 feet from the East line
Section 10 Township 22S Range 35E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3614' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK
- TEMPORARILY ABANDON
- PULL OR ALTER CASING
- DOWNHOLE COMMINGLE
- CLOSED-LOOP SYSTEM
- OTHER:
- PLUG AND ABANDON
- CHANGE PLANS
- MULTIPLE COMPL

SUBSEQUENT REPORT OF:

- REMEDIAL WORK
- COMMENCE DRILLING OPNS.
- CASING/CEMENT JOB
- OTHER:
- ALTERING CASING
- P AND A

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Breitburn Operating LP respectfully proposes to P&A this well as follows:

Notify Hobbs NMOCD Office 24 hours prior to beginning of plugging operations.

MIRU PU. ND WH, NU BOP. PU and RIH with tbg. open ended. Load hole with plug mud. — *Pressure test csg.*
 Spot 40 sk cement plug from 3800' – 3400' to isolate producing perms. WOC. Tag.
 Perf @ 1935'. Set ~~20~~ *set CIBP @ 3800'* sk in/out plug from 1935' – 1835' to isolate top of salt formation. WOC. Tag. *80 SX*
 Perf @ 270'. Set ~~20~~ sk in/out from 270' – 170' to isolate surface csg. Shoe. WOC. Tag. *80 SX*
 Perf. @ 60'. Circulate cement to surface. Cut off all csgs. And weld on 1/2" steel plate. Erect dead well marker.

Spud Date: *9-7-1957*

Rig Release Date:

11" hole down to 1898'

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Shelly Doescher* TITLE: Agent DATE: 07/06/2017

Type or print name Shelly Doescher E-mail address: shelly_doeacher@yahoo.com PHONE:: 505-320-5682

For State Use Only
APPROVED BY: *Mark Whitaker* TITLE *Petroleum Engr. Specialist* DATE *07/06/2017*

Conditions of Approval (if any):

MB

JALMAT FIELD YATES SAND UNIT 103
 JALMAT Field
 TANSILL / YATES Zone

API: 30-025-08580
 22S 35E 10B
 Lea County, NM

Current Wellbore Configuration

KB: '
 GL: 3630'


13-3/8" 54.5# @ 220 w/ 225 sxs,
 circ cmt to sfc

Tubing Detail

jts	Component	Top @
118	2-1/16" 3.25# 10rd	

Fish Detail

10' cut jt 2-1/16" tbg
 Larkin 95 tension pkr 3,807

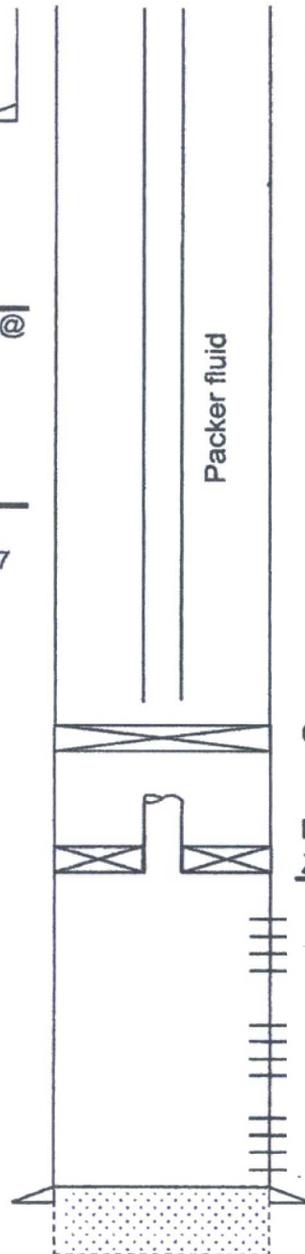

CIBP @ 3800'

Perforations

Zone	Top	Btm	SPF	Holes	Total =
	3,973	3,980	4	28	296
	3,982	3,992	4	40	
	4,012	4,017	4	20	
	4,021	4,026	4	20	
	4,033	4,040	4	28	
	4,044	4,052	4	32	
	4,078	4,090	4	48	
	4,093	4,113	4	80	

PBTD: 4200'
 TD: 4280'

5-1/2" 14# J-55 @ 4200' w/
 350 sxs, TTOC @ 2550'.

JALMAT FIELD YATES SAND UNIT 103
 JALMAT Field
 TANSILL / YATES Zone

API: 30-025-08580
 22S 35E 10B
 Lea County, NM

Proposed Wellbore Configuration


KB: '
 GL: 3630'

Perf @ 60', circ cmt to sfc

65 sk in/out plug set from
 270' - 170'
 Perfs @ 270'

50 sk in/out plug set from
 1935' - 1835'
 Perfs @ 1935'

40 sk plug set from 3400'
 - 3800'

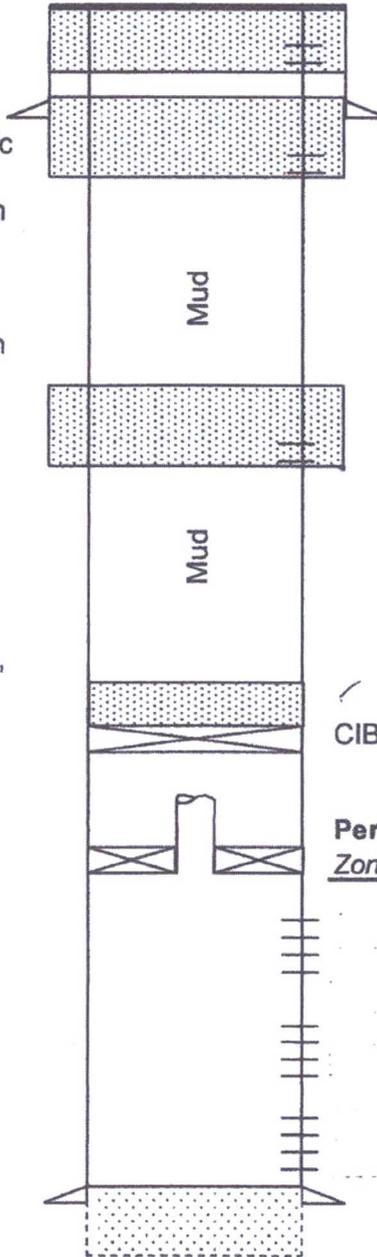

13-3/8" 54.5# @ 220 w/ 225 sxs,
 circ cmt to sfc

Perforations			Total =	296
Zone	Top	Btm	SPF	Holes
	3,973	3,980	4	28
	3,982	3,992	4	40
	4,012	4,017	4	20
	4,021	4,026	4	20
	4,033	4,040	4	28
	4,044	4,052	4	32
	4,078	4,090	4	48
	4,093	4,113	4	80

PBTD: 4200'
 TD: 4280'

5-1/2" 14# J-55 @ 4200' w/
 350 sxs, TTOC @ 2550'.