

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-36461
1. Type of Well: Oil Well ☒ Gas Well ☐ Other INJECTOR		5. Indicate Type of Lease STATE ☐ FEE ☒
2. Name of Operator Chevron USA INC		6. State Oil & Gas Lease No.
3. Address of Operator 6301 DEAUVILLE BLVD., MIDLAND, TX 79706		7. Lease Name or Unit Agreement Name Harris 2
4. Well Location Unit Letter <u>N</u> : <u>330</u> feet from the <u>SOUTH</u> line and <u>2310</u> feet from the <u>West</u> line Section <u>2</u> Township <u>13S</u> Range <u>38E</u> NMPM County <u>Lea</u>		8. Well Number: 2
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3850' GR		9. OGRID Number 493407 4323
10. Pool name or Wildcat Bronco; Wolfcamp 7600		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUEN

REMEDIAL WORK
COMMENCE DRILLING OPN
CASING/CEMENT JOB

INT TO PA Pm ✓
P&A NR _____
P&A R _____

OTHER: ☐

OTHER: _____

TEMPO: _____

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 13 3/8" 48# at 420' TOC surface, 8 5/8" 32# 4505' TOC surface, 5 1/2" 17# 9850' TOC 4250'

Chevron USA INC respectfully request to abandon this well as follows:

- MIRU, NDWH, NU BOPE, POOH with all rods and tubing. *Pressure test csg. H*
- Set CIBP between 9082'-8982', circulate well with 9.5 ppm salt gel mud and spot 25 sx or 35' of CL "C" cement on top of BP, PU reverse out, WOC, & tag. *H*
- PU to 7921', place a 40 sx CL "C" cement from 7921'-7721' (ABO). *H*
- PU to 7536', place a 100 sx CL "C" cement plug from 7536'-7036' (Drinkard & Tubb).
- PU to 4555', perf & sqz 100 sx CL "C" cement from 4555'-4210' (shoe & San Andres), PU reverse out, WOC & tag.
- PU to 3120', perf & sqz 75 sx CL "C" cement plug from 3180'-2930' (7 Rivers & Yates), PU reverse out, WOC & tag.
- PU to 2252', perf & sqz 60 sx CL "C" cement plug from 2252'-2052' (Rustler).
- PU to ~~470~~, perf and sqz, mix and circ. 140 sx CL "C" cement from ~~470~~ back to surface on both strings. *480'*
- Cut all casings & anchors & remove 3' below grade. Weld on dry hole marker. Clean location.
- All cement plugs class "C" with closed loop system used. *Verify cmt to surface all strings*

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Engineer DATE 7/6/17

Type or print name Ricky Spiller E-mail address: RCspiller@chevron.com PHONE: 432-687-7479

For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Engr. Specialist DATE 07/10/2017


Conditions of Approval (if any):

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

Proposed Wellbore Diagram

WELL (PN): HARRIS 2 2(CVX) (890783)
 FIELD OFFICE: HOBBS
 FIELD: TRINITY (WOLFCAMP)
 STATE / COUNTY: NEW MEXICO / LEA
 LOCATION: SEC 2-13S-38E, 330 FSL & 2310 FWL
 ROUTE: HOB-NM-ROUTE 16- CRAIG COLLINS
 ELEVATION: GL: 3,805.0 KB: 3,824.0 KB Height: 19.0
 DEPTHS: TD: 9,850.0

API #: 3002536461
 Serial #:
 SPUD DATE: 11/25/2003
 RIG RELEASE: 12/23/2003
 1ST SALES GAS: 1/17/2004
 1ST SALES OIL:
 Current Status: PRODUCING

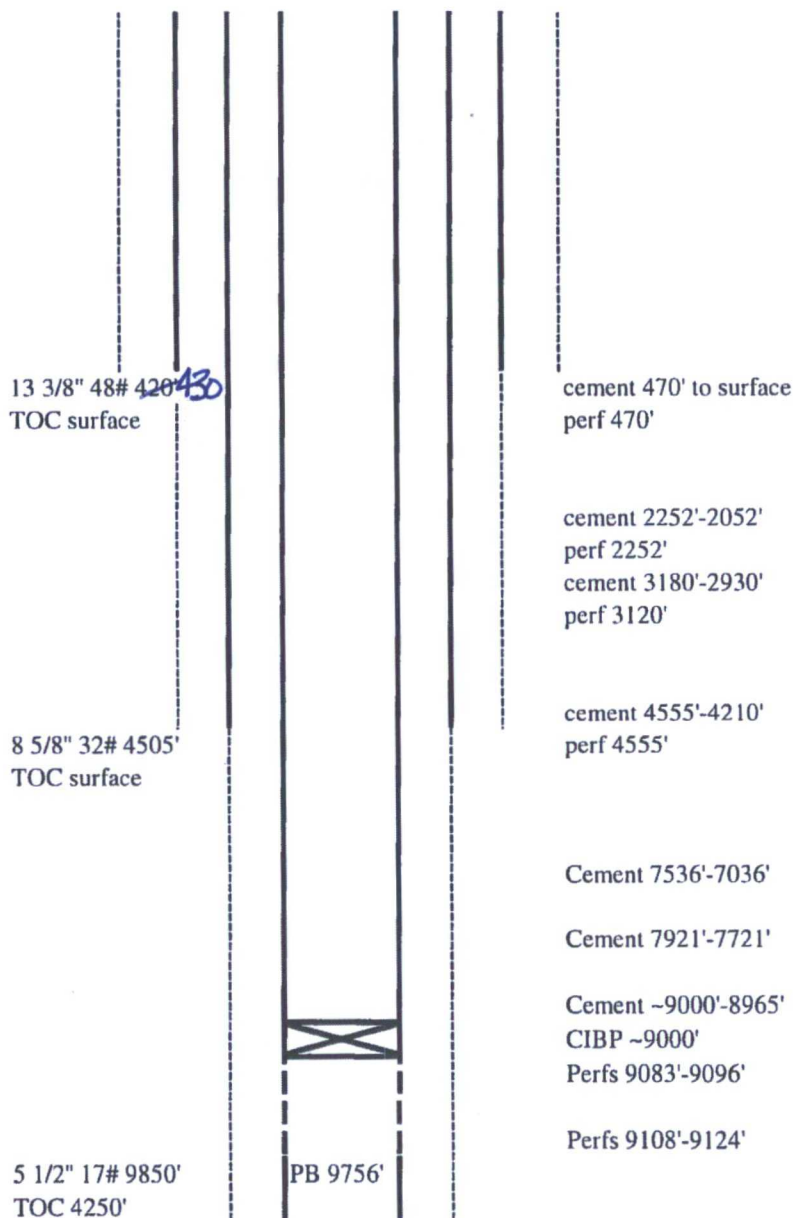

OCD TOPS

Rustler	2252'
Tansill	
Yates	3130'
7R	3364'
T. Bowers Sd	
B. Bowers Sd	
Queen	
Penrose	
Grayburg	
San Andres	4410'
Glorieta	
Tubb	7236'
Drinkard	7536'
Abo	7921'
Wolfcamp	9155'

Current Wellbore Schematic

WELL (PN): HARRIS 2 2(CVX) (880783)
 FIELD OFFICE: HOBBS
 FIELD: TRINITY (WOLFCAMP)
 STATE / COUNTY: NEW MEXICO / LEA
 LOCATION: SEC 2-13S-38E, 330 FSL & 2310 FWL
 ROUTE: HOB-NM-ROUTE 16-CRAIG COLLINS
 ELEVATION: GL: 3,805.0 KB: 3,824.0 KB Height: 19.0
 DEPTHS: TD: 9,850.0

API#: 3002536461
 Serial#: _____
 SPUD DATE: 11/25/2003
 RIG RELEASE: 12/23/2003
 1ST SALES GAS: 1/17/2004
 1ST SALES OIL: _____
 Current Status: PRODUCING

