

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-025-31275

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

B- 2359

7. Lease Name or Unit Agreement Name

Lovington Paddock Unit

8. Well Number: 118

9. OGRID Number

241333

10. Pool name or Wildcat

Lovington, Paddock

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Chevron USA INC Midcontinent, L.P.

3. Address of Operator

6301 DEAUVILLE BLVD., MIDLAND, TX 79706

4. Well Location

Unit Letter A : 1210 feet from the NORTH line and 1280 feet from the East line

Section 1 Township 17S Range 36E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3828'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐

INT TO PA fm X

P&A NR

P&A R

OTHER:

OTHER:

TEMPORARILY ABANDON

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 8 5/8" 24# @ 1860' TOC surface, 5 1/2" 15.5# @ 6800' TOC surface, Perfs 5950'-6660'

Chevron USA INC respectfully request to abandon this well as follows:

1. MIRU, NDWH, NU BOPE.
2. POOH with all rods and tubing if present.
3. Set CIBP between 5949'-5850', circulate well with 9.5 ppm salt gel and spot 25 sx of CL "C" cement on top of BP (perfs, Paddock, Glorieta). Pressure test csg.
4. Spot 25 sx cement plug at 4579'-4168' (San Andres, Grayburg).
5. Spot 30 sx cement plug at 3023'-2777' (Yates, base of Salt), WOC and tag.
6. Spot 50 sx cement plug at 2076'-1660' (top Salt, 8 5/8" shoe, Anhy), WOC and tag.
7. Spot 40 sx cement plug from 300' to surface. ATTEMPT TO PERF. & SQZ.
8. Cut all casings & anchors & remove 3' below grade. Weld on dry hole marker. Clean location. Verify cmt to surface

Note: All cement plugs class "C" with closed loop system used.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Engineer DATE 7/10/17

Type or print name Ricky Spiller E-mail address: rcspiller@chevron.com PHONE: (432) 687-7479

For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Engr. Specialist DATE 07/12/2017

Conditions of Approval (if any):


NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

Well: Lovington Paddock Unit 118
 Field: Lovington
 Reservoir: Paddock

API: 30-025-31275-00
 St.: New Mexico
 Loc: 1210' FNL and 1280' FEL

Sec: 1
 Tws: 17S
 Rng: 36E

Current Wellbore

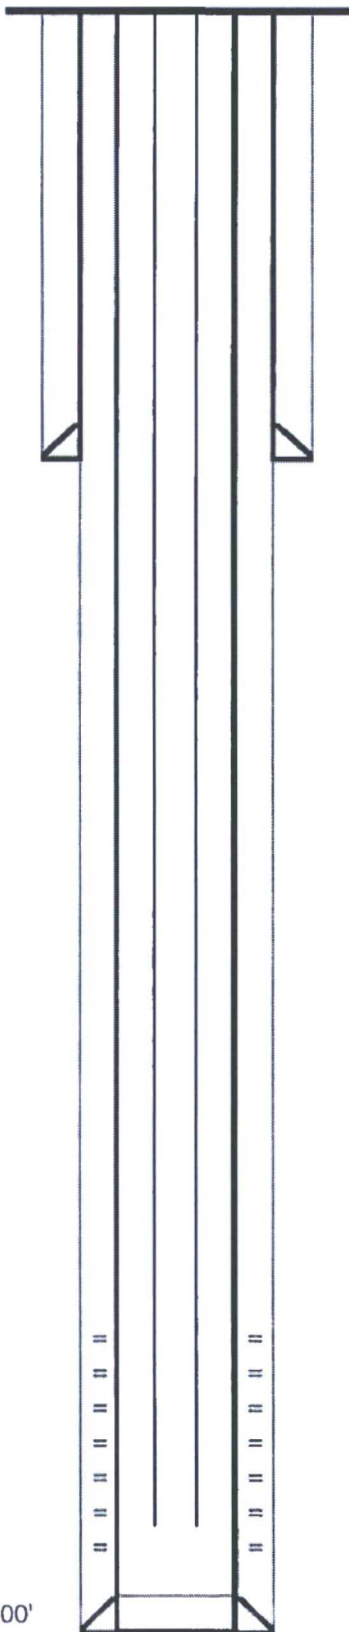

Spud Date: 7/13/1991
 TD Date: 7/25/1991
 Comp Date: 8/23/1991

8-5/8" 24# @ 1860' (43 jts)

CMT: 800sx Class 'C'
 TOC: Surface (circ)
 HOLE: 12-1/4"

Tbg Detail		12/6/2001
	2-7/8" Open End Sub	10
	2-7/8" Seat Nipple	1.1
	2-7/8" SS Blast Jt	18.2
23	2-7/8" Tubing	714.89
	2-7/8" x 5-1/2" TAC	2.9
191	2-7/8" Tubing	5916.3
214		6663.39

Rod String		10/30/2001
	7/8" Stabilizer	3
	7/8" 26K Shear Tool	0.05
	7/8" Stabilizer	3
8	1-1/2" K-Bar	200
122	1" Rods	3050
82	1" Rods	3075
	1" Pony Rods	24
212		6355.05

5-1/2" 15.5# @ 6800' (146 jts)

CMT: 1450sx Class 'C'
 TOC: Surface (circ)
 HOLE: 7-7/8"

Perforations

5950-6660'


COTD:
 PBTD:
 TD: 6800'

Well: Lovington Paddock Unit 118
Field: Lovington
Reservoir: Paddock

API: 30-025-31275-00
St.: New Mexico
Loc: 1210' FNL and 1280' FEL

Sec: 1
Tws: 17S
Rng: 36E

Proposed Wellbore

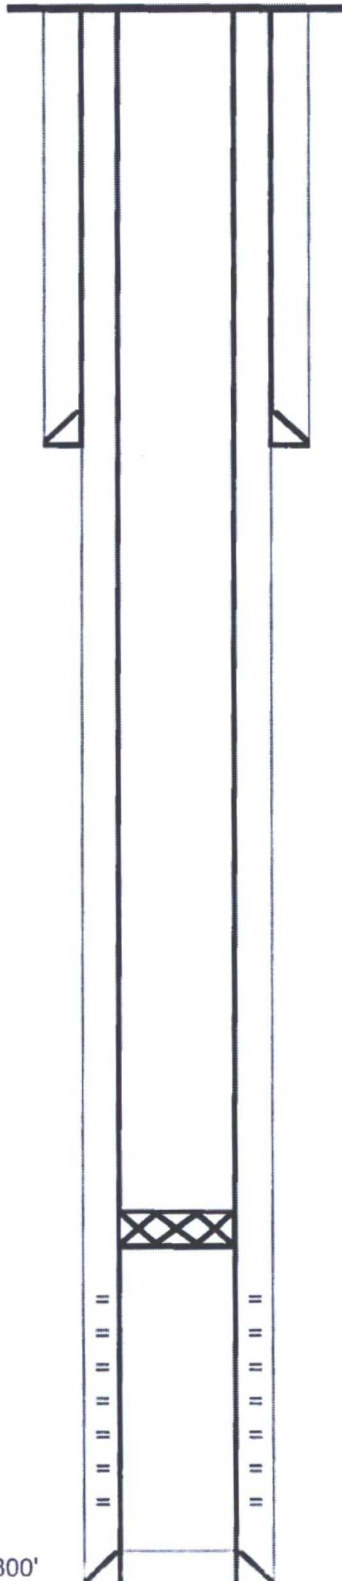

Spud Date: 7/13/1991

TD Date: 7/25/1991

Comp Date: 8/23/1991

cement 300' to surface

8-5/8" 24# @ 1860' (43 jts)

CMT: 800sx Class 'C'

TOC: Surface (circ)

HOLE: 12-1/4"

cement 2076'-1660'

cement 4579'-4168'

cement ~ 5900'-5727'

CIBP ~5900'

5-1/2" 15.5# @ 6800' (146 jts)

CMT: 1450sx Class 'C'

TOC: Surface (circ)

HOLE: 7-7/8"

Perforations

5950-6660'

COTD:

PBTD:

TD:

6800'