

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

HOBBS OCD
JUL 10 2017
RECEIVED

WELL API NO. 30-025-34685
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name B Medlin 10
8. Well Number: 1
9. OGRID Number 4323
10. Pool name or Wildcat Wildcat Wolfcamp
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3804' GL

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other WATER INJECTOR

2. Name of Operator
Chevron USA INC

3. Address of Operator
6301 DEAUVILLE BLVD., MIDLAND, TX 79706

4. Well Location; Surface

Unit Letter E : 2133 feet from the NORTH line and 633 feet from the West line
Section 10 Township 16S Range 37E NMPM County Lea

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT

REMEDIAL WORK []
COMMENCE DRILLING OPNS. []
CASING/CEMENT JOB []
INT TO PA Amx
P&A NR _____
P&A R _____

OTHER: ☐

OTHER: TEMPORA.

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 13 3/8" 48# @ 490' TOC surface, 9 5/8" 40# @ 4573' TOC surface, 5 1/2" 17# & 20# @ 12022' with DV tool @ 8504' TOC 3950'

Chevron USA INC respectfully request to abandon this well as follows:

1. MIRU, NU BOPE, POOH with all rods and tubing. TAG CIBP + CIRC MLF UP TO 10,630'
2. Set CIBP at 10574', place a 26sx CL "H" cmt from 10,574'-10543', circ well with 9.5 ppm salt gel mud.
3. PU to 9693', place a 30 sx CL "H" cement plug from 9693'-9493' (Wolfcamp).
4. PU to 8504' perf and sqz 70 sx CL "H" cement from 8504'-8304' (DV tool) and tag. WOC
5. PU to 6565', place a 30 sx CL "C" cement plug from 6565'-6365' (Glorieta).
6. PU to 4623', place a 30 sx CL "C" cement plug from 4623'-4423' (9 5/8" shoe San Andres). WOC + TAG
7. PU to 3350', perf & sqz 70 sx CL "C" cement plug from 3350'-3100' (base of Salt), WOC and tag.
8. PU to 2195', perf and sqz 70 sx CL "C" cement plug from 2195'-1995' (Paddock, top Salt) and tag.
9. PU to 540', perf and circ 220 sx CL "C" cement plug from 540' to surface (13 3/8" shoe).
10. Cut all casings & anchors & remove 3' below grade. Weld on dry hole marker. Clean location.
11. All cement plugs class "C" with closed loop system used. Verify cmt to surface

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Engineer DATE 7/7/17

Type or print name Ricky Spiller E-mail address: rcspiller@chevron.com PHONE: (432) 687-7479

For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Engr. Specialist DATE 07/12/2017


Conditions of Approval (if any):

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

Current Wellbore Schematic

WELL (PN): B MEDLIN 1-10(CVX) (810915)
 FIELD OFFICE: HOBBS
 FIELD: LOVINGTON
 STATE / COUNTY: NEW MEXICO / LEA
 LOCATION: SEC 10-16S-37E, 2133 FNL & 633 FWL
 ROUTE: HOB-NM-ROUTE 05- BENNY CONNOLLY
 ELEVATION: GL: 3,815.0 KB: 3,831.0 KB Height: 16.0
 DEPTHS: TD: 12,200.0

API #: 3002534685
 Serial #:
 SPUD DATE: 10/18/1999
 RIG RELEASE: 11/17/1999
 1ST SALES GAS: 1/14/2000
 1ST SALES OIL:
 Current Status: PRODUCING

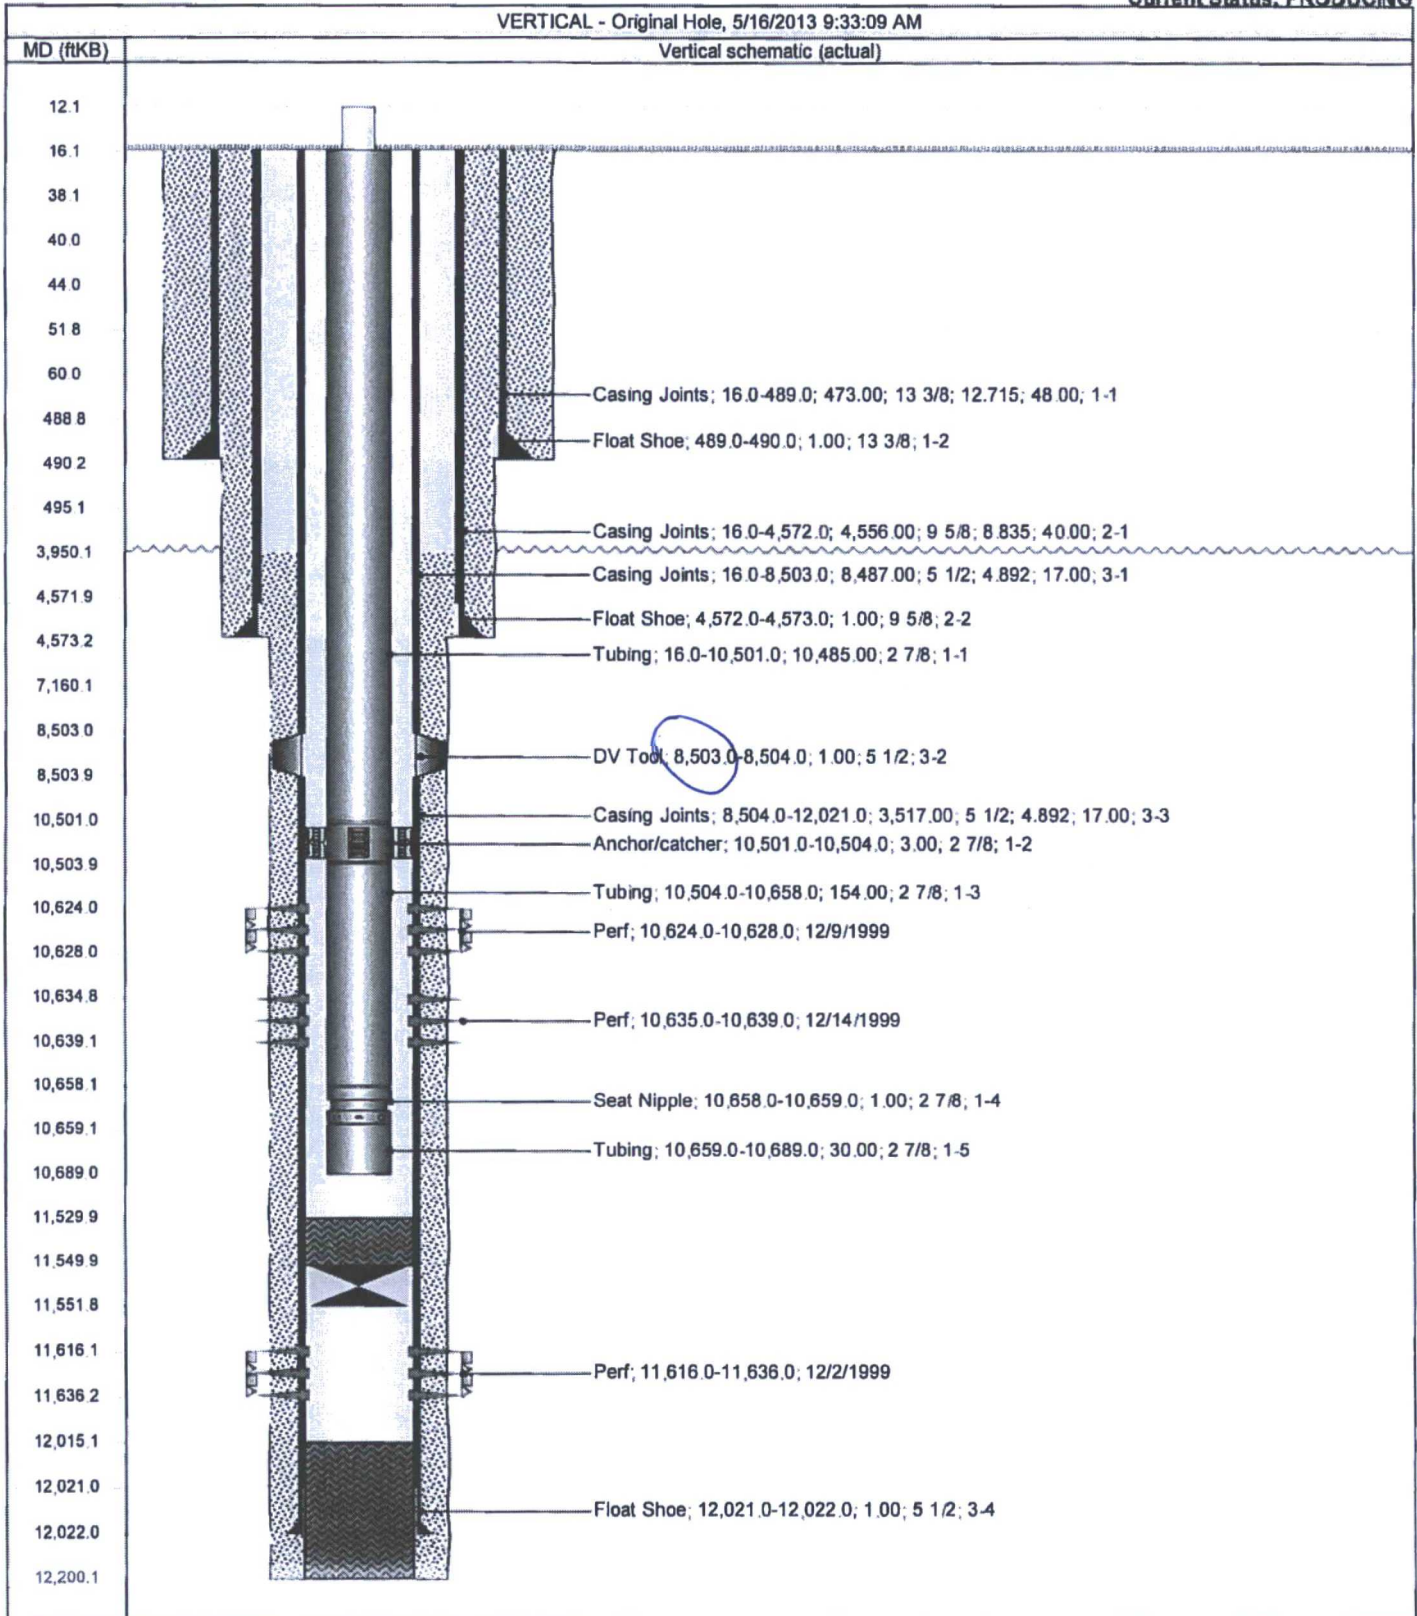

Proposed Wellbore
B Medlin 1-10

13 3/8" 48# 490'
cmt 540' to surface

cmt 2195'-1995'

cmt 3300'-3100'

9 5/8" 40# 4573'
cmt 4623'-4423'

cmt 6565'-6365'

cmt 8504'-8304'

cmt 10,574'-10543'
CIBP 10,574'

cmt 11,529'-11,550'
CIBP 11,550'

perfs 10'624'-10,639'

perfs 11,616'-11,636'

5 1/2" 17# & 20# 12022'