

OCD-HOBBS

RESUBMITTAL

F-06-04

Form 3160-3
(July 1992)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTSUBMIT IN TRIPLICATE*
(Other instructions on
reverse side)FORM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK

DRILL ☒DEEPEN ☐

b. TYPE OF WELL

OIL
WELL ☒GAS
WELL ☐

OTHER

SINGLE
ZONE ☐MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

Pogo Producing Company

<17891>

3. ADDRESS AND TELEPHONE NO.

P.O. Box 10340, Midland, TX 79702-7349 (432)685-8100

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)

At surface 330' FSL & 2210' FWL, Section 33

At proposed prod. zone same

Unit N

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

Approximately 25 miles East of Carlsbad New Mexico

15. DISTANCE FROM PROPOSED*
LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT
(Also to nearest drg. unit line, if any)

330'

16. NO. OF ACRES IN LEASE

1280

17. NO. OF ACRES ASSIGNED
TO THIS WELL

40

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.

4250'

19. PROPOSED DEPTH

8900'

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3606' GR

Carlsbad Committed Water Bank

22. APPROX. DATE WORK WILL START*
When approved

23.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
25	Conductor	NA	40	Cmt to surface w/ Redi-mix
17-1/2	13-3/8 J-55	54.5	1165	1000 sxs - circ to surface
11	8-5/8 J-55, S-80	32	4700	1800 sxs - circ to surface
7-7/8	5-1/2 J-55	17 & 15.5	8900	1200 sxs - Est TOC 3000'

1. Drill 25" hole to 40'. Set 40' of 20" conductor and cement to surface with Redi-mix.
2. Drill 17-1/2" hole to 1165'. Run & set 1165' of 13-3/8" 54.5# S-80 & J-55 ST&C csg. Cmt w/ 1000 sxs Cl "C" cmt + 2% CaCl + 1/4# Flocele/sk. Circulate cmt to surface.
3. Drill 11" hole to 4700'. Run & set 4700' of 8-5/8" csg as follows: 500' 8-5/8" 32# S-80 ST&C, 4200' 8-5/8" 32# J-55 ST&C. Cmt w/ 1800 sxs Cl "C" cmt + 2% CaCl + 1/4# Flocele/sk. Circulate cmt to surface.
4. Drill 7-7/8" hole to 8900'. Run & set 8900' 5-1/2" csg as follows: 2900' 5-1/2" 17# J-55 LT&C, 5000' 5-1/2" 15.5# J-55 LT&C, 1000' 5-1/2" 17# J-55 LT&C csg. Cmt in 2 stages. DV tool @ 6200'±. Cmt 1st stage w/ 600 sxs Cl "H" Premium Plus cmt + additives, 2nd stage cmt w/ 600 sxs Cl "H" cmt + additives. Est. TOC 3000' from surface.

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

Witness Surface Casing

IN ABOVE SPACE DESCRIBE PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

Cathy Wright

TITLE

Sr. Eng Tech

DATE

02/28/06

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL, IF ANY:

ACTING

APPROVED BY

/s/ James Stovall

TITLE

FIELD MANAGER

DATE

APR 04 2006

*See Instructions On Reverse Side

APPROVAL FOR 1 YEAR

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DISTRICT I

P.O. Box 1080, Hobbs, NM 87411-1080

DISTRICT II

P.O. Drawer DD, Artesia, NM 88211-0718

DISTRICT III

1000 Rio Brazos Rd., Artec, NM 87410

DISTRICT IV

P.O. Box 2088, Santa Fe, N.M. 87504-2088

State of New Mexico

Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

Form C-102

Revised February 10, 1994

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-025-37783	Pool Code 51683	Pool Name RED TANK-BONE SPRING
Property Code 17271	Property Name RED TANK "33" FEDERAL	Well Number 3
OGRID No. 17891	Operator Name POGO PRODUCING COMPANY	Elevation 3604'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	33	22-S	32-E		330	SOUTH	2210	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Signature Joe T. Janica Printed Name Agent Title 09/16/02 Date
	SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief. SEPTEMBER 12, 2002 Date Surveyed Signature of Seal of Professional Surveyor Certificate No. RONALD E. SIDSON 3239 State of New Mexico PROFESSIONAL SURVEYOR 12841

EXHIBIT "A"

[illegible]

JOHN WEST SURVEYING
HOBBS, NEW MEXICO
(505) 393-3117

APPLICATION TO DRILL

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM

In response to questions asked under Section II of Bulletin NTL-6 the following information on the above well is provided for your consideration.

1. Location: 330' FSL & 2210' FWL SEC. 33 T22S-R32E LEA CO. NM
2. Elevation above Sea Level: 3606' GR.
3. Geologic name of surface formation: Quaternary Aeolian Deposits.
4. Drilling tools and associated equipment: Conventional rotary drilling rig using drilling mud as a circulating medium for solids removal from hole.
5. Proposed drilling depth: 8900'
6. Estimated tops of geological markers:

Basal Anhydrite	4210'	Cherry Canyon	5539'
Delaware Lime	4670'	Brushy Canyon	6793'
Bell Canyon	4732	Bone Spring	8618'

7. Possible mineral bearing formations:

Brushy Canyon	Oil
Bone Spring	Oil

8. Casing program:

Hole size	Interval	OD of casing	Weight	Thread	Collar	Grade
25"	0-40	20"	NA	NA	NA	Conductor
17½"	0-1000'	13 3/8"	54.5	8-R	ST&C	J-55
8 5/8"	0-4700'	8 5/8"	32	8-R	ST&C	S-80 J-55
5½"	0-8900'	5½"	17 & 15.5	8-R	LT&C	J-55

APPLICATION TO DRILL

POGO PRODUCING COMPANY
 RED TANK "33" FEDERAL # 3
 UNIT "N" SECTION 33
 T22S-R32E LEA CO. NM

9. CASING SETTING & CEMENTING:

20"	Conductor	Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
13 3/8"	Surface	Set 1000' of 13 3/8" 54.5# J-55 ST&C casing. Cement with 1000 Sx. of Class "C" cement + additives, circulate cement to surface.
8 5/8"	Intermediate	Set 4700' of 8 5/8" 32# S-80 & J-55 ST&C casing. Cement with 1800 Sx. of Class "C" cement + 2% CaCl + 1/2# Flocele/Sx. circulate cement to surface.
5 1/2"	Production	Set 8900' of 5 1/2" casing as folloes: 2900' of 5 1/2" 17# J-55 LT&C, 5000' of 5 1/2" 15.5# J-55 LT&C, 1000' of 5 1/2" 17# J-55 LT&C casing. Cement in 2 stages. Cement 1st stage with 600 Sx. of Class "H" Premium Plus + additives, Cement 2nd stage with 600 Sx. of Class "H" cement plus additives. DV tool to be at 6200'±. estimate top of 3000' from surface.

10. PRESSURE CONTROL EQUIPMENT: Exhibit "E" shows a 900 Series 3000 PSI working pressure B.O.P. consisting of an annular bag type preventor, middle blind rams and bottom pipe rams. The B.O.P. will be nipped up on the ~~9 5/8"~~^{5 1/2"} casing and ~~8 5/8"~~^{5 1/2"} tested to API specifications. The B.O.P. will be operated at least once in each 24 hour period and the blind rams will be operated when drill pipe is out of hole on trips. Full opening stabbing valve and upper kelly cock will be utilized. Exhibit "E-1" shows a hydraulically operated closing unit and a 2" 3000 PSI choke manifold with dual adjustable chokes. No abnormal pressures or temperatures are expected.

11. PROPOSED MUD CIRCULATING SYSTEM:

DEPTH	MUD WT.	VISC.	FLUID LOSS	TYPE MUD SYSTEM
40-1000'	8.4-8.7	29-34	NC	Fresh water spud mud add paper to control seepage.
1000-4700'	10.0-10.3	29-36	NC	Brine water use paper to control seepage and high viscosity sweeps to clean hole.
4700-8900'	8.4-8.7	29-38	NC	Fresh water use fresh water Gel for viscosity control & High viscosity sweeps to clean hole. If water loss is required use a Polymer mud system.

Sufficient mud materials will be kept on location at all times in order to combat lost circulation, or unexpected kicks. In order to run DST's, open hole logs, and casing viscosity and/or water loss may have to be adjusted to meet these needs.

APPLICATION TO DRILL

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM

12. LOGGING, CORING, & TESTING PROGRAM:

- A. Open hole logs: Run Dual Induction, SNP, LDT, CNL, Gamma Ray, Caliper from TD back to 47000'.
- B. Cased hole logs: Run Gamma Ray, Neutron log from 4700' to surface. Run a collar locator log across pay interval after the production casing is run.
- C. Mud logger will be on hole from 4700' to TD. No DST's or cores are planned.

13. POTENTIAL HAZARDS:

No abnormal pressures or temperatures are expected. There is no known presence of H²S in this area. If H²S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated BHP 4250 PSI, and Estimated BHT 170°.

14. ANTICIPATED STARTING DATE AND DURATION OF OPERATION:

Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon after BLM approval and as soon as a rig will be available. Move in operation and drilling is expected to take 30 days. If production casing is run then an additional 30 days will be needed to complete well and construct surface facilities and/or lay flowlines in order to place well on production.

15. OTHER FACETS OF OPERATIONS:

After running casing, cased hole Gamma Ray, Neutron Collar logs will be run from TD back to all possible productive zones. The Bone Spring formation will be perforated and stimulated in order to establish production. The well will be swab tested and potentialized as an oil well.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Proper use of safety equipment and life support systems.
 - D. Principle and operation of H₂S detectors, warning system and briefing areas.
 - E. Evacuation procedure, routes and first aid.
 - F. Proper use of 30 minute pressure demand air pack.
2. H₂S Detection and Alarm Systems
 - A. H₂S detectors and audio alarm system to be located at bell nipple, end of bloopie line (mud pit) and on derrick floor or doghouse.
3. Windsock and/or wind streamers
 - A. Windsock at mudpit area should be high enough to be visible.
 - B. Windsock at briefing area should be high enough to be visible.
 - C. There should be a windsock at entrance to location.
4. Condition Flags and Signs
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag, normal safe condition. Yellow flag indicates potential pressure and danger. Red flag, danger, H₂S present in dangerous concentration. Only emergency personnel admitted to location.
5. Well control equipment
 - A. See exhibit "E" & "E-1"
6. Communication
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.
7. Drillstem Testing
 - A. Exhausts will be watered.
 - B. Flare line will be equipped with an electric ignitor or a propane pilot light in case gas reaches the surface.
 - C. If the location is near to a dwelling a closed DST will be performed.

8. Drilling contractor supervisor will be required to be familiar with the effects H_2S has on tubular goods and other mechanical equipment.
9. If H_2S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H_2S scavengers if necessary.

SURFACE USE PLAY

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM

1. EXISTING ROADS: Area maps, Exhibit "B" is a reproduction of a County General Highway Map. Exhibit "C" is a reproduction of a USGS Topographic Map, showing existing roads and proposed roads. All existing roads will be maintained in a condition equal to or better than current conditions. Any new roads will be constructed to BLM specifications.
 - A. Exhibit "A" shows the proposed well site as staked.
 - B. From Hobbs take U.S. Hi-way 62-180 west toward Carlsbad New Mexico go 38 miles to CR-29 turn South go 14 miles to MILLS Ranch Road, Turn Left go 5.2 miles to disposal well on the North side of road, turn Right and go 1.7 miles to Red Tank "33" federal # 1 turn West go to well # 14 bear Right follow road past well # 13 follow road South to well # 15 bear Right and follow new lease road .8 miles to location.
 - C. Lay flowline & construct powerline along road R-O-W as shown on Exhibit "F".
2. PLANNED ACCESS ROADS: Approximately .8 miles of road will be constructed.
 - A. The access road will be crowned and dirched to a 12'00" wide travel surface with a 40' right-of-way.
 - B. Gradient on all roads will be less than 5.00%.
 - C. Turn outs will be constructed as necessary.
 - D. If needed, road will be surfaced with a minimum of 4" of caliche. This material will be obtained from a local source.
 - E. Centerline for the new access road has been flagged. Earthwork will be as required by field conditions.
 - F. Culverts in the access road will not be used. The road will be constructed to utilize low water crossings for drainage as required by the Topography.
3. LOCATION OF EXISTING WELLS IN A ONE-MILE RADIUS EXHIBIT "A-1"

A. Water wells	-	None known
B. Disposal wells	-	One approximately 1.2 miles Northwest.
C. Drilling wells	-	None Known
D. Producing wells	-	As shown on Exhibit "A-1"
E. Abandoned wells	-	As shown on Exhibit "A-1"

SURFACE USE PLAY

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM

4. If on completion this well is a producer the operator will lay pipelines and construct powerlines along existing road R-O-W's or other existing R-O-W's. Possible routes of pipelines, flowlines and powerlines are shown on Exhibit "F".

5. LOCATION AND TYPE OF WATER SUPPLY:

Water will be purchased locally from a commercial source and trucked over the access roads or piped to location in flexible lines laid on top of the ground.

6. SOURCE OF CONSTRUCTION MATERIAL:

If possible construction material will be obtained from the excavation of drill site, if additional material is needed it will be obtained from a local source and transported over the access roads as shown on Exhibit "C".

7. METHODS OF HANDLING WASTE MATERIAL:

- A. Drill cuttings will be disposed of in the reserve pits.
- B. All trash, junk and other waste material will be contained in trash cages or trash bins to prevent scattering. When the job is completed all contents will be removed and disposed of in a approved sanitary land fill.
- C. Salts remaining after completion of well will be picked up by the supplier, including broken sacks.
- D. Waste water from living quarters will be drained into holes with a minium of 10'. These holes will be covered during drilling and will be back filled when the well is completed. A Porto-John will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.
- E. Remaining drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry enough to be broken out for furthred drying. If the drilling fluids do not evaporate in a reasonable time they will be hauled off by transports to a state approve disposal site. Later pips will be broken out to speed drying. Water produced during completion will be put in reserve pits. Oil and condensate produced will be put in storage tanks and sold.

8. ANCILLARY FACILITIES:

- A. No camps or air strips will be constructed on location.

SURFACE USE PLAY

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM

9. WELL SITE LAYOUT

- A. Exhibit "D" shows the proposed well site layout.
- B. This exhibit indicated proposed location of reserve and sump pits and living facilities.
- C. Mud pits in the active circulating system will be steel pits & the reserve pit is proposed to be unlined unless subsurface condition encountered during pit construction indicate that lining is needed for lateral containment of fluids.
- D. If needed, the reserve pit is to be lined with polyethelene. The pit liner will be 6 mils thick. Pit liner will extend a minimum 2'00" over the reserve pits dikes where the liner will be anchored down.
- E. The reserve pit will be fenced on three sides with four strands of barbed wire during drilling and completion phases. The fourth side will be fenced after all drilling operations have ceased. If the well is a producer, the reserve pit fence will be torn down. The reserve pit and those areas of the location not essential to production facilities will be reclaimed and seeded per BLM requirements.

10. PLANS FOR RESTORATION OF SURFACE

Rehabilitation of the location and reserve pit will start in a timely manner after all drilling operations cease. The type of reclamation will depend on whether the well is a producer or a dry hole.

However, in either event, the reserve pit will be allowed to dry properly, and fluid removed and disposed of in accordance with Article 7.B as previously noted. The pit area will then be leveled and contoured to conform to the original and surrounding area. Drainage systems, if any, will be reshaped to the original configuration with provisions made to alleviate erosion. These may need to be modified in certain circumstances to prevent inundation of the location's pad and surface facilities. After the area has been shaped and contoured, topsoil from the spoil pile will be placed over the disturbed area to the extent possible. Revegetation procedures will comply with BLM standards.

If the well is a dry hole, the pad and road area will be contoured to match the existing terrain. Topsoil will be spread to the extent possible. Revegetation will comply with BLM standards.

Should the well be a producer, the previously noted procedures will apply to those areas which are not required for production facilities.

SURFACE USE PLAY

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM

11. OTHER INFORMATION:

- A. Topography consists of sand dunes with a slight dip toward the West. Deep sandy soil supports native grasses, mesquite, and shinnery Oak.
- B. Surface is owned by the Bureau of Land Management U.S. Department of Interior. Surface is used for grazing of livestock and is leased to ranchers for this purpose.
- C. An archaeological survey will be conducted and copies of the survey will be filed in the Carlsbad Office of The Bureau of Land Management.
- D. There are no dwellings or habitation within three miles of this location.

12. OPERATORS REPRESENTATIVE:

Before construction:

TIERRA EXPLORATION INC.
P.O. BOX 2188
HOBBS, NEW MEXICO 88241
OFFICE PHONE 505-391-8503
JOE T. JANICA


During and after construction:

POGO PRODUCING COMPANY
P.O. BOX 10340
MIDLAND, TEXAS 79702-7340
OFFICE PHONE 915-685-8100
MR. RICHARD WRIGHT 915-685-8140

13. CERTIFICATION: - I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Pogo Producing company, its contractors/subcontractors is in the conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provision of U.S.C. 1001 for the filing of a false statement.

NAME : Joe T Janica
DATE : 09/16/02
TITLE : Agent

T
22
S

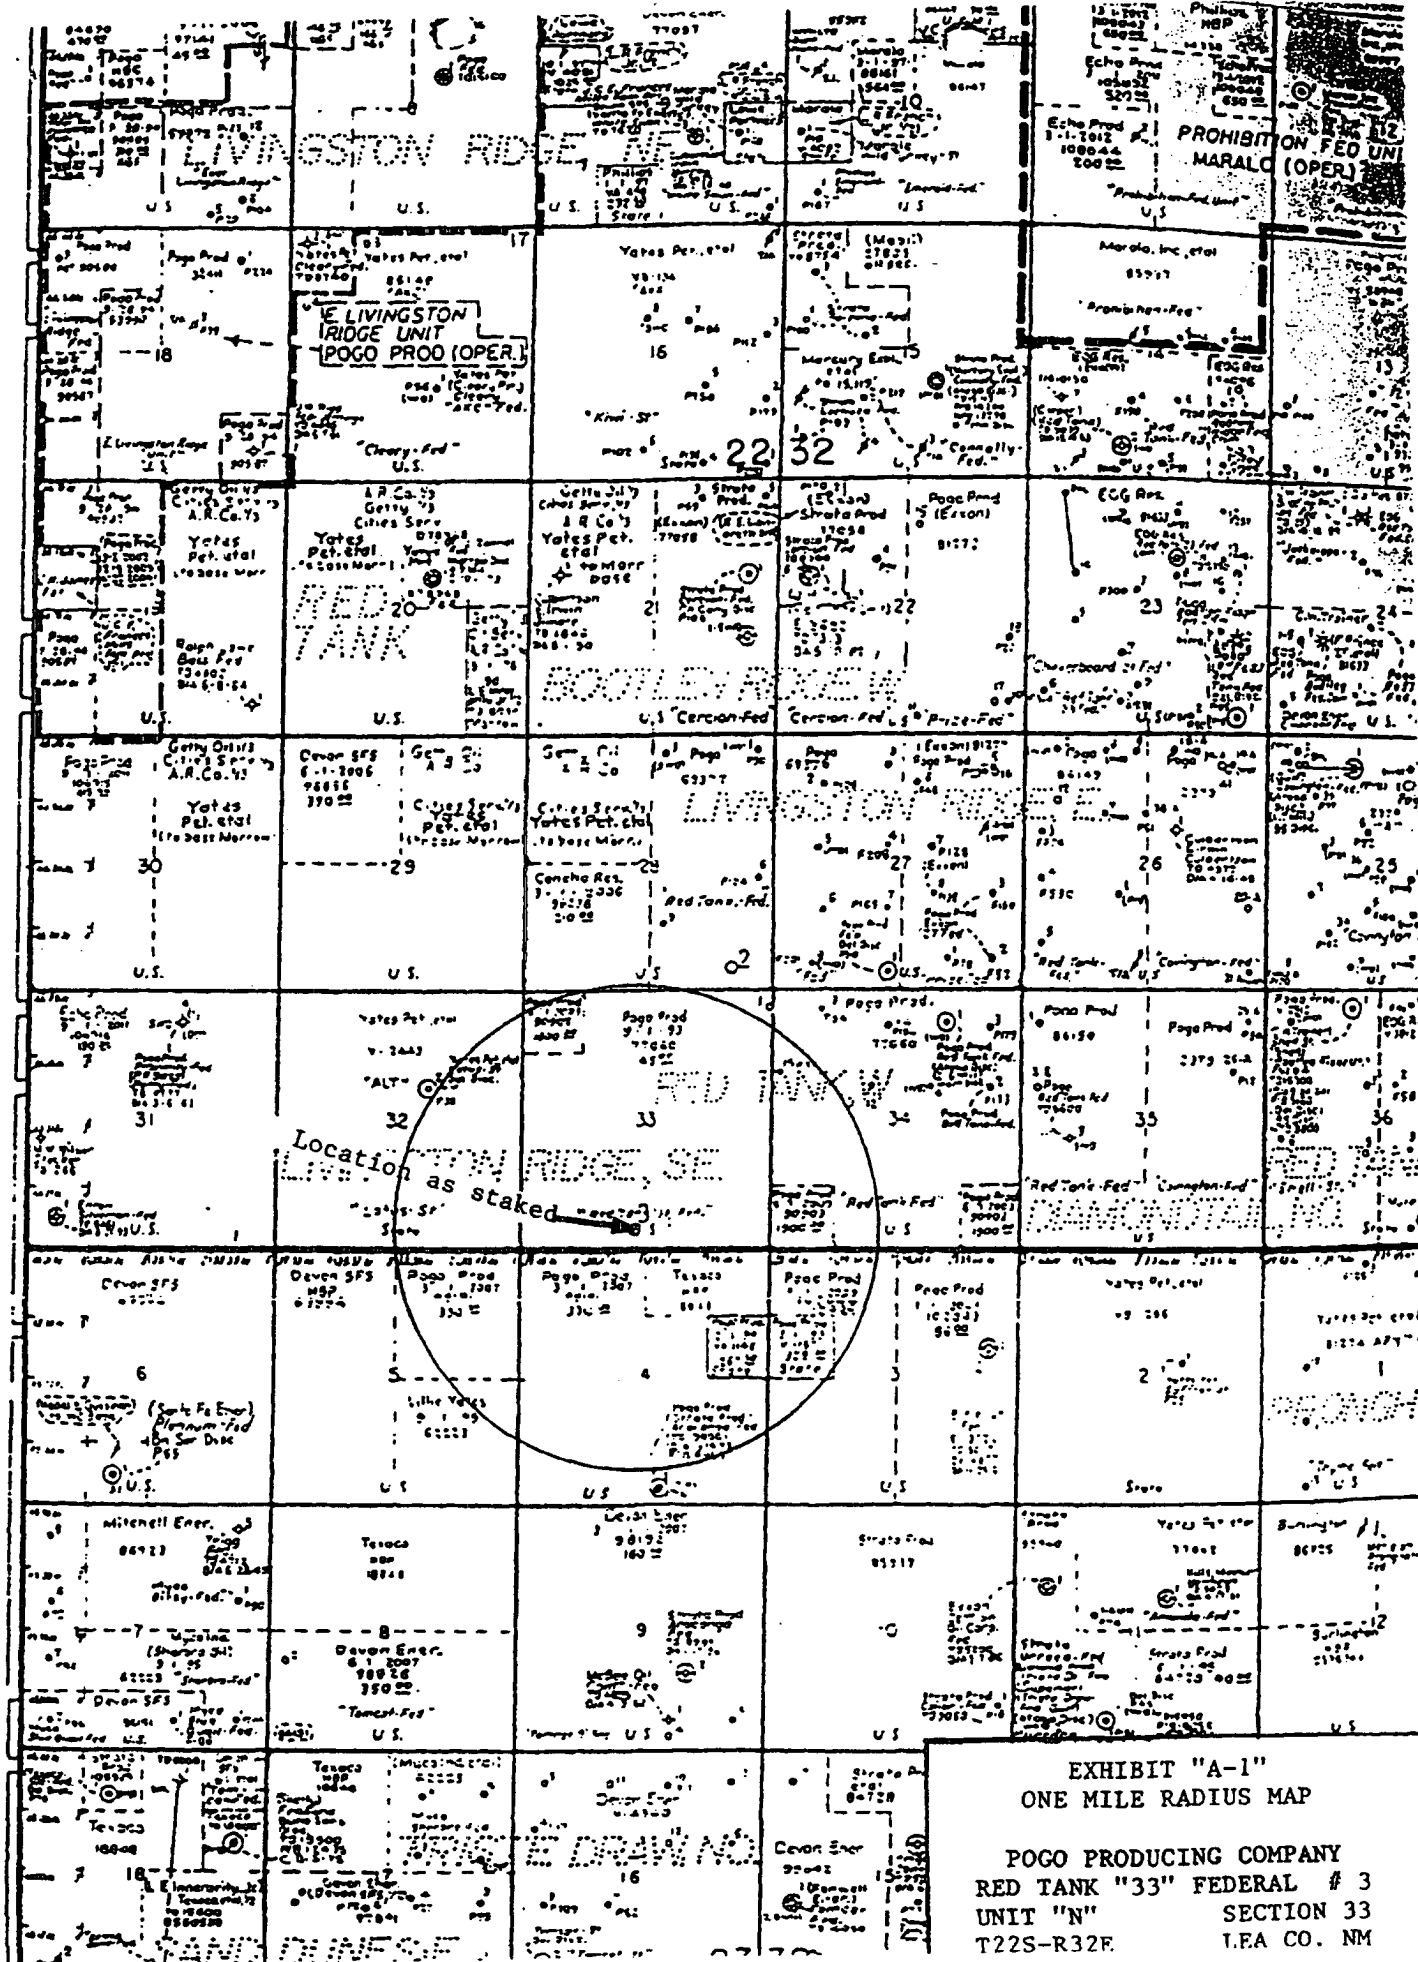

T

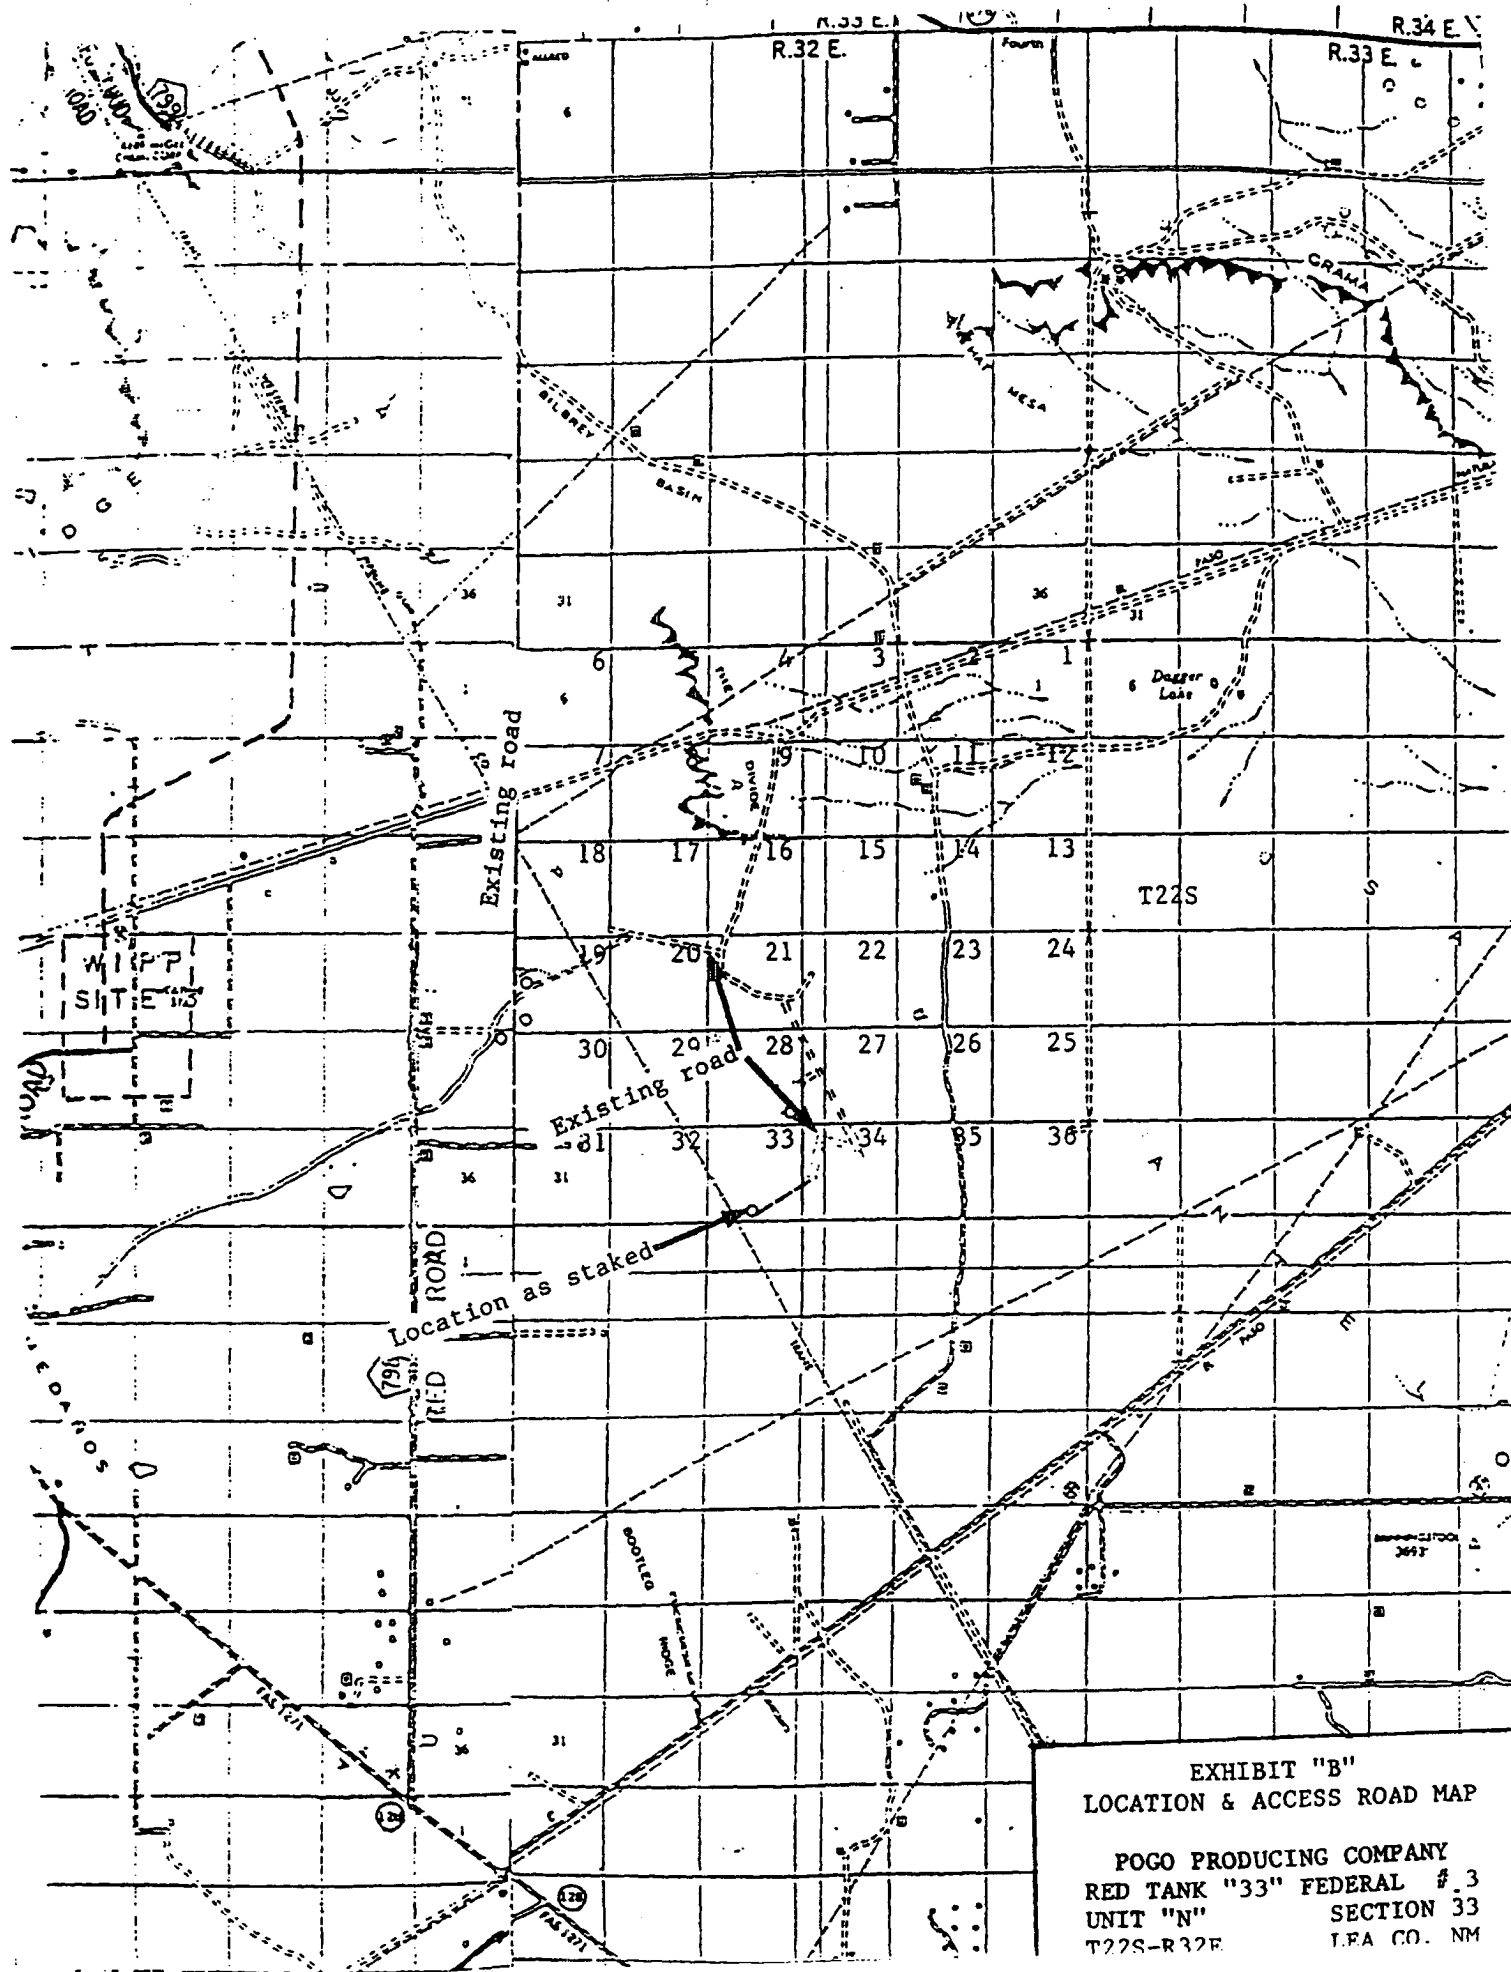


EXHIBIT "B"
LOCATION & ACCESS ROAD MAP

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL #.3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM


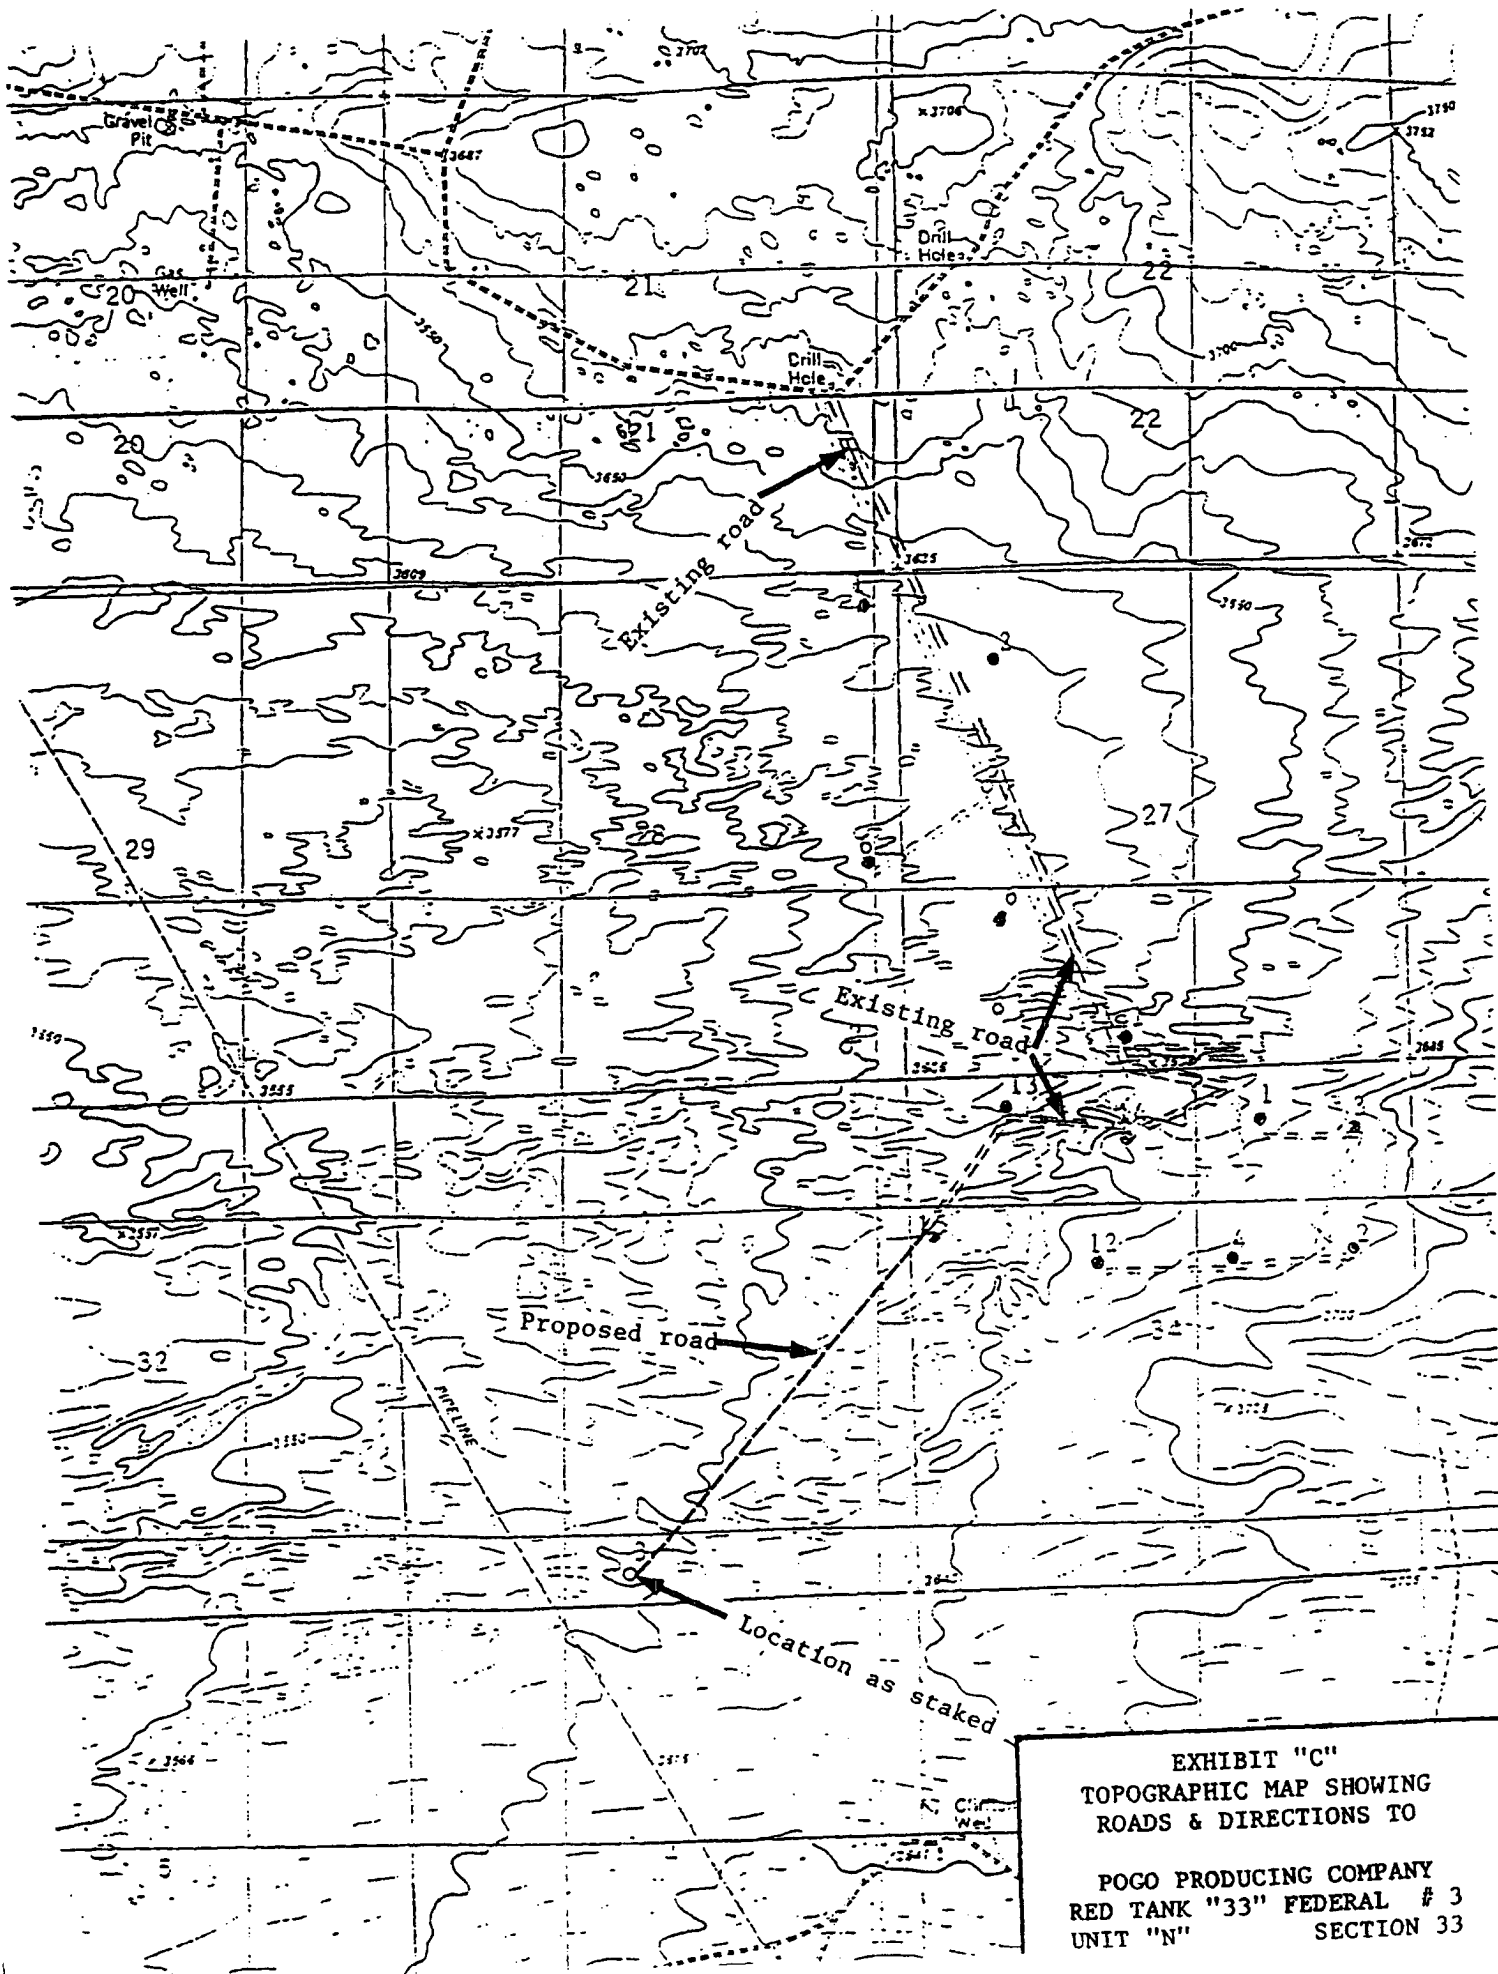


EXHIBIT "C"
TOPOGRAPHIC MAP SHOWING
ROADS & DIRECTIONS TO


POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33

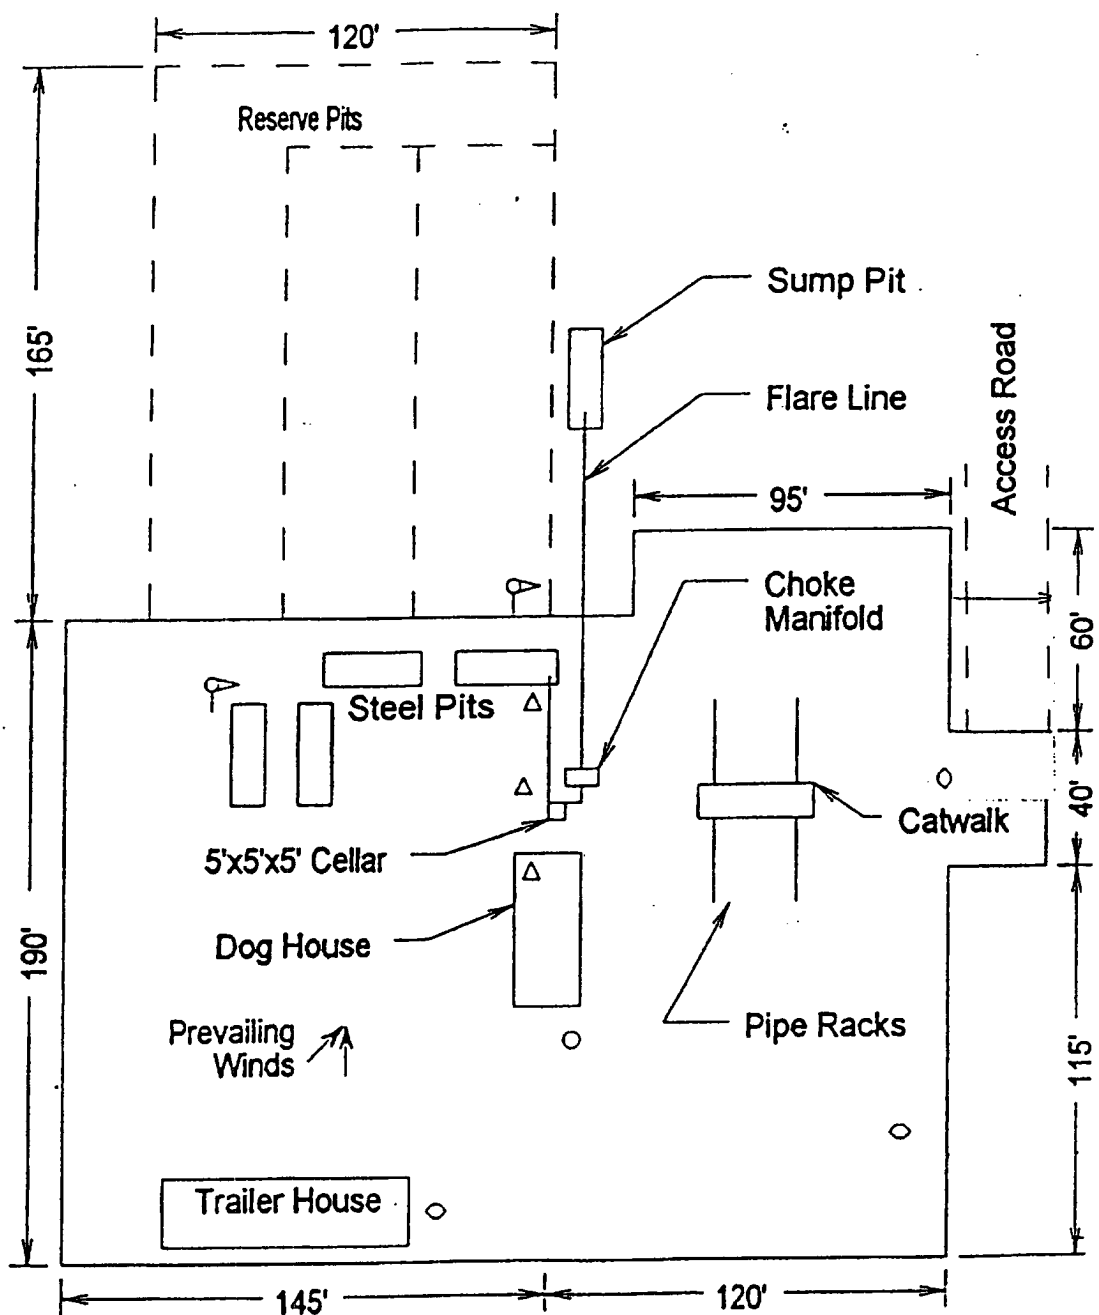

- ⌘ Wind Direction Indicators
(wind sock or streamers)
- △ H2S Monitors
(alarms at bell nipple and shale shaker)
- Briefing Areas
- Remote BOP Closing Unit
- Sign and Condition Flags

EXHIBIT "D"
RIG LAY OUT PLAT

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM

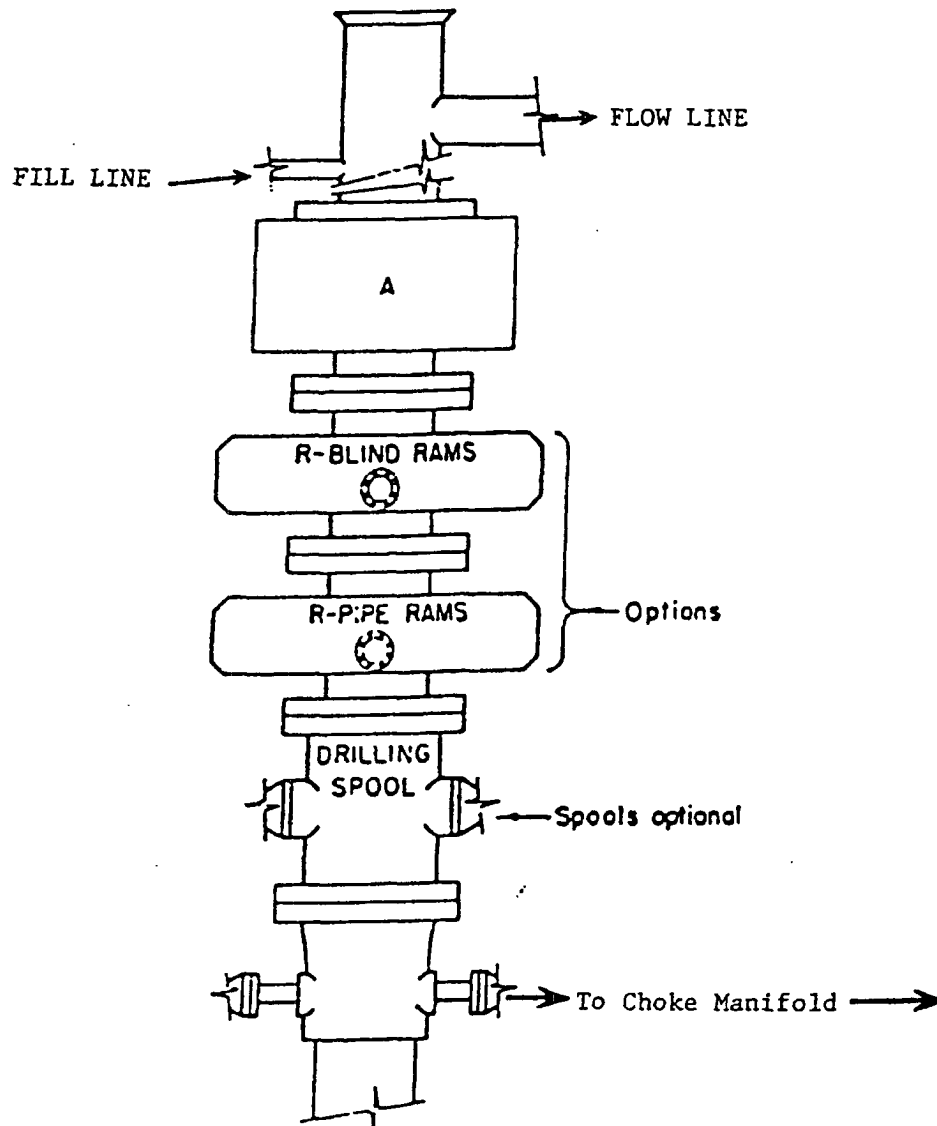

ARRANGEMENT SRRA

900 Series
3000 PSI WP

EXHIBIT "E"
SKETCH OF B.O.P. TO BE USED ON

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM

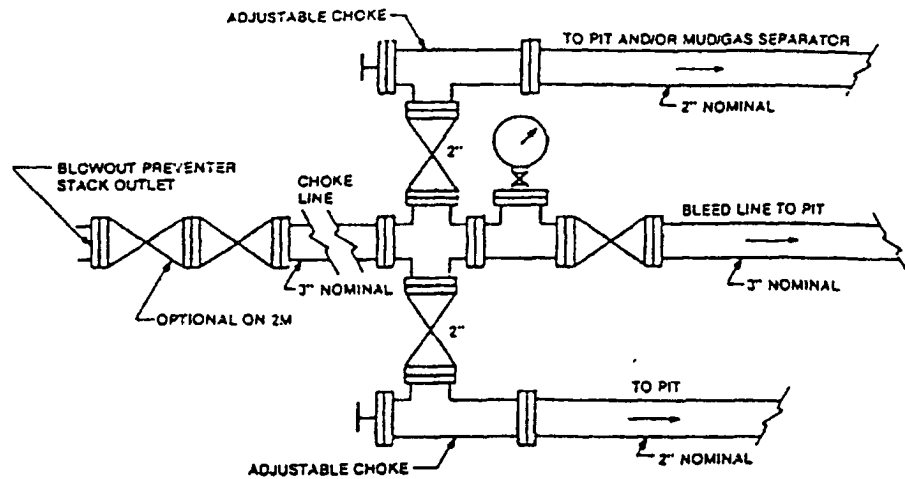


FIGURE K4-1. Typical choke manifold assembly for 2M and 3M rated working pressure service — surface installation.

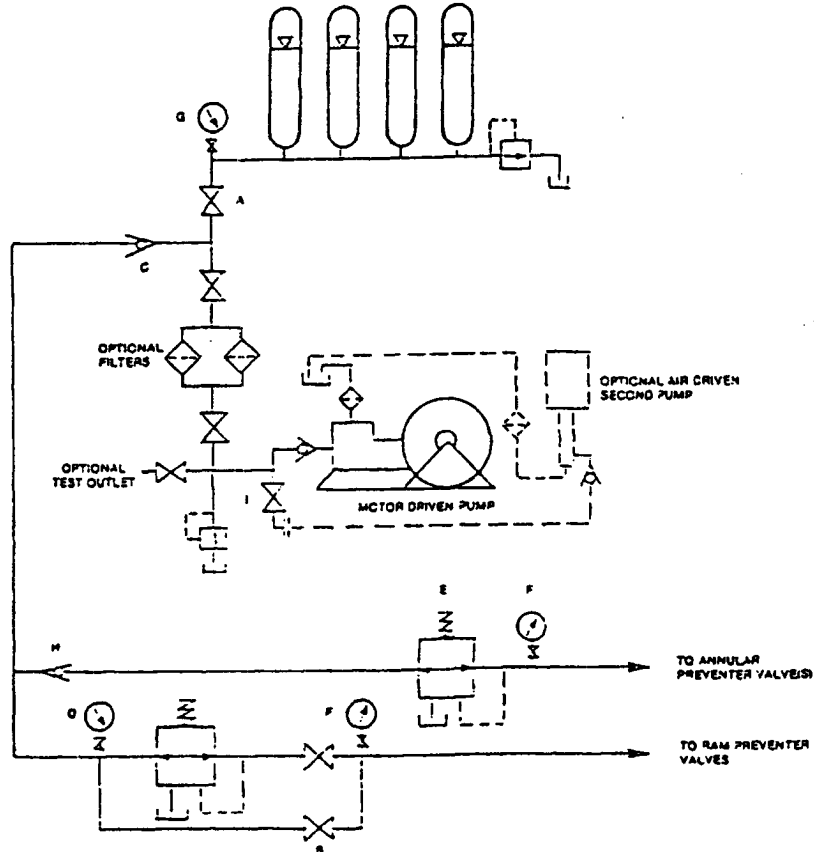


FIGURE K6-1. The schematic sketch of an accumulator system shows required and optional components.

EXHIBIT "E-1"
CHOKE MANIFOLD & CLOSING UNIT

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33
T22S-R32E LEA CO. NM

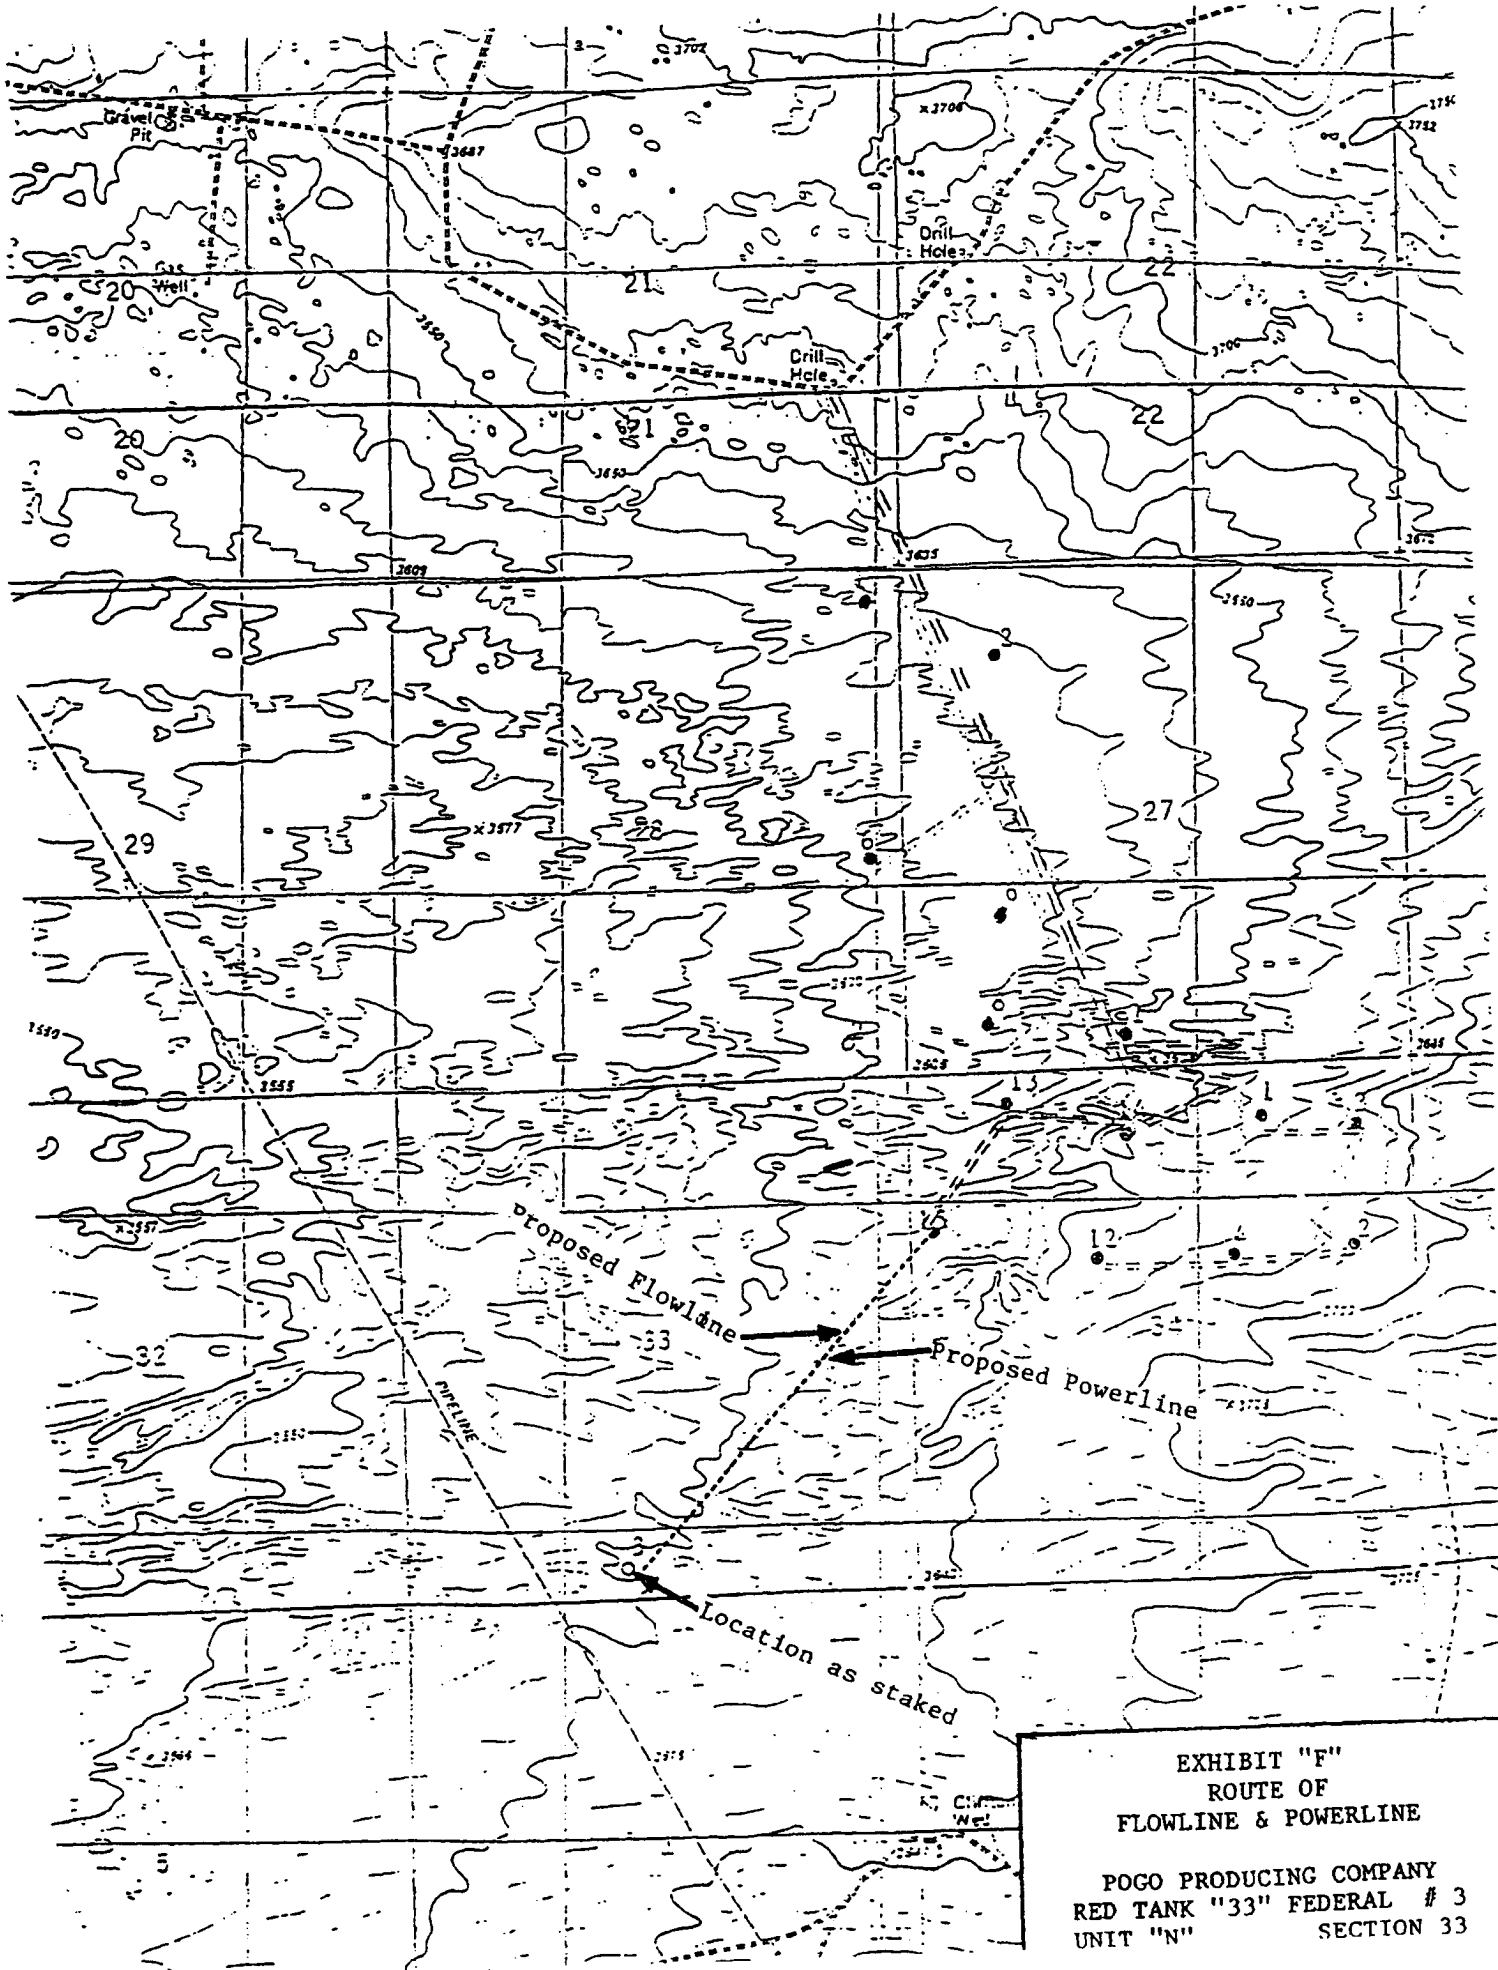


EXHIBIT "F"
ROUTE OF
FLOWLINE & POWERLINE

POGO PRODUCING COMPANY
RED TANK "33" FEDERAL # 3
UNIT "N" SECTION 33

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
March 12, 2004

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes ☐ No ☒

Type of action: Registration of a pit or below-grade tank ☐ Closure of a pit or below-grade tank ☒

Operator: Pogo Producing Company Telephone: 432-685-8100 e-mail address: wrightc@pogoproducing.com
Address: P. O. Box 10340, Midland, TX 79702-7340
Facility or well name: Red Tank 33 Fed #3 API #: 30-025-37783 U/L or Qtr/Qtr N Sec 33 T 22S R 32E
County: Lea Latitude _____ Longitude _____ NAD: 1927 ☒ 1983 ☐ Surface Owner Federal ☒ State ☐ Private ☐ Indian ☐

Pit

Type: Drilling ☒ Production ☐ Disposal ☐
Workover ☐ Emergency ☐

Lined ☒ Unlined ☐

Liner type: Synthetic ☒ Thickness 12 mil Clay ☐ Volume
16000 bbl

Below-grade tank

Volume: _____ bbl Type of fluid: _____

Construction material: _____

Double-walled, with leak detection? Yes ☐ If not, explain why not.

Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)

Less than 50 feet	(20 points)
50 feet or more, but less than 100 feet	(10 points)
100 feet or more	(0 points)
X	0

Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)

Yes	(20 points)
No	(0 points)
	0

Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)

Less than 200 feet	(20 points)
200 feet or more, but less than 1000 feet	(10 points)
1000 feet or more	(0 points)
X	0

Ranking Score (Total Points)

0

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location:

onsite ☐ offsite ☐ If offsite, name of facility _____. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☐ Yes ☐ If yes, show depth below ground surface _____ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐, or an (attached) alternative OCD-approved plan ☐.

Date: 02/28/06

Printed Name/Title Cathy Wright, Sr Eng Tech

Signature Cathy Wright

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: _____

Date: _____

Printed Name/Title APR 10 2006

PETROLEUM ENGINEER

Signature [Signature]



Water Resources

Data Category:

Site Information

Geographic Area:

New Mexico

go

Site Map for New Mexico

USGS 322314103384301 22S.32E.14.32322

Available data for this site

site map

GO

Lea County, New Mexico

Hydrologic Unit Code


Latitude 32°23'14", Longitude 103°38'43" NAD27

Land-surface elevation 3,717.00 feet above sea level NGVD29


The depth of the well is 435 feet below land surface.

This well is completed in the SANTA ROSA SANDSTONE (231SNRS) local aquifer.

Location of the site in New Mexico.

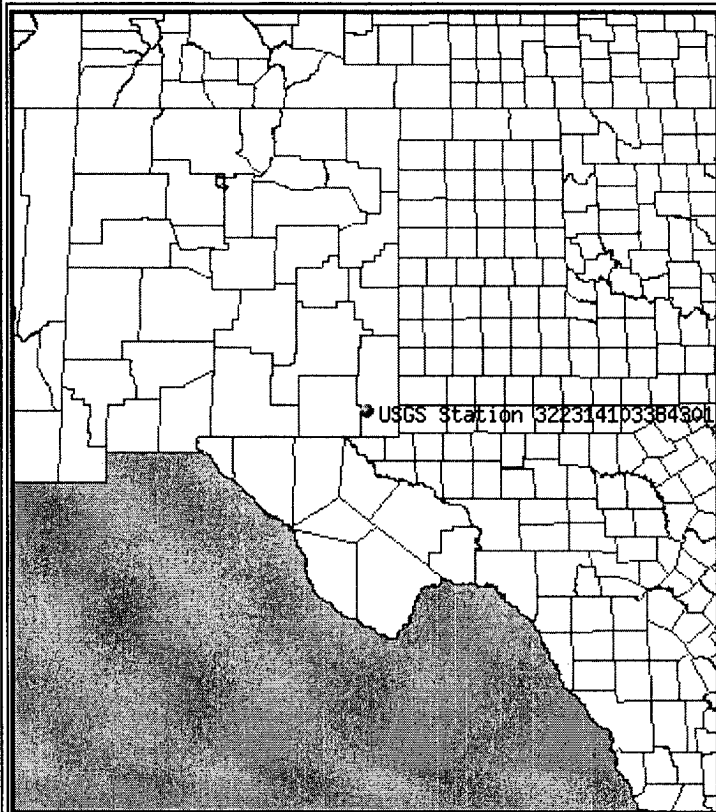

Site map.

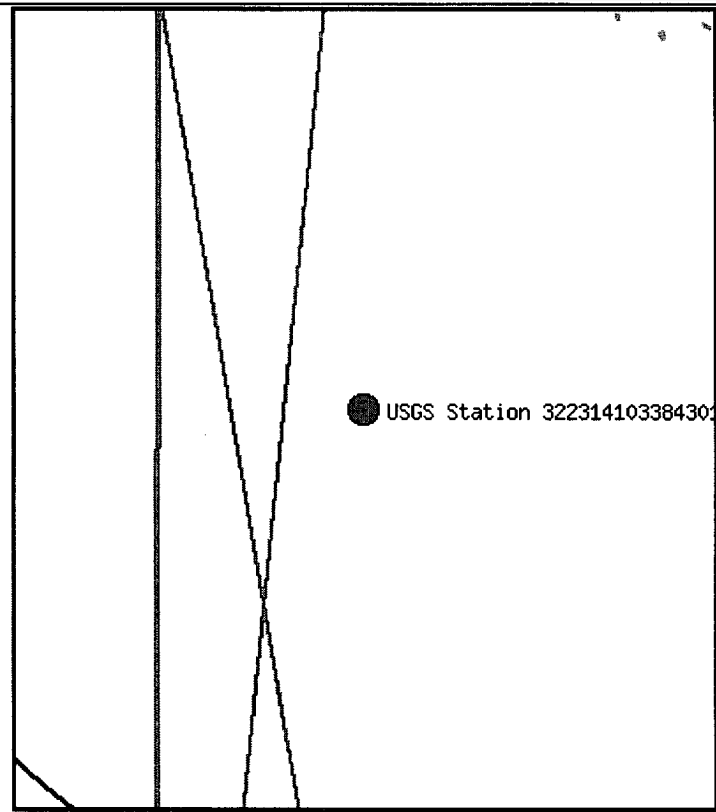

ZOOM IN 2X, 4X, 6X, 8X, or ZOOM OUT 2X, 4X, 6X, 8X.

Maps are generated by US Census Bureau TIGER Mapping Service.

[Questions about data](#) [New Mexico NWISWeb Data Inquiries](#)[Feedback on this website](#) [New Mexico NWISWeb Maintainer](#)[NWIS Site Inventory for New Mexico: Site Map](#)<http://waterdata.usgs.gov/nm/nwis/nwismap?>[Top](#)
[Explanation of terms](#)

Retrieved on 2006-02-28 09:59:32 EST

Department of the Interior, U.S. Geological Survey

USGS Water Resources of New Mexico

http://nwis.waterdata.usgs.gov/nm/nwis/nwismap/?site_no=322314103384301

2/28/2006



Water Resources

Data Category:

Ground Water

Geographic Area:

New Mexico

go

Ground-water levels for New Mexico

Search Results -- 1 sites found

Search Criteria

site_no list = • 322314103384301

[Save file of selected sites to local disk for future upload](#)

USGS 322314103384301 22S.32E.14.32322

Available data for this site

Ground-water: Levels

GO

Lea County, New Mexico

Hydrologic Unit Code

Latitude 32°23'14", Longitude 103°38'43" NAD27

Land-surface elevation 3,717.00 feet above sea level NGVD29

The depth of the well is 435 feet below land surface.

This well is completed in the SANTA ROSA SANDSTONE (231SNRS) local aquifer.


Output formats

Table of data

Tab-separated data

Graph of data

Reselect period

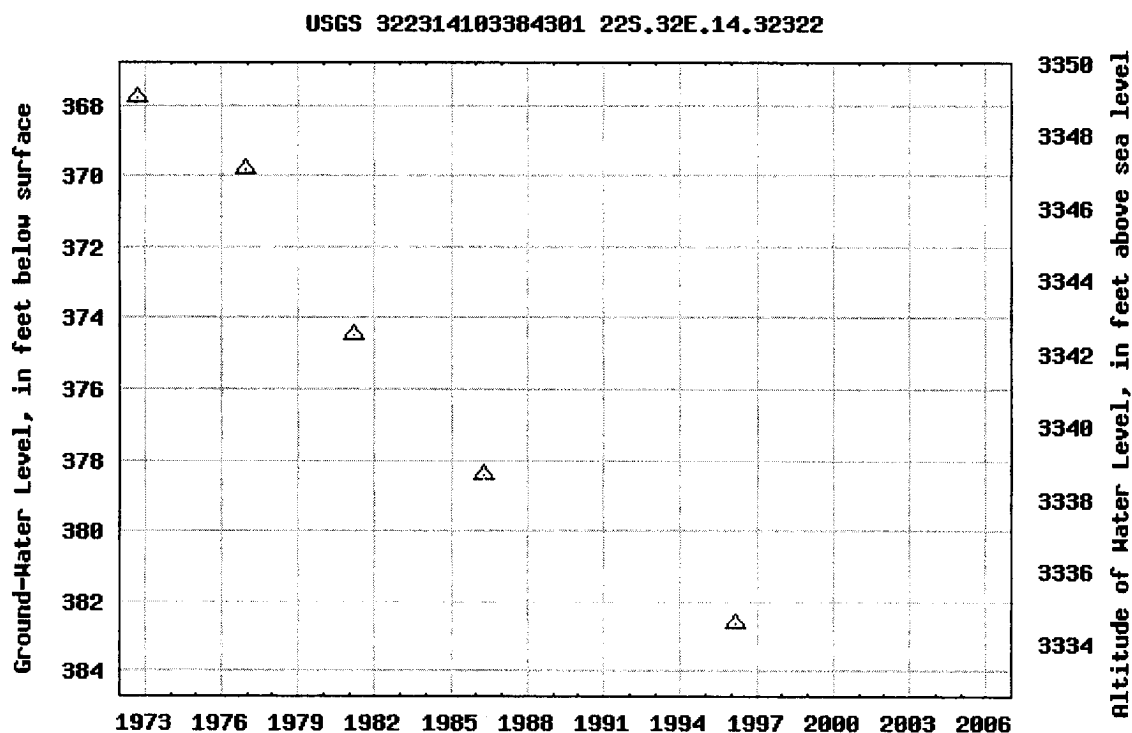


Breaks in the plot represent a gap of at least one calendar year between two consecutive points.

[Download a presentation-quality graph](#)

**POGO Producing Company
Red Tank 33 Federal #3
Approximate Pit Dimensions**

N/33/22S/32E, Lea County, New Mexico

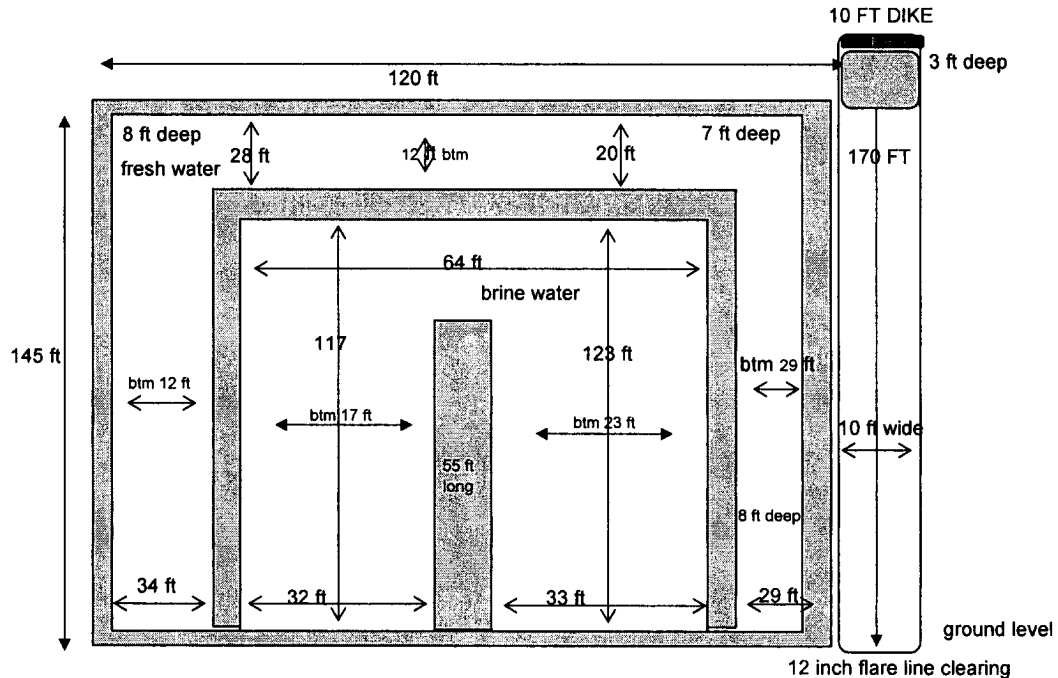

PIT NOTES:

Pit will be lined with 12 mil Black plastic w/ UV protection.

Pit walls are 6 ft to 8 ft wide.

Pit is 8 ft deep below ground level plus 2 ft walls

Pit walls are 2 ft above ground level.

Caliches mined from pit used to make Well Pad.

Fresh Water volume to ground level = ± 7950 bbls


Brine Water volume to ground level = ± 7730 bbls

12 inch Flare line laid on gradual descending graded ROW away from rig to avoid fluid trapping

Fresh water well = (Nad 27) 32° 23' 14" N & 103° 38' 43" W "Published data"

This well produces from a depth greater than 100 ft.

Pit equals approx 16000 bbls

 The sender of this message has requested a read receipt. [Click here to send a receipt.](#)

Mull, Donna, EMNRD

From: Phillips, Dorothy, EMNRD
To: Mull, Donna, EMNRD
Cc:
Subject: RE: Financial Assurance Requirement
Attachments:

Sent: Fri 4/7/2006 8:06 AM

All have blanket bonds and none appear on Jane's list.

From: Mull, Donna, EMNRD
Sent: Friday, April 07, 2006 7:44 AM
To: Phillips, Dorothy, EMNRD
Cc: Macquesten, Gail, EMNRD; Sanchez, Daniel J., EMNRD
Subject: Financial Assurance Requirement

Dorothy,

Is the Financial Assurance Requirement for these Operators OK ?

EOG Resources Inc (7377)
Pogo Producing Co (17891)
Range Operating New Mexico Inc (227588)
Harvard Petroleum Corp (10155)
Yates Petroleum Corp (25575)
Platinum Exploration Inc (227103)
Marbob Energy Corp (14049)
Chevron USA Inc (4323)
Marathon Oil Co (14021)
XTO Energy Inc (5380)

Please let me know. Donna