

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-31296
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☒
2. Name of Operator Chevron Midcontinent, L.P.		6. State Oil & Gas Lease No.
3. Address of Operator 6301 Deauville Blvd., Midland, TX 79706		7. Lease Name or Unit Agreement Name Lovington Paddock Unit
4. Well Location Unit Letter <u>F</u> : <u>2525</u> feet from the <u>NORTH</u> line and <u>1420</u> feet from the <u>WEST</u> line Section <u>6</u> Township <u>17S</u> Range <u>37E</u> NMPM County <u>Lea</u>		8. Well Number: <u>123</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3809' GR		9. OGRID Number 241333
		10. Pool name or Wildcat Lovington Paddock

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT

REMEDIAL WORK
COMMENCE DRILLING OPNS. INT TO PA Am X
CASING/CEMENT JOB P&A NR _____
P&A R _____

OTHER: ☐

OTHER: TEMPOR. ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 8 5/8" 24# @ 1870': TOC @ surface; 5 1/2" 15.5# @ 6500': TOC @ surface
Chevron USA INC respectfully request to abandon this well as follows:

1. MIRU, N/U BOPE, POOH w/ all rods & tubing.
2. Set CIBP @ 6110', circulate well w/ 9.5 ppg gel KCl water, and pressure test casing t/ 500 psi for 5 min ~~charted~~.
3. Spot 25 sx CL "C" cement plug f/ 6110' t/ 5910' (Glorieta).
4. Spot 25 sx CL "C" cement plug f/ 4680' t/ 4480' (San Andres). WOC & tag TOC.
5. Spot 25 sx CL "C" cement plug f/ 3085' t/ 2885' (Yates). WOC & tag TOC.
6. Spot 25 sx CL "C" cement plug f/ 2210' ~~t/ 2010'~~ (Top of Salt).
7. Perf & squeeze @ 1920' w/ 30 sx CL "C" cement & displace TOC t/ 1720' (8 5/8" Shoe). WOC & tag TOC.
8. Spot 25 sx CL "C" cement plug f/ 200' t/ surface (Top of Fresh Water). Verify TOC @ surface.
9. Cut all casings & anchors & remove 3' below grade. Weld on dry hole marker. Clean location.
10. All cement plugs class "C" with closed loop system used.

VERIFY CMT

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Well Abandonment Engineer DATE 8/8/2017

Type or print name Nick Glann E-mail address: nglann@chevron.com PHONE: 432-687-7786

For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Engr. Specialist DATE 08/10/2017

Conditions of Approval (if any):

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

Well: Lovington Paddock Unit 123
Field: Lovington
Reservoir: Paddock

API: 30-025-31296-00
St.: New Mexico
Loc: 2525' FNL and 1420' FWL

Sec: 6
Tws: 17S
Rng: 37E

CURRENT WBD

Spud Date: 9/5/1991
TD Date: 9/12/1991
Comp Date: 10/14/1991

8-5/8" 24# @ 1870' (44 jts.)
CMT: 700sx Class 'C'
TOC: Surface (circ)
HOLE: 12-1/4"

11/13/1991

Formation Tops	
WB	75
Top of Salt	2160
Yates	3035
Queen	3911
Penrose	4119
Grayburg	4366
San Andres	4630
LSAU OWC	5085
Glorieta	6056
Paddock	6155
LPU OWC	6271


2-7/8" BPMA	-	6377'-6407'
2-7/8" 3' P. S.	-	6374'-6377'
2-7/8" SN	-	6373'-6374'
10 jts 2-7/8" tbg	-	6072'-6373'
5-1/2" TAC	-	6069'-6072'
195 jts 2-7/8" tbg	-	0 -6069'

RIH w/pump, 171 - 3/4" and 82 - 7/8" rods w/1 - 2'x7/8" sub. total of 253 rods. RDMO.

5-1/2" 15.5# @ 6500' (150 jts.)
CMT: 1550sx Class 'C'
TOC: Surface (circ)
HOLE: 7-7/8"

Perforations
6120-6318'

COTD:
PBTD: 6453'
TD: 6500'

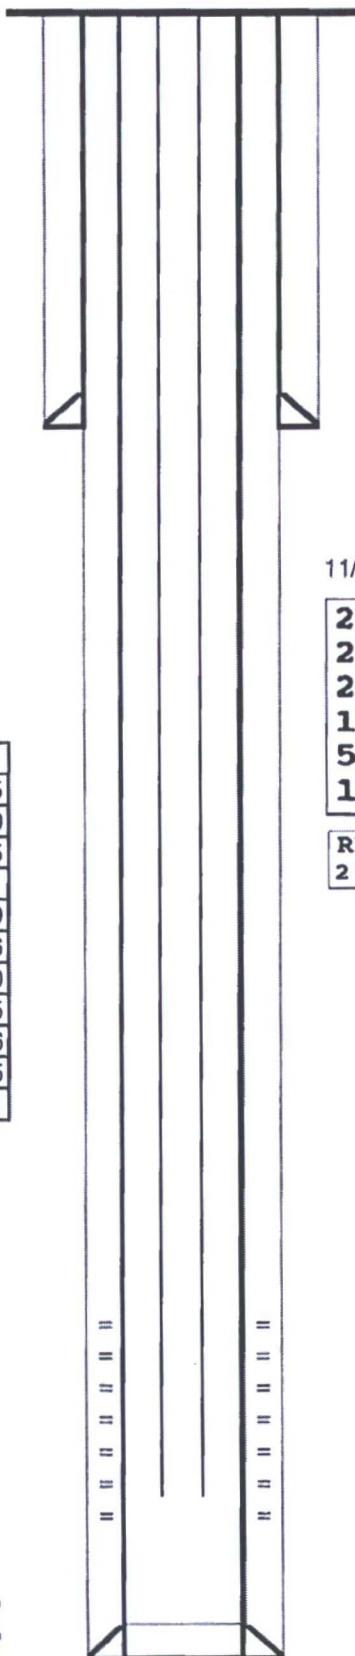

Well: Lovington Paddock Unit 123
 Field: Lovington
 Reservoir: Paddock

API: 30-025-31296-00
 St.: New Mexico
 Loc: 2525' FNL and 1420' FWL

Sec: 6
 Tws: 17S
 Rng: 37E


Proposed WBD

8-5/8" 24# @ 1870' (44 jts.)
 CMT: 700sx Class 'C'
 TOC: Surface (circ)
 HOLE: 12-1/4"

Formation Tops	
WB	75
Top of Salt	2160
Yates	3035
Queen	3911
Penrose	4119
Grayburg	4366
San Andres	4630
LSAU OWC	5085
Glorieta	6056
Paddock	6155
LPU OWC	6271

5-1/2" 15.5# @ 6500' (150 jts.)
 CMT: 1550sx Class 'C'
 TOC: Surface (circ)
 HOLE: 7-7/8"

COTD:
 PBTB: 6453'
 TD: 6500'

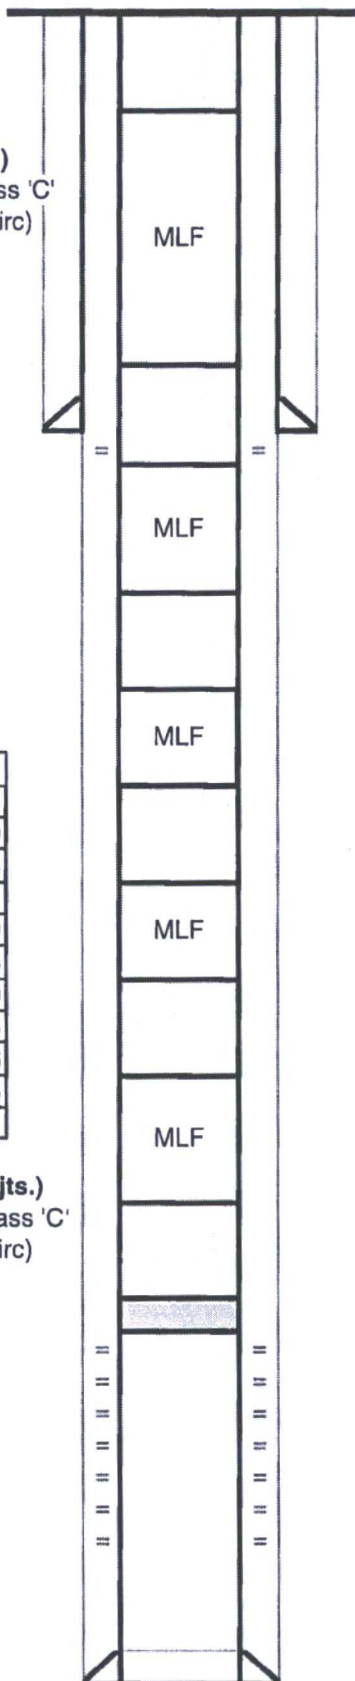

CMT Plug @ 200'-Surface
 25 SX (Water Board)

Spud Date: 9/5/1991
 TD Date: 9/12/1991
 Comp Date: 10/14/1991

CMT Plug @ 1720'-1920'
 30 SX for plug & squeeze (Shoe)
 Squeeze holes @ 1920'

CMT Plug @ 2010'-2210'
 25 SX CL "C" (Top of Salt)

CMT Plug @ 2885'-3085'
 25 SX CL "C" (Yates)

CMT Plug @ 4480'-4680'
 25 SX CL "C" (San Andres)

CMT Plug @ 5910'-6110'
 25 SX CL "C" (Glorieta)

CIBP @ 6110'

Perforations
 6120-6318'