

Submit 1 Copy To Appropriate District Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised August 1, 2011

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-10788	✓
5. Indicate Type of Lease STATE FEE XX	✓
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name E.L. Steeler	✓
8. Well Number 006	✓
9. OGRID Number 025504	✓
10. Pool name or Wildcat Langlie Mattix; 7 RVRs, Q-Grayburg	
11. Elevation (Show whether DR, RKB, RT, GR, etc.)	

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other **INJECTION HOBBS OCD** ✓

2. Name of Operator
Yarbrough Oil LP **AUG 29 2017**

3. Address of Operator
P.O. Box 1769 Eunice, NM 88231 **RECEIVED**

4. Well Location
 Unit Letter J : 1980 feet from the South line and 1980 feet from the East line
 Section 17 Township 23S Range 37E NMPM Lea County ✓

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT RE		
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>		INT TO PA <u>PMX</u> P&A NR _____ P&A R _____
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>		
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>		
DOWNHOLE COMMINGLE <input type="checkbox"/>				
OTHER: <input type="checkbox"/>		OTHER: _____		

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

SEE ATTACHED

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE _____ TITLE _____ Agent _____ DATE _____

Type or print name John R. Stearns, Jr. E-mail address: bobbystearns1@yahoo.com PHONE: 575-760-2482

For State Use Only

APPROVED BY: Mark C. [Signature] TITLE Petroleum Engr. Specialist DATE 08/29/2017

Conditions of Approval (if any):


**NOTIFY OCD 24 HOURS PRIOR TO
 BEGINNING PLUGGING OPERATIONS**

P&A Procedures
E.L. Steeler #6
API 30-025-10788

1. POOH with injection string. Set CIBP 5 ½" at 3472'. Circulated MLF and test casing. Spot 25 sx cement on top of CIBP.
2. Perforate 5 ½" casing at 2498' and squeeze with 35 sx cement. WOC and tag above 2398'. Base Salt Plug
3. Perforate 5 ½" casing at 1180' and squeeze with 50 sx cement. WOC and tag above 1080'. Top of Salt and Surface Shoe Plug.
4. Perforate 5 1/2" casing at 250'. Pump cement down 5 ½" casing to perforations at 250' and up annulus to surface.
5. Cut off wellhead. Insure both strings have cement to surface. Install marker and cut off anchors.

All fluids will be circulated to a steel pit.

Yarbrough Oil LP
E.L. Steeler #6
API 30-025-10788
WBD Before PA

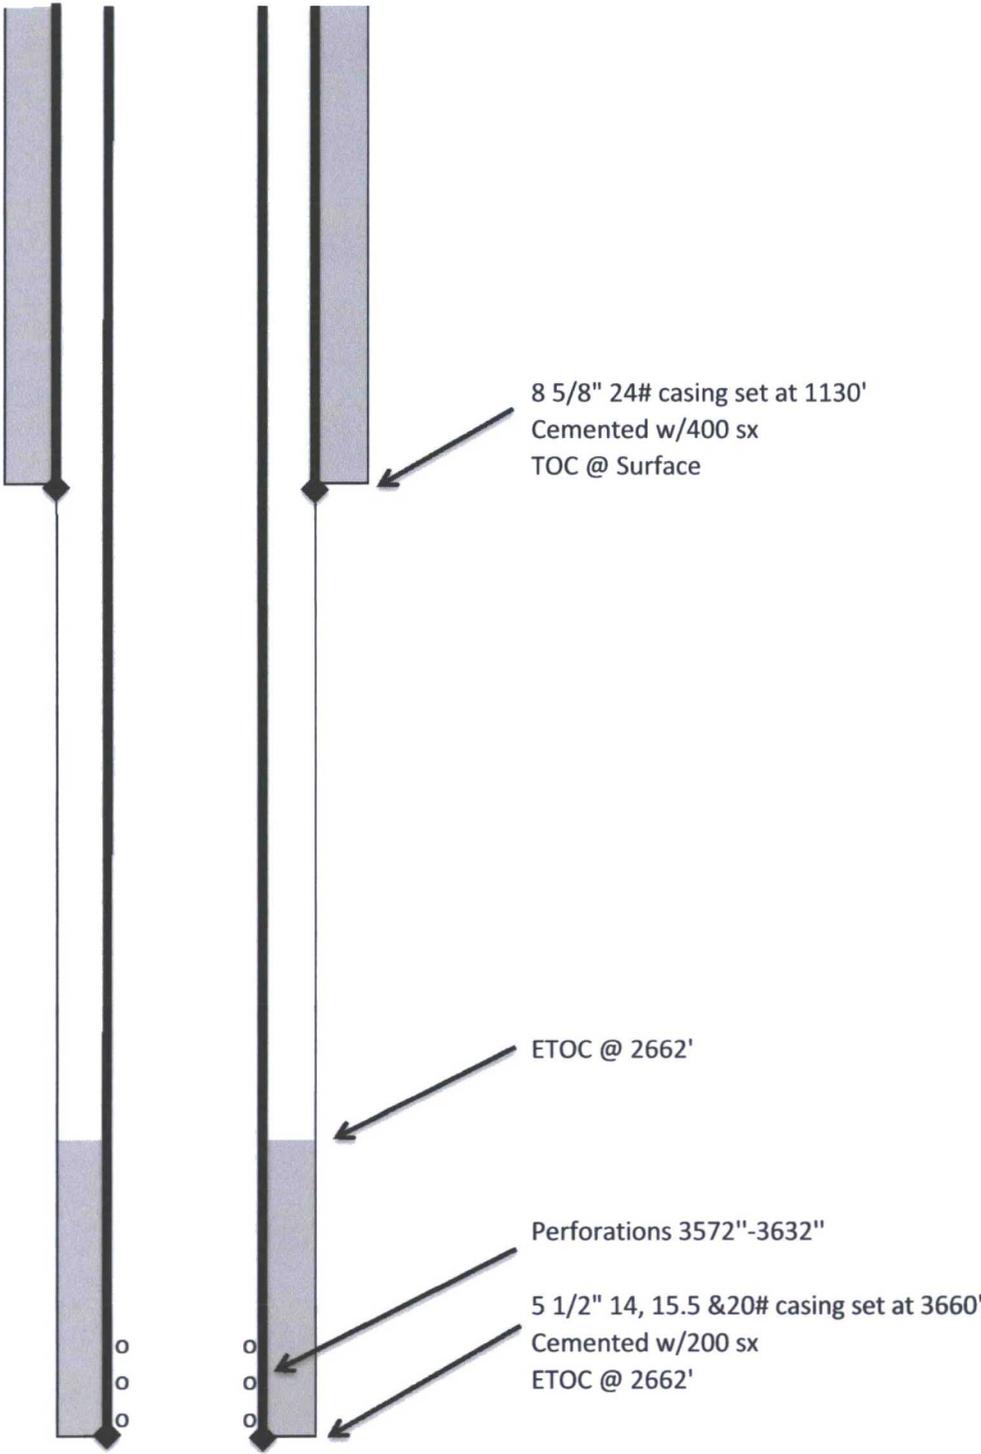

Yarbrough Oil LP
E.L. Steeler #6
API 30-025-10788
WBD After PA

Perforate and circulated
cement to surface

8 5/8" 24# casing set at 1130'
Cemented w/400 sx
TOC @ Surface

Perf & Squeeze w/50 sx cmt.
WOC & tag above 1080'.
Surface Shoe & Top Salt Plug

Perf & Squeeze with 35 sx
cement @ 2498'. WOC & tag
above 2398'. Base Salt

ETOC @ 2662'

Set CIBP at 3472' w/ 25 sx
cement on top

Perforations 3572"-3632"

5 1/2" 14, 15.5 & 20# casing set at 3660'
Cemented w/200 sx
ETOC @ 2662'

