

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-37160
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. V0-5785
7. Lease Name or Unit Agreement Name: OXY GR 8 State
8. Well Number 1
9. OGRID Number 192463
10. Pool name or Wildcat Grama Ridge Morrow, East

Pit or Below-grade Tank Application ☐ or Closure ☐
Pit type Steel Depth to Groundwater +/-50' Distance from nearest fresh water well 900' Distance from nearest surface water 900'
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other _____	7. Lease Name or Unit Agreement Name: OXY GR 8 State
2. Name of Operator OXY USA WTP Limited Partnership	8. Well Number 1
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250	9. OGRID Number 192463
4. Well Location Unit Letter <u>P</u> : <u>660</u> feet from the <u>south</u> line and <u>660</u> feet from the <u>east</u> line Section <u>8</u> Township <u>22S</u> Range <u>34E</u> NMPM County <u>Lea</u>	10. Pool name or Wildcat Grama Ridge Morrow, East
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3554'	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPLETION <input type="checkbox"/> OTHER: <input type="checkbox"/>	SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> PLUG AND ABANDONMENT <input type="checkbox"/> CASING TEST AND CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

SEE CHANGES ON PROCEDURE

**THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS.**

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE David Stewart TITLE Sr. Regulatory Analyst DATE 3/30/06

Type or print name David Stewart

E-mail address: david_stewart@oxy.com

For State Use Only

APPROVED BY Hayward Wink TITLE _____ DATE _____

Conditions of Approval, if any

OCD FIELD REPRESENTATIVE / STAFF MANAGER Telephone No. 432-685-5717
APR 13 2006

TD-13507' PBTD-13015' PERFS-12903-12905' CIBP-12815'

13-3/8" 48# @ 1735', 17-1/2", cmt w/1400sx, TOC-Surf-Circ

9-5/8" 40# @ 5045', 12-1/4", cmt w/1300sx, TOC-Surf-Circ

7" 26# @ 11600', 8-3/4", cmt w/1060sx, TOC-90'-TS

4-1/2" 11.6# liner @ 11274-13506', cmt w/ 150sx, TOC-11274'-Circ

1. RIH & Set CIBP @ 12850', dump 4sx cmt to 12815'
2. M&P 35sx cmt @ 11324-11224' - **W.O.C. + TAG PLUG - 4 1/2" LINER TOP**
3. M&P 40sx cmt @ 8550-8450'
4. M&P 35sx cmt @ 6100-6000'
5. M&P 30sx cmt @ 5095-4995' - **W.O.C. + TAG PLUG - 9 5/8" SHOE**
6. M&P 25sx cmt @ 1785-1685' - **W.O.C. + TAG PLUG - 13 3/8" SHOE**
7. M&P 25sx cmt @ 300-200'
8. M&P 15sx cmt @ Surface

10# MLF BETWEEN PLUGS

OXY USA WTP LP
OXY GR 8 State #1
API No. 30-025-37160

15sx Surface

25sx @ 300-200'

25sx @ 1785-1685'

30sx @ 5095-4995'


35sx @ 6100-6000'

40sx @ 8550-8450'

35sx @ 11324-11224'

CIBP @ 12850', dump 4sx cmt

10/16/05-CIBP @ 13050' w/ 4sx cmt

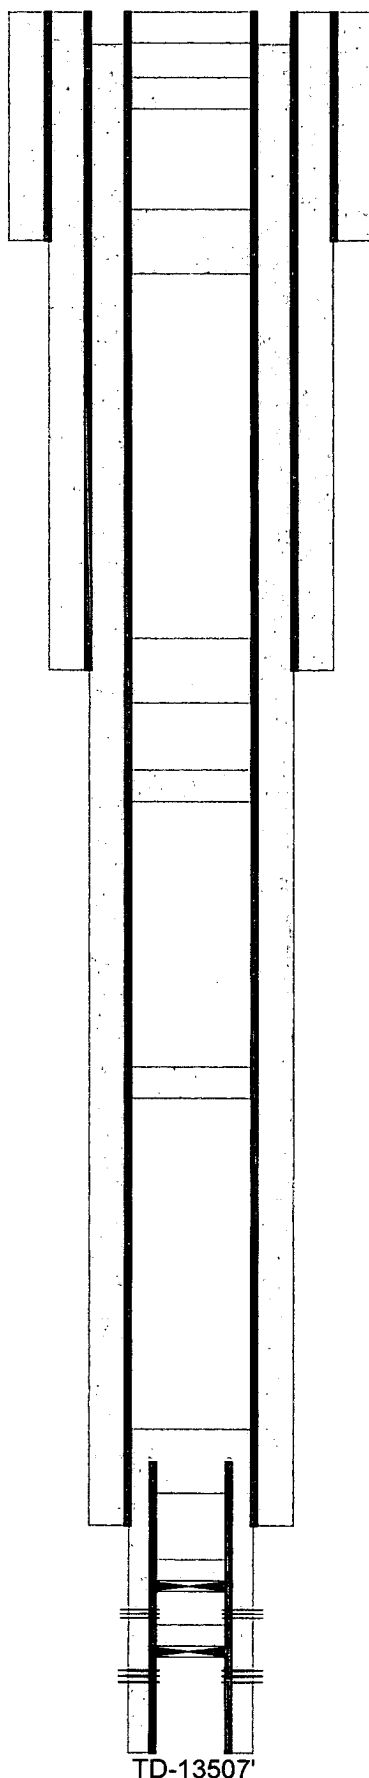

17-1/2" hole @ 1735'
13-3/8" csg @ 1735'
w/1400sx-TOC-Surf-Circ

12-1/4" hole @ 5045'
9-5/8" csg @ 5045'
w/1300sx-TOC-Surf-Circ

8-3/4" hole @ 11600'
7" csg @ 11600'
w/1060sx-TOC-90'-TS

6-1/4" hole @ 13507'
4-1" liner @ 11274-13506'
w/150sx-TOC-11274'-Circ

Perf @ 12903-12905'

Perf @ 13092-13104'

TD-13507'