

**PECOS DISTRICT
DRILLING OPERATIONS
CONDITIONS OF APPROVAL**

**HOBBS OCD
JAN 03 2018
RECEIVED**

OPERATOR'S NAME:	Legacy reserves Operating
LEASE NO.:	NM01747A
WELL NAME & NO.:	Lea Unit - 43H
SURFACE HOLE FOOTAGE:	2270'S & 560'E
BOTTOM HOLE FOOTAGE:	330'N & 430'E, sec. 13
LOCATION:	Sec. 24, T. 20 S, R. 34 E
COUNTY:	Lea County

Potash	☐ None	☒ Secretary	☐ R-111-P
Cave/Karst Potential	☒ Low	☐ Medium	☐ High
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☒ Conventional	☐ Multibowl	
Other	☐ 4 String Area	☒ Capitan Reef	☐ WIPP

A. Hydrogen Sulfide

1. A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated 500 feet prior to drilling into the **Yates - Seven Rivers** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **13 3/8** inch surface casing shall be set at approximately **1820** feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **24 hours in the Potash Area** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours

after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The minimum required fill of cement behind the 9 5/8 inch intermediate casing is:

Option 1:

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Capitan Reef and potash.**

Option 2:

Operator has proposed DV tool at depth of 3950', but will adjust cement proportionately if moved. DV tool shall be set a minimum of 50' below previous shoe and a minimum of 200' above current shoe. Operator shall submit sundry if DV tool depth cannot be set in this range. If an ECP is used, it is to be set a minimum of 50' below the shoe to provide cement across the shoe. If it cannot be set below the shoe, a CBL shall be run to verify cement coverage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Capitan Reef and potash.**

Option 3:

Operator has proposed DV tool at depth of 3950' and 1870', but will adjust cement proportionately if moved. DV tool shall be set a minimum of 50' below previous shoe and a minimum of 200' above current shoe. Operator shall submit sundry if DV tool depth cannot be set in this range. If an ECP is used, it is to be set a minimum of 50' below the shoe to provide cement across the shoe. If it cannot be set below the shoe, a CBL shall be run to verify cement coverage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.

b. Second stage above DV tool:

- Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with third stage cement job.

c. Third stage above DV tool:

- Cement to surface. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Capitan Reef and potash.**

❖ **Special Capitan Reef requirements.** If lost circulation (50% or greater) occurs below the Base of the Salt, the operator shall do the following:

- Switch to fresh water mud to protect the Capitan Reef and use fresh water mud until setting the intermediate casing. The appropriate BLM office is to be notified for a PET to witness the switch to fresh water.
- Daily drilling reports from the Base of the Salt to the setting of the intermediate casing are to be submitted to the BLM CFO engineering staff via e-mail by 0800 hours each morning. Any lost circulation encountered is to be recorded on these drilling reports. The daily drilling report should show mud volume per shift/tour. Failure to submit these reports will result in an Incidence of Non-Compliance being issued for failure to comply with the Conditions of Approval. If not already planned, the operator shall run a caliper survey for the intermediate well bore and submit to the appropriate BLM office.

3. The minimum required fill of cement behind the **5 1/2** inch production casing is:

- Cement should tie-back at least **50 feet above the Capitan Reef** (Top of Capitan Reef estimated at 3150'). Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.

D. SPECIAL REQUIREMENT(S)

Commercial Well Determination

A commercial well determination will need to be submitted after production has been established for at least six months.

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

Waste Minimization Plan (WMP)

In the interest of resource development, submission of additional well gas capture development plan information is deferred but may be required by the BLM Authorized Officer at a later date.

MHH 12082017

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Chaves and Roosevelt Counties
Call the Roswell Field Office, 2909 West Second St., Roswell NM 88201.
During office hours call (575) 627-0272.
After office hours call (575)

☒ Eddy County
Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County
Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after

installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

PECOS DISTRICT SURFACE USE CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Legacy Reserves Operating
LEASE NO.:	NM01747A
WELL NAME & NO.:	Lea Unit – 43H
SURFACE HOLE FOOTAGE:	2270'S & 560'E
BOTTOM HOLE FOOTAGE:	330'N & 430'E, sec. 13
LOCATION:	Section 24, T. 20 S., R. 34 E., NMPM
COUNTY:	Lea County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Lesser Prairie-Chicken Timing Stipulations
 - Below Ground-level Abandoned Well Marker
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Below Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

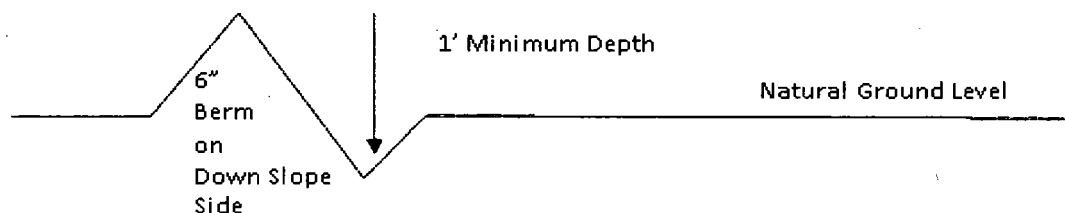

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

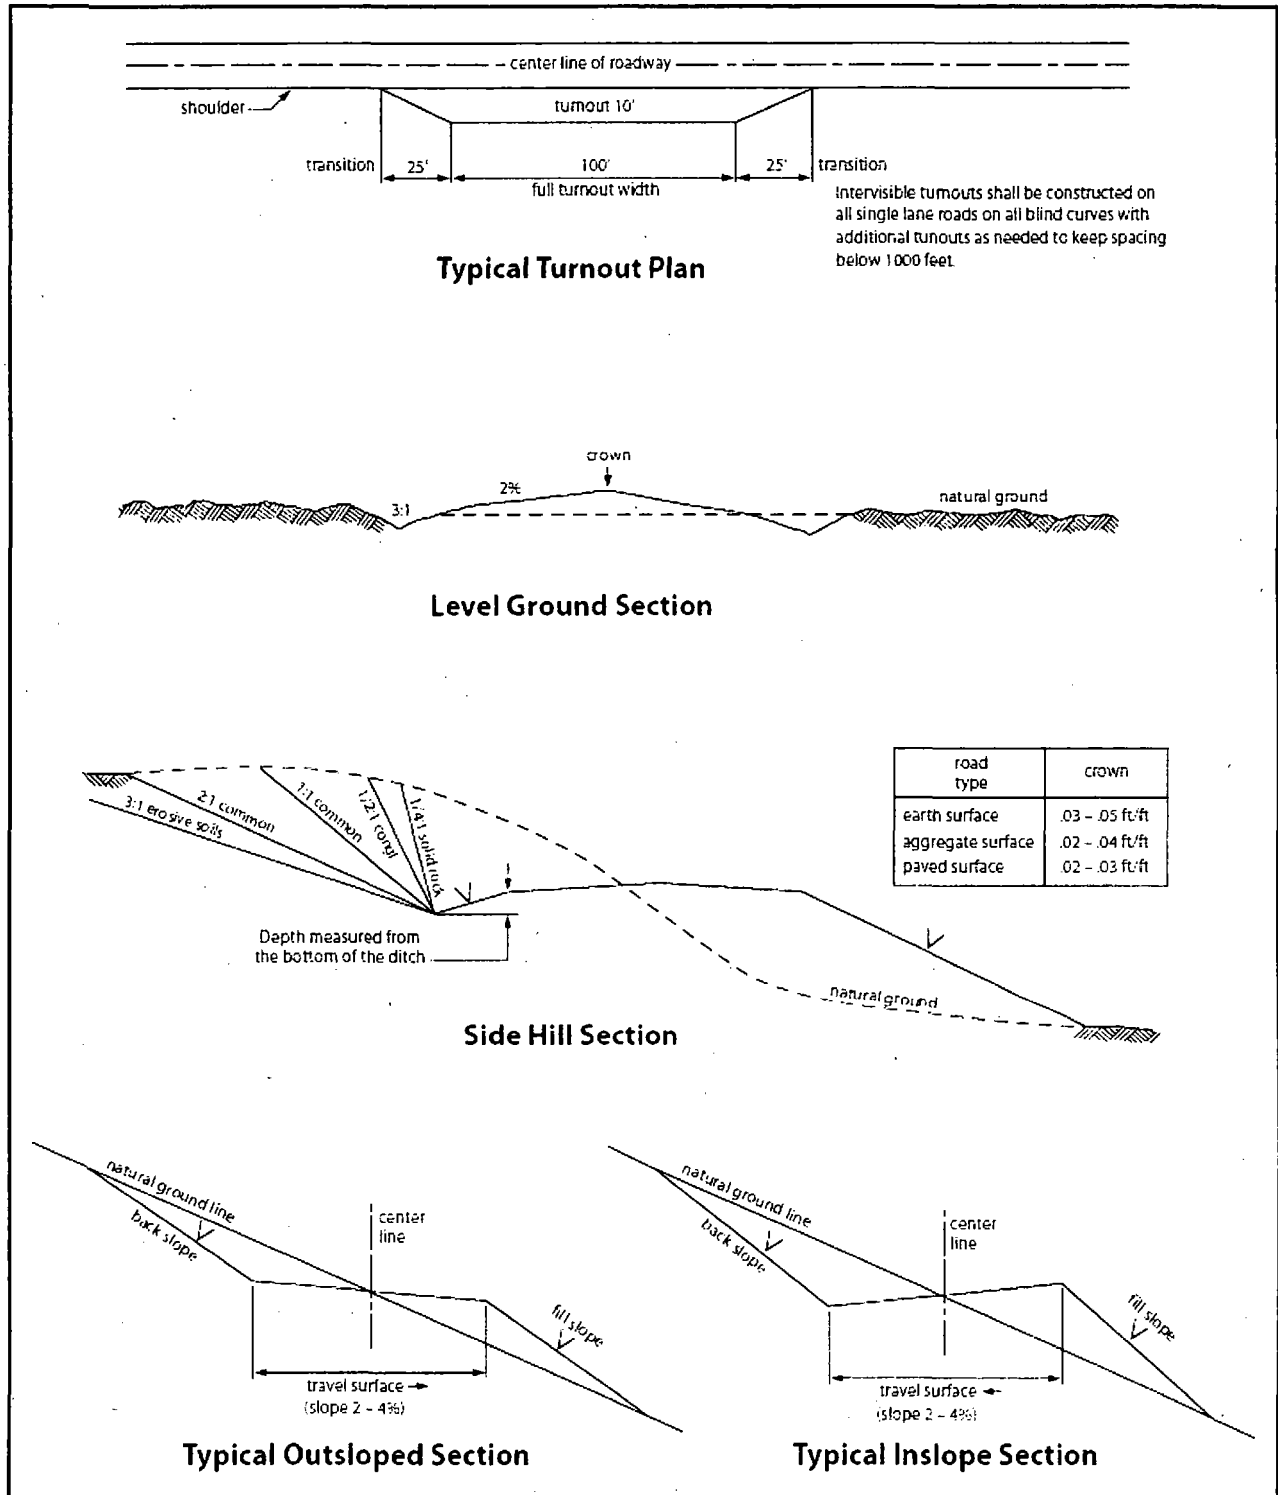


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the Grant and attachments, including stipulations, survey plat(s) and/or map(s), shall be on location during construction. BLM personnel may request to review a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, Holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC § 2601 *et seq.* (1982) with regard to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant (*see* 40 CFR, Part 702-799 and in particular, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193). Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the Authorized Officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. Holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. § 9601, *et seq.* or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, *et seq.*) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way Holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way Holder on the Right-of-Way. This provision applies without regard to whether a release is caused by Holder, its agent, or unrelated third

parties.

4. Holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. Holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of Holder including, but not limited to: construction, operation, maintenance, and termination of the facility;
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing
 - (2) Earth-disturbing and earth-moving work
 - (3) Blasting
 - (4) Vandalism and sabotage;

c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of Holder, regardless of fault. Upon failure of Holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he/she deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of Holder. Such action by the Authorized Officer shall not relieve Holder of any responsibility as provided herein.

6. All construction and maintenance activity shall be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline shall be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline shall be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity shall be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation shall be allowed unless approved in writing by the Authorized Officer.
8. Holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline shall be "snaked" around hummocks and dunes rather than suspended across these features.
9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.
10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.
12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.
13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.
14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.
15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed

is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines shall be less than or equal to 4 inches and a working pressure below 125 psi.

18. Special Stipulations:

- a. **Lesser Prairie-Chicken:** Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on

facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.

5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006. The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent,

conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Below Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture for LPC Sand/Shinnery Sites.

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

LEGACY RESERVES OPERATING, L. P.

HYDROGEN SULFIDE (H₂S) CONTINGENCY PLAN LEA UNIT 43H

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be rigged up and in use when the company drills out from under surface casing. H₂S monitors, warning signs, wind indicators and flags will be in use.

A. All personnel shall receive proper H₂S training in accordance with Onshore Order 6 III.C.3.a

B. Briefing Area: Two perpendicular areas will be designated by signs and readily accessible.

C. Required Emergency Equipment:

- Well control equipment

- a. Flare line 150' from wellhead to be ignited by flare gun.
- b. Choke manifold with a remotely operated choke.
- c. Mud/Gas Separator.

- Protective Equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) – 1 unit shall be placed at each briefing area. 2 units shall be stored in the safety trailer.
- b. Work/Escapes packs – 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
- c. Emergency Escape Packs – 4 packs shall be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft. 5/8" OSHA approved rope
- d. One 20# class ABC fire extinguisher

- H₂S detection and monitoring Equipment:

The stationary detector with three sensors will be placed in the upper doghouse, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor, Bell nipple, end of flare line or where well bore fluid is being discharged (Gas sample tubes will be stored in the safety trailer).

- Visual warning systems.

- a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
- b. A colored condition flag will be on display, reflecting the current condition, at the drilling site.
- c. Two wind socks will be placed in strategic locations being visible from all angles.

- **Mud Program:**
The mud program has been designated to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.
- **Metallurgy:**
 - a. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, shall be suitable for H₂S service.
 - b. All elastomers used for packing and seals shall be H₂S trim.
- **Communication:**
Communication will be via two way radio in emergency and company vehicles. Cell phones and land lines where available.

H₂S Operations

Though no H₂S is anticipated during the drilling operation, this contingency plan will provide for methods to ensure the well is kept under control in the event an H₂S reading of 100 ppm or more are encountered. Once personnel are safe and the proper protective gear is in place and on personnel, the operator and rig crew essential personnel will ensure the well is under control, suspend drilling operations and shut-in the well (unless pressure build up or other operational situations dictate suspending operations will prevent well control), increase the mud weight and circulate all gas from the hole utilizing the mud/gas separator downstream of the choke, the choke manifold and the emergency flare system located 150' from the well. Bring the mud system into compliance and the H₂S level below 10 ppm, then notify all emergency officers that drilling ahead is practical and safe.

Proceed with drilling ahead only after all provisions of Onshore Order 6, Section III.C. have been satisfied.

Ignition of Gas source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever this is an ignition of the gas.

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H₂S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Legacy Reserves Operating's personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential

responders has been prepared for use during a release. Legacy's response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

Emergency Assistance Telephone List

<u>PUBLIC SAFETY:</u>	<u>911 or</u>
Lea County Sheriff or Police	(575) 396-3611
Fire Department	(575) 397-9308
Hospital	(575) 492-5000
Ambulance	911
Department of Public Safety	(392) 392-5588
Oil Conservation Division	(575) 748-1823
New Mexico Energy, Minerals & Natural Resources Department	(575) 748-1283

LEGACY RESERVES OPERATING LP

Legacy Reserves Operating LP	Office (432) 689-5200
------------------------------	-----------------------

Drilling Manager:	Office (432) 689-5200
Daniel Breeding	Cell (432) 853-1680

Drilling Engineer:	Office (432) 689-5200
Matthew Dickson	Cell (432) 212-5698

Operations Manager:	Office (432) 689-5200
Ernie Hanson	Cell (432) 230-9009

Legacy Company Representative:	
Rick Massey	Cell (575) 942-4035

DRILLING CONTRACTOR-McVAY 4

Tool Pusher:	
Terry Johnson	Cell: (575) 370-5620

Relief Tool Pusher:	
Olin Vaught	Cell: (575) 631-7799

Drilling Manager:	Office: (575) 397-3311
Michael McVay	Cell: (575) 602-1839

LEGACY SAFETY **Hobbs (575) 393-7233**

EHS Coordinator:Field Operations Manager:	Office: (432) 689-5200
Randy Williams	Cell: (432) 260-5566

Field Safety Technician:	Office: (432) 689-5200
Randy Turner	Cell: (432) 536-6473


Evacuee Description:

Residents: THERE ARE NO RESIDENTS WITHIN 3000' ROE.



Prevailing Winds
Direction SW

H₂S Briefing Areas and Alarm Locations

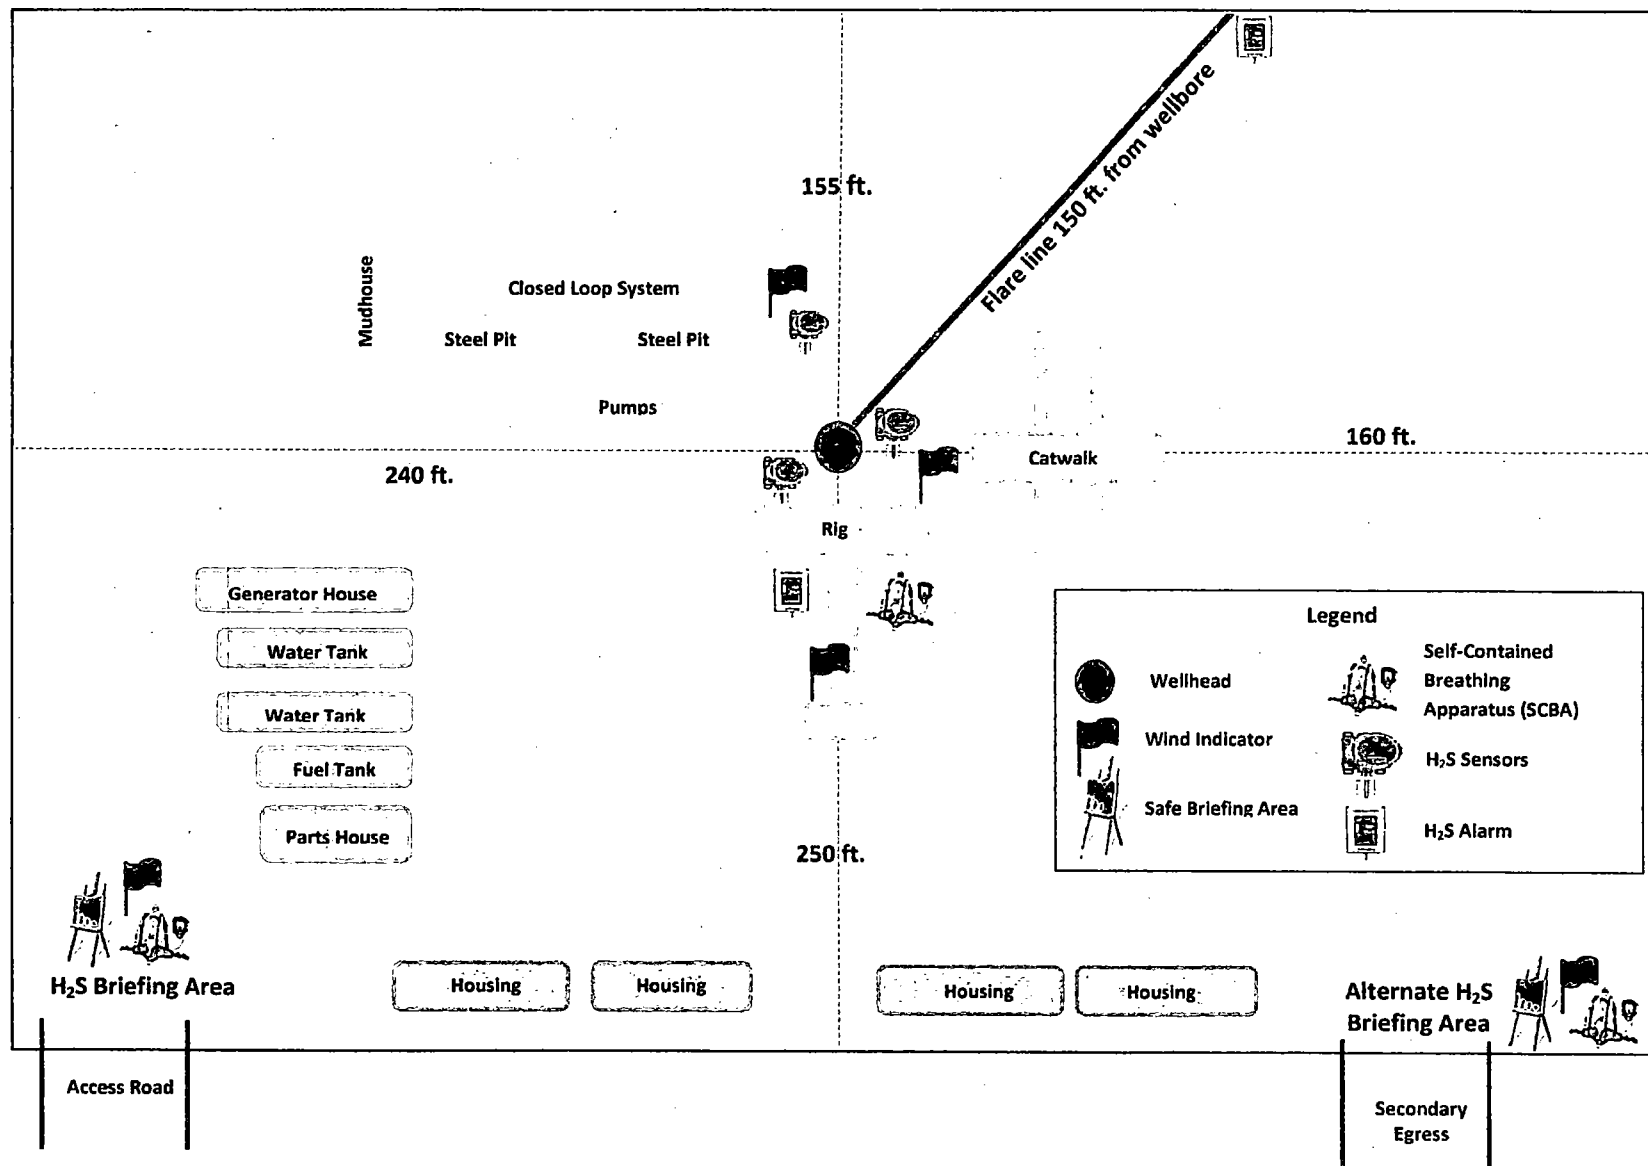



Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Site: Lea Unit #43H
Well: Lea Unit #43H
Wellbore: Lateral #1

Plan: Design #2 (Lea Unit #43H/Lateral #1)

Section Details

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	9227.04	0.00	0.00	9227.04	0.00	0.00	0.00	0.00	0.00	
3	10127.04	90.00	0.51	9800.00	572.94	5.07	10.00	0.51	572.96	
4	17506.59	90.00	0.51	9800.00	7952.20	70.40	0.00	0.00	7952.51	BHL-D2 (LU#43H/L1)


WELL DETAILS: Lea Unit #43H

Ground Elevation:: 3675.00
RKB Elevation: KB @ 3693.00usft (McVay 4)
Rig Name: McVay 4









Azimuths to Grid North
True North: -0.44°
Magnetic North: 6.71°

Magnetic Field
Strength: 48339.8nT
Dip Angle: 60.41°
Date: 7/18/2015
Model: IGRF2015



KB @ 3693.00usft (McVay 4)
Ground Level: 3675.00

Northing 567512.80 Easting 754754.70 Latitude 32° 33' 26.931 N Longitude 103° 30' 23.401 W

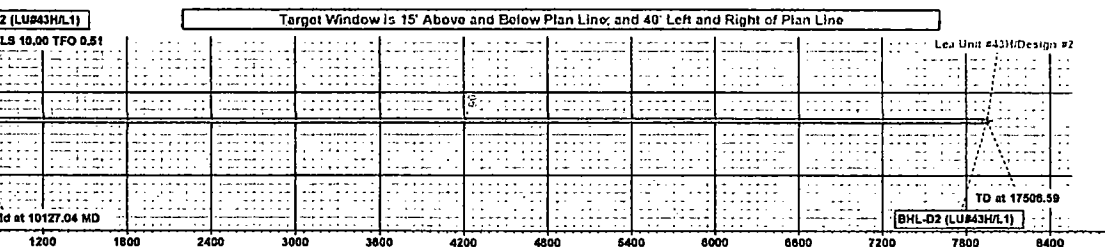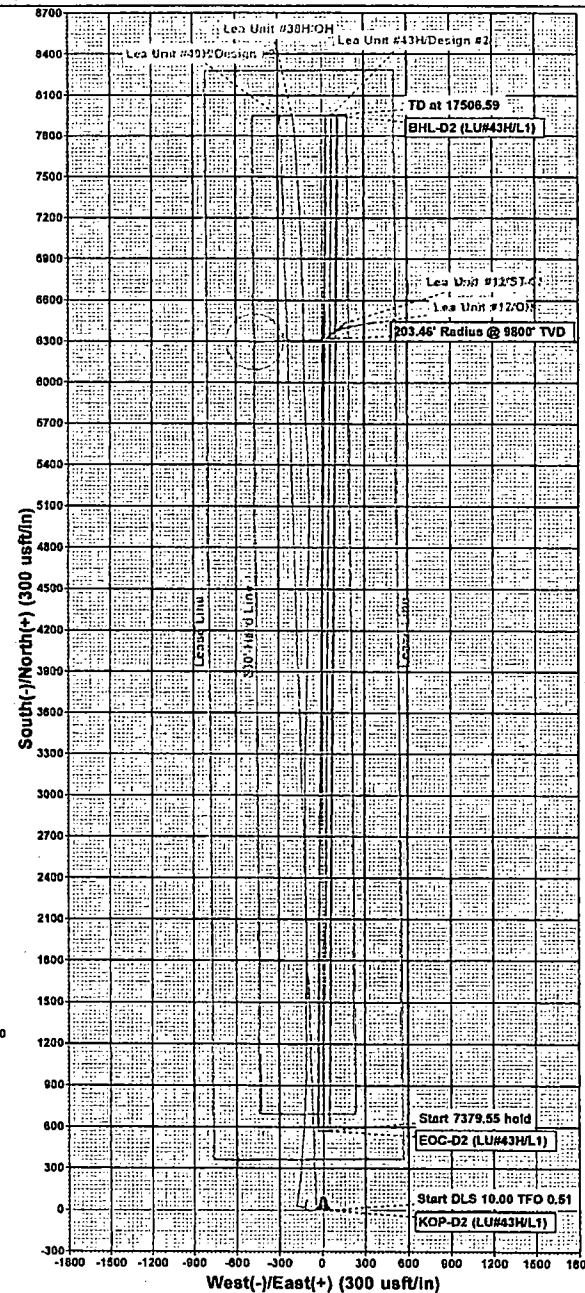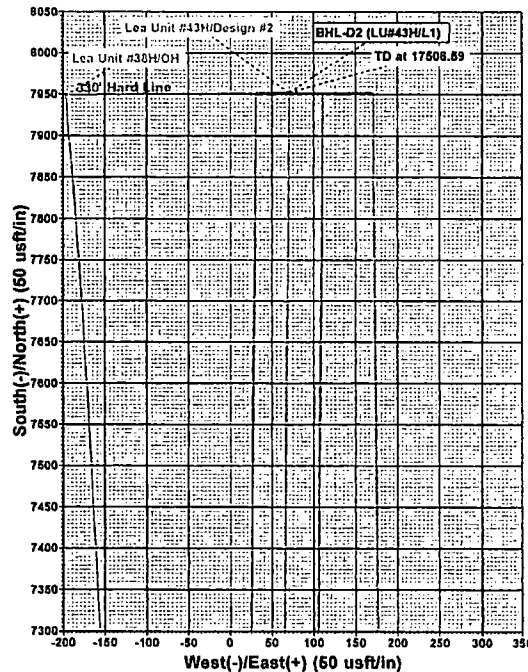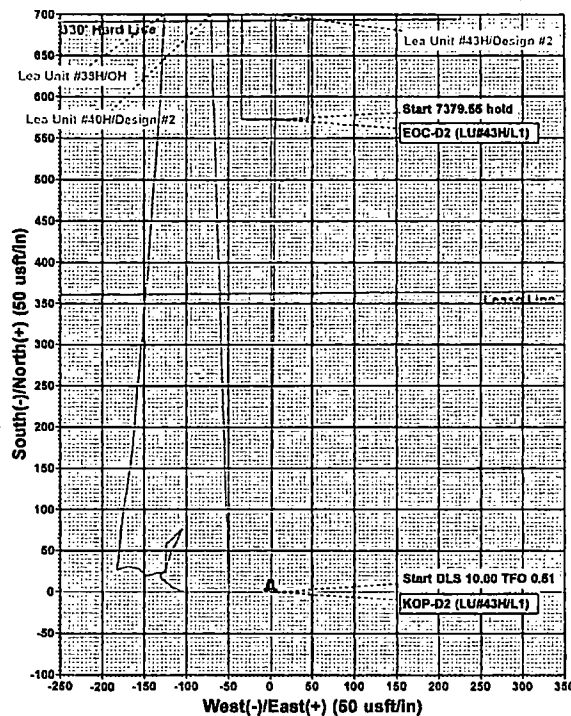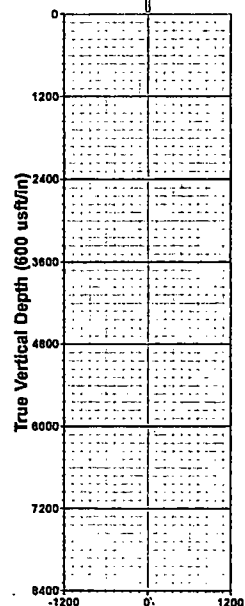

Plan: Design #2 (Lea Unit #43H/Lateral #1)
dated By: Well Planner Date: 14:15, November 30 2016

Terra Directional Services
3705 South County Road 1210, Midland, TX 79706
Office: (432) 618-1210

PROJECT DETAILS: Lea County, NM (NAD-27 2015)
Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Mean Sea Level
Local North: Grid



Legacy Reserves

Lea County, NM (NAD-27 2015)

Lea Unit #43H

Lea Unit #43H

Lateral #1

Plan: Design #2

Standard Planning Report

30 November, 2016





TDS
Planning Report



Database: EDM 5000.1 Single User Db
Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Site: Lea Unit #43H
Well: Lea Unit #43H
Wellbore: Lateral #1
Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Project: Lea County, NM (NAD-27 2015)

Map System: US State Plane 1927 (Exact solution)
Geo Datum: NAD 1927 (NADCON CONUS)
Map Zone: New Mexico East 3001

System Datum: Mean Sea Level

Site: Lea Unit #43H

Site Position: Northing: 567,512.80 usft Latitude: 32° 33' 26.931 N
From: Map Easting: 754,754.70 usft Longitude: 103° 30' 23.401 W
Position Uncertainty: 0.00 usft Slot Radius: 13.20 in Grid Convergence: 0.45 °

Well: Lea Unit #43H

Well Position: +N/-S 0.00 usft Northing: 567,512.80 usft Latitude: 32° 33' 26.931 N
+E/-W 0.00 usft Easting: 754,754.70 usft Longitude: 103° 30' 23.401 W
Position Uncertainty: 0.00 usft Wellhead Elevation: 0.00 usft Ground Level: 3,675.00 usft

Wellbore: Lateral #1

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	7/18/2015	7.15	60.41	48,340

Design: Design #2

Audit Notes:

Version: Phase: PLAN Tie On Depth: 0.00

Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	0.51

Plan Sections

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
9,227.04	0.00	0.00	9,227.04	0.00	0.00	0.00	0.00	0.00	0.00	
10,127.04	90.00	0.51	9,800.00	572.94	5.07	10.00	10.00	0.06	0.51	
17,506.59	90.00	0.51	9,800.00	7,952.20	70.40	0.00	0.00	0.00	0.00	BHL-D2 (LU#43H/L1)



TDS
Planning Report



Database: EDM 5000.1 Single User Db
Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Site: Lea Unit #43H
Well: Lea Unit #43H
Wellbore: Lateral #1
Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00



TDS
Planning Report



Database: EDM 5000.1 Single User Db
Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Site: Lea Unit #43H
Well: Lea Unit #43H
Wellbore: Lateral #1
Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,700.00	0.00	0.00	0.00	0.00	0.00	0.00
6,800.00	0.00	0.00	6,800.00	0.00	0.00	0.00	0.00	0.00	0.00
6,900.00	0.00	0.00	6,900.00	0.00	0.00	0.00	0.00	0.00	0.00
7,000.00	0.00	0.00	7,000.00	0.00	0.00	0.00	0.00	0.00	0.00
7,100.00	0.00	0.00	7,100.00	0.00	0.00	0.00	0.00	0.00	0.00
7,200.00	0.00	0.00	7,200.00	0.00	0.00	0.00	0.00	0.00	0.00
7,300.00	0.00	0.00	7,300.00	0.00	0.00	0.00	0.00	0.00	0.00
7,400.00	0.00	0.00	7,400.00	0.00	0.00	0.00	0.00	0.00	0.00
7,500.00	0.00	0.00	7,500.00	0.00	0.00	0.00	0.00	0.00	0.00
7,600.00	0.00	0.00	7,600.00	0.00	0.00	0.00	0.00	0.00	0.00
7,700.00	0.00	0.00	7,700.00	0.00	0.00	0.00	0.00	0.00	0.00
7,800.00	0.00	0.00	7,800.00	0.00	0.00	0.00	0.00	0.00	0.00
7,900.00	0.00	0.00	7,900.00	0.00	0.00	0.00	0.00	0.00	0.00
8,000.00	0.00	0.00	8,000.00	0.00	0.00	0.00	0.00	0.00	0.00
8,100.00	0.00	0.00	8,100.00	0.00	0.00	0.00	0.00	0.00	0.00
8,200.00	0.00	0.00	8,200.00	0.00	0.00	0.00	0.00	0.00	0.00
8,300.00	0.00	0.00	8,300.00	0.00	0.00	0.00	0.00	0.00	0.00
8,400.00	0.00	0.00	8,400.00	0.00	0.00	0.00	0.00	0.00	0.00
8,500.00	0.00	0.00	8,500.00	0.00	0.00	0.00	0.00	0.00	0.00
8,600.00	0.00	0.00	8,600.00	0.00	0.00	0.00	0.00	0.00	0.00
8,700.00	0.00	0.00	8,700.00	0.00	0.00	0.00	0.00	0.00	0.00
8,800.00	0.00	0.00	8,800.00	0.00	0.00	0.00	0.00	0.00	0.00
8,900.00	0.00	0.00	8,900.00	0.00	0.00	0.00	0.00	0.00	0.00
9,000.00	0.00	0.00	9,000.00	0.00	0.00	0.00	0.00	0.00	0.00
9,100.00	0.00	0.00	9,100.00	0.00	0.00	0.00	0.00	0.00	0.00
9,200.00	0.00	0.00	9,200.00	0.00	0.00	0.00	0.00	0.00	0.00
9,227.04	0.00	0.00	9,227.04	0.00	0.00	0.00	0.00	0.00	0.00
Start DLS 10.00 TFO 0.51									
9,250.00	2.30	0.51	9,249.99	0.46	0.00	0.46	10.00	10.00	0.00
9,300.00	7.30	0.51	9,299.80	4.64	0.04	4.64	10.00	10.00	0.00
9,350.00	12.30	0.51	9,349.06	13.14	0.12	13.14	10.00	10.00	0.00
9,400.00	17.30	0.51	9,397.39	25.91	0.23	25.91	10.00	10.00	0.00
9,450.00	22.30	0.51	9,444.42	42.83	0.38	42.84	10.00	10.00	0.00
9,500.00	27.30	0.51	9,489.79	63.80	0.56	63.80	10.00	10.00	0.00
9,550.00	32.30	0.51	9,533.17	88.63	0.78	88.64	10.00	10.00	0.00
9,600.00	37.30	0.51	9,574.21	117.16	1.04	117.16	10.00	10.00	0.00
9,650.00	42.30	0.51	9,612.62	149.15	1.32	149.15	10.00	10.00	0.00
9,700.00	47.30	0.51	9,648.09	184.36	1.63	184.37	10.00	10.00	0.00
9,750.00	52.30	0.51	9,680.35	222.54	1.97	222.55	10.00	10.00	0.00
9,800.00	57.30	0.51	9,709.17	263.38	2.33	263.39	10.00	10.00	0.00



TDS
Planning Report



Database: EDM 5000.1 Single User Db
Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Site: Lea Unit #43H
Well: Lea Unit #43H
Wellbore: Lateral #1
Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,850.00	62.30	0.51	9,734.31	306.58	2.71	306.59	10.00	10.00	0.00
9,900.00	67.30	0.51	9,755.60	351.80	3.11	351.81	10.00	10.00	0.00
9,950.00	72.30	0.51	9,772.86	398.71	3.53	398.72	10.00	10.00	0.00
10,000.00	77.30	0.51	9,785.97	446.94	3.96	446.96	10.00	10.00	0.00
10,050.00	82.30	0.51	9,794.83	496.13	4.39	496.15	10.00	10.00	0.00
10,100.00	87.30	0.51	9,799.36	545.91	4.83	545.93	10.00	10.00	0.00
10,127.04	90.00	0.51	9,800.00	572.94	5.07	572.96	10.00	10.00	0.00
Start 7379.55 hold at 10127.04 MD									
10,200.00	90.00	0.51	9,800.00	645.89	5.72	645.92	0.00	0.00	0.00
10,300.00	90.00	0.51	9,800.00	745.89	6.60	745.92	0.00	0.00	0.00
10,400.00	90.00	0.51	9,800.00	845.88	7.49	845.92	0.00	0.00	0.00
10,500.00	90.00	0.51	9,800.00	945.88	8.37	945.92	0.00	0.00	0.00
10,600.00	90.00	0.51	9,800.00	1,045.88	9.26	1,045.92	0.00	0.00	0.00
10,700.00	90.00	0.51	9,800.00	1,145.87	10.14	1,145.92	0.00	0.00	0.00
10,800.00	90.00	0.51	9,800.00	1,245.87	11.03	1,245.92	0.00	0.00	0.00
10,900.00	90.00	0.51	9,800.00	1,345.87	11.91	1,345.92	0.00	0.00	0.00
11,000.00	90.00	0.51	9,800.00	1,445.86	12.80	1,445.92	0.00	0.00	0.00
11,100.00	90.00	0.51	9,800.00	1,545.86	13.69	1,545.92	0.00	0.00	0.00
11,200.00	90.00	0.51	9,800.00	1,645.85	14.57	1,645.92	0.00	0.00	0.00
11,300.00	90.00	0.51	9,800.00	1,745.85	15.46	1,745.92	0.00	0.00	0.00
11,400.00	90.00	0.51	9,800.00	1,845.85	16.34	1,845.92	0.00	0.00	0.00
11,500.00	90.00	0.51	9,800.00	1,945.84	17.23	1,945.92	0.00	0.00	0.00
11,600.00	90.00	0.51	9,800.00	2,045.84	18.11	2,045.92	0.00	0.00	0.00
11,700.00	90.00	0.51	9,800.00	2,145.83	19.00	2,145.92	0.00	0.00	0.00
11,800.00	90.00	0.51	9,800.00	2,245.83	19.88	2,245.92	0.00	0.00	0.00
11,900.00	90.00	0.51	9,800.00	2,345.83	20.77	2,345.92	0.00	0.00	0.00
12,000.00	90.00	0.51	9,800.00	2,445.82	21.65	2,445.92	0.00	0.00	0.00
12,100.00	90.00	0.51	9,800.00	2,545.82	22.54	2,545.92	0.00	0.00	0.00
12,200.00	90.00	0.51	9,800.00	2,645.81	23.42	2,645.92	0.00	0.00	0.00
12,300.00	90.00	0.51	9,800.00	2,745.81	24.31	2,745.92	0.00	0.00	0.00
12,400.00	90.00	0.51	9,800.00	2,845.81	25.19	2,845.92	0.00	0.00	0.00
12,500.00	90.00	0.51	9,800.00	2,945.80	26.08	2,945.92	0.00	0.00	0.00
12,600.00	90.00	0.51	9,800.00	3,045.80	26.96	3,045.92	0.00	0.00	0.00
12,700.00	90.00	0.51	9,800.00	3,145.79	27.85	3,145.92	0.00	0.00	0.00
12,800.00	90.00	0.51	9,800.00	3,245.79	28.73	3,245.92	0.00	0.00	0.00
12,900.00	90.00	0.51	9,800.00	3,345.79	29.62	3,345.92	0.00	0.00	0.00
13,000.00	90.00	0.51	9,800.00	3,445.78	30.51	3,445.92	0.00	0.00	0.00
13,100.00	90.00	0.51	9,800.00	3,545.78	31.39	3,545.92	0.00	0.00	0.00
13,200.00	90.00	0.51	9,800.00	3,645.78	32.28	3,645.92	0.00	0.00	0.00
13,300.00	90.00	0.51	9,800.00	3,745.77	33.16	3,745.92	0.00	0.00	0.00
13,400.00	90.00	0.51	9,800.00	3,845.77	34.05	3,845.92	0.00	0.00	0.00
13,500.00	90.00	0.51	9,800.00	3,945.76	34.93	3,945.92	0.00	0.00	0.00
13,600.00	90.00	0.51	9,800.00	4,045.76	35.82	4,045.92	0.00	0.00	0.00
13,700.00	90.00	0.51	9,800.00	4,145.76	36.70	4,145.92	0.00	0.00	0.00
13,800.00	90.00	0.51	9,800.00	4,245.75	37.59	4,245.92	0.00	0.00	0.00
13,900.00	90.00	0.51	9,800.00	4,345.75	38.47	4,345.92	0.00	0.00	0.00
14,000.00	90.00	0.51	9,800.00	4,445.74	39.36	4,445.92	0.00	0.00	0.00
14,100.00	90.00	0.51	9,800.00	4,545.74	40.24	4,545.92	0.00	0.00	0.00
14,200.00	90.00	0.51	9,800.00	4,645.74	41.13	4,645.92	0.00	0.00	0.00
14,300.00	90.00	0.51	9,800.00	4,745.73	42.01	4,745.92	0.00	0.00	0.00
14,400.00	90.00	0.51	9,800.00	4,845.73	42.90	4,845.92	0.00	0.00	0.00
14,500.00	90.00	0.51	9,800.00	4,945.72	43.78	4,945.92	0.00	0.00	0.00
14,600.00	90.00	0.51	9,800.00	5,045.72	44.67	5,045.92	0.00	0.00	0.00
14,700.00	90.00	0.51	9,800.00	5,145.72	45.55	5,145.92	0.00	0.00	0.00



TDS
Planning Report



Database: EDM 5000.1 Single User Db
Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Site: Lea Unit #43H
Well: Lea Unit #43H
Wellbore: Lateral #1
Design: Design #2

Local Co-ordinate Reference:
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,800.00	90.00	0.51	9,800.00	5,245.71	46.44	5,245.92	0.00	0.00	0.00
14,900.00	90.00	0.51	9,800.00	5,345.71	47.33	5,345.92	0.00	0.00	0.00
15,000.00	90.00	0.51	9,800.00	5,445.70	48.21	5,445.92	0.00	0.00	0.00
15,100.00	90.00	0.51	9,800.00	5,545.70	49.10	5,545.92	0.00	0.00	0.00
15,200.00	90.00	0.51	9,800.00	5,645.70	49.98	5,645.92	0.00	0.00	0.00
15,300.00	90.00	0.51	9,800.00	5,745.69	50.87	5,745.92	0.00	0.00	0.00
15,400.00	90.00	0.51	9,800.00	5,845.69	51.75	5,845.92	0.00	0.00	0.00
15,500.00	90.00	0.51	9,800.00	5,945.68	52.64	5,945.92	0.00	0.00	0.00
15,600.00	90.00	0.51	9,800.00	6,045.68	53.52	6,045.92	0.00	0.00	0.00
15,700.00	90.00	0.51	9,800.00	6,145.68	54.41	6,145.92	0.00	0.00	0.00
15,800.00	90.00	0.51	9,800.00	6,245.67	55.29	6,245.92	0.00	0.00	0.00
15,900.00	90.00	0.51	9,800.00	6,345.67	56.18	6,345.92	0.00	0.00	0.00
16,000.00	90.00	0.51	9,800.00	6,445.67	57.06	6,445.92	0.00	0.00	0.00
16,100.00	90.00	0.51	9,800.00	6,545.66	57.95	6,545.92	0.00	0.00	0.00
16,200.00	90.00	0.51	9,800.00	6,645.66	58.83	6,645.92	0.00	0.00	0.00
16,300.00	90.00	0.51	9,800.00	6,745.65	59.72	6,745.92	0.00	0.00	0.00
16,400.00	90.00	0.51	9,800.00	6,845.65	60.60	6,845.92	0.00	0.00	0.00
16,500.00	90.00	0.51	9,800.00	6,945.65	61.49	6,945.92	0.00	0.00	0.00
16,600.00	90.00	0.51	9,800.00	7,045.64	62.37	7,045.92	0.00	0.00	0.00
16,700.00	90.00	0.51	9,800.00	7,145.64	63.26	7,145.92	0.00	0.00	0.00
16,800.00	90.00	0.51	9,800.00	7,245.63	64.14	7,245.92	0.00	0.00	0.00
16,900.00	90.00	0.51	9,800.00	7,345.63	65.03	7,345.92	0.00	0.00	0.00
17,000.00	90.00	0.51	9,800.00	7,445.63	65.92	7,445.92	0.00	0.00	0.00
17,100.00	90.00	0.51	9,800.00	7,545.62	66.80	7,545.92	0.00	0.00	0.00
17,200.00	90.00	0.51	9,800.00	7,645.62	67.69	7,645.92	0.00	0.00	0.00
17,300.00	90.00	0.51	9,800.00	7,745.61	68.57	7,745.92	0.00	0.00	0.00
17,400.00	90.00	0.51	9,800.00	7,845.61	69.46	7,845.92	0.00	0.00	0.00
17,506.59	90.00	0.51	9,800.00	7,952.20	70.40	7,952.51	0.00	0.00	0.00

TD at 17506.59

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
203.46' Radius @ 9800'	0.00	0.00	0.00	6,295.29	-470.70	573,808.09	754,284.00	32° 34' 29.258 N	103° 30' 28.330 W
- plan misses target center by 6312.86usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Circle (radius 203.47)									
KOP-D2 (LU#43H/L1)	0.00	0.00	9,227.04	0.00	0.00	567,512.80	754,754.70	32° 33' 26.931 N	103° 30' 23.401 W
- plan hits target center									
- Point									
BHL-D2 (LU#43H/L1)	0.00	0.51	9,800.00	7,952.20	70.40	575,465.00	754,825.10	32° 34' 45.611 N	103° 30' 21.857 W
- plan hits target center									
- Rectangle (sides W80.00 H7,379.55 D30.00)									
EOC-D2 (LU#43H/L1)	0.00	0.00	9,800.00	572.94	5.07	568,085.74	754,759.77	32° 33' 32.600 N	103° 30' 23.290 W
- plan hits target center									
- Point									



TDS
Planning Report



Database: EDM 5000.1 Single User Db
Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Site: Lea Unit #43H
Well: Lea Unit #43H
Wellbore: Lateral #1
Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
9,227.04	9,227.04	0.00	0.00	Start DLS 10.00 TFO 0.51
10,127.04	9,800.00	572.94	5.07	Start 7379.55 hold at 10127.04 MD
17,506.59	9,800.00	7,952.20	70.40	TD at 17506.59



Legacy Reserves

Lea County, NM (NAD-27 2015)

Lea Unit #43H

Lea Unit #43H

Lateral #1

Design #2

Anticollision Report

30 November, 2016





TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Reference	Design #2		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	Stations	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum center-center distance of 9,999.98 usft	Error Surface:	Elliptical Conic
Warning Levels Evaluated at:	2.00 Sigma	Casing Method:	Not applied

Survey Tool Program		Date	11/30/2016		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.00	17,506.59	Design #2 (Lateral #1)	MWD	MWD - Standard	

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Lea County Offset Wells						
Lea Unit #12 - OH - OH	15,600.00	9,814.07	411.82	-142.98	0.742	Level 1, ES, SF
Lea Unit #12 - OH - OH	15,855.48	9,814.53	323.00	7.99	1.025	Level 2, CC
Lea Unit #12 - ST-01 - ST-01	15,600.00	9,814.07	411.82	-142.98	0.742	Level 1, ES, SF
Lea Unit #12 - ST-01 - ST-01	15,855.48	9,814.53	323.00	7.99	1.025	Level 2, CC
Lea Unit #38H						
Lea Unit #38H - OH - OH	704.52	703.53	98.64	95.93	36.476	CC
Lea Unit #38H - OH - OH	8,400.00	8,400.52	127.04	90.92	3.517	ES
Lea Unit #38H - OH - OH	8,500.00	8,499.56	127.78	91.23	3.496	SF
Lea Unit #40H						
Lea Unit #40H - Lateral #1 - Design #2	9,227.04	9,227.04	49.90	8.69	1.211	Level 2, CC
Lea Unit #40H - Lateral #1 - Design #2	9,250.00	9,249.99	49.91	8.60	1.208	Level 2, ES, SF

Offset Design Lea County Offset Wells - Lea Unit #12 - OH - OH												Offset Site Error:	0.00 usft
Survey Program: 207-INC. 16000-MWD												Offset Well Error:	0.00 usft
Reference Measured Depth (usft)	Vertical Depth (usft)	Offset Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.61	0.61	0.00	0.01	-4.28	6,295.29	-470.70	6,312.86				
100.00	100.00	101.89	101.89	0.09	2.50	-4.27	6,295.31	-470.37	6,312.85	6,310.27	2.59	2,439.919	
200.00	200.00	203.17	203.17	0.32	4.98	-4.26	6,295.35	-469.39	6,312.82	6,307.53	5.29	1,192.903	
300.00	300.00	302.40	302.39	0.54	8.72	-4.25	6,295.39	-468.29	6,312.79	6,303.53	9.25	682.130	
400.00	400.00	402.34	402.33	0.77	12.08	-4.25	6,295.43	-467.42	6,312.76	6,299.92	12.84	491.757	
500.00	500.00	502.88	502.86	0.99	15.95	-4.24	6,295.47	-466.44	6,312.73	6,295.79	16.94	372.712	
600.00	600.00	602.14	602.12	1.22	19.59	-4.23	6,295.52	-465.33	6,312.69	6,291.90	20.79	303.579	
700.00	700.00	701.48	701.45	1.44	22.21	-4.22	6,295.54	-464.83	6,312.68	6,289.04	23.64	267.043	
800.00	800.00	801.48	801.45	1.67	24.48	-4.22	6,295.56	-464.40	6,312.67	6,286.55	26.12	241.711	
900.00	900.00	901.48	901.45	1.89	26.71	-4.21	6,295.58	-463.96	6,312.65	6,284.06	28.59	220.767	
1,000.00	1,000.00	1,001.85	1,001.81	2.12	29.67	-4.21	6,295.60	-463.43	6,312.64	6,280.86	31.78	198.662	
1,100.00	1,100.00	1,102.21	1,102.18	2.34	32.63	-4.20	6,295.63	-462.71	6,312.61	6,277.65	34.96	180.561	
1,200.00	1,200.00	1,202.08	1,202.04	2.56	35.14	-4.20	6,295.67	-461.89	6,312.59	6,274.89	37.69	167.465	
1,300.00	1,300.00	1,301.74	1,301.70	2.79	37.47	-4.19	6,295.70	-461.23	6,312.57	6,272.32	40.25	156.845	
1,400.00	1,400.00	1,401.40	1,401.36	3.01	39.80	-4.19	6,295.72	-460.75	6,312.55	6,269.75	42.80	147.491	
1,500.00	1,500.00	1,501.06	1,501.02	3.24	42.12	-4.18	6,295.73	-460.44	6,312.54	6,267.19	45.35	139.190	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea County Offset Wells - Lea Unit #12 - OH - OH													Offset Site Error:	0.00 usft
Survey Program: 207-INC, 16000-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft).	Separation Factor		
1,600.00	1,600.00	1,600.73	1,600.69	3.46	44.45	-4.18	6,295.74	-460.31	6,312.54	6,264.64	47.90	131.773		
1,700.00	1,700.00	1,701.13	1,701.09	3.69	47.56	-4.18	6,295.74	-460.21	6,312.54	6,261.30	51.24	123.198		
1,800.00	1,800.00	1,801.80	1,801.76	3.91	50.95	-4.18	6,295.76	-459.77	6,312.52	6,257.67	54.85	115.080		
1,900.00	1,900.00	1,902.47	1,902.42	4.14	54.34	-4.17	6,295.79	-458.98	6,312.50	6,254.03	58.47	107.966		
2,000.00	2,000.00	2,003.12	2,003.07	4.36	57.73	-4.16	6,295.84	-457.83	6,312.47	6,250.39	62.08	101.681		
2,100.00	2,100.00	2,103.77	2,103.71	4.59	61.12	-4.15	6,295.91	-456.34	6,312.42	6,246.73	65.69	96.087		
2,200.00	2,200.00	2,203.75	2,203.67	4.81	65.73	-4.13	6,295.98	-454.64	6,312.37	6,241.84	70.53	89.502		
2,300.00	2,300.00	2,303.53	2,303.44	5.04	70.71	-4.12	6,296.05	-453.04	6,312.33	6,236.60	75.73	83.356		
2,400.00	2,400.00	2,403.32	2,403.22	5.26	75.68	-4.10	6,296.11	-451.55	6,312.28	6,231.36	80.93	78.000		
2,500.00	2,500.00	2,503.11	2,503.00	5.49	80.66	-4.09	6,296.17	-450.17	6,312.24	6,226.12	86.13	73.290		
2,600.00	2,600.00	2,603.84	2,603.72	5.71	86.71	-4.08	6,296.23	-448.67	6,312.20	6,219.80	92.40	68.315		
2,700.00	2,700.00	2,704.74	2,704.59	5.94	92.96	-4.06	6,296.32	-446.65	6,312.14	6,213.27	98.87	63.842		
2,800.00	2,800.00	2,805.62	2,805.45	6.16	100.30	-4.03	6,296.43	-444.12	6,312.07	6,205.64	106.43	59.307		
2,900.00	2,900.00	2,906.50	2,906.28	6.39	110.25	-4.01	6,296.56	-441.06	6,311.99	6,195.39	116.60	54.133		
3,000.00	3,000.00	3,007.34	3,007.06	6.61	120.19	-3.97	6,296.71	-437.45	6,311.89	6,185.12	126.77	49.790		
3,100.00	3,100.00	3,107.41	3,107.04	6.84	131.80	-3.94	6,296.88	-433.54	6,311.79	6,173.19	138.60	45.539		
3,200.00	3,200.00	3,207.33	3,206.89	7.06	143.72	-3.90	6,297.05	-429.62	6,311.69	6,160.95	150.74	41.870		
3,300.00	3,300.00	3,307.06	3,306.55	7.28	155.00	-3.87	6,297.22	-425.73	6,311.59	6,149.34	162.25	38.901		
3,400.00	3,400.00	3,406.48	3,405.90	7.51	165.17	-3.83	6,297.37	-422.11	6,311.50	6,138.87	172.63	35.560		
3,500.00	3,500.00	3,505.93	3,505.29	7.73	175.33	-3.80	6,297.51	-418.83	6,311.42	6,128.40	183.02	34.484		
3,600.00	3,600.00	3,605.39	3,604.71	7.96	185.50	-3.78	6,297.64	-415.87	6,311.35	6,117.94	193.41	32.631		
3,700.00	3,700.00	3,704.86	3,704.15	8.18	194.34	-3.75	6,297.75	-413.25	6,311.29	6,108.82	202.48	31.170		
3,800.00	3,800.00	3,804.34	3,803.59	8.41	201.42	-3.73	6,297.85	-410.97	6,311.24	6,101.45	209.79	30.084		
3,900.00	3,900.00	3,903.82	3,903.06	8.63	208.51	-3.72	6,297.93	-409.04	6,311.20	6,094.10	217.10	29.070		
4,000.00	4,000.00	4,003.78	4,003.00	8.86	214.42	-3.70	6,298.00	-407.30	6,311.16	6,087.92	223.24	28.271		
4,100.00	4,100.00	4,103.76	4,102.97	9.08	220.25	-3.68	6,298.08	-405.55	6,311.12	6,081.83	229.29	27.524		
4,200.00	4,200.00	4,203.73	4,202.92	9.31	225.99	-3.67	6,298.15	-403.81	6,311.09	6,075.83	235.26	26.827		
4,300.00	4,300.00	4,303.59	4,302.77	9.53	231.18	-3.65	6,298.22	-402.13	6,311.05	6,070.38	240.67	26.223		
4,400.00	4,400.00	4,403.45	4,402.62	9.76	236.37	-3.64	6,298.29	-400.55	6,311.02	6,064.93	246.08	25.646		
4,500.00	4,500.00	4,503.32	4,502.47	9.98	241.56	-3.63	6,298.36	-399.05	6,310.99	6,059.49	251.50	25.093		
4,600.00	4,600.00	4,603.19	4,602.33	10.21	246.75	-3.61	6,298.42	-397.66	6,310.96	6,054.04	256.91	24.564		
4,700.00	4,700.00	4,703.18	4,702.32	10.43	251.95	-3.60	6,298.47	-396.33	6,310.93	6,048.59	262.34	24.057		
4,800.00	4,800.00	4,803.28	4,802.41	10.66	257.15	-3.59	6,298.53	-394.93	6,310.90	6,043.14	267.76	23.569		
4,900.00	4,900.00	4,903.38	4,902.50	10.88	262.36	-3.57	6,298.60	-393.44	6,310.87	6,037.68	273.19	23.100		
5,000.00	5,000.00	5,003.48	5,002.58	11.11	267.56	-3.56	6,298.66	-391.86	6,310.84	6,032.22	278.62	22.650		
5,100.00	5,100.00	5,103.57	5,102.66	11.33	272.76	-3.54	6,298.74	-390.19	6,310.81	6,026.76	284.05	22.217		
5,200.00	5,200.00	5,203.77	5,202.84	11.56	279.14	-3.53	6,298.81	-388.41	6,310.78	6,020.12	290.66	21.712		
5,300.00	5,300.00	5,304.02	5,303.07	11.78	286.29	-3.51	6,298.90	-386.40	6,310.74	6,012.71	298.03	21.175		
5,400.00	5,400.00	5,404.26	5,403.29	12.00	293.44	-3.49	6,298.99	-384.17	6,310.70	6,005.30	305.40	20.664		
5,500.00	5,500.00	5,504.50	5,503.49	12.23	300.59	-3.47	6,299.10	-381.70	6,310.65	5,997.88	312.77	20.176		
5,600.00	5,600.00	5,603.57	5,602.54	12.45	306.57	-3.45	6,299.19	-379.47	6,310.61	5,991.63	318.98	19.784		
5,700.00	5,700.00	5,702.58	5,701.55	12.68	312.05	-3.44	6,299.25	-378.21	6,310.59	5,985.90	324.69	19.436		
5,800.00	5,800.00	5,802.58	5,801.54	12.90	315.33	-3.43	6,299.29	-377.34	6,310.58	5,982.38	328.20	19.228		
5,900.00	5,900.00	5,902.75	5,901.70	13.13	319.06	-3.42	6,299.32	-376.45	6,310.56	5,978.42	332.15	18.999		
6,000.00	6,000.00	6,003.49	6,002.44	13.35	324.30	-3.41	6,299.38	-375.05	6,310.54	5,972.92	337.62	18.691		
6,100.00	6,100.00	6,103.78	6,102.71	13.58	330.01	-3.39	6,299.47	-373.03	6,310.51	5,966.95	343.55	18.368		
6,200.00	6,200.00	6,203.65	6,202.56	13.80	336.61	-3.37	6,299.55	-371.15	6,310.47	5,960.10	350.37	18.011		
6,300.00	6,300.00	6,304.32	6,303.20	14.03	344.04	-3.35	6,299.65	-368.79	6,310.44	5,952.40	358.04	17.625		
6,400.00	6,400.00	6,404.28	6,403.13	14.25	352.45	-3.33	6,299.76	-366.18	6,310.40	5,943.73	366.67	17.210		
6,500.00	6,500.00	6,504.25	6,503.06	14.48	360.85	-3.30	6,299.88	-363.56	6,310.36	5,935.06	375.30	16.814		
6,600.00	6,600.00	6,604.21	6,602.99	14.70	369.26	-3.28	6,299.99	-360.95	6,310.32	5,926.39	383.93	16.436		
6,700.00	6,700.00	6,704.67	6,703.40	14.93	378.70	-3.25	6,300.11	-358.11	6,310.28	5,916.68	393.59	16.032		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea County Offset Wells - Lea Unit #12 - OH - OH													Offset Site Error: 0.00 usft
Survey Program: 207-INC, 16000-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)					
6,800.00	6,800.00	6,804.89	6,803.57	15.15	389.12	-3.22	6,300.25	-354.69	6,310.23	5,905.99	404.24	15.610	
6,900.00	6,900.00	6,904.83	6,903.45	15.38	400.10	-3.19	6,300.40	-351.20	6,310.19	5,894.74	415.45	15.189	
7,000.00	7,000.00	7,004.77	7,003.33	15.60	411.10	-3.16	6,300.55	-347.72	6,310.14	5,883.47	426.67	14.789	
7,100.00	7,100.00	7,104.71	7,103.20	15.83	422.09	-3.13	6,300.70	-344.23	6,310.10	5,872.21	437.89	14.410	
7,200.00	7,200.00	7,204.65	7,203.08	16.05	433.09	-3.10	6,300.85	-340.75	6,310.06	5,860.94	449.12	14.050	
7,300.00	7,300.00	7,304.59	7,302.96	16.28	444.10	-3.06	6,301.00	-337.26	6,310.02	5,849.67	460.35	13.707	
7,400.00	7,400.00	7,404.49	7,402.80	16.50	454.95	-3.03	6,301.15	-333.78	6,309.98	5,838.56	471.43	13.385	
7,500.00	7,500.00	7,504.14	7,502.40	16.72	464.64	-3.00	6,301.29	-330.60	6,309.95	5,828.61	481.35	13.109	
7,600.00	7,600.00	7,603.98	7,602.20	16.95	474.35	-2.98	6,301.40	-327.85	6,309.93	5,818.64	491.28	12.844	
7,700.00	7,700.00	7,704.21	7,702.39	17.17	484.11	-2.95	6,301.53	-324.85	6,309.90	5,808.63	501.27	12.588	
7,800.00	7,800.00	7,804.29	7,802.41	17.40	494.48	-2.92	6,301.68	-321.43	6,309.87	5,798.00	511.87	12.327	
7,900.00	7,900.00	7,904.23	7,902.29	17.62	505.52	-2.89	6,301.83	-317.94	6,309.84	5,788.71	523.13	12.062	
8,000.00	8,000.00	8,004.10	8,002.10	17.85	516.18	-2.86	6,301.98	-314.48	6,309.82	5,778.80	534.01	11.816	
8,100.00	8,100.00	8,103.88	8,101.81	18.07	525.90	-2.83	6,302.11	-311.36	6,309.80	5,768.84	543.96	11.600	
8,200.00	8,200.00	8,203.71	8,201.62	18.30	535.12	-2.80	6,302.22	-308.66	6,309.78	5,758.37	553.41	11.402	
8,300.00	8,300.00	8,303.67	8,301.55	18.52	543.56	-2.78	6,302.34	-306.05	6,309.76	5,747.69	562.08	11.226	
8,400.00	8,400.00	8,403.34	8,401.20	18.75	550.95	-2.76	6,302.43	-303.79	6,309.75	5,740.08	569.69	11.076	
8,500.00	8,500.00	8,503.33	8,501.16	18.97	558.78	-2.74	6,302.51	-302.04	6,309.74	5,733.99	575.75	10.959	
8,600.00	8,600.00	8,603.31	8,601.13	19.20	562.61	-2.73	6,302.58	-300.30	6,309.73	5,727.93	581.81	10.845	
8,700.00	8,700.00	8,703.30	8,701.10	19.42	568.45	-2.71	6,302.66	-298.56	6,309.72	5,721.86	587.86	10.733	
8,800.00	8,800.00	8,803.18	8,800.98	19.65	574.05	-2.70	6,302.72	-296.99	6,309.72	5,716.02	593.69	10.628	
8,900.00	8,900.00	8,903.27	8,901.05	19.87	580.54	-2.68	6,302.79	-295.43	6,309.71	5,709.30	600.41	10.509	
9,000.00	9,000.00	9,003.34	9,001.11	20.10	587.03	-2.67	6,302.87	-293.50	6,309.70	5,702.58	607.12	10.393	
9,100.00	9,100.00	9,103.40	9,101.14	20.32	593.52	-2.65	6,302.97	-291.19	6,309.69	5,695.85	613.84	10.279	
9,200.00	9,200.00	9,203.55	9,201.24	20.55	602.22	-2.62	6,303.09	-288.31	6,309.69	5,688.92	622.76	10.132	
9,227.04	9,227.04	9,230.58	9,228.26	20.61	605.18	-2.61	6,303.14	-287.37	6,309.68	5,683.90	625.78	10.083	
9,250.00	9,249.99	9,253.52	9,251.18	20.66	607.71	-3.11	6,303.17	-286.57	6,309.22	5,680.85	628.37	10.041	
9,300.00	9,299.80	9,303.30	9,300.94	20.77	613.22	-3.12	6,303.24	-284.83	6,305.04	5,671.05	633.99	9.945	
9,350.00	9,349.06	9,352.54	9,350.15	20.88	618.67	-3.16	6,303.32	-283.11	6,296.55	5,657.00	639.55	9.845	
9,400.00	9,397.39	9,400.87	9,398.44	20.99	624.01	-3.22	6,303.39	-281.43	6,283.80	5,638.79	645.00	9.742	
9,450.00	9,444.42	9,447.90	9,445.44	21.10	629.21	-3.32	6,303.46	-279.79	6,266.89	5,616.57	650.32	9.637	
9,500.00	9,489.79	9,493.28	9,490.80	21.21	634.24	-3.45	6,303.53	-278.21	6,245.95	5,590.51	655.44	9.529	
9,550.00	9,533.17	9,536.68	9,534.17	21.31	639.04	-3.62	6,303.59	-276.69	6,221.15	5,560.81	660.34	9.421	
9,600.00	9,574.21	9,577.75	9,575.22	21.43	643.58	-3.85	6,303.65	-275.26	6,192.66	5,527.69	664.98	9.313	
9,650.00	9,612.62	9,616.19	9,613.63	21.57	647.84	-4.14	6,303.71	-273.92	6,160.71	5,491.40	669.32	9.204	
9,700.00	9,648.09	9,651.70	9,649.12	21.72	651.77	-4.53	6,303.76	-272.68	6,125.54	5,452.22	673.33	9.097	
9,750.00	9,680.35	9,684.02	9,681.42	21.89	655.34	-5.03	6,303.81	-271.56	6,087.42	5,410.45	676.97	8.992	
9,800.00	9,709.17	9,712.89	9,710.27	22.08	658.54	-5.71	6,303.85	-270.55	6,046.64	5,366.41	680.23	8.889	
9,850.00	9,734.31	9,738.09	9,735.47	22.29	661.33	-6.66	6,303.89	-269.67	6,003.50	5,320.43	683.07	8.789	
9,900.00	9,755.60	9,759.45	9,756.81	22.54	663.69	-8.05	6,303.92	-268.93	5,958.34	5,272.86	685.48	8.692	
9,950.00	9,772.86	9,776.79	9,774.13	22.81	665.61	-10.24	6,303.95	-268.32	5,911.50	5,224.07	687.43	8.599	
10,000.00	9,785.97	9,789.97	9,787.31	23.11	667.07	-14.12	6,303.97	-267.86	5,863.34	5,174.42	688.92	8.511	
10,050.00	9,794.83	9,798.91	9,796.24	23.43	668.06	-22.58	6,303.98	-267.55	5,814.22	5,124.29	689.92	8.427	
10,100.00	9,799.36	9,803.53	9,800.86	23.78	668.58	-50.06	6,303.99	-267.39	5,764.51	5,074.07	690.44	8.349	
10,127.04	9,800.00	9,804.22	9,801.55	23.98	668.65	-90.17	6,303.99	-267.36	5,737.53	5,047.00	690.52	8.309	
10,200.00	9,800.00	9,804.35	9,801.68	24.56	668.67	-90.19	6,303.99	-267.36	5,664.68	4,974.14	690.54	8.203	
10,300.00	9,800.00	9,804.53	9,801.86	25.44	668.69	-90.22	6,303.99	-267.35	5,564.85	4,874.28	690.57	8.058	
10,400.00	9,800.00	9,804.71	9,802.04	26.41	668.71	-90.26	6,303.99	-267.35	5,465.02	4,774.42	690.60	7.913	
10,500.00	9,800.00	9,804.89	9,802.22	27.48	668.73	-90.29	6,303.99	-267.34	5,365.20	4,674.57	690.63	7.769	
10,600.00	9,800.00	9,805.07	9,802.40	28.62	668.75	-90.32	6,303.99	-267.33	5,265.39	4,574.73	690.66	7.624	
10,700.00	9,800.00	9,805.25	9,802.58	29.83	668.77	-90.35	6,303.99	-267.33	5,165.58	4,474.89	690.69	7.479	
10,800.00	9,800.00	9,805.43	9,802.76	31.10	668.79	-90.38	6,303.99	-267.32	5,065.78	4,375.06	690.72	7.334	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea County Offset Wells - Lea Unit #12 - OH - OH													Offset Site Error: 0.00 usft
Survey Program: 207-INC, 16000-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
10,900.00	9,800.00	9,805.61	9,802.94	32.42	668.81	-90.41	6,303.99	-267.32	4,965.99	4,275.23	690.75	7.189	
11,000.00	9,800.00	9,805.79	9,803.12	33.79	668.83	-90.45	6,303.99	-267.31	4,866.20	4,175.42	690.79	7.044	
11,100.00	9,800.00	9,805.97	9,803.30	35.21	668.85	-90.48	6,303.99	-267.30	4,766.43	4,075.61	690.82	6.900	
11,200.00	9,800.00	9,806.15	9,803.48	36.65	668.87	-90.51	6,303.99	-267.30	4,666.66	3,975.81	690.86	6.755	
11,300.00	9,800.00	9,806.33	9,803.66	38.14	668.89	-90.54	6,303.99	-267.29	4,566.91	3,876.02	690.89	6.610	
11,400.00	9,800.00	9,806.51	9,803.84	39.65	668.91	-90.57	6,303.99	-267.28	4,467.16	3,776.24	690.93	6.465	
11,500.00	9,800.00	9,806.69	9,804.02	41.18	668.93	-90.61	6,303.99	-267.28	4,367.43	3,676.47	690.96	6.321	
11,600.00	9,800.00	9,806.87	9,804.20	42.74	668.94	-90.64	6,304.00	-267.27	4,267.71	3,576.71	691.00	6.176	
11,700.00	9,800.00	9,807.05	9,804.38	44.32	668.96	-90.67	6,304.00	-267.27	4,168.01	3,476.98	691.04	6.031	
11,800.00	9,800.00	9,807.23	9,804.56	45.92	668.98	-90.70	6,304.00	-267.26	4,068.31	3,377.23	691.08	5.887	
11,900.00	9,800.00	9,807.41	9,804.74	47.53	669.00	-90.73	6,304.00	-267.25	3,968.64	3,277.52	691.12	5.742	
12,000.00	9,800.00	9,807.59	9,804.92	49.16	669.02	-90.77	6,304.00	-267.25	3,868.98	3,177.82	691.16	5.598	
12,100.00	9,800.00	9,807.77	9,805.10	50.80	669.04	-90.80	6,304.00	-267.24	3,769.34	3,078.14	691.20	5.453	
12,200.00	9,800.00	9,807.95	9,805.28	52.46	669.06	-90.83	6,304.00	-267.23	3,669.71	2,978.47	691.24	5.309	
12,300.00	9,800.00	9,808.13	9,805.46	54.12	669.08	-90.86	6,304.00	-267.23	3,570.11	2,878.83	691.28	5.164	
12,400.00	9,800.00	9,808.31	9,805.64	55.80	669.10	-90.89	6,304.00	-267.22	3,470.54	2,779.21	691.32	5.020	
12,500.00	9,800.00	9,808.49	9,805.82	57.48	669.12	-90.93	6,304.00	-267.22	3,370.98	2,679.62	691.36	4.876	
12,600.00	9,800.00	9,808.67	9,806.00	59.17	669.14	-90.96	6,304.00	-267.21	3,271.46	2,580.05	691.41	4.732	
12,700.00	9,800.00	9,808.85	9,806.18	60.88	669.16	-90.99	6,304.00	-267.20	3,171.98	2,480.51	691.45	4.587	
12,800.00	9,800.00	9,809.03	9,806.36	62.58	669.18	-91.02	6,304.00	-267.20	3,072.50	2,381.01	691.49	4.443	
12,900.00	9,800.00	9,809.21	9,806.54	64.30	669.20	-91.05	6,304.00	-267.19	2,973.07	2,281.55	691.52	4.299	
13,000.00	9,800.00	9,809.39	9,806.72	66.02	669.22	-91.09	6,304.00	-267.18	2,873.68	2,182.12	691.56	4.155	
13,100.00	9,800.00	9,809.57	9,806.90	67.75	669.24	-91.12	6,304.00	-267.18	2,774.34	2,082.74	691.60	4.011	
13,200.00	9,800.00	9,809.75	9,807.08	69.48	669.26	-91.15	6,304.00	-267.17	2,675.05	1,983.42	691.63	3.868	
13,300.00	9,800.00	9,809.93	9,807.26	71.21	669.28	-91.18	6,304.00	-267.17	2,575.81	1,884.15	691.66	3.724	
13,400.00	9,800.00	9,810.11	9,807.44	72.95	669.30	-91.21	6,304.00	-267.16	2,476.63	1,784.95	691.68	3.581	
13,500.00	9,800.00	9,810.29	9,807.62	74.70	669.32	-91.24	6,304.00	-267.15	2,377.52	1,685.82	691.70	3.437	
13,600.00	9,800.00	9,810.47	9,807.80	76.45	669.34	-91.28	6,304.00	-267.15	2,278.48	1,586.78	691.70	3.294	
13,700.00	9,800.00	9,810.65	9,807.98	78.20	669.36	-91.31	6,304.00	-267.14	2,179.54	1,487.84	691.70	3.151	
13,800.00	9,800.00	9,810.83	9,808.16	79.95	669.38	-91.34	6,304.00	-267.13	2,080.70	1,389.02	691.68	3.008	
13,900.00	9,800.00	9,811.01	9,808.34	81.71	669.40	-91.37	6,304.00	-267.13	1,981.97	1,290.33	691.64	2.866	
14,000.00	9,800.00	9,811.19	9,808.52	83.47	669.42	-91.40	6,304.00	-267.12	1,883.38	1,191.81	691.57	2.723	
14,100.00	9,800.00	9,811.37	9,808.70	85.24	669.44	-91.44	6,304.00	-267.12	1,784.94	1,093.47	691.47	2.581	
14,200.00	9,800.00	9,811.55	9,808.88	87.00	669.46	-91.47	6,304.00	-267.11	1,686.69	995.38	691.31	2.440	
14,300.00	9,800.00	9,811.73	9,809.06	88.77	669.48	-91.50	6,304.00	-267.10	1,588.66	897.57	691.09	2.299	
14,400.00	9,800.00	9,811.91	9,809.24	90.55	669.50	-91.53	6,304.00	-267.10	1,490.88	800.11	690.77	2.158	
14,500.00	9,800.00	9,812.09	9,809.42	92.32	669.52	-91.56	6,304.00	-267.09	1,393.43	703.11	690.31	2.019	
14,600.00	9,800.00	9,812.27	9,809.60	94.09	669.54	-91.60	6,304.00	-267.08	1,296.36	606.70	689.66	1.880	
14,700.00	9,800.00	9,812.45	9,809.78	95.87	669.56	-91.63	6,304.00	-267.08	1,199.77	511.04	688.73	1.742	
14,800.00	9,800.00	9,812.63	9,809.96	97.65	669.58	-91.66	6,304.00	-267.07	1,103.79	416.42	687.37	1.606	
14,900.00	9,800.00	9,812.81	9,810.14	99.43	669.60	-91.69	6,304.00	-267.06	1,008.59	323.21	685.38	1.472 Level 3	
15,000.00	9,800.00	9,812.99	9,810.32	101.22	669.62	-91.72	6,304.00	-267.06	914.42	232.01	682.41	1.340 Level 3	
15,100.00	9,800.00	9,813.17	9,810.50	103.00	669.64	-91.76	6,304.00	-267.05	821.63	143.76	677.87	1.212 Level 2	
15,200.00	9,800.00	9,813.35	9,810.68	104.79	669.66	-91.79	6,304.00	-267.05	730.74	59.95	670.79	1.089 Level 2	
15,300.00	9,800.00	9,813.53	9,810.86	106.57	669.68	-91.82	6,304.00	-267.04	642.56	-16.87	659.43	0.974 Level 1	
15,400.00	9,800.00	9,813.71	9,811.04	108.36	669.70	-91.85	6,304.01	-267.03	559.38	-82.28	640.66	0.872 Level 1	
15,500.00	9,800.00	9,813.89	9,811.22	110.15	669.72	-91.88	6,304.01	-267.03	480.30	-128.60	608.90	0.789 Level 1	
15,600.00	9,800.00	9,814.07	9,811.40	111.94	669.74	-91.92	6,304.01	-267.02	411.82	-142.98	554.80	0.742 Level 1, ES, SF	
15,700.00	9,800.00	9,814.25	9,811.58	113.73	669.76	-91.95	6,304.01	-267.01	358.47	-108.74	487.21	0.767 Level 1	
15,800.00	9,800.00	9,814.43	9,811.76	115.53	669.78	-91.98	6,304.01	-267.01	327.73	-27.32	355.04	0.923 Level 1	
15,855.48	9,800.00	9,814.53	9,811.86	116.52	669.79	-92.00	6,304.01	-267.00	323.00	7.99	315.01	1.025 Level 2, CC	
15,900.00	9,800.00	9,814.61	9,811.94	117.32	669.80	-92.01	6,304.01	-267.00	326.05	6.58	319.47	1.021 Level 2	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea County Offset Wells - Lea Unit #12 - OH - OH													Offset Site Error: 0.00 usft
Survey Program: 207-INC, 16000-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Tooface (")	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)					
16,000.00	9,800.00	9,814.79	9,812.12	119.12	669.82	-92.04	6,304.01	-267.00	353.86	-58.16	412.01	0.859 Level 1	
16,100.00	9,800.00	9,814.97	9,812.30	120.91	669.84	-92.08	6,304.01	-266.99	405.11	-101.93	507.04	0.799 Level 1	
16,200.00	9,800.00	9,815.15	9,812.48	122.71	669.86	-92.11	6,304.01	-266.98	472.25	-98.79	571.04	0.827 Level 1	
16,300.00	9,800.00	9,815.33	9,812.66	124.51	669.88	-92.14	6,304.01	-266.98	549.48	-81.44	610.92	0.899 Level 1	
16,400.00	9,800.00	9,815.51	9,812.84	126.31	669.90	-92.17	6,304.01	-266.97	633.11	-2.73	635.84	0.996 Level 1	
16,500.00	9,800.00	9,815.69	9,813.02	128.11	669.92	-92.20	6,304.01	-266.96	720.93	69.07	651.86	1.106 Level 2	
16,600.00	9,800.00	9,815.87	9,813.20	129.91	669.94	-92.24	6,304.01	-266.96	811.57	149.05	662.51	1.225 Level 2	
16,700.00	9,800.00	9,816.05	9,813.38	131.71	669.96	-92.27	6,304.01	-266.95	904.18	234.34	669.84	1.350 Level 3	
16,800.00	9,800.00	9,816.23	9,813.56	133.51	669.98	-92.30	6,304.01	-266.95	998.22	323.19	675.03	1.479 Level 3	
16,900.00	9,800.00	9,816.41	9,813.74	135.31	670.00	-92.33	6,304.01	-266.94	1,093.32	414.50	678.82	1.611	
17,000.00	9,800.00	9,816.59	9,813.92	137.11	670.02	-92.36	6,304.01	-266.93	1,189.22	507.57	681.65	1.745	
17,100.00	9,800.00	9,816.77	9,814.10	138.92	670.04	-92.39	6,304.01	-266.93	1,285.75	601.93	683.82	1.880	
17,200.00	9,800.00	9,816.95	9,814.28	140.72	670.06	-92.43	6,304.01	-266.92	1,382.77	697.26	685.52	2.017	
17,300.00	9,800.00	9,817.13	9,814.46	142.53	670.08	-92.46	6,304.01	-266.91	1,480.19	793.33	686.86	2.155	
17,400.00	9,800.00	9,817.31	9,814.64	144.33	670.10	-92.49	6,304.01	-266.91	1,577.93	889.98	687.95	2.294	
17,506.59	9,800.00	9,817.51	9,814.83	146.26	670.12	-92.52	6,304.01	-266.90	1,682.41	993.50	688.91	2.442	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea County Offset Wells - Lea Unit #12 - ST-01 - ST-01														Offset Site Error:	0.00 usft
Survey Program: 207-INC, 15700-INC, 15990-MWD, 16431-MWD														Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)				Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)
0.00	0.00	0.61	0.61	0.00	0.01	-4.28	6,295.29	-470.70	6,312.86						
100.00	100.00	101.89	101.89	0.09	2.50	-4.27	6,295.31	-470.37	6,312.85	6,310.27	2.59	2,439.919			
200.00	200.00	203.17	203.17	0.32	4.98	-4.26	6,295.35	-469.39	6,312.82	6,307.53	5.29	1,192.903			
300.00	300.00	302.40	302.39	0.54	8.72	-4.25	6,295.39	-468.29	6,312.79	6,303.53	9.25	682.130			
400.00	400.00	402.34	402.33	0.77	12.08	-4.25	6,295.43	-467.42	6,312.76	6,299.92	12.84	491.757			
500.00	500.00	502.88	502.86	0.99	15.95	-4.24	6,295.47	-466.44	6,312.73	6,295.79	16.94	372.712			
600.00	600.00	602.14	602.12	1.22	19.59	-4.23	6,295.52	-465.33	6,312.69	6,291.90	20.79	303.579			
700.00	700.00	701.48	701.45	1.44	22.21	-4.22	6,295.54	-464.83	6,312.68	6,289.04	23.64	267.043			
800.00	800.00	801.48	801.45	1.67	24.46	-4.22	6,295.56	-464.40	6,312.67	6,286.55	26.12	241.711			
900.00	900.00	901.48	901.45	1.89	26.71	-4.21	6,295.58	-463.96	6,312.65	6,284.06	28.59	220.767			
1,000.00	1,000.00	1,001.85	1,001.81	2.12	28.67	-4.21	6,295.60	-463.43	6,312.64	6,280.86	31.78	198.662			
1,100.00	1,100.00	1,102.21	1,102.18	2.34	32.63	-4.20	6,295.63	-462.71	6,312.61	6,277.65	34.96	180.561			
1,200.00	1,200.00	1,202.08	1,202.04	2.56	35.14	-4.20	6,295.67	-461.89	6,312.59	6,274.89	37.69	167.465			
1,300.00	1,300.00	1,301.74	1,301.70	2.79	37.47	-4.19	6,295.70	-461.23	6,312.57	6,272.32	40.25	156.845			
1,400.00	1,400.00	1,401.40	1,401.36	3.01	39.80	-4.19	6,295.72	-460.75	6,312.55	6,269.75	42.80	147.491			
1,500.00	1,500.00	1,501.06	1,501.02	3.24	42.12	-4.18	6,295.73	-460.44	6,312.54	6,267.19	45.35	139.190			
1,600.00	1,600.00	1,600.73	1,600.69	3.46	44.45	-4.18	6,295.74	-460.31	6,312.54	6,264.64	47.90	131.773			
1,700.00	1,700.00	1,701.13	1,701.09	3.69	47.56	-4.18	6,295.74	-460.21	6,312.54	6,261.30	51.24	123.198			
1,800.00	1,800.00	1,801.80	1,801.76	3.91	50.95	-4.18	6,295.76	-459.77	6,312.52	6,257.67	54.85	115.080			
1,900.00	1,900.00	1,902.47	1,902.42	4.14	54.34	-4.17	6,295.79	-458.98	6,312.50	6,254.03	58.47	107.966			
2,000.00	2,000.00	2,003.12	2,003.07	4.36	57.73	-4.16	6,295.84	-457.83	6,312.47	6,250.39	62.08	101.681			
2,100.00	2,100.00	2,103.77	2,103.71	4.59	61.12	-4.15	6,295.91	-456.34	6,312.42	6,246.73	65.69	96.087			
2,200.00	2,200.00	2,203.75	2,203.67	4.81	65.73	-4.13	6,295.98	-454.64	6,312.37	6,241.84	70.53	89.502			
2,300.00	2,300.00	2,303.53	2,303.44	5.04	70.71	-4.12	6,296.05	-453.04	6,312.33	6,236.60	75.73	83.356			
2,400.00	2,400.00	2,403.32	2,403.22	5.26	75.68	-4.10	6,296.11	-451.55	6,312.28	6,231.36	80.93	78.000			
2,500.00	2,500.00	2,503.11	2,503.00	5.49	80.66	-4.09	6,296.17	-450.17	6,312.24	6,226.12	86.13	73.290			
2,600.00	2,600.00	2,603.84	2,603.72	5.71	86.71	-4.08	6,296.23	-448.67	6,312.20	6,219.80	92.40	68.315			
2,700.00	2,700.00	2,704.74	2,704.59	5.94	92.96	-4.06	6,296.32	-446.65	6,312.14	6,213.27	98.87	63.842			
2,800.00	2,800.00	2,805.62	2,805.45	6.16	100.30	-4.03	6,296.43	-444.12	6,312.07	6,205.64	106.43	59.307			
2,900.00	2,900.00	2,906.50	2,906.28	6.39	110.25	-4.01	6,296.56	-441.06	6,311.99	6,195.39	116.60	54.133			
3,000.00	3,000.00	3,007.34	3,007.06	6.61	120.19	-3.97	6,296.71	-437.45	6,311.89	6,185.12	126.77	49.790			
3,100.00	3,100.00	3,107.41	3,107.04	6.84	131.80	-3.94	6,296.88	-433.54	6,311.79	6,173.19	138.60	45.539			
3,200.00	3,200.00	3,207.33	3,206.89	7.06	143.72	-3.90	6,297.05	-429.62	6,311.69	6,160.95	150.74	41.870			
3,300.00	3,300.00	3,307.06	3,306.55	7.28	155.00	-3.87	6,297.22	-425.73	6,311.59	6,149.34	162.25	38.901			
3,400.00	3,400.00	3,406.48	3,405.90	7.51	165.17	-3.83	6,297.37	-422.11	6,311.50	6,138.87	172.63	36.560			
3,500.00	3,500.00	3,505.93	3,505.29	7.73	175.33	-3.80	6,297.51	-418.83	6,311.42	6,128.40	183.02	34.484			
3,600.00	3,600.00	3,605.39	3,604.71	7.96	185.50	-3.78	6,297.64	-415.87	6,311.35	6,117.94	193.41	32.631			
3,700.00	3,700.00	3,704.86	3,704.15	8.18	194.34	-3.75	6,297.75	-413.25	6,311.29	6,108.82	202.48	31.170			
3,800.00	3,800.00	3,804.34	3,803.59	8.41	201.42	-3.73	6,297.85	-410.97	6,311.24	6,101.45	209.79	30.084			
3,900.00	3,900.00	3,903.82	3,903.06	8.63	208.51	-3.72	6,297.93	-409.04	6,311.20	6,094.10	217.10	29.070			
4,000.00	4,000.00	4,003.78	4,003.00	8.86	214.42	-3.70	6,298.00	-407.30	6,311.16	6,087.92	223.24	28.271			
4,100.00	4,100.00	4,103.76	4,102.97	9.08	220.25	-3.68	6,298.08	-405.55	6,311.12	6,081.83	229.29	27.524			
4,200.00	4,200.00	4,203.73	4,202.92	9.31	225.99	-3.67	6,298.15	-403.81	6,311.09	6,075.83	235.26	26.827			
4,300.00	4,300.00	4,303.59	4,302.77	9.53	231.18	-3.65	6,298.22	-402.13	6,311.05	6,070.38	240.67	26.223			
4,400.00	4,400.00	4,403.45	4,402.62	9.76	236.37	-3.64	6,298.29	-400.55	6,311.02	6,064.93	246.08	25.646			
4,500.00	4,500.00	4,503.32	4,502.47	9.98	241.56	-3.63	6,298.36	-399.05	6,310.99	6,059.49	251.50	25.093			
4,600.00	4,600.00	4,603.19	4,602.33	10.21	246.75	-3.61	6,298.42	-397.66	6,310.96	6,054.04	256.91	24.564			
4,700.00	4,700.00	4,703.18	4,702.32	10.43	251.95	-3.60	6,298.47	-396.33	6,310.93	6,048.59	262.34	24.057			
4,800.00	4,800.00	4,803.28	4,802.41	10.66	257.15	-3.59	6,298.53	-394.93	6,310.90	6,043.14	267.76	23.569			
4,900.00	4,900.00	4,903.38	4,902.50	10.88	262.36	-3.57	6,298.60	-393.44	6,310.87	6,037.68	273.19	23.100			
5,000.00	5,000.00	5,003.48	5,002.58	11.11	267.56	-3.56	6,298.66	-391.86	6,310.84	6,032.22	278.62	22.650			
5,100.00	5,100.00	5,103.57	5,102.66	11.33	272.76	-3.54	6,298.74	-390.19	6,310.81	6,026.76	284.05	22.217			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS

Anticollision Report



Company: Legacy Reserves
 Project: Lea County, NM (NAD-27 2015)
 Reference Site: Lea Unit #43H
 Site Error: 0.00 usft
 Reference Well: Lea Unit #43H
 Well Error: 0.00 usft
 Reference Wellbore: Lateral #1
 Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
 TVD Reference: KB @ 3693.00usft (McVay 4)
 MD Reference: KB @ 3693.00usft (McVay 4)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 2.00 sigma
 Database: EDM 5000.1 Single User Db
 Offset TVD Reference: Offset Datum

Offset Design Lea County Offset Wells - Lea Unit #12 - ST-01 - ST-01														Offset Site Error:	0.00 usft
Survey Program: 207-INC, 15700-INC, 15990-MWD, 16431-MWD														Offset Well Error:	0.00 usft
Reference	Vertical	Offset	Vertical	Semi Major Axis		Highside	Distance		Minimum		Separation		Warning		
Measured Depth (usft)	Depth (usft)	Measured Depth (usft)	Depth (usft)	Reference (usft)	Offset (usft)	Tooface (")	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipsos (usft)	Separation (usft)	Factor			
5,200.00	5,200.00	5,203.77	5,202.84	11.56	279.14	-3.53	6,298.81	-388.41	6,310.78	6,020.12	290.66	21.712			
5,300.00	5,300.00	5,304.02	5,303.07	11.78	286.29	-3.51	6,298.90	-386.40	6,310.74	6,012.71	298.03	21.175			
5,400.00	5,400.00	5,404.26	5,403.29	12.00	293.44	-3.49	6,298.99	-384.17	6,310.70	6,005.30	305.40	20.664			
5,500.00	5,500.00	5,504.50	5,503.49	12.23	300.59	-3.47	6,299.10	-381.70	6,310.65	5,997.88	312.77	20.176			
5,600.00	5,600.00	5,603.57	5,602.54	12.45	306.57	-3.45	6,299.19	-379.47	6,310.61	5,991.63	318.98	19.784			
5,700.00	5,700.00	5,702.58	5,701.55	12.68	312.05	-3.44	6,299.25	-378.21	6,310.59	5,985.90	324.69	19.436			
5,800.00	5,800.00	5,802.58	5,801.54	12.90	315.33	-3.43	6,299.29	-377.34	6,310.58	5,982.38	328.20	19.228			
5,900.00	5,900.00	5,902.75	5,901.70	13.13	319.06	-3.42	6,299.32	-376.45	6,310.56	5,978.42	332.15	18.999			
6,000.00	6,000.00	6,003.49	6,002.44	13.35	324.30	-3.41	6,299.38	-375.05	6,310.54	5,972.92	337.62	18.691			
6,100.00	6,100.00	6,103.78	6,102.71	13.58	330.01	-3.39	6,299.47	-373.03	6,310.51	5,966.95	343.55	18.368			
6,200.00	6,200.00	6,203.65	6,202.56	13.80	336.61	-3.37	6,299.55	-371.15	6,310.47	5,960.10	350.37	18.011			
6,300.00	6,300.00	6,304.32	6,303.20	14.03	344.04	-3.35	6,299.65	-368.79	6,310.44	5,952.40	358.04	17.625			
6,400.00	6,400.00	6,404.28	6,403.13	14.25	352.45	-3.33	6,299.76	-366.18	6,310.40	5,943.73	366.67	17.210			
6,500.00	6,500.00	6,504.25	6,503.06	14.48	360.85	-3.30	6,299.88	-363.56	6,310.36	5,935.06	375.30	16.814			
6,600.00	6,600.00	6,604.21	6,602.99	14.70	369.26	-3.28	6,299.99	-360.95	6,310.32	5,926.39	383.93	16.436			
6,700.00	6,700.00	6,704.67	6,703.40	14.93	378.70	-3.25	6,300.11	-358.11	6,310.28	5,916.68	393.59	16.032			
6,800.00	6,800.00	6,804.89	6,803.57	15.15	389.12	-3.22	6,300.25	-354.69	6,310.23	5,905.99	404.24	15.610			
6,900.00	6,900.00	6,904.83	6,903.45	15.38	400.10	-3.19	6,300.40	-351.20	6,310.19	5,894.74	415.45	15.189			
7,000.00	7,000.00	7,004.77	7,003.33	15.60	411.10	-3.16	6,300.55	-347.72	6,310.14	5,883.47	426.67	14.789			
7,100.00	7,100.00	7,104.71	7,103.20	15.83	422.09	-3.13	6,300.70	-344.23	6,310.10	5,872.21	437.89	14.410			
7,200.00	7,200.00	7,204.65	7,203.08	16.05	433.09	-3.10	6,300.85	-340.75	6,310.06	5,860.94	449.12	14.050			
7,300.00	7,300.00	7,304.59	7,302.96	16.28	444.10	-3.06	6,301.00	-337.26	6,310.02	5,849.67	460.35	13.707			
7,400.00	7,400.00	7,404.49	7,402.80	16.50	454.95	-3.03	6,301.15	-333.78	6,309.98	5,838.56	471.43	13.385			
7,500.00	7,500.00	7,504.14	7,502.40	16.72	464.84	-3.00	6,301.29	-330.60	6,309.95	5,828.61	481.35	13.109			
7,600.00	7,600.00	7,603.98	7,602.20	16.95	474.35	-2.98	6,301.40	-327.85	6,309.93	5,818.64	491.28	12.844			
7,700.00	7,700.00	7,704.21	7,702.38	17.17	484.11	-2.95	6,301.53	-324.85	6,309.90	5,808.63	501.27	12.588			
7,800.00	7,800.00	7,804.29	7,802.41	17.40	494.48	-2.92	6,301.68	-321.43	6,309.87	5,798.00	511.87	12.327			
7,900.00	7,900.00	7,904.23	7,902.29	17.62	505.52	-2.89	6,301.83	-317.94	6,309.84	5,786.71	523.13	12.062			
8,000.00	8,000.00	8,004.10	8,002.10	17.85	516.18	-2.86	6,301.98	-314.48	6,309.82	5,775.80	534.01	11.816			
8,100.00	8,100.00	8,103.86	8,101.81	18.07	525.90	-2.83	6,302.11	-311.35	6,309.80	5,765.84	543.96	11.600			
8,200.00	8,200.00	8,203.71	8,201.62	18.30	535.12	-2.80	6,302.22	-308.66	6,309.78	5,756.37	553.41	11.402			
8,300.00	8,300.00	8,303.67	8,301.55	18.52	543.56	-2.78	6,302.34	-306.05	6,309.76	5,747.69	562.08	11.226			
8,400.00	8,400.00	8,403.34	8,401.20	18.75	550.95	-2.76	6,302.43	-303.79	6,309.75	5,740.06	569.69	11.076			
8,500.00	8,500.00	8,503.33	8,501.16	18.97	556.78	-2.74	6,302.51	-302.04	6,309.74	5,733.99	575.75	10.959			
8,600.00	8,600.00	8,603.31	8,601.13	19.20	562.61	-2.73	6,302.58	-300.30	6,309.73	5,727.93	581.81	10.845			
8,700.00	8,700.00	8,703.30	8,701.10	19.42	568.45	-2.71	6,302.66	-298.55	6,309.72	5,721.86	587.86	10.733			
8,800.00	8,800.00	8,803.18	8,800.98	19.65	574.05	-2.70	6,302.72	-296.99	6,309.72	5,716.02	593.69	10.628			
8,900.00	8,900.00	8,903.27	8,901.05	19.87	580.54	-2.68	6,302.79	-295.43	6,309.71	5,709.30	600.41	10.509			
9,000.00	9,000.00	9,003.34	9,001.11	20.10	587.03	-2.67	6,302.87	-293.50	6,309.70	5,702.58	607.12	10.393			
9,100.00	9,100.00	9,103.40	9,101.14	20.32	593.52	-2.65	6,302.97	-291.19	6,309.69	5,695.85	613.84	10.279			
9,200.00	9,200.00	9,203.55	9,201.24	20.55	602.22	-2.62	6,303.09	-288.31	6,309.69	5,686.92	622.76	10.132			
9,227.04	9,227.04	9,230.58	9,228.26	20.61	605.18	-2.61	6,303.14	-287.37	6,309.68	5,683.90	625.78	10.083			
9,250.00	9,249.99	9,253.52	9,251.18	20.66	607.71	-3.11	6,303.17	-286.57	6,309.22	5,680.85	628.37	10.041			
9,300.00	9,299.80	9,303.30	9,300.94	20.77	613.22	-3.12	6,303.24	-284.83	6,305.04	5,671.05	633.99	9.945			
9,350.00	9,349.06	9,352.54	9,350.15	20.88	618.67	-3.16	6,303.32	-283.11	6,296.55	5,657.00	639.55	9.845			
9,400.00	9,397.39	9,400.87	9,398.44	20.99	624.01	-3.22	6,303.39	-281.43	6,283.80	5,638.79	645.00	9.742			
9,450.00	9,444.42	9,447.90	9,445.44	21.10	629.21	-3.32	6,303.46	-279.79	6,266.89	5,616.57	650.32	9.637			
9,500.00	9,489.79	9,493.28	9,490.80	21.21	634.24	-3.45	6,303.53	-278.21	6,245.95	5,590.51	655.44	9.529			
9,550.00	9,533.17	9,536.68	9,534.17	21.31	639.04	-3.62	6,303.59	-276.69	6,221.15	5,560.81	660.34	9.421			
9,600.00	9,574.21	9,577.75	9,575.22	21.43	643.58	-3.85	6,303.65	-275.26	6,192.66	5,527.69	664.98	9.313			
9,650.00	9,612.62	9,616.19	9,613.63	21.57	647.84	-4.14	6,303.71	-273.92	6,160.71	5,491.40	669.32	9.204			
9,700.00	9,648.09	9,651.70	9,649.12	21.72	651.77	-4.53	6,303.76	-272.68	6,125.54	5,452.22	673.33	9.097			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea County Offset Wells - Lea Unit #12 - ST-01 - ST-01												Offset Site Error: 0.00 usft
Survey Program: 207-INC, 15700-INC, 15990-MWD, 16431-MWD												Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centro +N/-S (usft)	+E/-W (usft)				Between Centres (usft)
9,750.00	9,680.35	9,684.02	9,681.42	21.89	655.34	-5.03	6,303.81	-271.56	6,087.42	5,410.45	676.97	8.992
9,800.00	9,709.17	9,712.89	9,710.27	22.08	658.54	-5.71	6,303.85	-270.55	6,046.64	5,366.41	680.23	8.889
9,850.00	9,734.31	9,738.09	9,735.47	22.29	661.33	-6.66	6,303.89	-269.67	6,003.50	5,320.43	683.07	8.789
9,900.00	9,755.60	9,759.45	9,756.81	22.54	663.69	-8.05	6,303.92	-268.93	5,958.34	5,272.86	685.48	8.692
9,950.00	9,772.86	9,776.79	9,774.13	22.81	665.61	-10.24	6,303.95	-268.32	5,911.50	5,224.07	687.43	8.599
10,000.00	9,785.97	9,789.97	9,787.31	23.11	667.07	-14.12	6,303.97	-267.86	5,863.34	5,174.42	688.92	8.511
10,050.00	9,794.83	9,798.91	9,796.24	23.43	668.06	-22.58	6,303.98	-267.55	5,814.22	5,124.29	689.92	8.427
10,100.00	9,799.36	9,803.53	9,800.86	23.78	668.58	-50.06	6,303.99	-267.39	5,764.51	5,074.07	690.44	8.349
10,127.04	9,800.00	9,804.22	9,801.55	23.98	668.65	-90.17	6,303.99	-267.36	5,737.53	5,047.00	690.52	8.309
10,200.00	9,800.00	9,804.35	9,801.68	24.56	668.67	-90.19	6,303.99	-267.36	5,664.68	4,974.14	690.54	8.203
10,300.00	9,800.00	9,804.53	9,801.86	25.44	668.69	-90.22	6,303.99	-267.35	5,564.85	4,874.28	690.57	8.058
10,400.00	9,800.00	9,804.71	9,802.04	26.41	668.71	-90.26	6,303.99	-267.35	5,465.02	4,774.42	690.60	7.913
10,500.00	9,800.00	9,804.89	9,802.22	27.48	668.73	-90.29	6,303.99	-267.34	5,365.20	4,674.57	690.63	7.769
10,600.00	9,800.00	9,805.07	9,802.40	28.62	668.75	-90.32	6,303.99	-267.33	5,265.39	4,574.73	690.66	7.624
10,700.00	9,800.00	9,805.25	9,802.58	29.83	668.77	-90.35	6,303.99	-267.33	5,165.58	4,474.89	690.69	7.479
10,800.00	9,800.00	9,805.43	9,802.76	31.10	668.79	-90.38	6,303.99	-267.32	5,065.78	4,375.06	690.72	7.334
10,900.00	9,800.00	9,805.61	9,802.94	32.42	668.81	-90.41	6,303.99	-267.32	4,965.99	4,275.23	690.75	7.189
11,000.00	9,800.00	9,805.79	9,803.12	33.79	668.83	-90.45	6,303.99	-267.31	4,866.20	4,175.42	690.79	7.044
11,100.00	9,800.00	9,805.97	9,803.30	35.21	668.85	-90.48	6,303.99	-267.30	4,766.43	4,075.61	690.82	6.900
11,200.00	9,800.00	9,806.15	9,803.48	36.65	668.87	-90.51	6,303.99	-267.30	4,666.66	3,975.81	690.86	6.755
11,300.00	9,800.00	9,806.33	9,803.66	38.14	668.89	-90.54	6,303.99	-267.29	4,566.91	3,876.02	690.89	6.610
11,400.00	9,800.00	9,806.51	9,803.84	39.65	668.91	-90.57	6,303.99	-267.28	4,467.16	3,776.24	690.93	6.465
11,500.00	9,800.00	9,806.69	9,804.02	41.18	668.93	-90.61	6,303.99	-267.28	4,367.43	3,676.47	690.96	6.321
11,600.00	9,800.00	9,806.87	9,804.20	42.74	668.94	-90.64	6,304.00	-267.27	4,267.71	3,576.71	691.00	6.176
11,700.00	9,800.00	9,807.05	9,804.38	44.32	668.96	-90.67	6,304.00	-267.27	4,168.01	3,476.96	691.04	6.031
11,800.00	9,800.00	9,807.23	9,804.56	45.92	668.98	-90.70	6,304.00	-267.26	4,068.31	3,377.23	691.08	5.887
11,900.00	9,800.00	9,807.41	9,804.74	47.53	669.00	-90.73	6,304.00	-267.25	3,968.64	3,277.52	691.12	5.742
12,000.00	9,800.00	9,807.59	9,804.92	49.16	669.02	-90.77	6,304.00	-267.25	3,868.98	3,177.82	691.16	5.598
12,100.00	9,800.00	9,807.77	9,805.10	50.80	669.04	-90.80	6,304.00	-267.24	3,769.34	3,078.14	691.20	5.453
12,200.00	9,800.00	9,807.95	9,805.28	52.46	669.06	-90.83	6,304.00	-267.23	3,669.71	2,978.47	691.24	5.309
12,300.00	9,800.00	9,808.13	9,805.46	54.12	669.08	-90.86	6,304.00	-267.23	3,570.11	2,878.83	691.28	5.164
12,400.00	9,800.00	9,808.31	9,805.64	55.80	669.10	-90.89	6,304.00	-267.22	3,470.54	2,779.21	691.32	5.020
12,500.00	9,800.00	9,808.49	9,805.82	57.48	669.12	-90.93	6,304.00	-267.22	3,370.98	2,679.62	691.36	4.876
12,600.00	9,800.00	9,808.67	9,806.00	59.17	669.14	-90.96	6,304.00	-267.21	3,271.46	2,580.05	691.41	4.732
12,700.00	9,800.00	9,808.85	9,806.18	60.88	669.16	-90.99	6,304.00	-267.20	3,171.96	2,480.51	691.45	4.587
12,800.00	9,800.00	9,809.03	9,806.36	62.58	669.18	-91.02	6,304.00	-267.20	3,072.50	2,381.01	691.49	4.443
12,900.00	9,800.00	9,809.21	9,806.54	64.30	669.20	-91.05	6,304.00	-267.19	2,973.07	2,281.55	691.52	4.299
13,000.00	9,800.00	9,809.39	9,806.72	66.02	669.22	-91.09	6,304.00	-267.18	2,873.68	2,182.12	691.56	4.155
13,100.00	9,800.00	9,809.57	9,806.90	67.75	669.24	-91.12	6,304.00	-267.18	2,774.34	2,082.74	691.60	4.011
13,200.00	9,800.00	9,809.75	9,807.08	69.48	669.26	-91.15	6,304.00	-267.17	2,675.05	1,983.42	691.63	3.868
13,300.00	9,800.00	9,809.93	9,807.26	71.21	669.28	-91.18	6,304.00	-267.17	2,575.81	1,884.15	691.66	3.724
13,400.00	9,800.00	9,810.11	9,807.44	72.95	669.30	-91.21	6,304.00	-267.16	2,476.63	1,784.95	691.68	3.581
13,500.00	9,800.00	9,810.29	9,807.62	74.70	669.32	-91.24	6,304.00	-267.15	2,377.52	1,685.82	691.70	3.437
13,600.00	9,800.00	9,810.47	9,807.80	76.45	669.34	-91.28	6,304.00	-267.15	2,278.48	1,586.78	691.70	3.294
13,700.00	9,800.00	9,810.65	9,807.98	78.20	669.36	-91.31	6,304.00	-267.14	2,179.54	1,487.84	691.70	3.151
13,800.00	9,800.00	9,810.83	9,808.16	79.95	669.38	-91.34	6,304.00	-267.13	2,080.70	1,389.02	691.68	3.008
13,900.00	9,800.00	9,811.01	9,808.34	81.71	669.40	-91.37	6,304.00	-267.13	1,981.97	1,290.33	691.64	2.866
14,000.00	9,800.00	9,811.19	9,808.52	83.47	669.42	-91.40	6,304.00	-267.12	1,883.38	1,191.81	691.57	2.723
14,100.00	9,800.00	9,811.37	9,808.70	85.24	669.44	-91.44	6,304.00	-267.12	1,784.94	1,093.47	691.47	2.581
14,200.00	9,800.00	9,811.55	9,808.88	87.00	669.46	-91.47	6,304.00	-267.11	1,686.69	995.38	691.31	2.440
14,300.00	9,800.00	9,811.73	9,809.06	88.77	669.48	-91.50	6,304.00	-267.10	1,588.66	897.57	691.09	2.299
14,400.00	9,800.00	9,811.91	9,809.24	90.55	669.50	-91.53	6,304.00	-267.10	1,490.88	800.11	690.77	2.158

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea County Offset Wells - Lea Unit #12 - ST-01 - ST-01													Offset Site Error: 0.00 usft
Survey Program: 207-INC, 15700-INC, 15990-MWD, 16431-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface [°]	Distance		Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
14,500.00	9,800.00	9,812.09	9,809.42	92.32	669.52	-91.56	6,304.00	-267.09	1,393.43	703.11	690.31	2.019	
14,600.00	9,800.00	9,812.27	9,809.60	94.09	669.54	-91.60	6,304.00	-267.08	1,296.36	606.70	689.66	1.880	
14,700.00	9,800.00	9,812.45	9,809.78	95.87	669.56	-91.63	6,304.00	-267.08	1,199.77	511.04	688.73	1.742	
14,800.00	9,800.00	9,812.63	9,809.96	97.65	669.58	-91.66	6,304.00	-267.07	1,103.79	416.42	687.37	1.606	
14,900.00	9,800.00	9,812.81	9,810.14	99.43	669.60	-91.69	6,304.00	-267.06	1,008.59	323.21	685.38	1.472 Level 3	
15,000.00	9,800.00	9,812.99	9,810.32	101.22	669.62	-91.72	6,304.00	-267.06	914.42	232.01	682.41	1.340 Level 3	
15,100.00	9,800.00	9,813.17	9,810.50	103.00	669.64	-91.76	6,304.00	-267.05	821.63	143.76	677.87	1.212 Level 2	
15,200.00	9,800.00	9,813.35	9,810.68	104.79	669.66	-91.79	6,304.00	-267.05	730.74	59.95	670.79	1.089 Level 2	
15,300.00	9,800.00	9,813.53	9,810.86	106.57	669.68	-91.82	6,304.00	-267.04	642.56	-16.87	659.43	0.974 Level 1	
15,400.00	9,800.00	9,813.71	9,811.04	108.36	669.70	-91.85	6,304.01	-267.03	558.38	-82.28	640.66	0.872 Level 1	
15,500.00	9,800.00	9,813.89	9,811.22	110.15	669.72	-91.88	6,304.01	-267.03	480.30	-128.60	608.90	0.789 Level 1	
15,600.00	9,800.00	9,814.07	9,811.40	111.94	669.74	-91.92	6,304.01	-267.02	411.82	-142.98	554.80	0.742 Level 1, ES, SF	
15,700.00	9,800.00	9,814.25	9,811.58	113.73	669.76	-91.95	6,304.01	-267.01	358.47	-108.74	467.21	0.767 Level 1	
15,800.00	9,800.00	9,814.43	9,811.76	115.53	669.78	-91.98	6,304.01	-267.01	327.73	-27.32	355.04	0.923 Level 1	
15,855.48	9,800.00	9,814.53	9,811.86	116.52	669.79	-92.00	6,304.01	-267.00	323.00	7.99	315.01	1.025 Level 2, CC	
15,900.00	9,800.00	9,814.61	9,811.94	117.32	669.80	-92.01	6,304.01	-267.00	326.05	6.58	319.47	1.021 Level 2	
16,000.00	9,800.00	9,814.79	9,812.12	119.12	669.82	-92.04	6,304.01	-267.00	353.86	-58.16	412.01	0.859 Level 1	
16,100.00	9,800.00	9,814.97	9,812.30	120.91	669.84	-92.08	6,304.01	-266.99	405.11	-101.93	507.04	0.799 Level 1	
16,200.00	9,800.00	9,815.15	9,812.48	122.71	669.86	-92.11	6,304.01	-266.98	472.25	-98.79	571.04	0.827 Level 1	
16,300.00	9,800.00	9,815.33	9,812.66	124.51	669.88	-92.14	6,304.01	-266.98	549.48	-61.44	610.92	0.899 Level 1	
16,400.00	9,800.00	9,815.51	9,812.84	126.31	669.90	-92.17	6,304.01	-266.97	633.11	-2.73	635.84	0.996 Level 1	
16,500.00	9,800.00	9,815.69	9,813.02	128.11	669.92	-92.20	6,304.01	-266.96	720.93	69.07	651.86	1.106 Level 2	
16,600.00	9,800.00	9,815.87	9,813.20	129.91	669.94	-92.24	6,304.01	-266.96	811.57	149.05	662.51	1.225 Level 2	
16,700.00	9,800.00	9,816.05	9,813.38	131.71	669.96	-92.27	6,304.01	-266.95	904.18	234.34	669.84	1.350 Level 3	
16,800.00	9,800.00	9,816.23	9,813.56	133.51	669.98	-92.30	6,304.01	-266.95	998.22	323.19	675.03	1.479 Level 3	
16,900.00	9,800.00	9,816.41	9,813.74	135.31	670.00	-92.33	6,304.01	-266.94	1,093.32	414.50	678.82	1.611	
17,000.00	9,800.00	9,816.59	9,813.92	137.11	670.02	-92.36	6,304.01	-266.93	1,189.22	507.57	681.65	1.745	
17,100.00	9,800.00	9,816.77	9,814.10	138.92	670.04	-92.39	6,304.01	-266.93	1,285.75	601.93	683.82	1.880	
17,200.00	9,800.00	9,816.95	9,814.28	140.72	670.06	-92.43	6,304.01	-266.92	1,382.77	697.26	685.52	2.017	
17,300.00	9,800.00	9,817.13	9,814.46	142.53	670.08	-92.46	6,304.01	-266.91	1,480.19	793.33	686.86	2.155	
17,400.00	9,800.00	9,817.31	9,814.64	144.33	670.10	-92.49	6,304.01	-266.91	1,577.93	889.98	687.95	2.294	
17,506.59	9,800.00	9,817.51	9,814.83	146.26	670.12	-92.52	6,304.01	-266.90	1,682.41	993.50	688.91	2.442	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea Unit #38H - Lea Unit #38H - OH - OH													Offset Site Error: 0.00 usft
Survey Program: 200-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance				Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)					
0.00	0.00	0.00	0.00	0.00	0.00	-90.46	-0.80	-100.00	100.01				
100.00	100.00	98.84	98.84	0.09	0.10	-90.54	-0.95	-100.08	100.08	99.89	0.19	516.820	
200.00	200.00	198.68	198.67	0.32	0.20	-90.81	-1.41	-100.31	100.32	99.80	0.52	192.641	
300.00	300.00	298.92	298.92	0.54	0.41	-91.18	-2.07	-100.52	100.54	99.59	0.96	105.222	
400.00	400.00	399.41	399.41	0.77	0.62	-91.04	-1.83	-100.35	100.36	98.98	1.38	72.578	
500.00	500.00	499.72	499.72	0.99	0.83	-90.86	-1.51	-99.79	99.80	97.98	1.82	54.903	
600.00	600.00	599.68	599.67	1.22	1.04	-91.07	-1.84	-98.97	98.99	96.74	2.25	43.962	
700.00	700.00	699.04	699.03	1.44	1.24	-91.28	-2.21	-98.61	98.64	95.95	2.68	36.742	
704.52	704.52	703.53	703.52	1.45	1.25	-91.29	-2.22	-98.61	98.64	95.93	2.70	36.476 CC	
800.00	800.00	798.68	798.67	1.67	1.45	-91.31	-2.26	-98.83	98.86	95.74	3.12	31.733	
900.00	900.00	898.93	898.91	1.89	1.66	-90.90	-1.56	-99.13	99.14	95.59	3.55	27.946	
976.80	976.80	975.82	975.80	2.06	1.82	-90.78	-1.35	-99.13	99.14	95.25	3.88	25.545	
1,000.00	1,000.00	999.00	998.98	2.12	1.87	-90.72	-1.25	-99.13	99.14	95.16	3.98	24.900	
1,100.00	1,100.00	1,098.96	1,098.94	2.34	2.08	-90.46	-0.80	-99.18	99.18	94.77	4.42	22.464	
1,200.00	1,200.00	1,198.53	1,198.51	2.56	2.29	-90.32	-0.55	-99.44	99.44	94.59	4.85	20.499	
1,300.00	1,300.00	1,298.30	1,298.28	2.79	2.50	-90.27	-0.47	-100.04	100.04	94.75	5.29	18.917	
1,400.00	1,400.00	1,397.88	1,397.85	3.01	2.71	-90.21	-0.37	-100.94	100.95	95.22	5.72	17.634	
1,500.00	1,500.00	1,497.06	1,497.02	3.24	2.92	-90.08	-0.14	-102.45	102.47	96.31	6.16	16.634	
1,600.00	1,600.00	1,596.11	1,596.04	3.46	3.13	-89.66	0.62	-104.81	104.86	98.26	6.60	15.898	
1,700.00	1,700.00	1,695.60	1,695.48	3.69	3.35	-89.11	1.68	-107.94	108.01	100.98	7.03	15.360	
1,800.00	1,800.00	1,795.62	1,795.43	3.91	3.55	-88.43	3.05	-111.15	111.25	103.79	7.46	14.910	
1,900.00	1,900.00	1,896.09	1,895.85	4.14	3.76	-87.81	4.36	-114.18	114.31	106.41	7.89	14.482	
2,000.00	2,000.00	1,996.63	1,996.35	4.36	3.97	-87.22	5.66	-116.57	116.73	108.41	8.32	14.023	
2,100.00	2,100.00	2,096.74	2,096.43	4.59	4.18	-86.53	7.19	-118.69	118.94	110.18	8.76	13.582	
2,200.00	2,200.00	2,196.80	2,196.46	4.81	4.39	-85.80	8.86	-120.71	121.06	111.87	9.19	13.172	
2,300.00	2,300.00	2,296.78	2,296.40	5.04	4.60	-85.07	10.59	-122.68	123.16	113.53	9.63	12.795	
2,400.00	2,400.00	2,396.73	2,396.32	5.26	4.82	-84.36	12.31	-124.65	125.28	115.22	10.06	12.453	
2,500.00	2,500.00	2,496.99	2,496.54	5.49	5.03	-83.72	13.93	-126.56	127.34	116.85	10.50	12.133	
2,600.00	2,600.00	2,597.45	2,596.99	5.71	5.24	-83.17	15.35	-128.16	129.10	118.17	10.93	11.810	
2,700.00	2,700.00	2,697.75	2,697.27	5.94	5.45	-82.66	16.68	-129.45	130.53	119.17	11.37	11.484	
2,800.00	2,800.00	2,797.80	2,797.30	6.16	5.67	-82.16	17.98	-130.61	131.85	120.05	11.80	11.172	
2,900.00	2,900.00	2,898.90	2,898.39	6.39	5.88	-81.72	19.11	-131.34	132.73	120.49	12.24	10.843	
3,000.00	3,000.00	3,000.03	2,999.51	6.61	6.09	-81.25	20.19	-131.20	132.75	120.07	12.68	10.470	
3,100.00	3,100.00	3,100.73	3,100.21	6.84	6.31	-80.71	21.32	-130.29	132.03	118.91	13.12	10.065	
3,200.00	3,200.00	3,200.66	3,200.12	7.06	6.51	-80.23	22.26	-129.22	131.13	117.57	13.55	9.676	
3,300.00	3,300.00	3,300.42	3,299.88	7.28	6.72	-79.78	23.14	-128.29	130.36	116.38	13.98	9.322	
3,400.00	3,400.00	3,400.29	3,399.73	7.51	6.93	-79.17	24.38	-127.46	129.77	115.35	14.42	9.001	
3,500.00	3,500.00	3,500.26	3,499.69	7.73	7.14	-78.50	25.75	-126.61	129.21	114.35	14.85	8.699	
3,600.00	3,600.00	3,600.10	3,599.51	7.96	7.35	-77.70	27.43	-125.78	128.73	113.45	15.29	8.421	
3,700.00	3,700.00	3,699.94	3,699.34	8.18	7.55	-76.84	29.23	-125.04	128.41	112.69	15.72	8.168	
3,800.00	3,800.00	3,799.99	3,799.36	8.41	7.77	-75.88	31.26	-124.29	128.16	112.01	16.16	7.932	
3,900.00	3,900.00	3,900.10	3,899.44	8.63	7.98	-74.79	33.55	-123.36	127.85	111.25	16.60	7.704	
4,000.00	4,000.00	3,999.79	3,999.10	8.86	8.19	-73.60	36.03	-122.41	127.60	110.56	17.03	7.491	
4,025.40	4,025.40	4,025.10	4,024.40	8.92	8.24	-73.28	36.70	-122.20	127.59	110.45	17.14	7.442	
4,100.00	4,100.00	4,099.62	4,098.89	9.08	8.40	-72.38	38.64	-121.63	127.62	110.15	17.47	7.306	
4,200.00	4,200.00	4,199.65	4,198.88	9.31	8.61	-71.11	41.36	-120.84	127.72	109.81	17.90	7.134	
4,300.00	4,300.00	4,299.62	4,298.80	9.53	8.83	-69.66	44.43	-119.87	127.84	109.50	18.34	6.970	
4,400.00	4,400.00	4,399.66	4,398.78	9.76	9.04	-68.22	47.50	-118.87	128.01	109.23	18.78	6.817	
4,500.00	4,500.00	4,499.87	4,498.95	9.98	9.25	-66.95	50.16	-117.89	128.12	108.91	19.21	6.668	
4,600.00	4,600.00	4,600.14	4,599.19	10.21	9.46	-65.77	52.56	-116.80	128.08	108.43	19.65	6.518	
4,700.00	4,700.00	4,700.49	4,699.50	10.43	9.68	-64.50	55.00	-115.32	127.77	107.68	20.09	6.360	
4,800.00	4,800.00	4,800.26	4,799.22	10.66	9.89	-63.18	57.52	-113.75	127.47	106.94	20.52	6.210	

CC - Min centre to center distance or convergent point; SF - min separation factor; ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea Unit #38H - Lea Unit #38H - OH - OH													Offset Site Error: 0.00 usft
Survey Program: 200-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
4,849.99	4,849.99	4,850.05	4,848.99	10.77	9.99	-62.49	58.85	-113.02	127.42	106.68	20.74	6.143	
4,900.00	4,900.00	4,899.82	4,898.74	10.88	10.10	-61.81	60.21	-112.36	127.47	106.51	20.96	6.082	
5,000.00	5,000.00	4,999.64	4,998.53	11.11	10.31	-60.73	62.50	-111.51	127.84	106.44	21.39	5.975	
5,100.00	5,100.00	5,099.70	5,098.56	11.33	10.52	-59.66	64.73	-110.59	128.14	106.31	21.83	5.870	
5,200.00	5,200.00	5,199.74	5,198.57	11.56	10.73	-58.59	66.98	-109.70	128.53	106.27	22.27	5.773	
5,300.00	5,300.00	5,299.81	5,298.62	11.78	10.94	-57.60	69.03	-108.75	128.81	106.11	22.70	5.674	
5,400.00	5,400.00	5,399.58	5,398.36	12.00	11.15	-56.65	71.03	-107.91	129.19	106.05	23.13	5.584	
5,500.00	5,500.00	5,499.43	5,498.18	12.23	11.37	-55.58	73.35	-107.05	129.77	106.20	23.57	5.506	
5,600.00	5,600.00	5,599.42	5,598.14	12.45	11.58	-54.51	75.72	-106.19	130.43	106.42	24.01	5.433	
5,700.00	5,700.00	5,699.86	5,698.55	12.68	11.79	-53.70	77.56	-105.58	131.01	106.57	24.44	5.360	
5,800.00	5,800.00	5,800.31	5,799.01	12.90	12.00	-53.86	77.32	-105.88	131.11	106.23	24.87	5.271	
5,866.42	5,866.42	5,866.73	5,865.42	13.05	12.13	-54.21	76.67	-106.33	131.09	105.93	25.16	5.211	
5,900.00	5,900.00	5,900.25	5,898.94	13.13	12.20	-54.43	76.25	-106.64	131.10	105.80	25.30	5.181	
6,000.00	6,000.00	6,000.00	5,998.67	13.35	12.40	-55.27	74.77	-107.86	131.24	105.51	25.73	5.100	
6,100.00	6,100.00	6,099.95	6,098.60	13.58	12.61	-56.15	73.28	-109.25	131.55	105.38	26.17	5.028	
6,200.00	6,200.00	6,199.93	6,198.56	13.80	12.82	-56.97	71.87	-110.55	131.86	105.27	26.60	4.958	
6,300.00	6,300.00	6,299.80	6,298.41	14.03	13.02	-57.82	70.44	-111.93	132.25	105.22	27.03	4.893	
6,400.00	6,400.00	6,399.87	6,398.46	14.25	13.23	-58.67	68.99	-113.34	132.68	105.22	27.46	4.832	
6,500.00	6,500.00	6,499.93	6,498.50	14.48	13.44	-59.56	67.42	-114.72	133.07	105.18	27.89	4.771	
6,600.00	6,600.00	6,599.44	6,597.97	14.70	13.64	-60.67	65.47	-116.50	133.64	105.32	28.32	4.718	
6,700.00	6,700.00	6,698.96	6,697.44	14.93	13.85	-61.91	63.37	-118.73	134.59	105.84	28.75	4.681	
6,800.00	6,800.00	6,798.48	6,796.90	15.15	14.05	-63.29	61.15	-121.51	136.04	106.86	29.18	4.662	
6,900.00	6,900.00	6,899.81	6,898.18	15.38	14.26	-64.55	58.96	-123.86	137.18	107.56	29.62	4.631	
7,000.00	7,000.00	7,001.43	6,999.78	15.60	14.47	-65.45	56.96	-124.69	137.09	107.03	30.05	4.561	
7,100.00	7,100.00	7,101.90	7,100.22	15.83	14.68	-66.38	54.61	-124.88	136.31	105.82	30.49	4.471	
7,200.00	7,200.00	7,201.82	7,200.11	16.05	14.88	-67.41	52.01	-125.02	135.41	104.49	30.92	4.379	
7,300.00	7,300.00	7,301.88	7,300.13	16.28	15.09	-68.47	49.40	-125.25	134.65	103.30	31.35	4.295	
7,400.00	7,400.00	7,402.06	7,400.29	16.50	15.30	-69.13	47.63	-124.93	133.70	101.92	31.78	4.207	
7,500.00	7,500.00	7,501.85	7,500.07	16.72	15.50	-69.70	46.07	-124.54	132.79	100.57	32.22	4.122	
7,600.00	7,600.00	7,601.62	7,599.82	16.95	15.71	-70.40	44.30	-124.43	132.08	99.43	32.65	4.045	
7,700.00	7,700.00	7,701.56	7,699.74	17.17	15.92	-71.26	42.24	-124.53	131.50	98.42	33.08	3.975	
7,800.00	7,800.00	7,801.53	7,799.68	17.40	16.13	-72.38	39.65	-124.81	130.96	97.44	33.52	3.907	
7,900.00	7,900.00	7,901.23	7,899.33	17.62	16.34	-73.69	36.67	-125.30	130.56	96.60	33.95	3.845	
8,000.00	8,000.00	8,002.14	8,000.21	17.85	16.55	-74.87	33.95	-125.50	130.02	95.63	34.39	3.781	
8,100.00	8,100.00	8,102.62	8,100.66	18.07	16.75	-75.78	31.65	-124.93	128.89	94.07	34.82	3.702	
8,200.00	8,200.00	8,202.32	8,200.32	18.30	16.96	-76.78	29.20	-124.32	127.71	92.46	35.25	3.623	
8,300.00	8,300.00	8,301.49	8,299.46	18.52	17.17	-77.85	26.74	-124.15	127.00	91.31	35.69	3.559	
8,344.35	8,344.35	8,345.39	8,343.35	18.62	17.26	-78.27	25.80	-124.27	126.92	91.04	35.88	3.538	
8,400.00	8,400.00	8,400.52	8,398.47	18.75	17.37	-78.71	24.86	-124.58	127.04	90.92	36.12	3.517 ES	
8,500.00	8,500.00	8,499.56	8,497.51	18.97	17.58	-79.21	23.93	-125.51	127.78	91.23	36.55	3.496 SF	
8,600.00	8,600.00	8,598.04	8,595.97	19.20	17.79	-79.48	23.64	-127.33	129.54	92.57	36.97	3.504	
8,700.00	8,700.00	8,696.71	8,694.59	19.42	18.00	-79.71	23.65	-130.23	132.43	95.03	37.40	3.541	
8,800.00	8,800.00	8,796.53	8,794.35	19.65	18.21	-80.04	23.51	-133.86	135.98	98.15	37.83	3.594	
8,900.00	8,900.00	8,896.77	8,894.54	19.87	18.42	-80.50	22.94	-137.14	139.11	100.85	38.27	3.635	
9,000.00	9,000.00	8,896.12	8,893.82	20.10	18.63	-81.11	22.01	-140.78	142.59	103.89	38.70	3.685	
9,100.00	9,100.00	9,097.54	9,095.16	20.32	18.84	-81.82	20.78	-144.46	146.00	106.85	39.15	3.730	
9,200.00	9,200.00	9,197.62	9,195.20	20.55	19.05	-82.17	20.18	-146.81	148.24	108.66	39.58	3.745	
9,227.04	9,227.04	9,224.23	9,221.81	20.61	19.11	-82.15	20.34	-147.51	148.97	109.28	39.69	3.753	
9,250.00	9,249.99	9,247.09	9,244.66	20.66	19.16	-82.71	20.59	-148.15	149.58	109.78	39.79	3.759	
9,300.00	9,299.80	9,296.96	9,294.51	20.77	19.26	-83.99	21.31	-149.51	150.53	110.53	40.01	3.763	
9,350.00	9,349.06	9,346.35	9,343.86	20.88	19.37	-86.77	22.29	-150.81	151.26	111.05	40.22	3.761	
9,400.00	9,397.39	9,394.92	9,392.40	20.99	19.47	-90.90	23.51	-152.10	152.40	111.97	40.43	3.770	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea Unit #38H - Lea Unit #38H - OH - OH													Offset Site Error: 0.00 usft
Survey Program: 200-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
9,450.00	9,444.42	9,442.35	9,439.80	21.10	19.57	-96.13	24.89	-153.37	154.83	114.19	40.64	3.810	
9,500.00	9,489.79	9,488.17	9,485.58	21.21	19.67	-102.09	26.19	-154.61	159.70	118.85	40.85	3.909	
9,550.00	9,533.17	9,531.94	9,529.32	21.31	19.76	-108.25	27.33	-155.81	168.19	127.13	41.06	4.096	
9,600.00	9,574.21	9,573.04	9,570.40	21.43	19.85	-114.09	28.09	-156.90	181.34	140.08	41.26	4.395	
9,650.00	9,612.62	9,611.13	9,608.47	21.57	19.93	-119.14	28.50	-157.87	199.77	158.31	41.46	4.819	
9,700.00	9,648.09	9,646.15	9,643.48	21.72	20.00	-123.14	28.74	-158.82	223.55	181.92	41.64	5.389	
9,750.00	9,680.35	9,677.99	9,675.31	21.89	20.07	-125.95	28.95	-159.80	252.31	210.51	41.80	6.036	
9,800.00	9,709.17	9,706.64	9,703.94	22.08	20.13	-127.55	29.11	-160.76	285.48	243.53	41.94	6.808	
9,850.00	9,734.31	9,732.59	9,729.87	22.29	20.19	-128.01	29.28	-161.63	322.36	280.29	42.07	7.662	
9,900.00	9,755.60	9,754.71	9,751.98	22.54	20.23	-127.01	29.44	-162.34	362.35	320.17	42.17	8.592	
9,950.00	9,772.86	9,772.83	9,770.09	22.81	20.27	-124.23	29.60	-162.91	404.90	362.64	42.26	9.582	
10,000.00	9,785.97	9,786.77	9,784.03	23.11	20.30	-119.13	29.73	-163.33	449.50	407.18	42.32	10.621	
10,050.00	9,794.83	9,796.34	9,793.59	23.43	20.32	-110.87	29.83	-163.62	495.65	453.28	42.36	11.700	
10,100.00	9,799.36	9,801.29	9,798.54	23.78	20.33	-98.53	29.88	-163.77	542.87	500.48	42.39	12.807	
10,127.04	9,800.00	9,802.18	9,799.43	23.98	20.34	-90.15	29.89	-163.79	568.70	526.30	42.40	13.414	
10,200.00	9,800.00	9,802.90	9,800.14	24.56	20.34	-90.40	29.90	-163.82	638.90	596.50	42.41	15.066	
10,300.00	9,800.00	9,803.88	9,801.12	25.44	20.34	-90.74	29.91	-163.85	735.99	693.58	42.42	17.351	
10,400.00	9,800.00	9,804.85	9,802.10	26.41	20.34	-91.08	29.92	-163.88	833.77	791.34	42.43	19.650	
10,500.00	9,800.00	9,805.83	9,803.07	27.48	20.34	-91.42	29.93	-163.91	932.02	889.58	42.44	21.959	
10,600.00	9,800.00	9,806.81	9,804.05	28.62	20.35	-91.76	29.94	-163.93	1,030.61	988.15	42.46	24.274	
10,700.00	9,800.00	9,807.78	9,805.02	29.83	20.35	-92.10	29.95	-163.96	1,129.44	1,086.97	42.47	26.593	
10,800.00	9,800.00	9,808.75	9,806.00	31.10	20.35	-92.44	29.96	-163.99	1,228.47	1,185.98	42.49	28.914	
10,900.00	9,800.00	9,809.73	9,806.97	32.42	20.35	-92.78	29.97	-164.02	1,327.63	1,285.13	42.50	31.237	
11,000.00	9,800.00	12,293.07	11,122.35	33.79	35.05	-174.50	1,484.65	-114.20	1,330.00	1,301.43	28.57	46.554	
11,100.00	9,800.00	12,369.00	11,120.68	35.21	35.99	-174.49	1,560.56	-113.65	1,327.88	1,298.34	29.54	44.948	
11,185.00	9,800.00	12,440.42	11,120.07	36.44	36.85	-174.47	1,631.98	-113.56	1,327.26	1,296.83	30.43	43.611	
11,200.00	9,800.00	12,452.11	11,120.08	36.65	36.99	-174.46	1,643.67	-113.60	1,327.28	1,296.69	30.59	43.391	
11,300.00	9,800.00	12,557.00	11,120.10	38.14	38.36	-174.42	1,748.56	-113.65	1,327.40	1,295.65	31.75	41.810	
11,320.97	9,800.00	12,576.40	11,120.06	38.45	38.62	-174.41	1,767.96	-113.54	1,327.37	1,295.38	31.99	41.498	
11,400.00	9,800.00	12,641.51	11,120.40	39.65	39.49	-174.41	1,833.07	-113.07	1,327.78	1,294.93	32.85	40.416	
11,500.00	9,800.00	12,735.56	11,121.67	41.18	40.74	-174.42	1,927.11	-112.13	1,329.11	1,295.10	34.01	39.077	
11,600.00	9,800.00	12,848.48	11,122.76	42.74	42.33	-174.42	2,040.01	-111.33	1,330.09	1,294.82	35.28	37.705	
11,700.00	9,800.00	12,934.00	11,123.55	44.32	43.57	-174.36	2,125.53	-111.92	1,331.16	1,294.70	36.46	36.507	
11,800.00	9,800.00	13,047.65	11,124.53	45.92	45.26	-174.24	2,239.15	-113.96	1,332.29	1,294.48	37.81	35.232	
11,900.00	9,800.00	13,166.05	11,124.12	47.53	47.09	-174.11	2,357.54	-115.77	1,332.19	1,292.98	39.21	33.972	
12,000.00	9,800.00	13,284.39	11,122.16	49.16	48.94	-174.02	2,475.86	-116.74	1,330.72	1,290.09	40.63	32.755	
12,100.00	9,800.00	13,388.48	11,119.47	50.80	50.59	-173.95	2,579.91	-117.13	1,328.28	1,286.30	41.98	31.642	
12,200.00	9,800.00	13,486.95	11,116.89	52.46	52.15	-173.87	2,678.35	-117.90	1,325.85	1,282.53	43.32	30.605	
12,300.00	9,800.00	13,581.78	11,114.54	54.12	53.60	-173.75	2,773.13	-119.63	1,323.67	1,279.00	44.67	29.630	
12,400.00	9,800.00	13,686.50	11,112.00	55.80	55.23	-173.61	2,877.80	-121.68	1,321.58	1,275.48	46.10	28.668	
12,500.00	9,800.00	13,782.00	11,109.74	57.48	56.70	-173.51	2,973.26	-122.85	1,319.47	1,271.99	47.47	27.794	
12,600.00	9,800.00	13,876.00	11,108.02	59.17	58.13	-173.45	3,067.25	-123.10	1,317.77	1,268.94	48.83	26.986	
12,700.00	9,800.00	13,966.11	11,105.95	60.88	59.87	-173.45	3,177.33	-122.03	1,315.90	1,265.64	50.26	26.181	
12,800.00	9,800.00	14,092.16	11,103.25	62.58	61.57	-173.52	3,283.31	-119.17	1,313.15	1,261.51	51.64	25.428	
12,900.00	9,800.00	14,182.78	11,101.31	64.30	63.00	-173.57	3,373.87	-116.85	1,310.83	1,257.88	52.95	24.755	
13,000.00	9,800.00	14,281.24	11,099.56	66.02	64.54	-173.65	3,472.28	-113.99	1,308.83	1,254.53	54.30	24.105	
13,100.00	9,800.00	14,390.51	11,097.62	67.75	66.27	-173.75	3,581.48	-110.62	1,306.88	1,251.16	55.70	23.464	
13,200.00	9,800.00	14,513.42	11,093.50	69.48	68.29	-173.88	3,704.23	-106.07	1,303.18	1,246.03	57.15	22.803	
13,300.00	9,800.00	14,592.33	11,090.58	71.21	69.57	-173.95	3,783.05	-103.41	1,299.32	1,240.91	58.41	22.245	
13,400.00	9,800.00	14,665.77	11,089.46	72.95	70.74	-173.99	3,856.45	-101.77	1,297.64	1,237.98	59.66	21.752	
13,442.02	9,800.00	14,698.31	11,089.36	73.69	71.26	-173.99	3,888.99	-101.38	1,297.48	1,237.29	60.19	21.555	
13,500.00	9,800.00	14,751.35	11,089.54	74.70	72.11	-173.98	3,942.03	-101.14	1,297.70	1,236.71	60.99	21.278	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea Unit #38H - Lea Unit #38H - OH - OH														Offset Site Error: 0.00 usft	
Survey Program: 200-MWD														Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Distance								Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor			
13,600.00	9,800.00	14,858.58	11,089.49	76.45	73.87	-173.95	4,049.26	-101.04	1,297.73	1,235.26	62.47	20.773			
13,700.00	9,800.00	14,957.50	11,089.08	78.20	75.50	-173.86	4,148.18	-102.05	1,297.52	1,233.58	63.94	20.293			
13,723.54	9,800.00	14,979.84	11,089.03	78.61	75.86	-173.85	4,170.52	-102.20	1,297.51	1,233.23	64.28	20.186			
13,800.00	9,800.00	15,056.14	11,088.99	79.95	77.12	-173.81	4,246.81	-102.36	1,297.56	1,232.17	65.39	19.843			
13,900.00	9,800.00	15,164.99	11,088.63	81.71	78.94	-173.76	4,355.66	-102.38	1,297.33	1,230.43	66.90	19.391			
14,000.00	9,800.00	15,277.56	11,087.24	83.47	80.86	-173.73	4,468.22	-102.06	1,296.17	1,227.74	68.43	18.940			
14,100.00	9,800.00	15,400.32	11,084.20	85.24	82.95	-173.75	4,590.93	-100.10	1,293.63	1,223.65	69.98	18.485			
14,200.00	9,800.00	15,508.65	11,080.35	87.00	84.76	-173.80	4,697.16	-97.62	1,289.86	1,218.44	71.42	18.059			
14,300.00	9,800.00	15,619.92	11,075.88	88.77	86.66	-173.82	4,810.32	-95.76	1,285.91	1,212.99	72.92	17.635			
14,400.00	9,800.00	15,739.10	11,068.95	90.55	88.68	-173.89	4,929.25	-92.41	1,279.87	1,205.47	74.40	17.203			
14,500.00	9,800.00	15,811.13	11,064.99	92.32	89.88	-173.93	5,001.14	-90.34	1,274.28	1,198.59	75.69	16.835			
14,600.00	9,800.00	15,889.43	11,062.66	94.09	91.17	-173.91	5,079.40	-89.81	1,271.24	1,194.19	77.04	16.500			
14,700.00	9,800.00	16,016.59	11,058.09	95.87	93.29	-173.73	5,206.45	-92.28	1,268.07	1,189.31	78.76	16.101			
14,800.00	9,800.00	16,103.82	11,053.54	97.65	94.74	-173.53	5,293.50	-95.49	1,263.45	1,183.15	80.30	15.734			
14,900.00	9,800.00	16,179.99	11,051.11	99.43	95.98	-173.37	5,369.59	-98.05	1,260.75	1,178.99	81.76	15.421			
15,000.00	9,800.00	16,263.81	11,049.94	101.22	97.34	-173.22	5,453.37	-100.36	1,259.76	1,176.51	83.24	15.134			
15,100.00	9,800.00	16,369.15	11,048.82	103.00	99.10	-172.98	5,558.61	-104.68	1,259.31	1,174.36	84.95	14.825			
15,200.00	9,800.00	16,464.36	11,046.96	104.79	100.70	-172.72	5,653.68	-109.47	1,258.14	1,171.51	86.62	14.524			
15,227.30	9,800.00	16,485.12	11,046.76	105.27	101.05	-172.66	5,674.42	-110.47	1,258.06	1,171.03	87.03	14.455			
15,300.00	9,800.00	16,563.73	11,045.37	106.57	102.37	-172.47	5,752.94	-113.97	1,258.24	1,169.91	88.33	14.245			
15,400.00	9,800.00	16,662.99	11,044.79	108.36	104.05	-172.24	5,852.11	-117.90	1,257.30	1,167.28	90.02	13.966			
15,425.57	9,800.00	16,683.66	11,044.61	108.82	104.40	-172.20	5,872.77	-118.75	1,257.25	1,166.83	90.42	13.905			
15,500.00	9,800.00	16,755.44	11,044.30	110.15	105.60	-172.03	5,944.49	-121.67	1,257.44	1,165.76	91.68	13.716			
15,600.00	9,800.00	16,890.00	11,042.38	111.94	107.91	-171.78	6,078.96	-125.91	1,256.70	1,163.06	93.64	13.420			
15,698.59	9,800.00	16,956.95	11,041.18	113.71	109.04	-171.68	6,145.88	-127.31	1,255.40	1,160.36	95.04	13.209			
15,700.00	9,800.00	16,957.88	11,041.18	113.73	109.06	-171.68	6,146.81	-127.33	1,255.40	1,160.34	95.06	13.206			
15,800.00	9,800.00	17,064.09	11,041.19	115.53	110.86	-171.55	6,253.01	-129.20	1,255.84	1,159.09	96.75	12.980			
15,886.92	9,800.00	17,145.34	11,040.61	117.09	112.23	-171.47	6,334.24	-130.11	1,255.49	1,157.38	98.11	12.797			
15,900.00	9,800.00	17,156.79	11,040.58	117.32	112.42	-171.46	6,345.69	-130.24	1,255.50	1,157.19	98.31	12.771			
16,000.00	9,800.00	17,267.38	11,040.15	119.12	114.29	-171.38	6,456.28	-131.10	1,255.38	1,155.39	99.98	12.556			
16,100.00	9,800.00	17,392.95	11,037.30	120.91	116.46	-171.30	6,581.81	-131.33	1,253.21	1,151.47	101.73	12.318			
16,200.00	9,800.00	17,478.85	11,035.03	122.71	117.92	-171.22	6,667.68	-131.83	1,250.84	1,147.58	103.26	12.113			
16,300.00	9,800.00	17,556.45	11,034.18	124.51	119.21	-171.09	6,745.24	-133.97	1,250.27	1,145.46	104.81	11.929			
16,333.60	9,800.00	17,605.88	11,033.58	125.11	120.06	-170.98	6,794.63	-135.87	1,250.12	1,144.56	105.56	11.843			
16,400.00	9,800.00	17,688.74	11,031.35	126.31	121.50	-170.79	6,877.40	-138.97	1,248.81	1,141.90	106.91	11.681			
16,500.00	9,800.00	17,779.54	11,028.51	128.11	123.07	-170.60	6,968.11	-141.92	1,246.43	1,137.78	108.65	11.472			
16,600.00	9,800.00	17,859.56	11,027.38	129.91	124.43	-170.43	7,048.08	-144.62	1,245.70	1,135.42	110.28	11.296			
16,605.50	9,800.00	17,864.47	11,027.34	130.01	124.51	-170.42	7,052.98	-144.80	1,245.70	1,135.32	110.38	11.286			
16,700.00	9,800.00	17,946.26	11,026.96	131.71	125.88	-170.23	7,134.69	-148.38	1,245.12	1,134.10	112.02	11.124			
16,800.00	9,800.00	18,030.89	11,027.74	133.51	127.30	-170.02	7,219.23	-152.28	1,247.93	1,134.19	113.74	10.972			
16,900.00	9,800.00	18,149.95	11,028.01	135.31	129.33	-169.70	7,338.13	-158.38	1,249.17	1,133.25	115.92	10.776			
17,000.00	9,800.00	18,251.24	11,027.64	137.11	131.08	-169.42	7,439.28	-163.56	1,249.90	1,131.98	117.92	10.599			
17,100.00	9,800.00	18,339.17	11,027.40	138.92	132.59	-169.18	7,527.11	-168.04	1,250.78	1,130.99	119.78	10.442			
17,200.00	9,800.00	18,420.70	11,028.63	140.72	133.98	-168.97	7,608.51	-172.41	1,253.40	1,131.84	121.56	10.311			
17,300.00	9,800.00	18,537.56	11,030.18	142.53	135.98	-168.61	7,725.13	-179.66	1,256.13	1,132.23	123.90	10.138			
17,400.00	9,800.00	18,664.61	11,028.82	144.33	138.19	-168.12	7,851.80	-189.28	1,256.75	1,130.19	126.57	9.930			
17,502.14	9,800.00	18,762.00	11,026.45	146.18	139.90	-167.70	7,948.84	-197.25	1,256.29	1,127.33	128.95	9.742			
17,506.59	9,800.00	18,762.00	11,026.45	146.26	139.90	-167.70	7,948.84	-197.25	1,256.30	1,127.30	129.00	9.739			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea Unit #40H - Lea Unit #40H - Lateral #1 - Design #2													Offset Site Error: 0.00 usft
Survey Program: O-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toothface (")	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N-S (usft)	+E-W (usft)					
0.00	0.00	0.00	0.00	0.00	0.00	-90.46	-0.40	-49.90	49.90				
100.00	100.00	100.00	100.00	0.09	0.09	-90.46	-0.40	-49.90	49.90	49.72	0.18	270.751	
200.00	200.00	200.00	200.00	0.32	0.32	-90.46	-0.40	-49.90	49.90	49.27	0.63	78.729	
300.00	300.00	300.00	300.00	0.54	0.54	-90.46	-0.40	-49.90	49.90	48.82	1.08	46.061	
400.00	400.00	400.00	400.00	0.77	0.77	-90.46	-0.40	-49.90	49.90	48.37	1.53	32.554	
500.00	500.00	500.00	500.00	0.99	0.99	-90.46	-0.40	-49.90	49.90	47.92	1.98	25.172	
600.00	600.00	600.00	600.00	1.22	1.22	-90.46	-0.40	-49.90	49.90	47.47	2.43	20.519	
700.00	700.00	700.00	700.00	1.44	1.44	-90.46	-0.40	-49.90	49.90	47.02	2.88	17.318	
800.00	800.00	800.00	800.00	1.67	1.67	-90.46	-0.40	-49.90	49.90	46.57	3.33	14.981	
900.00	900.00	900.00	900.00	1.89	1.89	-90.46	-0.40	-49.90	49.90	46.12	3.78	13.200	
1,000.00	1,000.00	1,000.00	1,000.00	2.12	2.12	-90.46	-0.40	-49.90	49.90	45.67	4.23	11.797	
1,100.00	1,100.00	1,100.00	1,100.00	2.34	2.34	-90.46	-0.40	-49.90	49.90	45.22	4.68	10.664	
1,200.00	1,200.00	1,200.00	1,200.00	2.56	2.56	-90.46	-0.40	-49.90	49.90	44.77	5.13	9.729	
1,300.00	1,300.00	1,300.00	1,300.00	2.79	2.79	-90.46	-0.40	-49.90	49.90	44.32	5.58	8.945	
1,400.00	1,400.00	1,400.00	1,400.00	3.01	3.01	-90.46	-0.40	-49.90	49.90	43.87	6.03	8.278	
1,500.00	1,500.00	1,500.00	1,500.00	3.24	3.24	-90.46	-0.40	-49.90	49.90	43.42	6.48	7.704	
1,600.00	1,600.00	1,600.00	1,600.00	3.46	3.46	-90.46	-0.40	-49.90	49.90	42.97	6.93	7.204	
1,700.00	1,700.00	1,700.00	1,700.00	3.69	3.69	-90.46	-0.40	-49.90	49.90	42.52	7.38	6.765	
1,800.00	1,800.00	1,800.00	1,800.00	3.91	3.91	-90.46	-0.40	-49.90	49.90	42.08	7.83	6.376	
1,900.00	1,900.00	1,900.00	1,900.00	4.14	4.14	-90.46	-0.40	-49.90	49.90	41.63	8.28	6.030	
2,000.00	2,000.00	2,000.00	2,000.00	4.36	4.36	-90.46	-0.40	-49.90	49.90	41.18	8.73	5.719	
2,100.00	2,100.00	2,100.00	2,100.00	4.59	4.59	-90.46	-0.40	-49.90	49.90	40.73	9.17	5.439	
2,200.00	2,200.00	2,200.00	2,200.00	4.81	4.81	-90.46	-0.40	-49.90	49.90	40.28	9.62	5.185	
2,300.00	2,300.00	2,300.00	2,300.00	5.04	5.04	-90.46	-0.40	-49.90	49.90	39.83	10.07	4.953	
2,400.00	2,400.00	2,400.00	2,400.00	5.26	5.26	-90.46	-0.40	-49.90	49.90	39.38	10.52	4.742	
2,500.00	2,500.00	2,500.00	2,500.00	5.49	5.49	-90.46	-0.40	-49.90	49.90	38.93	10.97	4.548	
2,600.00	2,600.00	2,600.00	2,600.00	5.71	5.71	-90.46	-0.40	-49.90	49.90	38.48	11.42	4.369	
2,700.00	2,700.00	2,700.00	2,700.00	5.94	5.94	-90.46	-0.40	-49.90	49.90	38.03	11.87	4.203	
2,800.00	2,800.00	2,800.00	2,800.00	6.16	6.16	-90.46	-0.40	-49.90	49.90	37.58	12.32	4.050	
2,900.00	2,900.00	2,900.00	2,900.00	6.39	6.39	-90.46	-0.40	-49.90	49.90	37.13	12.77	3.907	
3,000.00	3,000.00	3,000.00	3,000.00	6.61	6.61	-90.46	-0.40	-49.90	49.90	36.68	13.22	3.774	
3,100.00	3,100.00	3,100.00	3,100.00	6.84	6.84	-90.46	-0.40	-49.90	49.90	36.23	13.67	3.650	
3,200.00	3,200.00	3,200.00	3,200.00	7.06	7.06	-90.46	-0.40	-49.90	49.90	35.78	14.12	3.534	
3,300.00	3,300.00	3,300.00	3,300.00	7.28	7.28	-90.46	-0.40	-49.90	49.90	35.33	14.57	3.425	
3,400.00	3,400.00	3,400.00	3,400.00	7.51	7.51	-90.46	-0.40	-49.90	49.90	34.88	15.02	3.323	
3,500.00	3,500.00	3,500.00	3,500.00	7.73	7.73	-90.46	-0.40	-49.90	49.90	34.43	15.47	3.226	
3,600.00	3,600.00	3,600.00	3,600.00	7.96	7.96	-90.46	-0.40	-49.90	49.90	33.98	15.92	3.135	
3,700.00	3,700.00	3,700.00	3,700.00	8.18	8.18	-90.46	-0.40	-49.90	49.90	33.53	16.37	3.049	
3,800.00	3,800.00	3,800.00	3,800.00	8.41	8.41	-90.46	-0.40	-49.90	49.90	33.08	16.82	2.967	
3,900.00	3,900.00	3,900.00	3,900.00	8.63	8.63	-90.46	-0.40	-49.90	49.90	32.64	17.27	2.890	
4,000.00	4,000.00	4,000.00	4,000.00	8.86	8.86	-90.46	-0.40	-49.90	49.90	32.19	17.72	2.817	
4,100.00	4,100.00	4,100.00	4,100.00	9.08	9.08	-90.46	-0.40	-49.90	49.90	31.74	18.17	2.747	
4,200.00	4,200.00	4,200.00	4,200.00	9.31	9.31	-90.46	-0.40	-49.90	49.90	31.29	18.62	2.681	
4,300.00	4,300.00	4,300.00	4,300.00	9.53	9.53	-90.46	-0.40	-49.90	49.90	30.84	19.06	2.617	
4,400.00	4,400.00	4,400.00	4,400.00	9.76	9.76	-90.46	-0.40	-49.90	49.90	30.39	19.51	2.557	
4,500.00	4,500.00	4,500.00	4,500.00	9.98	9.98	-90.46	-0.40	-49.90	49.90	29.94	19.96	2.500	
4,600.00	4,600.00	4,600.00	4,600.00	10.21	10.21	-90.46	-0.40	-49.90	49.90	29.49	20.41	2.445	
4,700.00	4,700.00	4,700.00	4,700.00	10.43	10.43	-90.46	-0.40	-49.90	49.90	29.04	20.86	2.392	
4,800.00	4,800.00	4,800.00	4,800.00	10.66	10.66	-90.46	-0.40	-49.90	49.90	28.59	21.31	2.341	
4,900.00	4,900.00	4,900.00	4,900.00	10.88	10.88	-90.46	-0.40	-49.90	49.90	28.14	21.76	2.293	
5,000.00	5,000.00	5,000.00	5,000.00	11.11	11.11	-90.46	-0.40	-49.90	49.90	27.69	22.21	2.247	
5,100.00	5,100.00	5,100.00	5,100.00	11.33	11.33	-90.46	-0.40	-49.90	49.90	27.24	22.66	2.202	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea Unit #40H - Lea Unit #40H - Lateral #1 - Design #2														Offset Site Error: 0.00 usft	
Survey Program: 0-MWD														Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis			Distance							Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor			
5,200.00	5,200.00	5,200.00	5,200.00	11.56	11.56	-90.46	-0.40	-49.90	49.90	26.79	23.11	2.159			
5,300.00	5,300.00	5,300.00	5,300.00	11.78	11.78	-90.46	-0.40	-49.90	49.90	26.34	23.56	2.118			
5,400.00	5,400.00	5,400.00	5,400.00	12.00	12.00	-90.46	-0.40	-49.90	49.90	25.89	24.01	2.078			
5,500.00	5,500.00	5,500.00	5,500.00	12.23	12.23	-90.46	-0.40	-49.90	49.90	25.44	24.46	2.040			
5,600.00	5,600.00	5,600.00	5,600.00	12.45	12.45	-90.46	-0.40	-49.90	49.90	24.99	24.91	2.003			
5,700.00	5,700.00	5,700.00	5,700.00	12.68	12.68	-90.46	-0.40	-49.90	49.90	24.54	25.36	1.968			
5,800.00	5,800.00	5,800.00	5,800.00	12.90	12.90	-90.46	-0.40	-49.90	49.90	24.09	25.81	1.934			
5,900.00	5,900.00	5,900.00	5,900.00	13.13	13.13	-90.46	-0.40	-49.90	49.90	23.64	26.26	1.900			
6,000.00	6,000.00	6,000.00	6,000.00	13.35	13.35	-90.46	-0.40	-49.90	49.90	23.19	26.71	1.869			
6,100.00	6,100.00	6,100.00	6,100.00	13.58	13.58	-90.46	-0.40	-49.90	49.90	22.75	27.16	1.838			
6,200.00	6,200.00	6,200.00	6,200.00	13.80	13.80	-90.46	-0.40	-49.90	49.90	22.30	27.61	1.808			
6,300.00	6,300.00	6,300.00	6,300.00	14.03	14.03	-90.46	-0.40	-49.90	49.90	21.85	28.06	1.779			
6,400.00	6,400.00	6,400.00	6,400.00	14.25	14.25	-90.46	-0.40	-49.90	49.90	21.40	28.50	1.751			
6,500.00	6,500.00	6,500.00	6,500.00	14.48	14.48	-90.46	-0.40	-49.90	49.90	20.95	28.95	1.723			
6,600.00	6,600.00	6,600.00	6,600.00	14.70	14.70	-90.46	-0.40	-49.90	49.90	20.50	29.40	1.697			
6,700.00	6,700.00	6,700.00	6,700.00	14.93	14.93	-90.46	-0.40	-49.90	49.90	20.05	29.85	1.672			
6,800.00	6,800.00	6,800.00	6,800.00	15.15	15.15	-90.46	-0.40	-49.90	49.90	19.60	30.30	1.647			
6,900.00	6,900.00	6,900.00	6,900.00	15.38	15.38	-90.46	-0.40	-49.90	49.90	19.15	30.75	1.623			
7,000.00	7,000.00	7,000.00	7,000.00	15.60	15.60	-90.46	-0.40	-49.90	49.90	18.70	31.20	1.599			
7,100.00	7,100.00	7,100.00	7,100.00	15.83	15.83	-90.46	-0.40	-49.90	49.90	18.25	31.65	1.577			
7,200.00	7,200.00	7,200.00	7,200.00	16.05	16.05	-90.46	-0.40	-49.90	49.90	17.80	32.10	1.555			
7,300.00	7,300.00	7,300.00	7,300.00	16.28	16.28	-90.46	-0.40	-49.90	49.90	17.35	32.55	1.533			
7,400.00	7,400.00	7,400.00	7,400.00	16.50	16.50	-90.46	-0.40	-49.90	49.90	16.90	33.00	1.512			
7,500.00	7,500.00	7,500.00	7,500.00	16.72	16.72	-90.46	-0.40	-49.90	49.90	16.45	33.45	1.492 Level 3			
7,600.00	7,600.00	7,600.00	7,600.00	16.95	16.95	-90.46	-0.40	-49.90	49.90	16.00	33.90	1.472 Level 3			
7,700.00	7,700.00	7,700.00	7,700.00	17.17	17.17	-90.46	-0.40	-49.90	49.90	15.55	34.35	1.453 Level 3			
7,800.00	7,800.00	7,800.00	7,800.00	17.40	17.40	-90.46	-0.40	-49.90	49.90	15.10	34.80	1.434 Level 3			
7,900.00	7,900.00	7,900.00	7,900.00	17.62	17.62	-90.46	-0.40	-49.90	49.90	14.65	35.25	1.416 Level 3			
8,000.00	8,000.00	8,000.00	8,000.00	17.85	17.85	-90.46	-0.40	-49.90	49.90	14.20	35.70	1.398 Level 3			
8,100.00	8,100.00	8,100.00	8,100.00	18.07	18.07	-90.46	-0.40	-49.90	49.90	13.75	36.15	1.381 Level 3			
8,200.00	8,200.00	8,200.00	8,200.00	18.30	18.30	-90.46	-0.40	-49.90	49.90	13.31	36.60	1.364 Level 3			
8,300.00	8,300.00	8,300.00	8,300.00	18.52	18.52	-90.46	-0.40	-49.90	49.90	12.86	37.05	1.347 Level 3			
8,400.00	8,400.00	8,400.00	8,400.00	18.75	18.75	-90.46	-0.40	-49.90	49.90	12.41	37.50	1.331 Level 3			
8,500.00	8,500.00	8,500.00	8,500.00	18.97	18.97	-90.46	-0.40	-49.90	49.90	11.96	37.94	1.315 Level 3			
8,600.00	8,600.00	8,600.00	8,600.00	19.20	19.20	-90.46	-0.40	-49.90	49.90	11.51	38.39	1.300 Level 3			
8,700.00	8,700.00	8,700.00	8,700.00	19.42	19.42	-90.46	-0.40	-49.90	49.90	11.06	38.84	1.285 Level 3			
8,800.00	8,800.00	8,800.00	8,800.00	19.65	19.65	-90.46	-0.40	-49.90	49.90	10.61	39.29	1.270 Level 3			
8,900.00	8,900.00	8,900.00	8,900.00	19.87	19.87	-90.46	-0.40	-49.90	49.90	10.16	39.74	1.256 Level 3			
9,000.00	9,000.00	9,000.00	9,000.00	20.10	20.10	-90.46	-0.40	-49.90	49.90	9.71	40.19	1.242 Level 2			
9,100.00	9,100.00	9,100.00	9,100.00	20.32	20.32	-90.46	-0.40	-49.90	49.90	9.26	40.64	1.228 Level 2			
9,200.00	9,200.00	9,200.00	9,200.00	20.55	20.55	-90.46	-0.40	-49.90	49.90	8.81	41.09	1.214 Level 2			
9,227.04	9,227.04	9,227.04	9,227.04	20.61	20.61	-90.46	-0.40	-49.90	49.90	8.69	41.21	1.211 Level 2, CC			
9,250.00	9,249.99	9,249.99	9,249.99	20.66	20.66	-91.49	-0.40	-49.90	49.91	8.60	41.32	1.208 Level 2, ES, SF			
9,300.00	9,299.80	9,299.80	9,299.80	20.77	20.77	-95.22	-0.40	-49.90	50.19	8.66	41.54	1.208 Level 2			
9,350.00	9,349.06	9,349.06	9,349.06	20.88	20.88	-105.32	-0.40	-49.90	51.82	10.06	41.76	1.241 Level 2			
9,400.00	9,397.39	9,397.39	9,397.39	20.99	20.99	-117.11	-0.40	-49.90	56.61	14.64	41.97	1.349 Level 3			
9,450.00	9,444.42	9,444.42	9,444.42	21.10	21.10	-129.01	-0.40	-49.90	66.31	24.12	42.19	1.572			
9,500.00	9,489.79	9,489.79	9,489.79	21.21	21.20	-139.02	-0.40	-49.90	81.66	39.26	42.40	1.926			
9,550.00	9,533.17	9,533.17	9,533.17	21.31	21.29	-146.59	-0.40	-49.90	102.45	59.85	42.60	2.405			
9,600.00	9,574.21	9,574.21	9,574.21	21.43	21.39	-152.01	-0.40	-49.90	128.12	85.33	42.79	2.994			
9,650.00	9,612.62	9,612.62	9,612.62	21.57	21.47	-155.79	-0.40	-49.90	158.08	115.11	42.97	3.679			
9,700.00	9,648.09	9,648.09	9,648.09	21.72	21.55	-158.34	-0.40	-49.90	191.82	148.69	43.12	4.448			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea Unit #40H - Lea Unit #40H - Lateral #1 - Design #2													Offset Site Error: 0.00 usft
Survey Program: O-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)					
9,750.00	9,680.35	9,680.35	9,680.35	21.89	21.83	-159.94	-0.40	-49.90	228.89	185.62	43.27	5.290	
9,800.00	9,709.17	9,709.17	9,709.17	22.08	21.69	-160.74	-0.40	-49.90	268.90	225.51	43.40	6.197	
9,850.00	9,734.31	9,734.31	9,734.31	22.29	21.75	-160.76	-0.40	-49.90	311.45	267.95	43.50	7.159	
9,900.00	9,755.60	9,755.60	9,755.60	22.54	21.79	-159.87	-0.40	-49.90	356.17	312.57	43.60	8.170	
9,950.00	9,772.86	9,772.86	9,772.86	22.81	21.83	-157.68	-0.40	-49.90	402.67	359.00	43.67	9.221	
10,000.00	9,785.97	9,785.97	9,785.97	23.11	21.86	-153.13	-0.40	-49.90	450.57	406.85	43.72	10.305	
10,050.00	9,794.83	9,794.83	9,794.83	23.43	21.88	-143.17	-0.40	-49.90	499.49	455.73	43.76	11.414	
10,100.00	9,799.36	9,799.36	9,799.36	23.78	21.89	-117.34	-0.40	-49.90	549.04	505.26	43.78	12.541	
10,127.04	9,800.00	9,800.00	9,800.00	23.98	21.89	-90.00	-0.40	-49.90	575.96	532.18	43.79	13.154	
10,200.00	9,800.00	9,800.00	9,800.00	24.56	21.89	-90.00	-0.40	-49.90	648.68	604.89	43.79	14.813	
10,300.00	9,800.00	9,800.00	9,800.00	25.44	21.89	-90.00	-0.40	-49.90	748.42	704.63	43.80	17.088	
10,400.00	9,800.00	11,169.46	10,555.83	26.41	27.99	-173.71	856.57	-75.78	760.48	738.29	22.19	34.270	
10,500.00	9,800.00	11,269.37	10,554.09	27.48	29.02	-173.40	956.42	-78.80	759.19	736.13	23.06	32.928	
10,600.00	9,800.00	11,369.28	10,552.35	28.62	30.12	-173.09	1,056.26	-81.81	757.91	733.91	24.00	31.581	
10,700.00	9,800.00	11,469.18	10,550.60	29.83	31.30	-172.78	1,156.11	-84.83	756.66	731.64	25.02	30.248	
10,800.00	9,800.00	11,569.09	10,548.86	31.10	32.54	-172.47	1,255.96	-87.85	755.43	729.33	26.10	28.946	
10,900.00	9,800.00	11,669.00	10,547.11	32.42	33.83	-172.16	1,355.81	-90.86	754.22	726.98	27.24	27.687	
11,000.00	9,800.00	11,768.91	10,545.37	33.79	35.17	-171.85	1,455.66	-93.88	753.03	724.59	28.44	26.477	
11,100.00	9,800.00	11,868.82	10,543.63	35.21	36.55	-171.54	1,555.50	-96.89	751.87	722.17	29.69	25.321	
11,200.00	9,800.00	11,968.73	10,541.88	36.65	37.97	-171.22	1,655.35	-99.91	750.73	719.73	31.00	24.221	
11,300.00	9,800.00	12,068.64	10,540.14	38.14	39.43	-170.91	1,755.20	-102.93	749.61	717.27	32.34	23.178	
11,400.00	9,800.00	12,168.54	10,538.40	39.65	40.92	-170.59	1,855.05	-105.94	748.51	714.78	33.73	22.190	
11,500.00	9,800.00	12,268.45	10,536.65	41.18	42.43	-170.27	1,954.89	-108.96	747.44	712.28	35.16	21.257	
11,600.00	9,800.00	12,368.36	10,534.91	42.74	43.97	-169.96	2,054.74	-111.97	746.39	709.76	36.63	20.376	
11,700.00	9,800.00	12,468.27	10,533.17	44.32	45.53	-169.64	2,154.59	-114.99	745.36	707.22	38.14	19.544	
11,800.00	9,800.00	12,568.18	10,531.42	45.92	47.11	-169.32	2,254.44	-118.00	744.36	704.68	39.68	18.760	
11,900.00	9,800.00	12,668.09	10,529.68	47.53	48.71	-169.00	2,354.29	-121.02	743.38	702.12	41.25	18.019	
12,000.00	9,800.00	12,768.00	10,527.93	49.16	50.33	-168.68	2,454.13	-124.04	742.42	699.55	42.86	17.320	
12,100.00	9,800.00	12,867.90	10,526.19	50.80	51.96	-168.36	2,553.98	-127.05	741.48	696.98	44.51	16.660	
12,200.00	9,800.00	12,967.81	10,524.45	52.46	53.60	-168.03	2,653.83	-130.07	740.57	694.39	46.18	16.037	
12,300.00	9,800.00	13,067.72	10,522.70	54.12	55.26	-167.71	2,753.68	-133.08	739.69	691.80	47.88	15.447	
12,400.00	9,800.00	13,167.63	10,520.96	55.80	56.93	-167.38	2,853.52	-136.10	738.82	689.20	49.62	14.890	
12,500.00	9,800.00	13,267.54	10,519.22	57.48	58.60	-167.06	2,953.37	-139.11	737.98	686.60	51.39	14.361	
12,600.00	9,800.00	13,367.45	10,517.47	59.17	60.29	-166.73	3,053.22	-142.13	737.17	683.99	53.18	13.861	
12,700.00	9,800.00	13,467.36	10,515.73	60.88	61.99	-166.41	3,153.07	-145.15	736.38	681.37	55.01	13.386	
12,800.00	9,800.00	13,567.26	10,513.99	62.58	63.69	-166.08	3,252.92	-148.16	735.61	678.74	56.86	12.936	
12,900.00	9,800.00	13,667.17	10,512.24	64.30	65.40	-165.75	3,352.76	-151.18	734.86	676.11	58.75	12.508	
13,000.00	9,800.00	13,767.08	10,510.50	66.02	67.12	-165.42	3,452.61	-154.19	734.15	673.48	60.67	12.102	
13,100.00	9,800.00	13,866.99	10,508.75	67.75	68.84	-165.10	3,552.46	-157.21	733.45	670.84	62.61	11.715	
13,200.00	9,800.00	13,966.90	10,507.01	69.48	70.57	-164.77	3,652.31	-160.22	732.78	668.20	64.58	11.346	
13,300.00	9,800.00	14,066.81	10,505.27	71.21	72.30	-164.44	3,752.16	-163.24	732.13	665.55	66.59	10.995	
13,400.00	9,800.00	14,166.72	10,503.52	72.95	74.04	-164.10	3,852.00	-166.26	731.51	662.89	68.62	10.661	
13,500.00	9,800.00	14,266.62	10,501.78	74.70	75.78	-163.77	3,951.85	-169.27	730.91	660.23	70.68	10.341	
13,600.00	9,800.00	14,366.53	10,500.04	76.45	77.53	-163.44	4,051.70	-172.29	730.34	657.57	72.77	10.036	
13,700.00	9,800.00	14,466.44	10,498.29	78.20	79.29	-163.11	4,151.55	-175.30	729.79	654.90	74.89	9.745	
13,800.00	9,800.00	14,566.35	10,496.55	79.95	81.04	-162.78	4,251.39	-178.32	729.27	652.23	77.04	9.466	
13,900.00	9,800.00	14,666.26	10,494.81	81.71	82.80	-162.44	4,351.24	-181.33	728.77	649.55	79.22	9.200	
14,000.00	9,800.00	14,766.17	10,493.06	83.47	84.56	-162.11	4,451.09	-184.35	728.29	646.87	81.42	8.944	
14,100.00	9,800.00	14,866.08	10,491.32	85.24	86.33	-161.77	4,550.94	-187.37	727.84	644.18	83.66	8.700	
14,200.00	9,800.00	14,965.98	10,489.57	87.00	88.10	-161.44	4,650.79	-190.38	727.42	641.49	85.93	8.465	
14,300.00	9,800.00	15,065.89	10,487.83	88.77	89.87	-161.10	4,750.63	-193.40	727.02	638.79	88.23	8.240	
14,400.00	9,800.00	15,165.80	10,486.09	90.55	91.64	-160.77	4,850.48	-196.41	726.64	636.09	90.55	8.025	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Offset Design Lea Unit #40H - Lea Unit #40H - Lateral #1 - Design #2													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside		Distance		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
14,500.00	9,800.00	15,265.71	10,484.34	92.32	93.42	-160.43	4,950.33	-199.43	726.29	633.39	92.91	7.817	
14,600.00	9,800.00	15,365.62	10,482.60	94.09	95.20	-160.10	5,050.18	-202.44	725.97	630.68	95.29	7.618	
14,700.00	9,800.00	15,465.53	10,480.86	95.87	96.98	-159.76	5,150.02	-205.46	725.67	627.98	97.71	7.427	
14,800.00	9,800.00	15,565.44	10,479.11	97.65	98.76	-159.42	5,249.87	-208.48	725.39	625.24	100.15	7.243	
14,900.00	9,800.00	15,665.34	10,477.37	99.43	100.55	-159.09	5,349.72	-211.49	725.14	622.52	102.63	7.066	
15,000.00	9,800.00	15,765.25	10,475.63	101.22	102.34	-158.75	5,449.57	-214.51	724.92	619.79	105.13	6.896	
15,100.00	9,800.00	15,865.16	10,473.88	103.00	104.12	-158.41	5,549.42	-217.52	724.72	617.06	107.66	6.731	
15,200.00	9,800.00	15,965.07	10,472.14	104.79	105.92	-158.07	5,649.26	-220.54	724.54	614.32	110.22	6.573	
15,300.00	9,800.00	16,064.98	10,470.39	106.57	107.71	-157.74	5,749.11	-223.55	724.39	611.58	112.82	6.421	
15,400.00	9,800.00	16,164.89	10,468.65	108.36	109.50	-157.40	5,848.96	-226.57	724.27	608.83	115.44	6.274	
15,500.00	9,800.00	16,264.80	10,466.91	110.15	111.30	-157.06	5,948.81	-229.59	724.17	606.09	118.09	6.133	
15,600.00	9,800.00	16,364.70	10,465.16	111.94	113.09	-156.72	6,048.65	-232.60	724.10	603.33	120.77	5.996	
15,700.00	9,800.00	16,464.61	10,463.42	113.73	114.89	-156.39	6,148.50	-235.62	724.05	600.57	123.48	5.864	
15,800.00	9,800.00	16,564.52	10,461.68	115.53	116.69	-156.05	6,248.35	-238.63	724.03	597.81	126.21	5.737	
15,841.26	9,800.00	16,605.75	10,460.96	116.27	117.43	-155.91	6,289.55	-239.88	724.03	596.67	127.35	5.685	
15,900.00	9,800.00	16,664.43	10,459.93	117.32	118.49	-155.71	6,348.20	-241.65	724.03	595.05	128.98	5.613	
16,000.00	9,800.00	16,764.34	10,458.19	119.12	120.29	-155.37	6,448.05	-244.66	724.06	592.28	131.78	5.495	
16,100.00	9,800.00	16,864.25	10,456.45	120.91	122.09	-155.03	6,547.89	-247.68	724.11	589.51	134.60	5.380	
16,200.00	9,800.00	16,964.16	10,454.70	122.71	123.89	-154.70	6,647.74	-250.70	724.19	586.73	137.45	5.269	
16,300.00	9,800.00	17,064.06	10,452.96	124.51	125.70	-154.36	6,747.59	-253.71	724.29	583.95	140.34	5.161	
16,400.00	9,800.00	17,163.97	10,451.21	126.31	127.50	-154.02	6,847.44	-256.73	724.42	581.17	143.25	5.057	
16,500.00	9,800.00	17,263.88	10,449.47	128.11	129.31	-153.68	6,947.29	-259.74	724.57	578.39	146.18	4.957	
16,600.00	9,800.00	17,363.79	10,447.73	129.91	131.12	-153.35	7,047.13	-262.76	724.75	575.60	149.15	4.859	
16,700.00	9,800.00	17,463.70	10,445.98	131.71	132.92	-153.01	7,146.98	-265.78	724.96	572.81	152.14	4.765	
16,800.00	9,800.00	17,563.61	10,444.24	133.51	134.73	-152.67	7,246.83	-268.79	725.18	570.02	155.17	4.674	
16,900.00	9,800.00	17,663.52	10,442.50	135.31	136.54	-152.33	7,346.68	-271.81	725.44	567.22	158.22	4.585	
17,000.00	9,800.00	17,763.42	10,440.75	137.11	138.35	-152.00	7,446.52	-274.82	725.72	564.43	161.29	4.499	
17,100.00	9,800.00	17,863.33	10,439.01	138.92	140.16	-151.66	7,546.37	-277.84	726.02	561.63	164.40	4.416	
17,200.00	9,800.00	17,963.24	10,437.27	140.72	141.97	-151.32	7,646.22	-280.85	726.35	558.83	167.53	4.336	
17,300.00	9,800.00	18,063.15	10,435.52	142.53	143.79	-150.99	7,746.07	-283.87	726.71	556.02	170.68	4.258	
17,400.00	9,800.00	18,163.06	10,433.78	144.33	145.60	-150.65	7,845.92	-286.89	727.09	553.22	173.87	4.182	
17,506.59	9,800.00	18,266.25	10,432.00	146.26	147.47	-150.31	7,949.04	-290.00	727.55	550.31	177.23	4.105	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report




Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2

Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Reference Depths are relative to KB @ 3693.00usft (McVay 4)
Offset Depths are relative to Offset Datum
Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: Lea Unit #43H
Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
Grid Convergence at Surface is: 0.45°

Ladder Plot

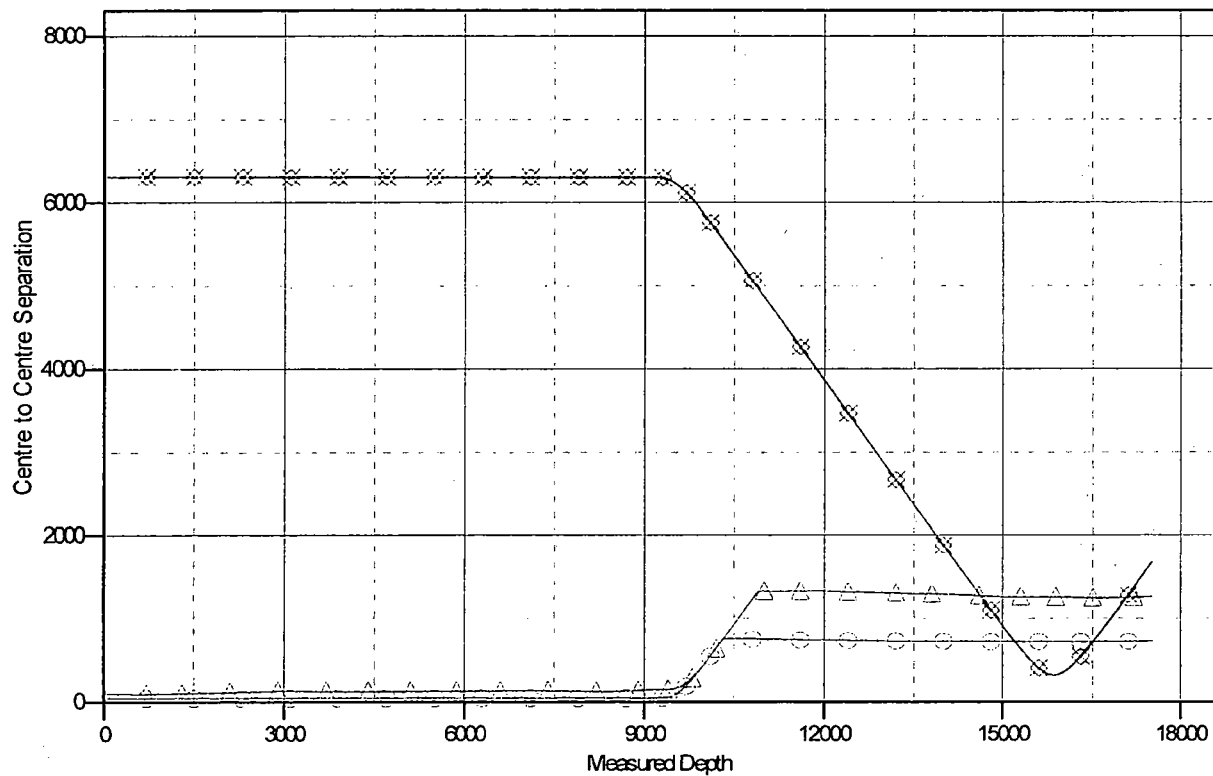

LEGEND

- Lea Unit#40H, Lateral#1, Design #2 V0
△ Lea Unit#38H, OH, OH V0
◇ Lea Unit#12, ST-01, ST-01 V0
✕ Lea Unit#12, OH, OH V0

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



TDS
Anticollision Report



Company: Legacy Reserves
Project: Lea County, NM (NAD-27 2015)
Reference Site: Lea Unit #43H
Site Error: 0.00 usft
Reference Well: Lea Unit #43H
Well Error: 0.00 usft
Reference Wellbore: Lateral #1
Reference Design: Design #2


Local Co-ordinate Reference: Well Lea Unit #43H
TVD Reference: KB @ 3693.00usft (McVay 4)
MD Reference: KB @ 3693.00usft (McVay 4)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Single User Db
Offset TVD Reference: Offset Datum

Reference Depths are relative to KB @ 3693.00usft (McVay 4)
Offset Depths are relative to Offset Datum
Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: Lea Unit #43H
Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
Grid Convergence at Surface is: 0.45°

Separation Factor

Plot

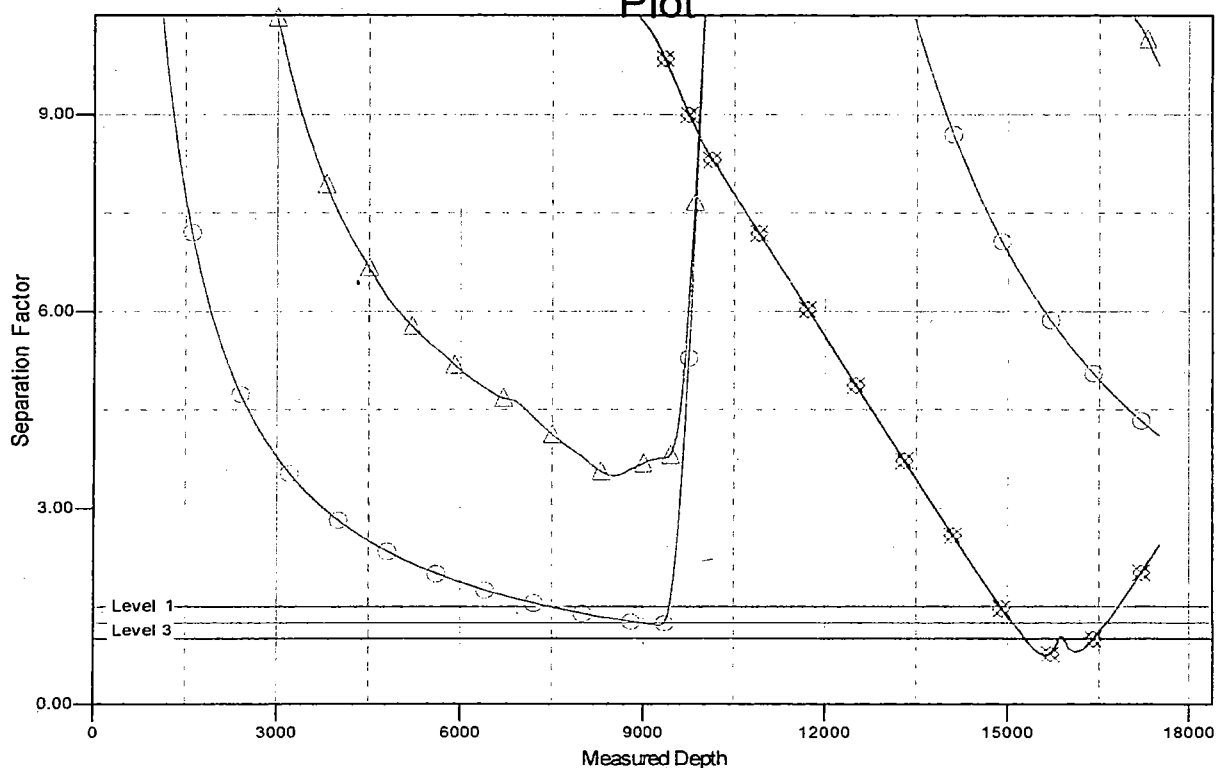

LEGEND

- Lea Unit #40H, Lateral #1, Design #2 V0
- Lea Unit #12, ST-01, ST-01 V0
- Lea Unit #38H, OH, OHV0
- Lea Unit #12, OH, OHV0

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

DRILLING PLAN
LEA UNIT 43H
LEGACY RESERVES OPERATING LP
SHL: Unit I, Section 24
BHL: Unit A, Section 13
T20S-R34E, Lea County, New Mexico

To satisfy requirements of Onshore Oil and Gas Order No. 1, Legacy Reserves Operating LP submits the following for your consideration:

1. **Location:** SHL: 2270' FSL & 560' FEL, Sec.24, T20S-R34E (First Take: 2310 FNL & 430 FEL)
 BHL: 330' FNL & 430' FEL, Sec. 13, T20S-R34E (Last Take)

2. **Elevations:** 3,675' GL

3. **Geological Name of Surface Formation:** Quaternary alluvium deposits

4. **Drilling Tools and Associated Equipment:** Rotary drilling rig using fluid as a means for removal of solid cuttings from the well.

5. **Proposed Drilling Depth:** 17,507' MD 9,800' TVD

6. **Estimated Tops of Geological Markers:**

Rustler	1,680'	Delaware	5,666'
Top Salt	1,720'	Bone Spring Lime	8,205'
Bottom Salt	3,150'	Avalon	8,760'
Top of Capitan Reef	3,150'	1 st . Bone Spring	9,501'
Capitan Reef Bottom	4,710'		
San Andres	4,710'		

7. **Possible mineral bearing formations:**

Primary: Bone Spring (oil); Secondary: Delaware (oil), Avalon (oil), fresh water (~125')

8. **Proposed Mud System:**

<u>Depth</u>	<u>Mud Wt.</u>	<u>Visc</u>	<u>Fluid Loss</u>	<u>Type Mud</u>
0' to 1800'	8.4-8.9	30-32	NC	Fresh water gel spud mud
1800' to 5600'	9.8-10	28-29	NC	Brine water
5600' to 9,800'	8.4-8.6	28-29	NC	Fresh water/brine, use hi-viscosity Weeps to clean hole
9,800' to 17,507'	8.9-9.1	28-29	18-20	Fresh water/brine

Sufficient mud materials will be kept on location at all times in order to combat lost circulation or unexpected kicks. A Pason PVT system will be rigged up prior to spudding this well. A volume monitoring system that measures, calculates and displays readings from the mud system on the rig to alert the rig crew of impending

gas kicks and lost circulation. In order to effectively run open hole logs and casing, the mud viscosity and fluid loss properties may be adjusted.

9. **Proposed Drilling Plan:**

Set surface and intermediate casing and cement to surface. Drill 8-3/4" to ~9,800', Kick off and drill 8-3/4" hole to TD of ~17,507'. Set 5-1/2" casing from surface to TD (~ 17,507'). Cement 5-1/2" production casing back to surface.

10. **Casing Information:**

String	Hole size	Depth	Casing OD	Collar	Weight	Grade
Surface	17-1/2"	1800' MD	New 13-3/8"	STC	54.5#	J-55
Intermediate	12-1/4"	3901' MD	New 9-5/8"	LTC	40#	J-55
Intermediate	12-1/4"	5600' MD	New 9-5/8"	LTC	40#	HCK-55
Production	8-3/4"	17,507' MD	New 5-1/2"	BTC	20#	P-110

5-1/2", P-110:

Collapse Factor: 1.55
Burst Factor: 1.29
Tension Factor: 3.06

9-5/8", HCK-55

Collapse Factor: 1.28
Burst Factor: 2.03
Tension Factor: 3.33

9-5/8, J-55

Collapse Factor: 1.24
Burst Factor: 1.82
Tension Factor: 3.12

13-3/8, J-55

Collapse Factor: 3.08
Burst Factor: 3.54
Tension Factor: 5.66

11. **Cementing Information:**

Surface Casing (75% excess on lead & 75% excess on tail to design for cement top at surface):

Lead: 1100 sxs class C cement + 4% bwoc bentonite II + 2% bwoc Calcium Chloride + 0.25 lbs/sack Cello Flake + 0.005% bwoc Static Free + 0.005 gps FP-6L (13.50 ppg, 1.93 cfps, 9.71 gps wtr).

Tail: 200 sxs class C cement + 1.5% bwoc Calcium Chloride + 0.005 lbs/sack Static Free + 0.005 gps FP-6L (14.80 ppg, 1.34 cfps, 6.35 gps wtr).

Intermediate Casing

In the event that circulation is lost (> 50%) while drilling the 12-1/4" intermediate hole in the Capitan Reef at +/-4000', we will plan to install a DV tool and external casing packer within 200' of the top depth where lost circulation occurred and will pump a two-stage cement job with the potential to add an additional DV tool for a three-stage cement job. If there is no lost circulation a single stage cementing procedure will be followed. Legacy plans to cement to surface regardless of whether a single stage, 2-stage or 3-stage procedure is implemented.

No DV tool (80% excess on lead & 80% excess on tail to design for cement top at surface)

Lead: 1400 sx (35:65) poz (fly ash) class C cement+ 4% bwoc bentonite II + 5% bwoc MPA-5 + 0.25% bwoc FL- 52 + 5 lbs/sack LCM-1 + 0.125 lbs/sk cello flake+ 0.005 lbs/sk defoamer + 0.005 gps

FP-6L + 1.2% bwoc Sodium Metasilicate + 5% bwow Sodium Chloride (12.5 ppg, 2.13 cfps, 8.81 gps wtr)

Tail: 200 sx class C cement (14.80 ppg, 1.33 cfps, 6.35 gps wtr)

With (1) DV Tool (100% excess on lead & 100% excess on tail to design for cement top at surface)

Assuming DV tool set at 3950' but if the setting depth changes, cement volumes will be adjusted proportionately.

Stage 1

Lead: 400 sx (35:65) paz (fly ash) class C cement+ 4% bwoc Bentonite II+ 5% bwoc MPA-5 + 0,25% bwoc FL-52 + 5 lbs/sack LCM-1 + 0.125 lbs/sk cello flake+ 0.005 lbs/sk defoamer + 0.005 gps FP-6L + 1.2% bwoc Sodium Metasilicate + 5% bwow Sodium Chloride (12.5 ppg, 2.13 cfps, 8.81 gps wtr)

Tail: 200 sx class C cement (14.80 ppg, 1.33 cfps, 6.35 gps wtr)

Stage 2

Lead: 1100 sx (35:65) paz (fly ash) class C cement+ 4% bwoc bentonite II + 5% bwoc MPA-5 + 0,25% bwoc FL-52 + 5 lbs/sack LCM-1 + 0.125 lbs/sk Cello Flake+ 0.005 lbs/sk Static Free+ 0.005 gps FP-6L + 1.2% bwoc Sodium Metasilicate + 5% bwow Sodium Chloride (12.5 ppg, 2.13 cfps, 8.81 gps wtr)

Tail: 200 sx class C cement (14.80 ppg, 1.33 cfps, 6.35 gps wtr)

With (2) DV Tools (100% excess on lead & 100% excess on tail to design for cement top at surface)

Assuming one DV tool set at 3950' and one DV tool set at 1800' but if the setting depths change, cement volumes will be adjusted proportionately.

Stage 1

Lead: 400 sx (35:65) paz (fly ash) class C cement+ 4% bwoc Bentonite II+ 5% bwoc MPA-5 + 0,25% bwoc FL-52 + 5 lbs/sack LCM-1 + 0.125 lbs/sk cello flake+ 0.005 lbs/sk defoamer + 0.005 gps FP-6L + 1.2% bwoc Sodium Metasilicate + 5% bwow Sodium Chloride (12.5 ppg, 2.13 cfps, 8.81 gps wtr)

Tail: 200 sx class C cement (14.80 ppg, 1.33 cfps, 6.35 gps wtr)

Stage 2

Lead: 600 sx (35:65) paz (fly ash) class C cement+ 4% bwoc bentonite II + 5% bwoc MPA-5 + 0,25% bwoc FL-52 + 5 lbs/sack LCM-1 + 0.125 lbs/sk Cello Flake+ 0.005 lbs/sk Static Free+ 0.005 gps FP-6L + 1.2% bwoc Sodium Metasilicate + 5% bwow Sodium Chloride (12.5 ppg, 2.13 cfps, 8.81 gps wtr)

Tail: 200 sx class C cement (14.80 ppg, 1.33 cfps, 6.35 gps wtr)

Stage 3

Lead: 600 sx (35:65) paz (fly ash) class C cement+ 4% bwoc bentonite II + 5% bwoc MPA-5 + 0,25% bwoc FL-52 + 5 lbs/sack LCM-1 + 0.125 lbs/sk Cello Flake+ 0.005 lbs/sk Static Free+ 0.005 gps FP-6L + 1.2% bwoc Sodium Metasilicate + 5% bwow Sodium Chloride (12.5 ppg, 2.13 cfps, 8.81 gps wtr)

Tail: 200 sx class C cement (14.80 ppg, 1.33 cfps, 6.35 gps wtr)

Production Casing (80% excess on lead & 20% excess on tail to design for cement top at surface):

Lead: 1600 sxs (50:50) poz (fly ash) class H cement + 10% bwoc bentonite II + 5% bwow sodium chloride + 5 pps LCM-1 + 0.005 lbs/sk Static Free + 0.005 gps FP-6L (11.90 ppg, 2.38 cf/sx, 13.22 gps wtr).

Tail: 1700 sxs Class H (15:61:11) poz (fly ash): class H cement: CSE-2 + 4% bwow sodium chloride + 3 pps LCM-1 + 0.6% bwoc FL-25 + 0.005 gps FP-6L + 0.005% bwoc Static Free (13.20 ppg, 1.62 cf/sx, 9.45 gps wtr).

12. Pressure Control Eqpt/BOP:

Legacy Reserves plans to use a 13-5/8" 5000-psi working pressure BOP system consisting of a double ram BOP with one ram being pipe and one ram being blind, a 5000-psi annular type preventer, a 5000-psi choke manifold and 80 gallon accumulator with floor, five remote operating stations and an auxiliary power system. A rotating head will be utilized as needed. A drill string safety valve in the open position will be available on the rig floor. A mud gas separator will be available for use if needed.

A 3M BOP will be used to drill from the surface casing shoe (~1800') to the intermediate casing shoe (~5600'). The BOP will be a 5M system, however the "A" section wellhead will be a 3M wellhead (see attached BOP Diagram).

The BOP unit will be hydraulically operated. The BOP will be operated at least once per day while drilling and the blind rams will be operated when out of hole during trips. No abnormal pressure or temperature is expected while drilling.

The BOPs will be tested by an independent service company to 250 psi low and 5000 psi high.

13. Testing, Logging, and Coring Program:

- A. Mud logging program: 2 man unit from approximately after setting intermediate casing.
- B. No open hole logs, DST's or cores are planned.

14. Potential Hazards

No abnormal pressures or temperatures are expected during the drilling of this well. If H2S is encountered the operator will comply with provisions of Onshore Order 6. Since there will be an H2S Safety package on location, attached is an "H2S Drilling Operations Plan". Adequate flare lines will be installed on the mud/gas separator so gas may be flared safely. All personnel will be familiar with all aspects of safe operations of equipment being used. Lost circulation may occur and a cement contingency plan is included in this plan along with mud materials to be kept on location at all times in order to combat lost circulation or unexpected kicks. Estimated BHP: 4312 psi, estimated BHT: 162°F.

15. Road and Location

Road and location construction will begin after BLM approval of the APD. Drilling is expected to take 30-35 days and an additional 10 days for the completion.

16. Additional Requirements of Project:

Completion: The targeted Bone Spring pay zone will be perforated and stimulated in multiple stages using acid and hydraulic fracturing treatments. Fresh water used in the drilling and completion of this well will be transferred from off-site via temporary flowlines and stored in frac tanks on the location.