

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised July 18, 2013

HOBBS OCD
FEB 06 2018
RECEIVED

WELL API NO. 30-025-22560
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name E.C. Hill C
8. Well Number 2
9. OGRID Number 16696
10. Pool name or Wildcat Teague Paddock Blinbury
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3296'

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
OXY USA Inc.

3. Address of Operator
P.O. Box 50250 Midland, TX 79710

4. Well Location
Unit Letter L : 2310 feet from the South line and 330 feet from the West line
Section 27 Township 23S Range 37E NMPM County Lea

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT

REMEDIAL WORK ☐
COMMENCE DRILLING OPERATIONS ☐
CASING/CEMENT JOB ☐
OTHER: ☐

INT TO P&A ☒
P&A NR
P&A R

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-5994' PBD-5383' Perfs-5433-5889' CIBP-5383'

9-5/8" 36# csg @ 994' w/ 400sx, 12-1/4" hole, TOC-Surf-Circ
7" 23-26# csg @ 5994' w/ 525sx, 8-3/4" hole, TOC-2500'-Calc

1. RIH & tag CIBP @ 5383', M&P 25sx cmt to 5283'
2. M&P 25sx cmt @ 5020-4920' WOC-Tag
3. M&P 40sx cmt @ 3580-3400' WOC-Tag
4. Perf @ 2405', sqz 40sx cmt to 2305' WOC-Tag
5. Perf @ 1175', sqz 90sx cmt to 944' WOC-Tag
6. Perf @ 250', sqz 95sx cmt to surface

10# MLF between plugs - Above ground steel tanks will be utilized

Spud Date:

Rig Release Date:

C103 INTENT TO P&A EXPIRES
02/06/2019

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 11/31/18

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Mark L. Pritikin TITLE Petroleum Engr. Specialist DATE 02/07/2018
Conditions of Approval (if any):

OXY USA Inc. - Current
E.C. Hill C #2
API No. 30-025-22560

12-1/4" hole @ 994'
9-5/8" csg @ 994'
w/ 400sx-TOC-Surf-Circ


CIBP @ 5383'

8-3/4" hole @ 5994'
7" csg @ 5994'
w/ 525sx-TOC-2500'-Calc

Perfs @ 5433-5889'

PB-5951'

TD-5994'

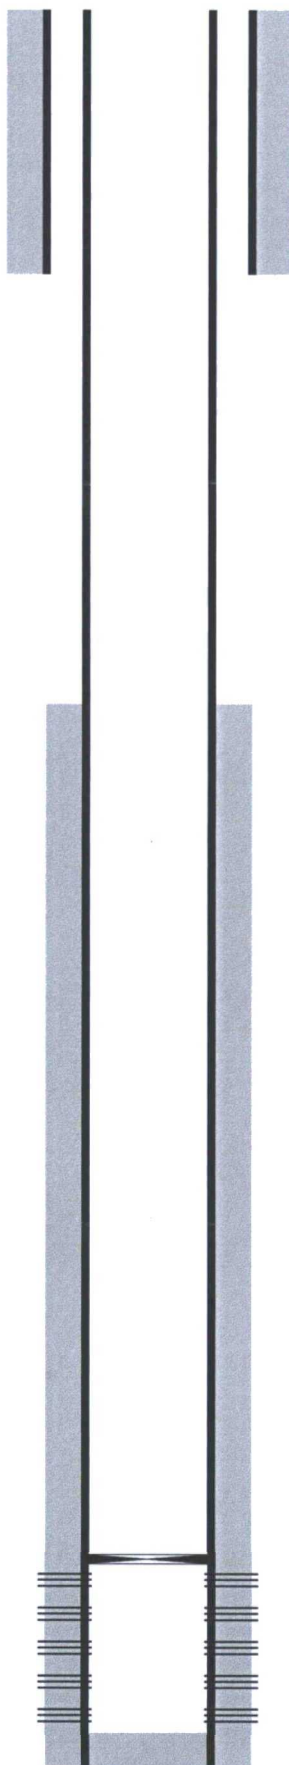

OXY USA Inc. - Proposed
E.C. Hill C #2
API No. 30-025-22560

95sx @ 250'-Surface

90sx @ 1175-944' WOC-Tag


40sx @ 2405-2305' WOC-Tag

40sx @ 3580-3400' WOC-Tag

25sx @ 5020-4920' WOC-Tag

25sx @ 5383-5283'
CIBP @ 5383'

PB-5951'

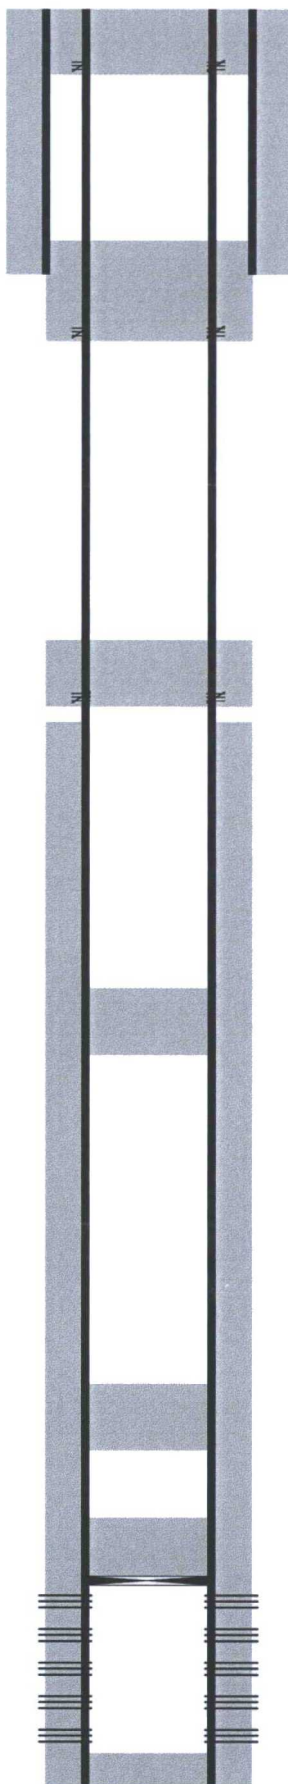

Perf @ 250'

Perf @ 1175'

Perf @ 2405'

Perfs @ 5433-5889'

12-1/4" hole @ 994'
9-5/8" csg @ 994'
w/ 400sx-TOC-Surf-Circ

8-3/4" hole @ 5994'
7" csg @ 5994'
w/ 525sx-TOC-2500'-Calc

TD-5994'