

Permit Information:

Well Name: Fruit Loop 29 State No. 502H

Location:

SL: 309' FNL & 815' FWL, Section 29, T-21-S, R-33-E, Lea Co., N.M.

BHL: 230' FSL & 1210' FWL, Section 29, T-21-S, R-33-E, Lea Co., N.M.

HOBBS OCD
FEB 16 2018
RECEIVED**Casing Program:**

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
17.5"	0 - 1,630'	13.375"	54.5#	J55	STC	1.125	1.25	1.60
12.25"	0-5,200'	9.625"	40#	J55	LTC	1.125	1.25	1.60
8.75"	0'-15,801'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

Cement Program:

Depth	No. Sacks	Wt. ppg	Yld Ft ³ /ft	Slurry Description
1,630'	600	13.5	1.73	Class C + 4.0% Bentonite + 0.6% CD-32 + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	300	14.8	1.34	Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate
5,200' DV Tool w/ ECP @ 3,200'	700	12.7	2.22	Stage 1 Lead: Class 'C' + 1.50% R-3 + 0.25 lb/sk Cello-Flake + 2.0% Sodium Metasilicate + 10% Salt + 0.005 lb/sk Static Free (TOC @ Surface)
	200	14.8	1.32	Stage 1 Tail: Class 'C' + 0.25 lb/sk Cello Flake + 0.005 lb/sk Static Free
	700	12.7	2.22	Stage 2 Lead: Class 'C' + 1.50% R-3 + 0.25 lb/sk Cello-Flake + 2.0% Sodium Metasilicate + 10% Salt + 0.005 lb/sk Static Free (TOC @ Surface)
	200	14.8	1.32	Stage 2 Tail: Class 'C' + 0.25 lb/sk Cello Flake + 0.005 lb/sk Static Free
15,801'	375	10.8	3.67	60:40:0 Class C + 15.0 pps BA-90 + 4% MPA-5 + 3.0% SMS + 5.0% A-10 + 1.0% BA-10A + 0.80% ASA-301 + 2.55% R-21 + 8.0 pps LCM-1 (TOC @ 4,700')
	300	11.8	2.38	50:50:10 Class H + 0.80% FL-52 + 0.30% ASA-301 + 0.40% SMS + 2.0% Salt + 0.30% R-21 + 3.0 pps LCM-1 + 0.25 pps Celloflake
	1300	14.2	1.28	50:50:2 Class H + 0.65% FL-52 + 0.45% CD-32 + 0.10% SMS + 2.0% Salt

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 - 1,630'	Fresh - Gel	8.6-8.8	28-34	N/c
1,630' - 5,200'	Oil Base	8.7-9.4	58-68	N/c - 6
5,200' - 10,518'	Oil Base	8.7-9.4	58-68	N/c - 6
10,518' - 15,801' Lateral	Oil Base	9.0-9.5	58-68	N/c - 6


Fruit Loop 29 State #502H
Lea County, New Mexico

309' FNL
815' FWL
Section 29
T-21-S, R-33-E

Proposed Wellbore

API: 30-025-*****

KB: 3,777'
GL: 3,752'

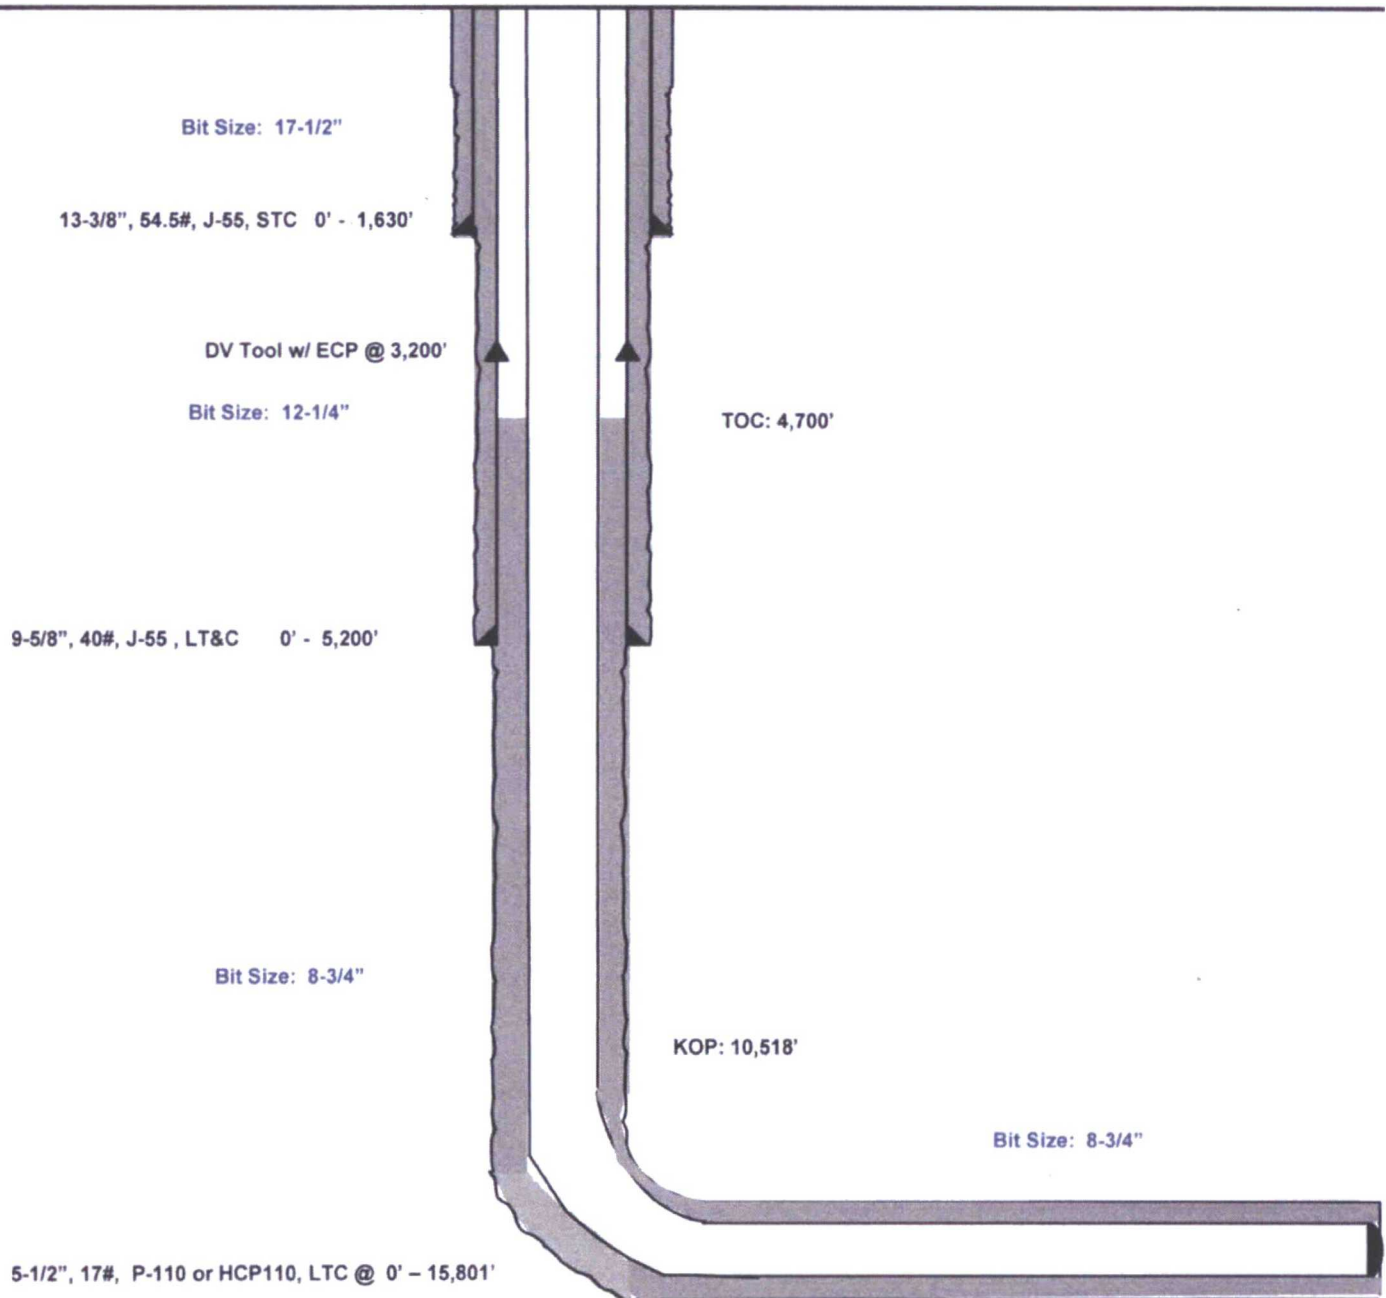

Lateral: 15,801' MD, 10,998' TVD

BH Location: 230' FSL & 1210' FWL
Section 29
T-21-S, R-33-E