

**PECOS DISTRICT
DRILLING CONDITIONS OF APPROVAL**

HOBBS OCD

MAR 08 2018

RECEIVED

OPERATOR'S NAME:	ROSEHILL OPERATING COMPANY
LEASE NO.:	NMNM 012280
WELL NAME & NO.:	006H TATANKA FED
SURFACE HOLE FOOTAGE:	230'/S & 765'/W
BOTTOM HOLE FOOTAGE:	200'/N & 765'/W
LOCATION:	Section 11, R35E, T26S, NMPM
COUNTY:	LEA County, New Mexico.

Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP

A. Hydrogen Sulfide

1. Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **13 3/8** inch surface casing shall be set at approximately **925** feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours

after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the **10 3/4** inch first intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The minimum required fill of cement behind the **7 5/8** inch second intermediate casing is:
 - Cement as proposed. Operator shall provide method of verification.
4. The minimum required fill of cement behind the **5** inch production casing is:
 - Cement as proposed. Operator shall provide method of verification.
Excess calculates to 6% - additional cement might be required.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. **Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 10,000 (10M) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

- e. **If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.**

MHH 02242018

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Chaves and Roosevelt Counties
Call the Roswell Field Office, 2909 West Second St., Roswell NM 88201.
During office hours call (575) 627-0272.
After office hours call (575)

Eddy County
Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

Lea County
Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after

installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	ROSEHILL OPERATING COMPANY
LEASE NO.:	NMNM 012280
WELL NAME & NO.:	006H TATANKA FED
SURFACE HOLE FOOTAGE:	230'/S & 765'/W
BOTTOM HOLE FOOTAGE:	200'/N & 765'/W
LOCATION:	Section 11,R35E, T26S, NMPM
COUNTY:	LEA County, New Mexico.

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Lesser Prairie-Chicken Timing Stipulations
 - Ground-level Abandoned Well Marker
 - Watershed
 - Range
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- Interim Reclamation**
- Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

- **The entirety of the well pads and facility surface sites would be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pads and surface sites. Topsoil should not be used to construct the berm. No water flow from the uphill side(s) of the pads should be allowed to enter the well pads. The berm should be maintained through the life of the wells and after interim reclamation has been completed.**
- **Any water erosion that may occur due to the construction of the well pads or facilities during the life of the project would be quickly corrected and proper measures would be taken to prevent future erosion.**
- **Stockpiling of topsoil is required. The topsoil would be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and would not be used for berming or erosion control.**

Cattleguards

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s). Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations. A gate shall be constructed on one side of the cattleguard and fastened securely to H-braces.

Fence Requirement

Where entry granted across a fence line, the fence must be braced and tied off on both sides of the passageway prior to cutting. Once the work is completed, the fence will be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Livestock Watering Requirement

Structures that provide water to livestock, such as windmills, pipelines, drinking troughs, and earthen reservoirs, will be avoided by moving the proposed action.

-OR-

Any damage to structures that provide water to livestock throughout the life of the well, caused by operations from the well site, must be immediately corrected by the operator. The operator must notify the BLM office (575-234-5972) and the private surface landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

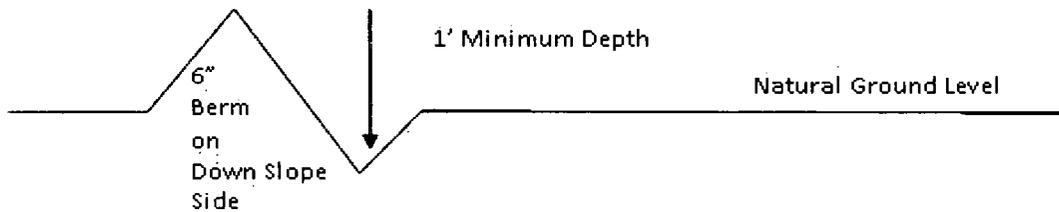

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Livestock Watering Requirement

Any damage to structures that provide water to livestock throughout the life of the well, caused by operations from the well site, must be immediately corrected by the operator. The operator must notify the BLM office (575-234-5972) and the private surface landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

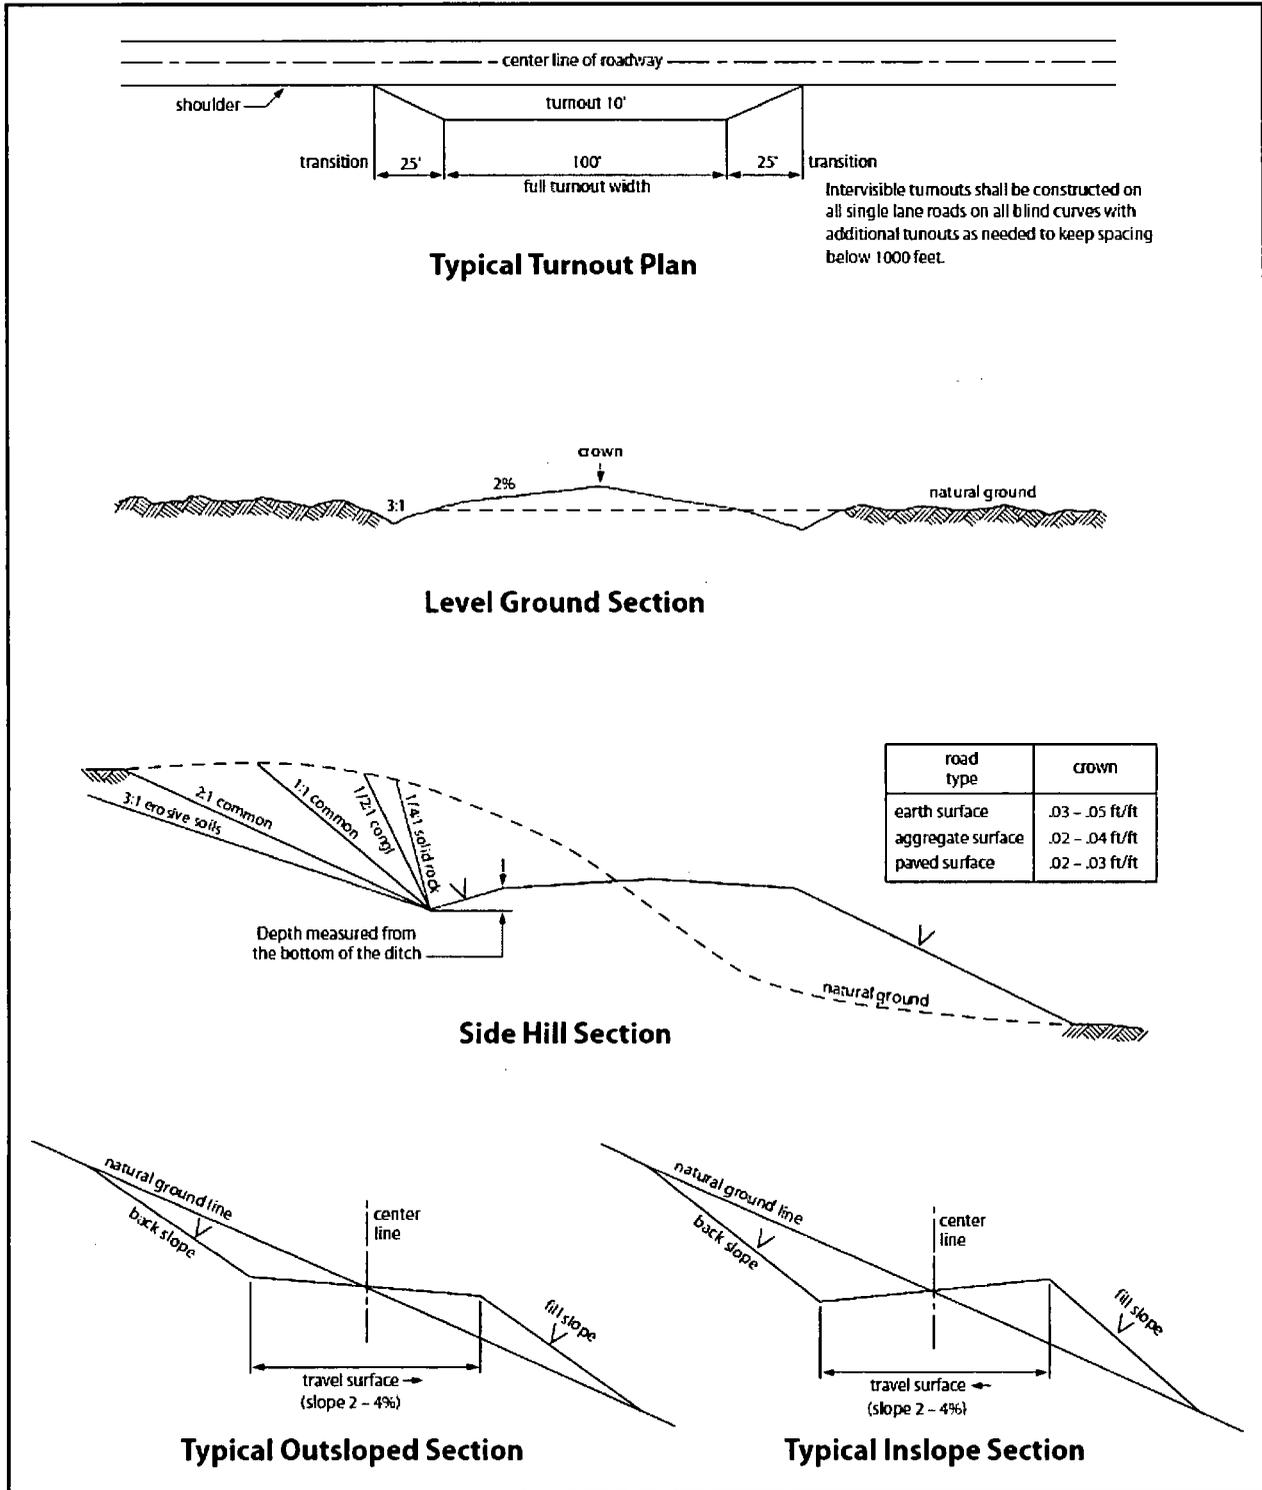


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C.6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.
6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.
7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:
 - Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
 - Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
 - The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)
8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.
9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

- | | |
|--|--|
| <input type="checkbox"/> seed mixture 1 | <input type="checkbox"/> seed mixture 3 |
| <input type="checkbox"/> seed mixture 2 | <input type="checkbox"/> seed mixture 4 |
| <input checked="" type="checkbox"/> seed mixture 2/LPC | <input type="checkbox"/> Aplomado Falcon Mixture |

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches that are not otherwise fenced, screened, or netted to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or

other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

19. Special Stipulations:

Lesser Prairie-Chicken

Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 *et seq.* (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as

a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, *et seq.* or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, *et seq.*) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full

expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.

6. All construction and maintenance activity will be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.

8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline will be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a

legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.

18. Special Stipulations:

- a. **Lesser Prairie-Chicken:** Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.
5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except

between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by

drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture for LPC Sand/Shinnery Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	ROSEHILL OPERATING COMPANY
LEASE NO.:	NMNM 012280
WELL NAME & NO.:	006H TATANKA FED
SURFACE HOLE FOOTAGE:	230'/S & 765'/W
BOTTOM HOLE FOOTAGE:	200'/N & 765'/W
LOCATION:	Section 11,R35E, T26S, NMPM
COUNTY:	LEA County, New Mexico.

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Lesser Prairie-Chicken Timing Stipulations
 - Ground-level Abandoned Well Marker
 - Watershed
 - Range
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- Interim Reclamation**
- Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

- **The entirety of the well pads and facility surface sites would be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pads and surface sites. Topsoil should not be used to construct the berm. No water flow from the uphill side(s) of the pads should be allowed to enter the well pads. The berm should be maintained through the life of the wells and after interim reclamation has been completed.**
- **Any water erosion that may occur due to the construction of the well pads or facilities during the life of the project would be quickly corrected and proper measures would be taken to prevent future erosion.**
- **Stockpiling of topsoil is required. The topsoil would be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and would not be used for berming or erosion control.**

Cattleguards

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s). Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations. A gate shall be constructed on one side of the cattleguard and fastened securely to H-braces.

Fence Requirement

Where entry granted across a fence line, the fence must be braced and tied off on both sides of the passageway prior to cutting. Once the work is completed, the fence will be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Livestock Watering Requirement

Structures that provide water to livestock, such as windmills, pipelines, drinking troughs, and earthen reservoirs, will be avoided by moving the proposed action.

-OR-

Any damage to structures that provide water to livestock throughout the life of the well, caused by operations from the well site, must be immediately corrected by the operator. The operator must notify the BLM office (575-234-5972) and the private surface landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

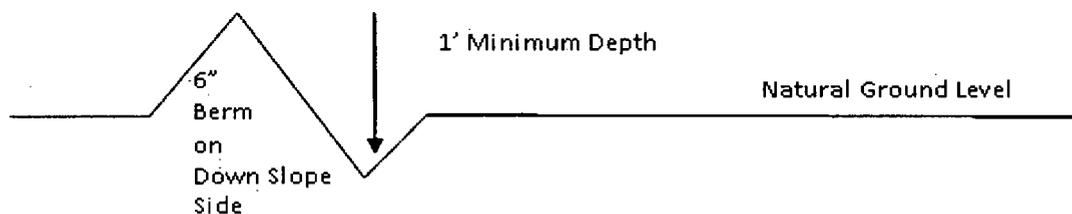

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Livestock Watering Requirement

Any damage to structures that provide water to livestock throughout the life of the well, caused by operations from the well site, must be immediately corrected by the operator. The operator must notify the BLM office (575-234-5972) and the private surface landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

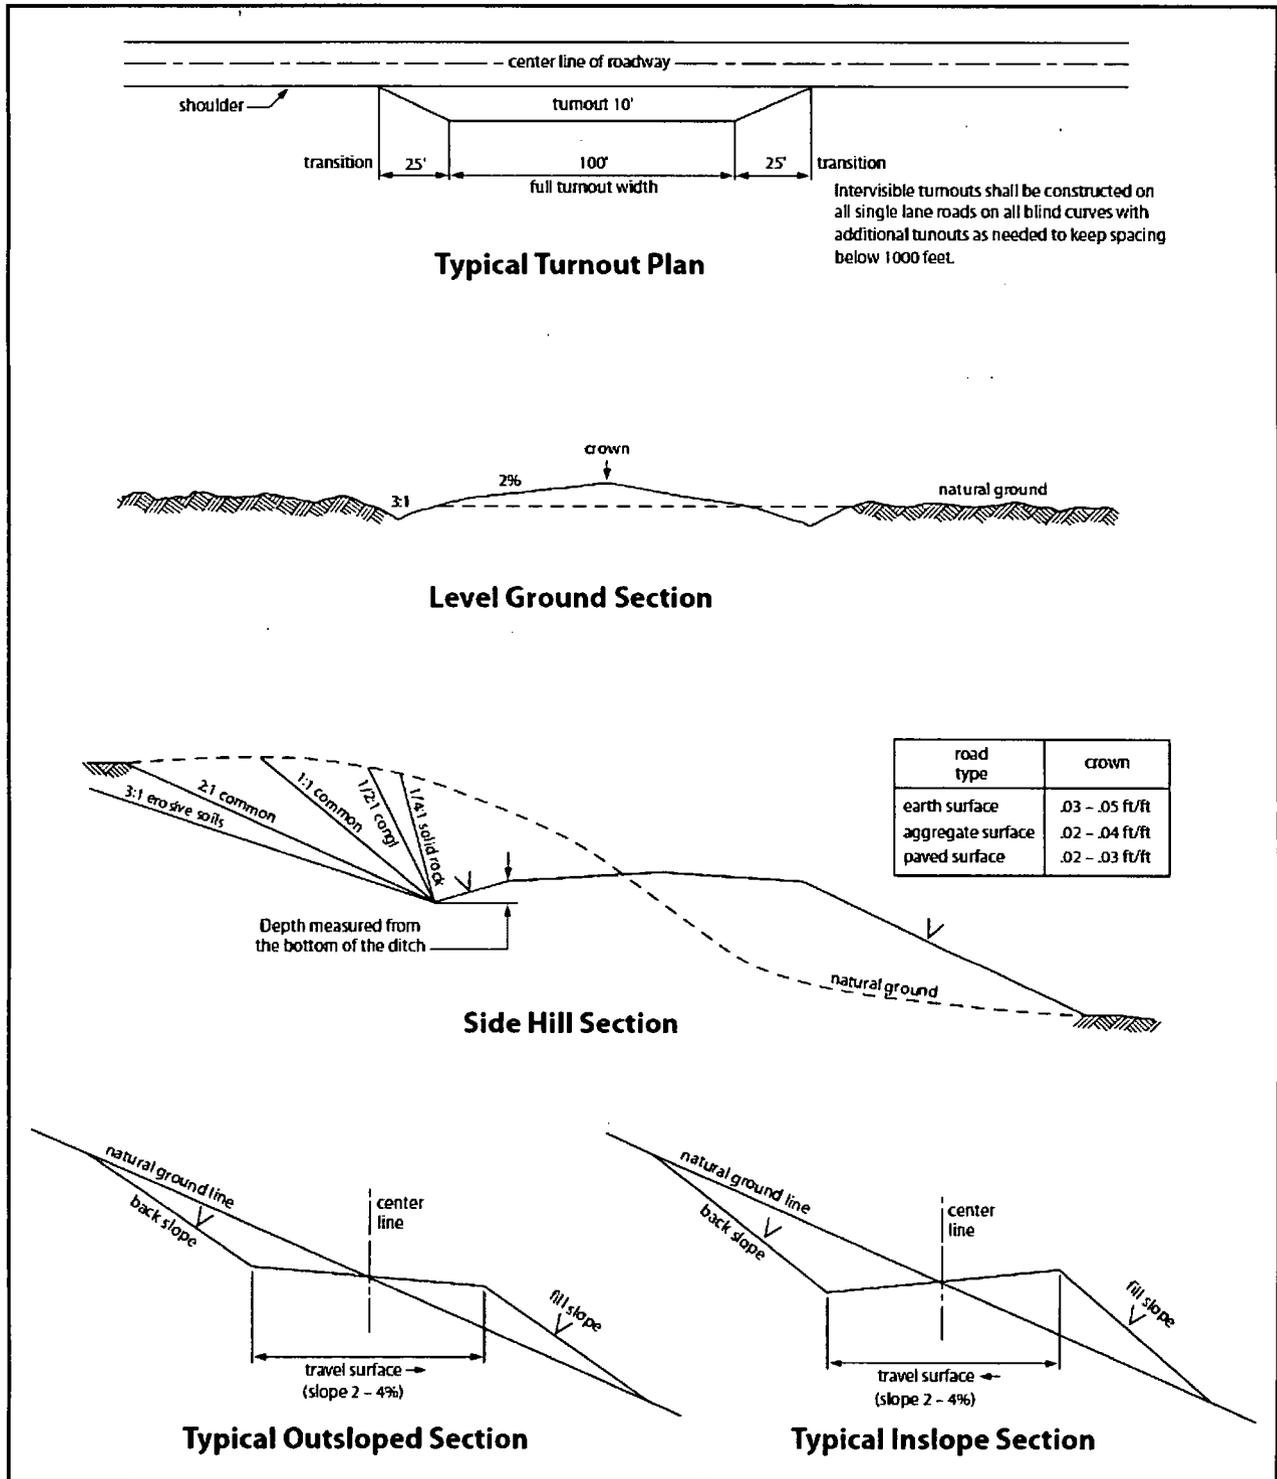


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C.6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.
6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.
7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:
 - Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
 - Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
 - The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)
8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.
9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

- | | |
|--|--|
| <input type="checkbox"/> seed mixture 1 | <input type="checkbox"/> seed mixture 3 |
| <input type="checkbox"/> seed mixture 2 | <input type="checkbox"/> seed mixture 4 |
| <input checked="" type="checkbox"/> seed mixture 2/LPC | <input type="checkbox"/> Aplomado Falcon Mixture |

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches that are not otherwise fenced, screened, or netted to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or

other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

19. Special Stipulations:

Lesser Prairie-Chicken

Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 *et seq.* (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as

a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full

expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.

6. All construction and maintenance activity will be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.

8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline will be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a

legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.

18. Special Stipulations:

- a. **Lesser Prairie-Chicken:** Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.
5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except

between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by

drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture for LPC Sand/Shinnery Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

Rosehill Operating Company, LLC

Hydrogen Sulfide Plan Summary

- A. All personnel shall receive proper H2S training
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:

- Well control equipment
 - a. Flare line 150' from wellhead to be ignited by flare gun.
 - b. Choke manifold with a remotely operated choke.
 - c. Mud/gas separator
- Protective equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) — 1 unit shall be placed at each briefing area, 2 shall be stored in the safety trailer.
- b. Work/Escape packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
- c. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft 5/8 inch OSHA approved rope
- d. 1-20# class ABC fire extinguisher

- H2S detection and monitoring equipment:

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.

(Gas sample tubes will be stored in the safety trailer)

- Visual warning systems.
 - a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
 - b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
 - c. Two wind socks will be placed in strategic locations, visible from all angles.

Casing Assumptions Worksheet

The below table illustrates the proposed casing design, as well as the minimum acceptable design factors for casing loads per Rosehill Operating Standards.

Csg Type	Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension	DF _{min} Coupling
Surface	17.5"	0 – 925'	13.375"	54.5#	J55	STC	1.125	1.25	1.60	1.6
Intermediate	12.25"	0 – 5100'	10.75"	45.5#	HCL-80	SFII	1.125	1.25	2.0	2.0
Intermediate	9.875"	0' – 11,600'	7.625"	29.7#	HCP110	GBCD	1.125	1.25	1.60	1.6
Production	6.75"	0' - 17,590'	5"	18#	HCP110	DQX	1.125	1.25	1.60	1.6

The actual safety factors specific to the Tatanka Federal #1H well are listed in the table below.

Csg Type	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension	DF _{min} Coupling
Surface	2.8	1.8	9.2	5.5
Intermediate	2.4	3.5	3.5	2.9
Intermediate	1.32	1.25	2.1	2.1
Production	1.57	1.27	1.48	1.48

These design factors are derived based on the following assumptions:

Surface:

Collapse – full evacuation

Burst – 1500 psi casing test

Tension – buoyant weight of casing at depth + 50,000 lb allowable overpull

Coupling – buoyant weight of casing at depth + 50,000 lb allowable overpull

First Intermediate:

Collapse – half evacuation with minimum mud weight of 10#

Burst – 1500 psi casing test

Tension – buoyant weight of casing at depth + 100,000 lb allowable overpull

Coupling – buoyant weight of casing at depth + 100,000 lb allowable overpull

Second Intermediate:

Collapse – half evacuation with minimum mud weight of 10#

Burst – max expected pore pressure minus gas column to surface

Tension – buoyant weight of casing at depth + 150,000 lb allowable overpull

Coupling - buoyant weight of casing at depth + 150,000 lb allowable overpull

Production

Collapse – full evacuation

Burst – 11,000 psi frac pressure

Tension – buoyant weight of casing at depth + 200,000 lb allowable overpull

Coupling - buoyant weight of casing at depth + 200,000 lb allowable overpull

Rosehill Operating Company, LLC

- **Mud program:**
The mud program has been designed to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.

- **Metallurgy:**
All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service.

- **Communication:**
Communication will be via cell phones and land lines where available.

Rosehill Operating Company, LLC

Emergency Assistance Telephone List

PUBLIC SAFETY:	911 or
Lea County Sheriff's Department	(575) 396-3611
Fire Department:	
Carlsbad	(575) 885-3125
Artesia	(575) 746-5050
Hospitals:	
Carlsbad	(575) 887-4121
Artesia	(575) 748-3333
Hobbs	(575) 392-1979
Dept. of Public Safety/Carlsbad	(575) 748-9718
Highway Department	(575) 885-3281
New Mexico Oil Conservation	(575) 476-3440
U.S. Dept. of Labor	(575) 887-1174
Rosehill Operating Company, LLC	
Midland	Office (432)684-2605
Houston	Office (281)675-3400
Company Drilling Consultants:	
TBA	
Drilling Engineer	
Robert Brosig	Office (432) 686-3609 Cell (432) 894-1256
Drilling Superintendent	
Jason Richey	Cell (940) 531-2470
H&P Drilling	
H&P Drilling	Office (432) 563-5757
Safety	
Chris Colston (HSE Manager)	Office (281) 675-3400 Cell (832) 823-8995

Rosehill Operating

DrilTech, LLC


Lea County, NM (NAD 83)
Tatanka Federal Locations
Tatanka Federal 006H
Wellbore #1
Plan #1
TBD

SURFACE LOCATION


US State Plane 1983
New Mexico Eastern Zone
Elevation: GL 3064' + 25' RKB @ 3089.00ft (TBD)
Northing: 383753.10 Easting: 847740.57 Latitude: 32° 3' 4.173 N Longitude: 103° 20' 39.733 W

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting
Tatanka 006 FTP	12790.00	100.06	-0.95	383853.16	847739.62
- plan misses target center by 51.42ft at 12851.87ft MD (12743.16 TVD, 121.21 N, -2.63 E)					
Tatanka 006 LTP	12790.00	4719.59	-47.25	388472.68	847693.32
- plan hits target center					
Tatanka 006 PBHL	12790.00	4849.59	-48.97	388602.68	847691.60
- plan misses target center by 0.46ft at 17587.50ft MD (12790.00 TVD, 4849.59 N, -48.51 E)					

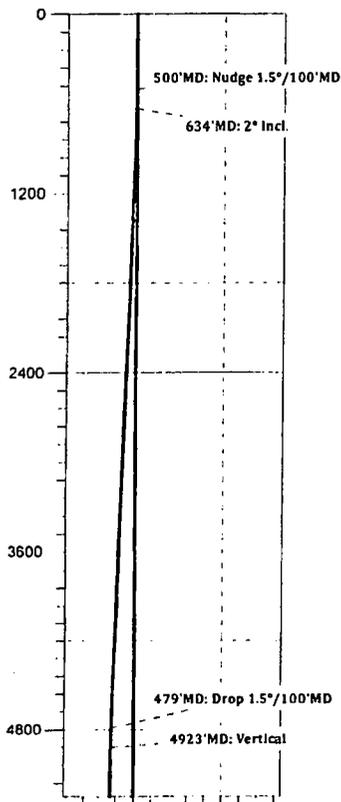


Azimuths to Grid North
True North: -0.53°
Magnetic North: 7.12°
Magnetic Field Strength: 48295.0nT
Dip Angle: 60.10°
Date: 12/31/2009
Model: IGRF2015

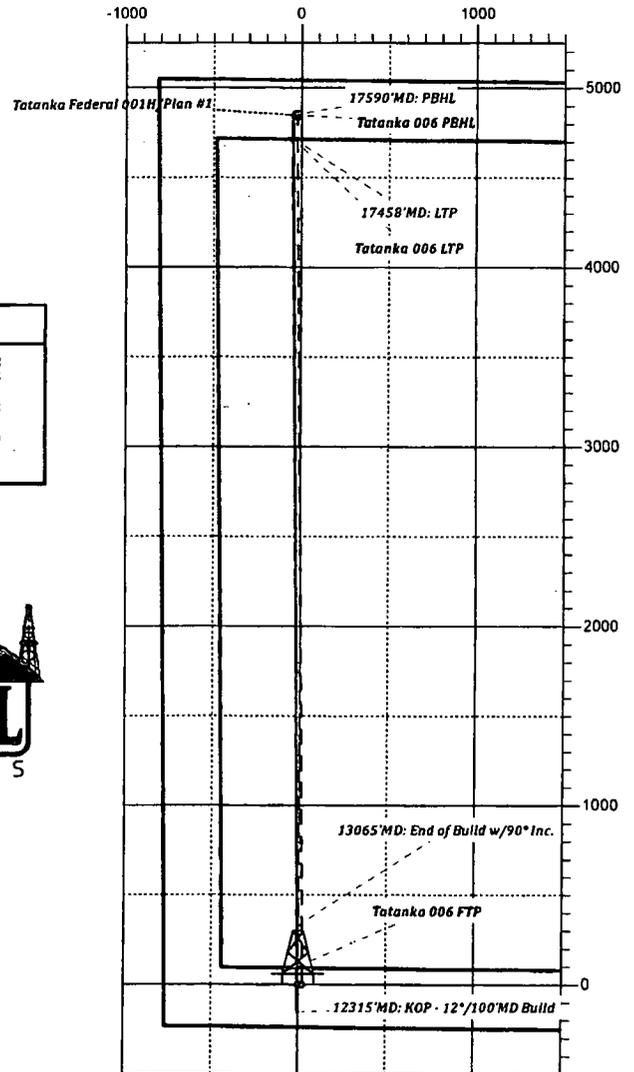

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsct
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00
633.62	2.00	180.00	633.59	-2.34	0.00	1.50	180.00	-2.34
4788.98	2.00	180.00	4786.41	-147.66	0.00	0.00	0.00	-147.66
4922.60	0.00	0.00	4920.00	-150.00	0.00	1.50	180.00	-149.99
12315.13	0.00	0.00	12312.54	-150.00	0.00	0.00	0.00	-149.99
13065.13	90.00	359.44	12790.00	327.44	-4.63	12.00	359.44	327.47
17457.49	90.00	359.44	12790.00	4719.59	-47.25	0.00	0.00	4719.83
17589.83	90.00	359.44	12790.00	4851.92	-48.53	0.00	0.00	4852.17

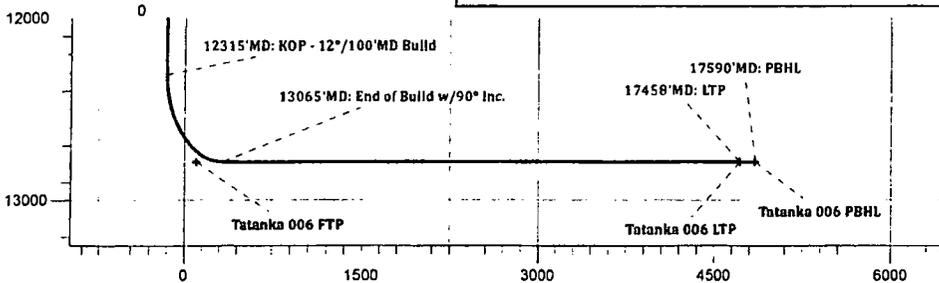

Vertical Section at 359.43° (1500 ft/in)





Rosehill Operating

Lea County, NM (NAD 83)

Tatanka Federal Locations

Tatanka Federal 006H

Wellbore #1

Plan: Plan #1

Standard Planning Report

05 December, 2017



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Project:	Lea County, NM (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Tatanka Federal Locations			
Site Position:	Northing:	383,753.34 usft	Latitude:	32° 3' 4.173 N
From: Map	Eastng:	847,765.59 usft	Longitude:	103° 20' 39.443 W
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	Grid Convergence: 0.52 °

Well	Tatanka Federal 006H			
Well Position	+N/-S	-0.24 ft	Northing:	383,753.10 usft
	+E/-W	-25.02 ft	Eastng:	847,740.57 usft
Position Uncertainty	0.00 ft	Wellhead Elevation:		Ground Level: 3,064.00 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	IGRF2015	12/31/2009	7.65	60.10	48,685.90174738

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(ft)	(ft)	(ft)	(°)
	0.00	0.00	0.00	359.43

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	
633.62	2.00	180.00	633.59	-2.34	0.00	1.50	1.50	0.00	180.00	
4,788.98	2.00	180.00	4,786.41	-147.66	0.00	0.00	0.00	0.00	0.00	
4,922.60	0.00	0.00	4,920.00	-150.00	0.00	1.50	-1.50	0.00	180.00	
12,315.13	0.00	0.00	12,312.54	-150.00	0.00	0.00	0.00	0.00	0.00	
13,065.13	90.00	359.44	12,790.00	327.44	-4.63	12.00	12.00	0.00	359.44	
17,457.49	90.00	359.44	12,790.00	4,719.59	-47.25	0.00	0.00	0.00	0.00	
17,589.83	90.00	359.44	12,790.00	4,851.92	-48.53	0.00	0.00	0.00	0.00	



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
500'MD: Nudge 1.5°/100'MD									
600.00	1.50	180.00	599.99	-1.31	0.00	-1.31	1.50	1.50	0.00
633.62	2.00	180.00	633.59	-2.34	0.00	-2.34	1.50	1.50	0.00
634'MD: 2° Incl.									
700.00	2.00	180.00	699.93	-4.66	0.00	-4.66	0.00	0.00	0.00
800.00	2.00	180.00	799.87	-8.16	0.00	-8.16	0.00	0.00	0.00
900.00	2.00	180.00	899.81	-11.65	0.00	-11.65	0.00	0.00	0.00
1,000.00	2.00	180.00	999.75	-15.15	0.00	-15.15	0.00	0.00	0.00
1,100.00	2.00	180.00	1,099.69	-18.65	0.00	-18.65	0.00	0.00	0.00
1,200.00	2.00	180.00	1,199.63	-22.15	0.00	-22.14	0.00	0.00	0.00
1,300.00	2.00	180.00	1,299.57	-25.64	0.00	-25.64	0.00	0.00	0.00
1,400.00	2.00	180.00	1,399.50	-29.14	0.00	-29.14	0.00	0.00	0.00
1,500.00	2.00	180.00	1,499.44	-32.64	0.00	-32.64	0.00	0.00	0.00
1,600.00	2.00	180.00	1,599.38	-36.13	0.00	-36.13	0.00	0.00	0.00
1,700.00	2.00	180.00	1,699.32	-39.63	0.00	-39.63	0.00	0.00	0.00
1,800.00	2.00	180.00	1,799.26	-43.13	0.00	-43.13	0.00	0.00	0.00
1,900.00	2.00	180.00	1,899.20	-46.63	0.00	-46.62	0.00	0.00	0.00
2,000.00	2.00	180.00	1,999.14	-50.12	0.00	-50.12	0.00	0.00	0.00
2,100.00	2.00	180.00	2,099.08	-53.62	0.00	-53.62	0.00	0.00	0.00
2,200.00	2.00	180.00	2,199.01	-57.12	0.00	-57.12	0.00	0.00	0.00
2,300.00	2.00	180.00	2,298.95	-60.62	0.00	-60.61	0.00	0.00	0.00
2,400.00	2.00	180.00	2,398.89	-64.11	0.00	-64.11	0.00	0.00	0.00
2,500.00	2.00	180.00	2,498.83	-67.61	0.00	-67.61	0.00	0.00	0.00
2,600.00	2.00	180.00	2,598.77	-71.11	0.00	-71.10	0.00	0.00	0.00
2,700.00	2.00	180.00	2,698.71	-74.60	0.00	-74.60	0.00	0.00	0.00
2,800.00	2.00	180.00	2,798.65	-78.10	0.00	-78.10	0.00	0.00	0.00
2,900.00	2.00	180.00	2,898.59	-81.60	0.00	-81.60	0.00	0.00	0.00
3,000.00	2.00	180.00	2,998.53	-85.10	0.00	-85.09	0.00	0.00	0.00
3,100.00	2.00	180.00	3,098.46	-88.59	0.00	-88.59	0.00	0.00	0.00
3,200.00	2.00	180.00	3,198.40	-92.09	0.00	-92.09	0.00	0.00	0.00
3,300.00	2.00	180.00	3,298.34	-95.59	0.00	-95.58	0.00	0.00	0.00
3,400.00	2.00	180.00	3,398.28	-99.09	0.00	-99.08	0.00	0.00	0.00
3,500.00	2.00	180.00	3,498.22	-102.58	0.00	-102.58	0.00	0.00	0.00
3,600.00	2.00	180.00	3,598.16	-106.08	0.00	-106.08	0.00	0.00	0.00
3,700.00	2.00	180.00	3,698.10	-109.58	0.00	-109.57	0.00	0.00	0.00
3,800.00	2.00	180.00	3,798.04	-113.08	0.00	-113.07	0.00	0.00	0.00
3,900.00	2.00	180.00	3,897.97	-116.57	0.00	-116.57	0.00	0.00	0.00
4,000.00	2.00	180.00	3,997.91	-120.07	0.00	-120.06	0.00	0.00	0.00
4,100.00	2.00	180.00	4,097.85	-123.57	0.00	-123.56	0.00	0.00	0.00
4,200.00	2.00	180.00	4,197.79	-127.06	0.00	-127.06	0.00	0.00	0.00
4,300.00	2.00	180.00	4,297.73	-130.56	0.00	-130.56	0.00	0.00	0.00
4,400.00	2.00	180.00	4,397.67	-134.06	0.00	-134.05	0.00	0.00	0.00
4,500.00	2.00	180.00	4,497.61	-137.56	0.00	-137.55	0.00	0.00	0.00
4,600.00	2.00	180.00	4,597.55	-141.05	0.00	-141.05	0.00	0.00	0.00
4,700.00	2.00	180.00	4,697.49	-144.55	0.00	-144.54	0.00	0.00	0.00
4,788.98	2.00	180.00	4,786.41	-147.66	0.00	-147.66	0.00	0.00	0.00
479'MD: Drop 1.5°/100'MD									



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (%/100ft)	Build Rate (%/100ft)	Turn Rate (%/100ft)
4,800.00	1.84	180.00	4,797.42	-148.03	0.00	-148.03	1.50	-1.50	0.00
4,900.00	0.34	180.00	4,897.40	-149.93	0.00	-149.93	1.50	-1.50	0.00
4,922.60	0.00	0.00	4,920.00	-150.00	0.00	-149.99	1.50	-1.50	0.00
4923'MD: Vertical									
5,000.00	0.00	0.00	4,997.40	-150.00	0.00	-149.99	0.00	0.00	0.00
5,100.00	0.00	0.00	5,097.40	-150.00	0.00	-149.99	0.00	0.00	0.00
5,200.00	0.00	0.00	5,197.40	-150.00	0.00	-149.99	0.00	0.00	0.00
5,300.00	0.00	0.00	5,297.40	-150.00	0.00	-149.99	0.00	0.00	0.00
5,400.00	0.00	0.00	5,397.40	-150.00	0.00	-149.99	0.00	0.00	0.00
5,500.00	0.00	0.00	5,497.40	-150.00	0.00	-149.99	0.00	0.00	0.00
5,600.00	0.00	0.00	5,597.40	-150.00	0.00	-149.99	0.00	0.00	0.00
5,700.00	0.00	0.00	5,697.40	-150.00	0.00	-149.99	0.00	0.00	0.00
5,800.00	0.00	0.00	5,797.40	-150.00	0.00	-149.99	0.00	0.00	0.00
5,900.00	0.00	0.00	5,897.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,000.00	0.00	0.00	5,997.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,100.00	0.00	0.00	6,097.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,200.00	0.00	0.00	6,197.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,300.00	0.00	0.00	6,297.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,400.00	0.00	0.00	6,397.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,500.00	0.00	0.00	6,497.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,600.00	0.00	0.00	6,597.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,700.00	0.00	0.00	6,697.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,800.00	0.00	0.00	6,797.40	-150.00	0.00	-149.99	0.00	0.00	0.00
6,900.00	0.00	0.00	6,897.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,000.00	0.00	0.00	6,997.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,100.00	0.00	0.00	7,097.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,200.00	0.00	0.00	7,197.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,300.00	0.00	0.00	7,297.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,400.00	0.00	0.00	7,397.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,500.00	0.00	0.00	7,497.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,600.00	0.00	0.00	7,597.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,700.00	0.00	0.00	7,697.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,800.00	0.00	0.00	7,797.40	-150.00	0.00	-149.99	0.00	0.00	0.00
7,900.00	0.00	0.00	7,897.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,000.00	0.00	0.00	7,997.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,100.00	0.00	0.00	8,097.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,200.00	0.00	0.00	8,197.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,300.00	0.00	0.00	8,297.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,400.00	0.00	0.00	8,397.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,500.00	0.00	0.00	8,497.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,600.00	0.00	0.00	8,597.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,700.00	0.00	0.00	8,697.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,800.00	0.00	0.00	8,797.40	-150.00	0.00	-149.99	0.00	0.00	0.00
8,900.00	0.00	0.00	8,897.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,000.00	0.00	0.00	8,997.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,100.00	0.00	0.00	9,097.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,200.00	0.00	0.00	9,197.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,300.00	0.00	0.00	9,297.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,400.00	0.00	0.00	9,397.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,500.00	0.00	0.00	9,497.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,600.00	0.00	0.00	9,597.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,700.00	0.00	0.00	9,697.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,800.00	0.00	0.00	9,797.40	-150.00	0.00	-149.99	0.00	0.00	0.00
9,900.00	0.00	0.00	9,897.40	-150.00	0.00	-149.99	0.00	0.00	0.00



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,000.00	0.00	0.00	9,997.40	-150.00	0.00	-149.99	0.00	0.00	0.00
10,100.00	0.00	0.00	10,097.40	-150.00	0.00	-149.99	0.00	0.00	0.00
10,200.00	0.00	0.00	10,197.40	-150.00	0.00	-149.99	0.00	0.00	0.00
10,300.00	0.00	0.00	10,297.40	-150.00	0.00	-149.99	0.00	0.00	0.00
10,400.00	0.00	0.00	10,397.40	-150.00	0.00	-149.99	0.00	0.00	0.00
10,500.00	0.00	0.00	10,497.40	-150.00	0.00	-149.99	0.00	0.00	0.00
10,600.00	0.00	0.00	10,597.40	-150.00	0.00	-149.99	0.00	0.00	0.00
10,700.00	0.00	0.00	10,697.40	-150.00	0.00	-149.99	0.00	0.00	0.00
10,800.00	0.00	0.00	10,797.40	-150.00	0.00	-149.99	0.00	0.00	0.00
10,900.00	0.00	0.00	10,897.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,000.00	0.00	0.00	10,997.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,100.00	0.00	0.00	11,097.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,200.00	0.00	0.00	11,197.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,300.00	0.00	0.00	11,297.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,400.00	0.00	0.00	11,397.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,500.00	0.00	0.00	11,497.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,600.00	0.00	0.00	11,597.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,700.00	0.00	0.00	11,697.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,800.00	0.00	0.00	11,797.40	-150.00	0.00	-149.99	0.00	0.00	0.00
11,900.00	0.00	0.00	11,897.40	-150.00	0.00	-149.99	0.00	0.00	0.00
12,000.00	0.00	0.00	11,997.40	-150.00	0.00	-149.99	0.00	0.00	0.00
12,100.00	0.00	0.00	12,097.40	-150.00	0.00	-149.99	0.00	0.00	0.00
12,200.00	0.00	0.00	12,197.40	-150.00	0.00	-149.99	0.00	0.00	0.00
12,300.00	0.00	0.00	12,297.40	-150.00	0.00	-149.99	0.00	0.00	0.00
12,315.13	0.00	0.00	12,312.53	-150.00	0.00	-149.99	0.00	0.00	0.00
12315'MD: KOP - 12°/100'MD Build									
12,400.00	10.18	359.44	12,396.96	-142.48	-0.07	-142.47	12.00	12.00	0.00
12,500.00	22.18	359.44	12,492.82	-114.66	-0.34	-114.65	12.00	12.00	0.00
12,600.00	34.18	359.44	12,580.80	-67.51	-0.80	-67.50	12.00	12.00	0.00
12,700.00	46.18	359.44	12,657.06	-3.11	-1.43	-3.10	12.00	12.00	0.00
12,800.00	58.18	359.44	12,718.26	75.74	-2.19	75.76	12.00	12.00	0.00
12,853.22	64.57	359.44	12,743.74	122.43	-2.64	122.45	12.00	12.00	0.00
Tatanka 006 FTP									
12,900.00	70.18	359.44	12,761.73	165.59	-3.06	165.61	12.00	12.00	0.00
13,000.00	82.18	359.44	12,785.56	262.52	-4.00	262.54	12.00	12.00	0.00
13,065.13	90.00	359.44	12,790.00	327.44	-4.63	327.47	12.00	12.00	0.00
13065'MD: End of Build w/90° Inc.									
13,100.00	90.00	359.44	12,790.00	362.31	-4.97	362.34	0.00	0.00	0.00
13,200.00	90.00	359.44	12,790.00	462.30	-5.94	462.34	0.00	0.00	0.00
13,300.00	90.00	359.44	12,790.00	562.30	-6.91	562.34	0.00	0.00	0.00
13,400.00	90.00	359.44	12,790.00	662.29	-7.88	662.34	0.00	0.00	0.00
13,500.00	90.00	359.44	12,790.00	762.29	-8.85	762.34	0.00	0.00	0.00
13,600.00	90.00	359.44	12,790.00	862.29	-9.82	862.34	0.00	0.00	0.00
13,700.00	90.00	359.44	12,790.00	962.28	-10.79	962.34	0.00	0.00	0.00
13,800.00	90.00	359.44	12,790.00	1,062.28	-11.76	1,062.34	0.00	0.00	0.00
13,900.00	90.00	359.44	12,790.00	1,162.27	-12.73	1,162.34	0.00	0.00	0.00
14,000.00	90.00	359.44	12,790.00	1,262.27	-13.70	1,262.34	0.00	0.00	0.00
14,100.00	90.00	359.44	12,790.00	1,362.26	-14.67	1,362.34	0.00	0.00	0.00
14,200.00	90.00	359.44	12,790.00	1,462.26	-15.64	1,462.34	0.00	0.00	0.00
14,300.00	90.00	359.44	12,790.00	1,562.25	-16.61	1,562.34	0.00	0.00	0.00
14,400.00	90.00	359.44	12,790.00	1,662.25	-17.58	1,662.34	0.00	0.00	0.00
14,500.00	90.00	359.44	12,790.00	1,762.24	-18.55	1,762.34	0.00	0.00	0.00
14,600.00	90.00	359.44	12,790.00	1,862.24	-19.53	1,862.34	0.00	0.00	0.00



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
14,700.00	90.00	359.44	12,790.00	1,962.23	-20.50	1,962.34	0.00	0.00	0.00
14,800.00	90.00	359.44	12,790.00	2,062.23	-21.47	2,062.34	0.00	0.00	0.00
14,900.00	90.00	359.44	12,790.00	2,162.22	-22.44	2,162.34	0.00	0.00	0.00
15,000.00	90.00	359.44	12,790.00	2,262.22	-23.41	2,262.34	0.00	0.00	0.00
15,100.00	90.00	359.44	12,790.00	2,362.21	-24.38	2,362.34	0.00	0.00	0.00
15,200.00	90.00	359.44	12,790.00	2,462.21	-25.35	2,462.34	0.00	0.00	0.00
15,300.00	90.00	359.44	12,790.00	2,562.21	-26.32	2,562.34	0.00	0.00	0.00
15,400.00	90.00	359.44	12,790.00	2,662.20	-27.29	2,662.34	0.00	0.00	0.00
15,500.00	90.00	359.44	12,790.00	2,762.20	-28.26	2,762.34	0.00	0.00	0.00
15,600.00	90.00	359.44	12,790.00	2,862.19	-29.23	2,862.34	0.00	0.00	0.00
15,700.00	90.00	359.44	12,790.00	2,962.19	-30.20	2,962.34	0.00	0.00	0.00
15,800.00	90.00	359.44	12,790.00	3,062.18	-31.17	3,062.34	0.00	0.00	0.00
15,900.00	90.00	359.44	12,790.00	3,162.18	-32.14	3,162.34	0.00	0.00	0.00
16,000.00	90.00	359.44	12,790.00	3,262.17	-33.11	3,262.34	0.00	0.00	0.00
16,100.00	90.00	359.44	12,790.00	3,362.17	-34.08	3,362.34	0.00	0.00	0.00
16,200.00	90.00	359.44	12,790.00	3,462.16	-35.05	3,462.34	0.00	0.00	0.00
16,300.00	90.00	359.44	12,790.00	3,562.16	-36.02	3,562.34	0.00	0.00	0.00
16,400.00	90.00	359.44	12,790.00	3,662.15	-36.99	3,662.34	0.00	0.00	0.00
16,500.00	90.00	359.44	12,790.00	3,762.15	-37.96	3,762.34	0.00	0.00	0.00
16,600.00	90.00	359.44	12,790.00	3,862.14	-38.93	3,862.34	0.00	0.00	0.00
16,700.00	90.00	359.44	12,790.00	3,962.14	-39.90	3,962.34	0.00	0.00	0.00
16,800.00	90.00	359.44	12,790.00	4,062.13	-40.87	4,062.34	0.00	0.00	0.00
16,900.00	90.00	359.44	12,790.00	4,162.13	-41.84	4,162.34	0.00	0.00	0.00
17,000.00	90.00	359.44	12,790.00	4,262.13	-42.81	4,262.34	0.00	0.00	0.00
17,100.00	90.00	359.44	12,790.00	4,362.12	-43.78	4,362.34	0.00	0.00	0.00
17,200.00	90.00	359.44	12,790.00	4,462.12	-44.75	4,462.34	0.00	0.00	0.00
17,300.00	90.00	359.44	12,790.00	4,562.11	-45.72	4,562.34	0.00	0.00	0.00
17,400.00	90.00	359.44	12,790.00	4,662.11	-46.69	4,662.34	0.00	0.00	0.00
17,457.29	90.00	359.44	12,790.00	4,719.40	-47.25	4,719.63	0.00	0.00	0.00
Tatanka 001 LTP									
17,457.49	90.00	359.44	12,790.00	4,719.59	-47.25	4,719.83	0.00	0.00	0.00
17458'MD: LTP - Tatanka 006 LTP									
17,500.00	90.00	359.44	12,790.00	4,762.10	-47.66	4,762.34	0.00	0.00	0.00
17,587.30	90.00	359.44	12,790.00	4,849.40	-48.51	4,849.64	0.00	0.00	0.00
Tatanka 001 PBHL									
17,587.50	90.00	359.44	12,790.00	4,849.59	-48.51	4,849.84	0.00	0.00	0.00
Tatanka 006 PBHL									
17,589.83	90.00	359.44	12,790.00	4,851.92	-48.53	4,852.17	0.00	0.00	0.00
17590'MD: PBHL									



Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/S	+E/W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(ft)	(ft)	(ft)	(usft)	(usft)		
- Shape									
Tatanka 006 PBHL	0.00	0.07	12,790.00	4,849.59	-48.97	388,602.68	847,691.60	32° 3' 52.164 N	103° 20' 39.786 W
- plan misses target center by 0.46ft at 17587.50ft MD (12790.00 TVD, 4849.59 N, -48.51 E)									
- Point									
Tatanka 006 LTP	0.00	0.07	12,790.00	4,719.59	-47.25	388,472.68	847,693.32	32° 3' 50.877 N	103° 20' 39.780 W
- plan hits target center									
- Point									
Tatanka 006 FTP	0.00	0.07	12,790.00	100.06	-0.95	383,853.16	847,739.62	32° 3' 5.164 N	103° 20' 39.734 W
- plan misses target center by 51.41ft at 12853.22ft MD (12743.74 TVD, 122.43 N, -2.64 E)									
- Point									

Plan Annotations				
Measured Depth	Vertical Depth	Local Coordinates		Comment
(ft)	(ft)	+N/S (ft)	+E/W (ft)	
500.00	500.00	0.00	0.00	500'MD: Nudge 1.5°/100'MD
633.62	633.59	-2.34	0.00	634'MD: 2° Incl.
4,788.98	4,786.41	-147.66	0.00	479'MD: Drop 1.5°/100'MD
4,922.60	4,920.00	-150.00	0.00	4923'MD: Vertical
12,315.13	12,312.53	-150.00	0.00	12315'MD: KOP - 12°/100'MD Build
13,065.13	12,790.00	327.44	-4.63	13065'MD: End of Build w90° Inc.
17,457.49	12,790.00	4,719.59	-47.25	17458'MD: LTP
17,589.83	12,790.00	4,851.92	-48.53	17590'MD: PBHL



Rosehill Operating

**Lea County, NM (NAD 83)
Tatanka Federal Locations
Tatanka Federal 006H**

Wellbore #1

Plan: Plan #1

Standard Planning Report - Geographic

05 December, 2017



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Project	Lea County, NM (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Tatanka Federal Locations				
Site Position:	Northing:	383,753.34 usft	Latitude:	32° 3' 4.173 N	
From: Map	Easting:	847,765.59 usft	Longitude:	103° 20' 39.443 W	
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	Grid Convergence:	0.52 °

Well	Tatanka Federal 006H					
Well Position	+N/-S	0.00 ft	Northing:	383,753.10 usft	Latitude:	32° 3' 4.173 N
	+E/-W	0.00 ft	Easting:	847,740.57 usft	Longitude:	103° 20' 39.733 W
Position Uncertainty	0.00 ft	Wellhead Elevation:		Ground Level:	3,064.00 ft	

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	12/31/2009	7.65	60.10	48,685.90174738

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	359.43

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	
633.62	2.00	180.00	633.59	-2.34	0.00	1.50	1.50	0.00	180.00	
4,788.98	2.00	180.00	4,786.41	-147.66	0.00	0.00	0.00	0.00	0.00	
4,922.60	0.00	0.00	4,920.00	-150.00	0.00	1.50	-1.50	0.00	180.00	
12,315.13	0.00	0.00	12,312.54	-150.00	0.00	0.00	0.00	0.00	0.00	
13,065.13	90.00	359.44	12,790.00	327.44	-4.63	12.00	12.00	0.00	359.44	
17,457.49	90.00	359.44	12,790.00	4,719.59	-47.25	0.00	0.00	0.00	0.00	
17,589.83	90.00	359.44	12,790.00	4,851.92	-48.53	0.00	0.00	0.00	0.00	



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local/Co-ordinate/Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD/Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD/Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned/Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.00	0.00	0.00	0.00	0.00	0.00	383,753.10	847,740.57	32° 3' 4.173 N	103° 20' 39.733 W
100.00	0.00	0.00	100.00	0.00	0.00	383,753.10	847,740.57	32° 3' 4.173 N	103° 20' 39.733 W
200.00	0.00	0.00	200.00	0.00	0.00	383,753.10	847,740.57	32° 3' 4.173 N	103° 20' 39.733 W
300.00	0.00	0.00	300.00	0.00	0.00	383,753.10	847,740.57	32° 3' 4.173 N	103° 20' 39.733 W
400.00	0.00	0.00	400.00	0.00	0.00	383,753.10	847,740.57	32° 3' 4.173 N	103° 20' 39.733 W
500.00	0.00	0.00	500.00	0.00	0.00	383,753.10	847,740.57	32° 3' 4.173 N	103° 20' 39.733 W
500'MD: Nudge 1.5°/100'MD									
600.00	1.50	180.00	599.99	-1.31	0.00	383,751.79	847,740.57	32° 3' 4.160 N	103° 20' 39.733 W
633.62	2.00	180.00	633.59	-2.34	0.00	383,750.76	847,740.57	32° 3' 4.150 N	103° 20' 39.734 W
634'MD: 2° Incl.									
700.00	2.00	180.00	699.93	-4.66	0.00	383,748.44	847,740.57	32° 3' 4.127 N	103° 20' 39.734 W
800.00	2.00	180.00	799.87	-8.16	0.00	383,744.94	847,740.57	32° 3' 4.093 N	103° 20' 39.734 W
900.00	2.00	180.00	899.81	-11.65	0.00	383,741.45	847,740.57	32° 3' 4.058 N	103° 20' 39.735 W
1,000.00	2.00	180.00	999.75	-15.15	0.00	383,737.95	847,740.57	32° 3' 4.023 N	103° 20' 39.735 W
1,100.00	2.00	180.00	1,099.69	-18.65	0.00	383,734.45	847,740.57	32° 3' 3.989 N	103° 20' 39.735 W
1,200.00	2.00	180.00	1,199.63	-22.15	0.00	383,730.95	847,740.57	32° 3' 3.954 N	103° 20' 39.736 W
1,300.00	2.00	180.00	1,299.57	-25.64	0.00	383,727.46	847,740.57	32° 3' 3.920 N	103° 20' 39.736 W
1,400.00	2.00	180.00	1,399.50	-29.14	0.00	383,723.96	847,740.57	32° 3' 3.885 N	103° 20' 39.736 W
1,500.00	2.00	180.00	1,499.44	-32.64	0.00	383,720.46	847,740.57	32° 3' 3.850 N	103° 20' 39.737 W
1,600.00	2.00	180.00	1,599.38	-36.13	0.00	383,716.96	847,740.57	32° 3' 3.816 N	103° 20' 39.737 W
1,700.00	2.00	180.00	1,699.32	-39.63	0.00	383,713.47	847,740.57	32° 3' 3.781 N	103° 20' 39.738 W
1,800.00	2.00	180.00	1,799.26	-43.13	0.00	383,709.97	847,740.57	32° 3' 3.747 N	103° 20' 39.738 W
1,900.00	2.00	180.00	1,899.20	-46.63	0.00	383,706.47	847,740.57	32° 3' 3.712 N	103° 20' 39.738 W
2,000.00	2.00	180.00	1,999.14	-50.12	0.00	383,702.98	847,740.57	32° 3' 3.677 N	103° 20' 39.739 W
2,100.00	2.00	180.00	2,099.08	-53.62	0.00	383,699.48	847,740.57	32° 3' 3.643 N	103° 20' 39.739 W
2,200.00	2.00	180.00	2,199.01	-57.12	0.00	383,695.98	847,740.57	32° 3' 3.608 N	103° 20' 39.739 W
2,300.00	2.00	180.00	2,298.95	-60.62	0.00	383,692.48	847,740.57	32° 3' 3.574 N	103° 20' 39.740 W
2,400.00	2.00	180.00	2,398.89	-64.11	0.00	383,688.99	847,740.57	32° 3' 3.539 N	103° 20' 39.740 W
2,500.00	2.00	180.00	2,498.83	-67.61	0.00	383,685.49	847,740.57	32° 3' 3.504 N	103° 20' 39.741 W
2,600.00	2.00	180.00	2,598.77	-71.11	0.00	383,681.99	847,740.57	32° 3' 3.470 N	103° 20' 39.741 W
2,700.00	2.00	180.00	2,698.71	-74.60	0.00	383,678.49	847,740.57	32° 3' 3.435 N	103° 20' 39.741 W
2,800.00	2.00	180.00	2,798.65	-78.10	0.00	383,675.00	847,740.57	32° 3' 3.401 N	103° 20' 39.742 W
2,900.00	2.00	180.00	2,898.59	-81.60	0.00	383,671.50	847,740.57	32° 3' 3.366 N	103° 20' 39.742 W
3,000.00	2.00	180.00	2,998.53	-85.10	0.00	383,668.00	847,740.57	32° 3' 3.331 N	103° 20' 39.742 W
3,100.00	2.00	180.00	3,098.46	-88.59	0.00	383,664.50	847,740.57	32° 3' 3.297 N	103° 20' 39.743 W
3,200.00	2.00	180.00	3,198.40	-92.09	0.00	383,661.01	847,740.57	32° 3' 3.262 N	103° 20' 39.743 W
3,300.00	2.00	180.00	3,298.34	-95.59	0.00	383,657.51	847,740.57	32° 3' 3.228 N	103° 20' 39.744 W
3,400.00	2.00	180.00	3,398.28	-99.09	0.00	383,654.01	847,740.57	32° 3' 3.193 N	103° 20' 39.744 W
3,500.00	2.00	180.00	3,498.22	-102.58	0.00	383,650.52	847,740.57	32° 3' 3.158 N	103° 20' 39.744 W
3,600.00	2.00	180.00	3,598.16	-106.08	0.00	383,647.02	847,740.57	32° 3' 3.124 N	103° 20' 39.745 W
3,700.00	2.00	180.00	3,698.10	-109.58	0.00	383,643.52	847,740.57	32° 3' 3.089 N	103° 20' 39.745 W
3,800.00	2.00	180.00	3,798.04	-113.08	0.00	383,640.02	847,740.57	32° 3' 3.055 N	103° 20' 39.745 W
3,900.00	2.00	180.00	3,897.97	-116.57	0.00	383,636.53	847,740.57	32° 3' 3.020 N	103° 20' 39.746 W
4,000.00	2.00	180.00	3,997.91	-120.07	0.00	383,633.03	847,740.57	32° 3' 2.985 N	103° 20' 39.746 W
4,100.00	2.00	180.00	4,097.85	-123.57	0.00	383,629.53	847,740.57	32° 3' 2.951 N	103° 20' 39.746 W
4,200.00	2.00	180.00	4,197.79	-127.06	0.00	383,626.03	847,740.57	32° 3' 2.916 N	103° 20' 39.747 W
4,300.00	2.00	180.00	4,297.73	-130.56	0.00	383,622.54	847,740.57	32° 3' 2.881 N	103° 20' 39.747 W
4,400.00	2.00	180.00	4,397.67	-134.06	0.00	383,619.04	847,740.57	32° 3' 2.847 N	103° 20' 39.748 W
4,500.00	2.00	180.00	4,497.61	-137.56	0.00	383,615.54	847,740.57	32° 3' 2.812 N	103° 20' 39.748 W
4,600.00	2.00	180.00	4,597.55	-141.05	0.00	383,612.04	847,740.57	32° 3' 2.778 N	103° 20' 39.748 W
4,700.00	2.00	180.00	4,697.49	-144.55	0.00	383,608.55	847,740.57	32° 3' 2.743 N	103° 20' 39.749 W
4,788.98	2.00	180.00	4,786.41	-147.66	0.00	383,605.44	847,740.57	32° 3' 2.712 N	103° 20' 39.749 W
479'MD: Drop 1.5°/100'MD									
4,800.00	1.84	180.00	4,797.42	-148.03	0.00	383,605.07	847,740.57	32° 3' 2.709 N	103° 20' 39.749 W



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
4,900.00	0.34	180.00	4,897.40	-149.93	0.00	383,603.17	847,740.57	32° 3' 2.690 N	103° 20' 39.749 W
4,922.60	0.00	0.00	4,920.00	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
4923 MD: Vertical									
5,000.00	0.00	0.00	4,997.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
5,100.00	0.00	0.00	5,097.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
5,200.00	0.00	0.00	5,197.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
5,300.00	0.00	0.00	5,297.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
5,400.00	0.00	0.00	5,397.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
5,500.00	0.00	0.00	5,497.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
5,600.00	0.00	0.00	5,597.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
5,700.00	0.00	0.00	5,697.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
5,800.00	0.00	0.00	5,797.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
5,900.00	0.00	0.00	5,897.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,000.00	0.00	0.00	5,997.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,100.00	0.00	0.00	6,097.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,200.00	0.00	0.00	6,197.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,300.00	0.00	0.00	6,297.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,400.00	0.00	0.00	6,397.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,500.00	0.00	0.00	6,497.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,600.00	0.00	0.00	6,597.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,700.00	0.00	0.00	6,697.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,800.00	0.00	0.00	6,797.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
6,900.00	0.00	0.00	6,897.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,000.00	0.00	0.00	6,997.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,100.00	0.00	0.00	7,097.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,200.00	0.00	0.00	7,197.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,300.00	0.00	0.00	7,297.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,400.00	0.00	0.00	7,397.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,500.00	0.00	0.00	7,497.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,600.00	0.00	0.00	7,597.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,700.00	0.00	0.00	7,697.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,800.00	0.00	0.00	7,797.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
7,900.00	0.00	0.00	7,897.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,000.00	0.00	0.00	7,997.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,100.00	0.00	0.00	8,097.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,200.00	0.00	0.00	8,197.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,300.00	0.00	0.00	8,297.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,400.00	0.00	0.00	8,397.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,500.00	0.00	0.00	8,497.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,600.00	0.00	0.00	8,597.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,700.00	0.00	0.00	8,697.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,800.00	0.00	0.00	8,797.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
8,900.00	0.00	0.00	8,897.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,000.00	0.00	0.00	8,997.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,100.00	0.00	0.00	9,097.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,200.00	0.00	0.00	9,197.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,300.00	0.00	0.00	9,297.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,400.00	0.00	0.00	9,397.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,500.00	0.00	0.00	9,497.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,600.00	0.00	0.00	9,597.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,700.00	0.00	0.00	9,697.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,800.00	0.00	0.00	9,797.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
9,900.00	0.00	0.00	9,897.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W
10,000.00	0.00	0.00	9,997.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD.Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD.Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
10,100.00	0.00	0.00	10,097.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
10,200.00	0.00	0.00	10,197.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
10,300.00	0.00	0.00	10,297.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
10,400.00	0.00	0.00	10,397.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
10,500.00	0.00	0.00	10,497.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
10,600.00	0.00	0.00	10,597.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
10,700.00	0.00	0.00	10,697.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
10,800.00	0.00	0.00	10,797.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
10,900.00	0.00	0.00	10,897.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,000.00	0.00	0.00	10,997.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,100.00	0.00	0.00	11,097.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,200.00	0.00	0.00	11,197.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,300.00	0.00	0.00	11,297.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,400.00	0.00	0.00	11,397.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,500.00	0.00	0.00	11,497.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,600.00	0.00	0.00	11,597.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,700.00	0.00	0.00	11,697.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,800.00	0.00	0.00	11,797.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
11,900.00	0.00	0.00	11,897.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
12,000.00	0.00	0.00	11,997.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
12,100.00	0.00	0.00	12,097.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
12,200.00	0.00	0.00	12,197.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
12,300.00	0.00	0.00	12,297.40	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
12,315.13	0.00	0.00	12,312.53	-150.00	0.00	383,603.10	847,740.57	32° 3' 2.689 N	103° 20' 39.749 W	
12315'MD: KOP - 12°/100'MD Build										
12,400.00	10.18	359.44	12,396.96	-142.48	-0.07	383,610.62	847,740.50	32° 3' 2.764 N	103° 20' 39.749 W	
12,500.00	22.18	359.44	12,492.82	-114.66	-0.34	383,638.44	847,740.23	32° 3' 3.039 N	103° 20' 39.750 W	
12,600.00	34.18	359.44	12,580.80	-67.51	-0.80	383,685.58	847,739.77	32° 3' 3.505 N	103° 20' 39.750 W	
12,700.00	46.18	359.44	12,657.06	-3.11	-1.43	383,749.99	847,739.14	32° 3' 4.143 N	103° 20' 39.750 W	
12,800.00	58.18	359.44	12,718.26	75.74	-2.19	383,828.84	847,738.38	32° 3' 4.923 N	103° 20' 39.751 W	
12,853.22	64.57	359.44	12,743.74	122.43	-2.64	383,875.53	847,737.93	32° 3' 5.385 N	103° 20' 39.751 W	
Tatanka 006 FTP										
12,900.00	70.18	359.44	12,761.73	165.59	-3.06	383,918.69	847,737.51	32° 3' 5.812 N	103° 20' 39.751 W	
13,000.00	82.18	359.44	12,785.56	262.52	-4.00	384,015.61	847,736.57	32° 3' 6.771 N	103° 20' 39.752 W	
13,065.13	90.00	359.44	12,790.00	327.44	-4.63	384,080.54	847,735.94	32° 3' 7.414 N	103° 20' 39.752 W	
13065'MD: End of Build w/90° Inc.										
13,100.00	90.00	359.44	12,790.00	362.31	-4.97	384,115.41	847,735.60	32° 3' 7.759 N	103° 20' 39.753 W	
13,200.00	90.00	359.44	12,790.00	462.30	-5.94	384,215.40	847,734.63	32° 3' 8.748 N	103° 20' 39.753 W	
13,300.00	90.00	359.44	12,790.00	562.30	-6.91	384,315.40	847,733.66	32° 3' 9.738 N	103° 20' 39.754 W	
13,400.00	90.00	359.44	12,790.00	662.29	-7.88	384,415.39	847,732.69	32° 3' 10.727 N	103° 20' 39.754 W	
13,500.00	90.00	359.44	12,790.00	762.29	-8.85	384,515.39	847,731.72	32° 3' 11.717 N	103° 20' 39.755 W	
13,600.00	90.00	359.44	12,790.00	862.29	-9.82	384,615.38	847,730.75	32° 3' 12.706 N	103° 20' 39.756 W	
13,700.00	90.00	359.44	12,790.00	962.28	-10.79	384,715.38	847,729.78	32° 3' 13.696 N	103° 20' 39.756 W	
13,800.00	90.00	359.44	12,790.00	1,062.28	-11.76	384,815.37	847,728.81	32° 3' 14.685 N	103° 20' 39.757 W	
13,900.00	90.00	359.44	12,790.00	1,162.27	-12.73	384,915.37	847,727.84	32° 3' 15.675 N	103° 20' 39.758 W	
14,000.00	90.00	359.44	12,790.00	1,262.27	-13.70	385,015.36	847,726.87	32° 3' 16.665 N	103° 20' 39.758 W	
14,100.00	90.00	359.44	12,790.00	1,362.26	-14.67	385,115.36	847,725.90	32° 3' 17.654 N	103° 20' 39.759 W	
14,200.00	90.00	359.44	12,790.00	1,462.26	-15.64	385,215.35	847,724.93	32° 3' 18.644 N	103° 20' 39.759 W	
14,300.00	90.00	359.44	12,790.00	1,562.25	-16.61	385,315.35	847,723.95	32° 3' 19.633 N	103° 20' 39.760 W	
14,400.00	90.00	359.44	12,790.00	1,662.25	-17.58	385,415.34	847,722.98	32° 3' 20.623 N	103° 20' 39.761 W	
14,500.00	90.00	359.44	12,790.00	1,762.24	-18.55	385,515.34	847,722.01	32° 3' 21.612 N	103° 20' 39.761 W	
14,600.00	90.00	359.44	12,790.00	1,862.24	-19.53	385,615.33	847,721.04	32° 3' 22.602 N	103° 20' 39.762 W	
14,700.00	90.00	359.44	12,790.00	1,962.23	-20.50	385,715.33	847,720.07	32° 3' 23.591 N	103° 20' 39.763 W	
14,800.00	90.00	359.44	12,790.00	2,062.23	-21.47	385,815.32	847,719.10	32° 3' 24.581 N	103° 20' 39.763 W	



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00R (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00R (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey/Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
14,900.00	90.00	359.44	12,790.00	2,162.22	-22.44	385,915.32	847,718.13	32° 3' 25.570 N	103° 20' 39.764 W
15,000.00	90.00	359.44	12,790.00	2,262.22	-23.41	386,015.31	847,717.16	32° 3' 26.560 N	103° 20' 39.764 W
15,100.00	90.00	359.44	12,790.00	2,362.21	-24.38	386,115.31	847,716.19	32° 3' 27.549 N	103° 20' 39.765 W
15,200.00	90.00	359.44	12,790.00	2,462.21	-25.35	386,215.30	847,715.22	32° 3' 28.539 N	103° 20' 39.766 W
15,300.00	90.00	359.44	12,790.00	2,562.21	-26.32	386,315.30	847,714.25	32° 3' 29.528 N	103° 20' 39.766 W
15,400.00	90.00	359.44	12,790.00	2,662.20	-27.29	386,415.29	847,713.28	32° 3' 30.518 N	103° 20' 39.767 W
15,500.00	90.00	359.44	12,790.00	2,762.20	-28.26	386,515.29	847,712.31	32° 3' 31.507 N	103° 20' 39.768 W
15,600.00	90.00	359.44	12,790.00	2,862.19	-29.23	386,615.28	847,711.34	32° 3' 32.497 N	103° 20' 39.768 W
15,700.00	90.00	359.44	12,790.00	2,962.19	-30.20	386,715.28	847,710.37	32° 3' 33.486 N	103° 20' 39.769 W
15,800.00	90.00	359.44	12,790.00	3,062.18	-31.17	386,815.27	847,709.40	32° 3' 34.476 N	103° 20' 39.769 W
15,900.00	90.00	359.44	12,790.00	3,162.18	-32.14	386,915.27	847,708.43	32° 3' 35.465 N	103° 20' 39.770 W
16,000.00	90.00	359.44	12,790.00	3,262.17	-33.11	387,015.26	847,707.46	32° 3' 36.455 N	103° 20' 39.771 W
16,100.00	90.00	359.44	12,790.00	3,362.17	-34.08	387,115.26	847,706.49	32° 3' 37.445 N	103° 20' 39.771 W
16,200.00	90.00	359.44	12,790.00	3,462.16	-35.05	387,215.25	847,705.52	32° 3' 38.434 N	103° 20' 39.772 W
16,300.00	90.00	359.44	12,790.00	3,562.16	-36.02	387,315.25	847,704.55	32° 3' 39.424 N	103° 20' 39.773 W
16,400.00	90.00	359.44	12,790.00	3,662.15	-36.99	387,415.24	847,703.58	32° 3' 40.413 N	103° 20' 39.773 W
16,500.00	90.00	359.44	12,790.00	3,762.15	-37.96	387,515.24	847,702.61	32° 3' 41.403 N	103° 20' 39.774 W
16,600.00	90.00	359.44	12,790.00	3,862.14	-38.93	387,615.24	847,701.64	32° 3' 42.392 N	103° 20' 39.775 W
16,700.00	90.00	359.44	12,790.00	3,962.14	-39.90	387,715.23	847,700.67	32° 3' 43.382 N	103° 20' 39.775 W
16,800.00	90.00	359.44	12,790.00	4,062.13	-40.87	387,815.23	847,699.70	32° 3' 44.371 N	103° 20' 39.776 W
16,900.00	90.00	359.44	12,790.00	4,162.13	-41.84	387,915.22	847,698.73	32° 3' 45.361 N	103° 20' 39.776 W
17,000.00	90.00	359.44	12,790.00	4,262.13	-42.81	388,015.22	847,697.76	32° 3' 46.350 N	103° 20' 39.777 W
17,100.00	90.00	359.44	12,790.00	4,362.12	-43.78	388,115.21	847,696.79	32° 3' 47.340 N	103° 20' 39.778 W
17,200.00	90.00	359.44	12,790.00	4,462.12	-44.75	388,215.21	847,695.82	32° 3' 48.329 N	103° 20' 39.778 W
17,300.00	90.00	359.44	12,790.00	4,562.11	-45.72	388,315.20	847,694.85	32° 3' 49.319 N	103° 20' 39.779 W
17,400.00	90.00	359.44	12,790.00	4,662.11	-46.69	388,415.20	847,693.88	32° 3' 50.308 N	103° 20' 39.780 W
17,457.29	90.00	359.44	12,790.00	4,719.40	-47.25	388,472.49	847,693.32	32° 3' 50.875 N	103° 20' 39.780 W
Tatanka 001 LTP									
17,457.49	90.00	359.44	12,790.00	4,719.59	-47.25	388,472.68	847,693.32	32° 3' 50.877 N	103° 20' 39.780 W
17458'MD: LTP - Tatanka 006 LTP									
17,500.00	90.00	359.44	12,790.00	4,762.10	-47.66	388,515.19	847,692.91	32° 3' 51.298 N	103° 20' 39.780 W
17,587.30	90.00	359.44	12,790.00	4,849.40	-48.51	388,602.49	847,692.06	32° 3' 52.162 N	103° 20' 39.781 W
Tatanka 001 PBHL									
17,587.50	90.00	359.44	12,790.00	4,849.59	-48.51	388,602.68	847,692.06	32° 3' 52.164 N	103° 20' 39.781 W
Tatanka 006 PBHL									
17,589.83	90.00	359.44	12,790.00	4,851.92	-48.53	388,605.01	847,692.03	32° 3' 52.187 N	103° 20' 39.781 W
17590'MD: PBHL									

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
Tatanka 006 PBHL - hit/miss target - Shape	0.00	0.07	12,790.00	4,849.59	-48.97	388,602.68	847,691.60	32° 3' 52.164 N	103° 20' 39.786 W
- plan misses target center by 0.46ft at 17587.50ft MD (12790.00 TVD, 4849.59 N, -48.51 E)									
- Point									
Tatanka 006 LTP - plan hits target center - Point	0.00	0.07	12,790.00	4,719.59	-47.25	388,472.68	847,693.32	32° 3' 50.877 N	103° 20' 39.780 W
Tatanka 006 FTP - plan misses target center by 51.41ft at 12853.22ft MD (12743.74 TVD, 122.43 N, -2.64 E) - Point	0.00	0.07	12,790.00	100.06	-0.95	383,853.16	847,739.62	32° 3' 5.164 N	103° 20' 39.734 W



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Company:	Rosehill Operating	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Project:	Lea County, NM (NAD 83)	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site:	Tatanka Federal Locations	North Reference:	Grid
Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment	
		+N/-S (ft)	+E/-W (ft)		
500.00	500.00	0.00	0.00	500'MD: Nudge 1.5°/100'MD	
633.62	633.59	-2.34	0.00	634'MD: 2° Incl.	
4,788.98	4,786.41	-147.66	0.00	479'MD: Drop 1.5°/100'MD	
4,922.60	4,920.00	-150.00	0.00	4923'MD: Vertical	
12,315.13	12,312.53	-150.00	0.00	12315'MD: KOP - 12°/100'MD Build	
13,065.13	12,790.00	327.44	-4.63	13065'MD: End of Build w/90° Inc.	
17,457.49	12,790.00	4,719.59	-47.25	17458'MD: LTP	
17,589.83	12,790.00	4,851.92	-48.53	17590'MD: PBHL	



Rosehill Operating

**Lea County, NM (NAD 83)
Tatanka Federal Locations
Tatanka Federal 006H**

**Wellbore #1
Plan #1**

Anticollision Report

05 December, 2017



Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference Site:	Tatanka Federal Locations	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Reference Plan #1	
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	MD + Stations Interval 50.00ft
Depth Range:	0.00 to 999,999.00ft
Results Limited by:	Maximum center-center distance of 2,500.00 ft
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Pedal Curve
Casing Method:	Not applied

Survey Tool Program Date 11/29/2017				
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
0.00	17,589.81	Plan #1 (Wellbore #1)	Copy of MWD	MWD - Standard

Site Name	Reference Measured Depth (ft)	Offset Measured Depth (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Tatanka Federal Locations						
Tatanka Federal 001H - Tatanka 001 - Plan #1	500.00	500.00	25.02	22.20	8.863	CC
Tatanka Federal 001H - Tatanka 001 - Plan #1	700.00	700.07	25.50	21.28	6.046	ES
Tatanka Federal 001H - Tatanka 001 - Plan #1	12,000.00	11,997.40	152.31	68.08	1.808	SF

Offset Design Tatanka Federal Locations - Tatanka Federal 001H - Tatanka 001 - Plan #1												Offset Site Error:	0.00 ft
Survey Program: 0-Copy of MWD												Offset Well Error:	0.00 ft
Reference Measured Depth (ft)	Vertical Depth (ft)	Offset Measured Depth (ft)	Vertical Depth (ft)	Semi Major Axis Reference (ft)	Semi Major Axis Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	Offset Wellbore Centre +E/-W (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
100.00	100.00	100.00	100.00	0.00	0.13	89.45	0.24	25.02	25.02	24.89	0.13	185.856	
150.00	150.00	150.00	150.00	0.09	0.31	89.45	0.24	25.02	25.02	24.62	0.40	62.029	
200.00	200.00	200.00	200.00	0.18	0.49	89.45	0.24	25.02	25.02	24.35	0.67	37.226	
250.00	250.00	250.00	250.00	0.36	0.67	89.45	0.24	25.02	25.02	23.99	1.03	24.278	
300.00	300.00	300.00	300.00	0.54	0.85	89.45	0.24	25.02	25.02	23.63	1.39	18.013	
350.00	350.00	350.00	350.00	0.72	1.03	89.45	0.24	25.02	25.02	23.27	1.75	14.318	
400.00	400.00	400.00	400.00	0.90	1.21	89.45	0.24	25.02	25.02	22.92	2.11	11.881	
450.00	450.00	450.00	450.00	1.08	1.39	89.45	0.24	25.02	25.02	22.56	2.46	10.153	
500.00	500.00	500.00	500.00	1.25	1.57	89.45	0.24	25.02	25.02	22.20	2.82	8.863	CC
550.00	550.00	550.00	550.00	1.43	1.75	-91.30	0.24	25.02	25.03	21.85	3.17	7.887	
600.00	599.99	600.01	599.99	1.60	1.93	-93.54	0.24	25.02	25.07	21.54	3.52	7.115	
633.62	633.59	633.59	633.59	1.71	2.05	-95.88	0.24	25.02	25.15	21.40	3.75	6.699	
650.00	649.96	649.96	649.96	1.76	2.11	-97.17	0.24	25.02	25.22	21.35	3.87	6.518	
700.00	699.93	700.07	699.93	1.93	2.29	-101.07	0.24	25.02	25.50	21.28	4.22	6.046	ES
750.00	749.90	749.90	749.90	2.10	2.46	-104.87	0.24	25.02	25.89	21.32	4.57	5.668	
800.00	799.87	800.13	799.87	2.27	2.64	-108.54	0.24	25.02	26.39	21.47	4.92	5.385	
850.00	849.84	849.84	849.84	2.45	2.82	-112.06	0.24	25.02	27.00	21.73	5.27	5.121	
900.00	899.81	900.19	899.81	2.62	3.00	-115.41	0.24	25.02	27.70	22.08	5.63	4.924	
950.00	949.78	949.78	949.78	2.80	3.18	-118.59	0.24	25.02	28.50	22.52	5.98	4.766	
1,000.00	999.75	1,000.25	999.75	2.98	3.36	-121.58	0.24	25.02	29.37	23.04	6.34	4.636	
1,050.00	1,049.72	1,049.72	1,049.72	3.15	3.54	-124.40	0.24	25.02	30.33	23.64	6.69	4.533	
1,100.00	1,099.69	1,100.31	1,099.69	3.33	3.72	-127.03	0.24	25.02	31.35	24.30	7.05	4.448	
1,150.00	1,149.66	1,149.66	1,149.66	3.51	3.90	-129.50	0.24	25.02	32.43	25.03	7.40	4.382	
1,200.00	1,199.63	1,200.37	1,199.63	3.69	4.08	-131.80	0.24	25.02	33.57	25.81	7.76	4.326	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference Site:	Tatanka Federal Locations	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Offset Design													Offset Site Error:	0.00 ft
Tatanka Federal Locations - Tatanka Federal 001H - Tatanka 001 - Plan #1													Offset Well Error:	0.00 ft
Survey Program: 0:Copy of MWD														
Reference														
Offset				Semi Major Axis			Distance					Warning		
Measured Reference Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
1,250.00	1,249.60	1,249.60	1,249.60	3.87	4.26	-133.95	0.24	25.02	34.76	26.65	8.11	4.284		
1,300.00	1,299.57	1,300.43	1,299.57	4.05	4.44	-135.95	0.24	25.02	36.00	27.52	8.47	4.248		
1,350.00	1,349.53	1,349.53	1,349.53	4.23	4.61	-137.82	0.24	25.02	37.28	28.45	8.83	4.222		
1,400.00	1,399.50	1,400.50	1,399.50	4.41	4.80	-139.56	0.24	25.02	38.59	29.40	9.19	4.200		
1,450.00	1,449.47	1,449.47	1,449.47	4.59	4.97	-141.19	0.24	25.02	39.84	30.40	9.54	4.186		
1,500.00	1,499.44	1,500.56	1,499.44	4.77	5.16	-142.71	0.24	25.02	41.31	31.41	9.90	4.172		
1,550.00	1,549.41	1,549.41	1,549.41	4.95	5.33	-144.13	0.24	25.02	42.72	32.46	10.26	4.165		
1,600.00	1,599.38	1,600.62	1,599.38	5.13	5.51	-145.46	0.24	25.02	44.15	33.53	10.62	4.158		
1,650.00	1,649.35	1,649.35	1,649.35	5.31	5.69	-146.71	0.24	25.02	45.60	34.63	10.97	4.157		
1,700.00	1,699.32	1,700.68	1,699.32	5.49	5.87	-147.88	0.24	25.02	47.07	35.74	11.33	4.154		
1,750.00	1,749.29	1,749.29	1,749.29	5.67	6.05	-148.97	0.24	25.02	48.56	36.88	11.69	4.156		
1,800.00	1,799.26	1,800.74	1,799.26	5.85	6.23	-150.00	0.24	25.02	50.07	38.02	12.05	4.156		
1,850.00	1,849.23	1,849.23	1,849.23	6.03	6.40	-150.97	0.24	25.02	51.59	39.19	12.40	4.161		
1,900.00	1,899.20	1,900.80	1,899.20	6.21	6.59	-151.89	0.24	25.02	53.13	40.36	12.76	4.162		
1,950.00	1,949.17	1,949.17	1,949.17	6.39	6.76	-152.75	0.24	25.02	54.68	41.56	13.12	4.169		
2,000.00	1,999.14	2,000.86	1,999.14	6.57	6.95	-153.57	0.24	25.02	56.24	42.76	13.48	4.172		
2,050.00	2,049.11	2,049.11	2,049.11	6.75	7.12	-154.34	0.24	25.02	57.81	43.98	13.83	4.180		
2,100.00	2,099.08	2,100.92	2,099.08	6.93	7.31	-155.07	0.24	25.02	59.39	45.19	14.19	4.184		
2,150.00	2,149.05	2,149.05	2,149.05	7.11	7.48	-155.76	0.24	25.02	60.98	46.43	14.55	4.192		
2,200.00	2,199.01	2,200.99	2,199.01	7.29	7.67	-156.42	0.24	25.02	62.58	47.67	14.91	4.197		
2,250.00	2,248.98	2,248.98	2,248.98	7.48	7.84	-157.04	0.24	25.02	64.18	48.92	15.26	4.206		
2,300.00	2,298.95	2,301.05	2,298.95	7.66	8.02	-157.64	0.24	25.02	65.80	50.17	15.63	4.211		
2,350.00	2,348.92	2,348.92	2,348.92	7.84	8.20	-158.20	0.24	25.02	67.42	51.44	15.98	4.220		
2,400.00	2,398.89	2,401.11	2,398.89	8.02	8.38	-158.74	0.24	25.02	69.05	52.70	16.34	4.225		
2,450.00	2,448.86	2,448.86	2,448.86	8.20	8.55	-159.26	0.24	25.02	70.68	53.98	16.69	4.234		
2,500.00	2,498.83	2,501.17	2,498.83	8.38	8.74	-159.75	0.24	25.02	72.32	55.26	17.06	4.239		
2,550.00	2,548.80	2,548.80	2,548.80	8.56	8.91	-160.22	0.24	25.02	73.96	56.55	17.41	4.248		
2,600.00	2,598.77	2,601.23	2,598.77	8.74	9.10	-160.66	0.24	25.02	75.61	57.83	17.78	4.253		
2,650.00	2,648.74	2,648.74	2,648.74	8.93	9.27	-161.09	0.24	25.02	77.26	59.13	18.13	4.262		
2,700.00	2,698.71	2,701.29	2,698.71	9.11	9.46	-161.51	0.24	25.02	78.92	60.42	18.49	4.267		
2,750.00	2,748.68	2,748.68	2,748.68	9.29	9.63	-161.90	0.24	25.02	80.58	61.73	18.84	4.276		
2,800.00	2,798.65	2,801.35	2,798.65	9.47	9.82	-162.28	0.24	25.02	82.24	63.03	19.21	4.281		
2,850.00	2,848.62	2,848.62	2,848.62	9.65	9.99	-162.64	0.24	25.02	83.91	64.35	19.56	4.290		
2,900.00	2,898.59	2,901.41	2,898.59	9.83	10.18	-162.99	0.24	25.02	85.58	65.65	19.93	4.295		
2,950.00	2,948.56	2,948.56	2,948.56	10.01	10.35	-163.33	0.24	25.02	87.25	66.98	20.27	4.304		
3,000.00	2,998.53	3,001.47	2,998.53	10.20	10.54	-163.65	0.24	25.02	88.93	68.29	20.64	4.308		
3,050.00	3,048.49	3,048.49	3,048.49	10.38	10.70	-163.96	0.24	25.02	90.61	69.62	20.99	4.317		
3,100.00	3,098.46	3,101.54	3,098.46	10.56	10.89	-164.26	0.24	25.02	92.29	70.93	21.36	4.321		
3,150.00	3,148.43	3,148.43	3,148.43	10.74	11.06	-164.55	0.24	25.02	93.97	72.27	21.71	4.329		
3,200.00	3,198.40	3,201.60	3,198.40	10.92	11.25	-164.83	0.24	25.02	95.66	73.58	22.08	4.333		
3,250.00	3,248.37	3,248.37	3,248.37	11.10	11.42	-165.10	0.24	25.02	97.35	74.93	22.42	4.341		
3,300.00	3,298.34	3,301.66	3,298.34	11.28	11.61	-165.36	0.24	25.02	99.04	76.25	22.79	4.345		
3,350.00	3,348.31	3,348.31	3,348.31	11.47	11.78	-165.61	0.24	25.02	100.73	77.59	23.14	4.353		
3,400.00	3,398.28	3,401.72	3,398.28	11.65	11.97	-165.85	0.24	25.02	102.43	78.92	23.51	4.357		
3,450.00	3,448.25	3,448.25	3,448.25	11.83	12.14	-166.09	0.24	25.02	104.13	80.27	23.86	4.365		
3,500.00	3,498.22	3,501.78	3,498.22	12.01	12.33	-166.32	0.24	25.02	105.82	81.60	24.23	4.368		
3,550.00	3,548.19	3,548.19	3,548.19	12.19	12.50	-166.54	0.24	25.02	107.52	82.95	24.57	4.376		
3,600.00	3,598.16	3,601.84	3,598.16	12.37	12.69	-166.75	0.24	25.02	109.23	84.28	24.95	4.379		
3,650.00	3,648.13	3,648.13	3,648.13	12.56	12.85	-166.96	0.24	25.02	110.93	85.64	25.29	4.386		
3,700.00	3,698.10	3,701.90	3,698.10	12.74	13.05	-167.16	0.24	25.02	112.63	86.97	25.66	4.389		
3,750.00	3,748.07	3,748.07	3,748.07	12.92	13.21	-167.35	0.24	25.02	114.34	88.33	26.01	4.396		
3,800.00	3,798.04	3,801.96	3,798.04	13.10	13.40	-167.54	0.24	25.02	116.04	89.66	26.38	4.399		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference Site:	Tatanka Federal Locations	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Offset Design													Offset Site Error:	0.00 ft
Tatanka Federal Locations - Tatanka Federal 001H - Tatanka 001 - Plan #1													Offset Well Error:	0.00 ft
Survey Program: 0-Copy of MWD														
Reference	Offset	Semi-Major Axis		Distance		Wellbore Centre		Between Centres		Minimum Separation	Separation Factor	Warning		
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside To Surface (ft)	+N/S (ft)	+E/W (ft)	Between Centres (ft)	Between Ellipses (ft)	(ft)			
3,850.00	3,848.01	3,848.01	3,848.01	13.28	13.57	-167.73	0.24	25.02	117.75	91.03	26.72	4.406		
3,900.00	3,897.97	3,902.03	3,897.97	13.46	13.76	-167.90	0.24	25.02	119.46	92.37	27.10	4.409		
3,950.00	3,947.94	3,947.94	3,947.94	13.65	13.93	-168.08	0.24	25.02	121.17	93.73	27.44	4.418		
4,000.00	3,997.91	4,002.09	3,997.91	13.83	14.12	-168.25	0.24	25.02	122.88	95.07	27.81	4.418		
4,050.00	4,047.88	4,047.88	4,047.88	14.01	14.29	-168.41	0.24	25.02	124.60	96.44	28.16	4.425		
4,100.00	4,097.85	4,102.15	4,097.85	14.19	14.48	-168.57	0.24	25.02	126.31	97.78	28.53	4.427		
4,150.00	4,147.82	4,147.82	4,147.82	14.37	14.64	-168.72	0.24	25.02	128.02	99.15	28.87	4.434		
4,200.00	4,197.79	4,202.21	4,197.79	14.55	14.84	-168.87	0.24	25.02	129.74	100.49	29.25	4.436		
4,250.00	4,247.76	4,247.76	4,247.76	14.74	15.00	-169.02	0.24	25.02	131.46	101.86	29.59	4.442		
4,300.00	4,297.73	4,302.27	4,297.73	14.92	15.20	-169.16	0.24	25.02	133.17	103.21	29.97	4.444		
4,350.00	4,347.70	4,347.70	4,347.70	15.10	15.36	-169.30	0.24	25.02	134.89	104.58	30.31	4.451		
4,400.00	4,397.67	4,402.33	4,397.67	15.28	15.56	-169.44	0.24	25.02	136.61	105.93	30.68	4.452		
4,450.00	4,447.64	4,447.64	4,447.64	15.46	15.72	-169.57	0.24	25.02	138.33	107.30	31.03	4.459		
4,500.00	4,497.61	4,502.39	4,497.61	15.64	15.92	-169.70	0.24	25.02	140.05	108.65	31.40	4.460		
4,550.00	4,547.58	4,547.58	4,547.58	15.83	16.08	-169.83	0.24	25.02	141.77	110.03	31.74	4.466		
4,600.00	4,597.55	4,602.45	4,597.55	16.01	16.27	-169.95	0.24	25.02	143.49	111.37	32.12	4.468		
4,650.00	4,647.52	4,647.52	4,647.52	16.19	16.44	-170.07	0.24	25.02	145.21	112.75	32.46	4.474		
4,700.00	4,697.49	4,702.51	4,697.49	16.37	16.63	-170.19	0.24	25.02	146.94	114.10	32.84	4.475		
4,750.00	4,747.45	4,747.45	4,747.45	16.55	16.79	-170.31	0.24	25.02	148.66	115.48	33.18	4.481		
4,788.98	4,786.41	4,786.41	4,786.41	16.69	16.93	-170.39	0.24	25.02	150.00	116.55	33.46	4.484		
4,800.00	4,797.42	4,802.58	4,797.42	16.73	16.99	-170.42	0.24	25.02	150.37	116.82	33.55	4.481		
4,850.00	4,847.41	4,847.41	4,847.41	16.91	17.15	-170.50	0.24	25.02	151.63	117.74	33.89	4.474		
4,900.00	4,897.40	4,902.60	4,897.40	17.09	17.35	-170.54	0.24	25.02	152.24	117.97	34.27	4.442		
4,922.60	4,920.00	4,920.00	4,920.00	17.17	17.41	9.45	0.24	25.02	152.31	117.90	34.41	4.426		
4,950.00	4,947.40	4,947.40	4,947.40	17.26	17.51	9.45	0.24	25.02	152.31	117.71	34.60	4.402		
5,000.00	4,997.40	5,002.60	4,997.40	17.42	17.71	9.45	0.24	25.02	152.31	117.35	34.96	4.357		
5,050.00	5,047.40	5,047.40	5,047.40	17.58	17.87	9.45	0.24	25.02	152.31	117.03	35.28	4.317		
5,100.00	5,097.40	5,102.60	5,097.40	17.74	18.07	9.45	0.24	25.02	152.31	116.66	35.65	4.273		
5,150.00	5,147.40	5,147.40	5,147.40	17.91	18.23	9.45	0.24	25.02	152.31	116.34	35.97	4.234		
5,200.00	5,197.40	5,202.60	5,197.40	18.07	18.43	9.45	0.24	25.02	152.31	115.98	36.33	4.192		
5,250.00	5,247.40	5,247.40	5,247.40	18.23	18.59	9.45	0.24	25.02	152.31	115.65	36.66	4.155		
5,300.00	5,297.40	5,302.60	5,297.40	18.40	18.78	9.45	0.24	25.02	152.31	115.29	37.02	4.114		
5,350.00	5,347.40	5,347.40	5,347.40	18.56	18.94	9.45	0.24	25.02	152.31	114.96	37.35	4.078		
5,400.00	5,397.40	5,402.60	5,397.40	18.72	19.14	9.45	0.24	25.02	152.31	114.60	37.71	4.039		
5,450.00	5,447.40	5,447.40	5,447.40	18.89	19.30	9.45	0.24	25.02	152.31	114.27	38.04	4.004		
5,500.00	5,497.40	5,502.60	5,497.40	19.05	19.50	9.45	0.24	25.02	152.31	113.91	38.40	3.966		
5,550.00	5,547.40	5,547.40	5,547.40	19.22	19.66	9.45	0.24	25.02	152.31	113.58	38.73	3.933		
5,600.00	5,597.40	5,602.60	5,597.40	19.38	19.86	9.45	0.24	25.02	152.31	113.22	39.09	3.896		
5,650.00	5,647.40	5,647.40	5,647.40	19.55	20.02	9.45	0.24	25.02	152.31	112.89	39.42	3.864		
5,700.00	5,697.40	5,702.60	5,697.40	19.71	20.22	9.45	0.24	25.02	152.31	112.52	39.79	3.828		
5,750.00	5,747.40	5,747.40	5,747.40	19.88	20.38	9.45	0.24	25.02	152.31	112.20	40.11	3.797		
5,800.00	5,797.40	5,802.60	5,797.40	20.04	20.58	9.45	0.24	25.02	152.31	111.83	40.48	3.763		
5,850.00	5,847.40	5,847.40	5,847.40	20.21	20.74	9.45	0.24	25.02	152.31	111.50	40.81	3.732		
5,900.00	5,897.40	5,902.60	5,897.40	20.38	20.94	9.45	0.24	25.02	152.31	111.14	41.17	3.699		
5,950.00	5,947.40	5,947.40	5,947.40	20.54	21.10	9.45	0.24	25.02	152.31	110.81	41.50	3.670		
6,000.00	5,997.40	6,002.60	5,997.40	20.71	21.29	9.45	0.24	25.02	152.31	110.44	41.87	3.638		
6,050.00	6,047.40	6,047.40	6,047.40	20.88	21.45	9.45	0.24	25.02	152.31	110.11	42.20	3.609		
6,100.00	6,097.40	6,102.60	6,097.40	21.05	21.65	9.45	0.24	25.02	152.31	109.74	42.56	3.578		
6,150.00	6,147.40	6,147.40	6,147.40	21.21	21.81	9.45	0.24	25.02	152.31	109.42	42.89	3.551		
6,200.00	6,197.40	6,202.60	6,197.40	21.38	22.01	9.45	0.24	25.02	152.31	109.05	43.26	3.521		
6,250.00	6,247.40	6,247.40	6,247.40	21.55	22.17	9.45	0.24	25.02	152.31	108.72	43.59	3.494		
6,300.00	6,297.40	6,302.60	6,297.40	21.72	22.37	9.45	0.24	25.02	152.31	108.35	43.96	3.465		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference/Site:	Tatanka Federal Locations	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Offset Design													Offset Site Error:	0.00 ft
Tatanka Federal Locations - Tatanka Federal 001H - Tatanka 001 - Plan #1													Offset Well Error:	0.00 ft
Survey Program: 0-Copy of MWD														
Reference														
Measured Depth (ft)	Vertical Depth (ft)	Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (ft)	Separation Factor	Warning	
		Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)		Offset N-S (ft)	Offset E-W (ft)	Between Centres (ft)	Between Ellipses (ft)				
6,350.00	6,347.40	6,347.40	6,347.40	21.88	22.53	9.45	0.24	25.02	152.31	108.02	44.29	3.439		
6,400.00	6,397.40	6,402.60	6,397.40	22.05	22.73	9.45	0.24	25.02	152.31	107.85	44.66	3.411		
6,450.00	6,447.40	6,447.40	6,447.40	22.22	22.89	9.45	0.24	25.02	152.31	107.32	44.99	3.386		
6,500.00	6,497.40	6,502.60	6,497.40	22.39	23.09	9.45	0.24	25.02	152.31	106.96	45.35	3.358		
6,550.00	6,547.40	6,547.40	6,547.40	22.56	23.25	9.45	0.24	25.02	152.31	106.62	45.68	3.334		
6,600.00	6,597.40	6,602.60	6,597.40	22.73	23.44	9.45	0.24	25.02	152.31	106.26	46.05	3.307		
6,650.00	6,647.40	6,647.40	6,647.40	22.90	23.61	9.45	0.24	25.02	152.31	105.93	46.38	3.284		
6,700.00	6,697.40	6,702.60	6,697.40	23.07	23.80	9.45	0.24	25.02	152.31	105.56	46.75	3.258		
6,750.00	6,747.40	6,747.40	6,747.40	23.24	23.96	9.45	0.24	25.02	152.31	105.23	47.08	3.235		
6,800.00	6,797.40	6,802.60	6,797.40	23.41	24.16	9.45	0.24	25.02	152.31	104.86	47.45	3.210		
6,850.00	6,847.40	6,847.40	6,847.40	23.58	24.32	9.45	0.24	25.02	152.31	104.53	47.78	3.187		
6,900.00	6,897.40	6,902.60	6,897.40	23.75	24.52	9.45	0.24	25.02	152.31	104.16	48.15	3.163		
6,950.00	6,947.40	6,947.40	6,947.40	23.92	24.68	9.45	0.24	25.02	152.31	103.83	48.48	3.141		
7,000.00	6,997.40	7,002.60	6,997.40	24.09	24.88	9.45	0.24	25.02	152.31	103.46	48.85	3.118		
7,050.00	7,047.40	7,047.40	7,047.40	24.26	25.04	9.45	0.24	25.02	152.31	103.12	49.19	3.097		
7,100.00	7,097.40	7,102.60	7,097.40	24.43	25.24	9.45	0.24	25.02	152.31	102.75	49.55	3.074		
7,150.00	7,147.40	7,147.40	7,147.40	24.60	25.40	9.45	0.24	25.02	152.31	102.42	49.89	3.053		
7,200.00	7,197.40	7,202.60	7,197.40	24.77	25.60	9.45	0.24	25.02	152.31	102.05	50.26	3.031		
7,250.00	7,247.40	7,247.40	7,247.40	24.94	25.76	9.45	0.24	25.02	152.31	101.72	50.59	3.011		
7,300.00	7,297.40	7,302.60	7,297.40	25.11	25.95	9.45	0.24	25.02	152.31	101.35	50.96	2.989		
7,350.00	7,347.40	7,347.40	7,347.40	25.28	26.11	9.45	0.24	25.02	152.31	101.02	51.29	2.969		
7,400.00	7,397.40	7,402.60	7,397.40	25.45	26.31	9.45	0.24	25.02	152.31	100.65	51.66	2.948		
7,450.00	7,447.40	7,447.40	7,447.40	25.62	26.47	9.45	0.24	25.02	152.31	100.31	51.99	2.929		
7,500.00	7,497.40	7,502.60	7,497.40	25.79	26.67	9.45	0.24	25.02	152.31	99.94	52.36	2.909		
7,550.00	7,547.40	7,547.40	7,547.40	25.97	26.83	9.45	0.24	25.02	152.31	99.61	52.70	2.890		
7,600.00	7,597.40	7,602.60	7,597.40	26.14	27.03	9.45	0.24	25.02	152.31	99.24	53.07	2.870		
7,650.00	7,647.40	7,647.40	7,647.40	26.31	27.19	9.45	0.24	25.02	152.31	98.91	53.40	2.852		
7,700.00	7,697.40	7,702.60	7,697.40	26.48	27.39	9.45	0.24	25.02	152.31	98.54	53.77	2.833		
7,750.00	7,747.40	7,747.40	7,747.40	26.65	27.55	9.45	0.24	25.02	152.31	98.20	54.10	2.815		
7,800.00	7,797.40	7,802.60	7,797.40	26.82	27.75	9.45	0.24	25.02	152.31	97.83	54.48	2.796		
7,850.00	7,847.40	7,847.40	7,847.40	27.00	27.91	9.45	0.24	25.02	152.31	97.50	54.81	2.779		
7,900.00	7,897.40	7,902.60	7,897.40	27.17	28.10	9.45	0.24	25.02	152.31	97.13	55.18	2.760		
7,950.00	7,947.40	7,947.40	7,947.40	27.34	28.27	9.45	0.24	25.02	152.31	96.80	55.51	2.744		
8,000.00	7,997.40	8,002.60	7,997.40	27.51	28.46	9.45	0.24	25.02	152.31	96.42	55.88	2.725		
8,050.00	8,047.40	8,047.40	8,047.40	27.69	28.62	9.45	0.24	25.02	152.31	96.09	56.22	2.709		
8,100.00	8,097.40	8,102.60	8,097.40	27.86	28.82	9.45	0.24	25.02	152.31	95.72	56.59	2.691		
8,150.00	8,147.40	8,147.40	8,147.40	28.03	28.98	9.45	0.24	25.02	152.31	95.39	56.92	2.676		
8,200.00	8,197.40	8,202.60	8,197.40	28.20	29.18	9.45	0.24	25.02	152.31	95.01	57.30	2.658		
8,250.00	8,247.40	8,247.40	8,247.40	28.38	29.34	9.45	0.24	25.02	152.31	94.68	57.63	2.643		
8,300.00	8,297.40	8,302.60	8,297.40	28.55	29.54	9.45	0.24	25.02	152.31	94.31	58.00	2.626		
8,350.00	8,347.40	8,347.40	8,347.40	28.72	29.70	9.45	0.24	25.02	152.31	93.97	58.34	2.611		
8,400.00	8,397.40	8,402.60	8,397.40	28.90	29.90	9.45	0.24	25.02	152.31	93.60	58.71	2.594		
8,450.00	8,447.40	8,447.40	8,447.40	29.07	30.06	9.45	0.24	25.02	152.31	93.27	59.04	2.580		
8,500.00	8,497.40	8,502.60	8,497.40	29.24	30.26	9.45	0.24	25.02	152.31	92.90	59.41	2.564		
8,550.00	8,547.40	8,547.40	8,547.40	29.42	30.42	9.45	0.24	25.02	152.31	92.56	59.75	2.549		
8,600.00	8,597.40	8,602.60	8,597.40	29.59	30.61	9.45	0.24	25.02	152.31	92.19	60.12	2.533		
8,650.00	8,647.40	8,647.40	8,647.40	29.76	30.77	9.45	0.24	25.02	152.31	91.85	60.45	2.519		
8,700.00	8,697.40	8,702.60	8,697.40	29.94	30.97	9.45	0.24	25.02	152.31	91.48	60.83	2.504		
8,750.00	8,747.40	8,747.40	8,747.40	30.11	31.13	9.45	0.24	25.02	152.31	91.15	61.16	2.490		
8,800.00	8,797.40	8,802.60	8,797.40	30.28	31.33	9.45	0.24	25.02	152.31	90.78	61.53	2.475		
8,850.00	8,847.40	8,847.40	8,847.40	30.46	31.49	9.45	0.24	25.02	152.31	90.44	61.87	2.462		
8,900.00	8,897.40	8,902.60	8,897.40	30.63	31.69	9.45	0.24	25.02	152.31	90.07	62.24	2.447		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference Site:	Tatanka Federal Locations	MID Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Offset Design													Offset Site Error:	0.00 ft
Tatanka Federal Locations - Tatanka Federal 001H - Tatanka 001 - Plan #1													Offset Well Error:	0.00 ft
Survey Program: 0-Copy of MWD														
Measured Depth (ft)	Vertical Depth (ft)	Offset		Semi Major Axis		Highside Toolface (°)	Wellbore Centre		Distance		Minimum Separation (ft)	Separation Factor	Warning	
		Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)		+N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)				
8,950.00	8,947.40	8,947.40	8,947.40	30.80	31.85	9.45	0.24	25.02	152.31	89.73	62.58	2.434		
9,000.00	8,997.40	9,002.60	8,997.40	30.98	32.05	9.45	0.24	25.02	152.31	89.36	62.95	2.420		
9,050.00	9,047.40	9,047.40	9,047.40	31.15	32.21	9.45	0.24	25.02	152.31	89.03	63.28	2.407		
9,100.00	9,097.40	9,102.60	9,097.40	31.33	32.41	9.45	0.24	25.02	152.31	88.65	63.66	2.393		
9,150.00	9,147.40	9,147.40	9,147.40	31.50	32.57	9.45	0.24	25.02	152.31	88.32	63.99	2.380		
9,200.00	9,197.40	9,202.60	9,197.40	31.67	32.76	9.45	0.24	25.02	152.31	87.95	64.36	2.366		
9,250.00	9,247.40	9,247.40	9,247.40	31.85	32.93	9.45	0.24	25.02	152.31	87.61	64.70	2.354		
9,300.00	9,297.40	9,302.60	9,297.40	32.02	33.12	9.45	0.24	25.02	152.31	87.24	65.07	2.341		
9,350.00	9,347.40	9,347.40	9,347.40	32.20	33.28	9.45	0.24	25.02	152.31	86.90	65.41	2.329		
9,400.00	9,397.40	9,402.60	9,397.40	32.37	33.48	9.45	0.24	25.02	152.31	86.53	65.78	2.315		
9,450.00	9,447.40	9,447.40	9,447.40	32.54	33.64	9.45	0.24	25.02	152.31	86.19	66.12	2.304		
9,500.00	9,497.40	9,502.60	9,497.40	32.72	33.84	9.45	0.24	25.02	152.31	85.82	66.49	2.291		
9,550.00	9,547.40	9,547.40	9,547.40	32.89	34.00	9.45	0.24	25.02	152.31	85.49	66.82	2.279		
9,600.00	9,597.40	9,602.60	9,597.40	33.07	34.20	9.45	0.24	25.02	152.31	85.11	67.20	2.267		
9,650.00	9,647.40	9,647.40	9,647.40	33.24	34.36	9.45	0.24	25.02	152.31	84.78	67.53	2.255		
9,700.00	9,697.40	9,702.60	9,697.40	33.42	34.56	9.45	0.24	25.02	152.31	84.40	67.91	2.243		
9,750.00	9,747.40	9,747.40	9,747.40	33.59	34.72	9.45	0.24	25.02	152.31	84.07	68.24	2.232		
9,800.00	9,797.40	9,802.60	9,797.40	33.77	34.92	9.45	0.24	25.02	152.31	83.69	68.61	2.220		
9,850.00	9,847.40	9,847.40	9,847.40	33.94	35.08	9.45	0.24	25.02	152.31	83.36	68.95	2.209		
9,900.00	9,897.40	9,902.60	9,897.40	34.12	35.27	9.45	0.24	25.02	152.31	82.99	69.32	2.197		
9,950.00	9,947.40	9,947.40	9,947.40	34.29	35.43	9.45	0.24	25.02	152.31	82.65	69.66	2.186		
10,000.00	9,997.40	10,002.60	9,997.40	34.47	35.63	9.45	0.24	25.02	152.31	82.28	70.03	2.175		
10,050.00	10,047.40	10,047.40	10,047.40	34.64	35.79	9.45	0.24	25.02	152.31	81.94	70.37	2.164		
10,100.00	10,097.40	10,102.60	10,097.40	34.82	35.99	9.45	0.24	25.02	152.31	81.57	70.74	2.153		
10,150.00	10,147.40	10,147.40	10,147.40	34.99	36.15	9.45	0.24	25.02	152.31	81.23	71.08	2.143		
10,200.00	10,197.40	10,202.60	10,197.40	35.17	36.35	9.45	0.24	25.02	152.31	80.86	71.45	2.132		
10,250.00	10,247.40	10,247.40	10,247.40	35.34	36.51	9.45	0.24	25.02	152.31	80.52	71.79	2.122		
10,300.00	10,297.40	10,302.60	10,297.40	35.52	36.71	9.45	0.24	25.02	152.31	80.15	72.16	2.111		
10,350.00	10,347.40	10,347.40	10,347.40	35.69	36.87	9.45	0.24	25.02	152.31	79.81	72.50	2.101		
10,400.00	10,397.40	10,402.60	10,397.40	35.87	37.07	9.45	0.24	25.02	152.31	79.44	72.87	2.090		
10,450.00	10,447.40	10,447.40	10,447.40	36.04	37.23	9.45	0.24	25.02	152.31	79.10	73.21	2.080		
10,500.00	10,497.40	10,502.60	10,497.40	36.22	37.42	9.45	0.24	25.02	152.31	78.73	73.58	2.070		
10,550.00	10,547.40	10,547.40	10,547.40	36.39	37.59	9.45	0.24	25.02	152.31	78.39	73.92	2.061		
10,600.00	10,597.40	10,602.60	10,597.40	36.57	37.78	9.45	0.24	25.02	152.31	78.02	74.29	2.050		
10,650.00	10,647.40	10,647.40	10,647.40	36.74	37.94	9.45	0.24	25.02	152.31	77.68	74.63	2.041		
10,700.00	10,697.40	10,702.60	10,697.40	36.92	38.14	9.45	0.24	25.02	152.31	77.31	75.00	2.031		
10,750.00	10,747.40	10,747.40	10,747.40	37.09	38.30	9.45	0.24	25.02	152.31	76.97	75.34	2.022		
10,800.00	10,797.40	10,802.60	10,797.40	37.27	38.50	9.45	0.24	25.02	152.31	76.60	75.71	2.012		
10,850.00	10,847.40	10,847.40	10,847.40	37.45	38.66	9.45	0.24	25.02	152.31	76.26	76.05	2.003		
10,900.00	10,897.40	10,902.60	10,897.40	37.62	38.86	9.45	0.24	25.02	152.31	75.89	76.42	1.993		
10,950.00	10,947.40	10,947.40	10,947.40	37.80	39.02	9.45	0.24	25.02	152.31	75.55	76.76	1.984		
11,000.00	10,997.40	11,002.60	10,997.40	37.97	39.22	9.45	0.24	25.02	152.31	75.18	77.13	1.975		
11,050.00	11,047.40	11,047.40	11,047.40	38.15	39.38	9.45	0.24	25.02	152.31	74.84	77.47	1.966		
11,100.00	11,097.40	11,102.60	11,097.40	38.32	39.58	9.45	0.24	25.02	152.31	74.46	77.84	1.957		
11,150.00	11,147.40	11,147.40	11,147.40	38.50	39.74	9.45	0.24	25.02	152.31	74.13	78.18	1.948		
11,200.00	11,197.40	11,202.60	11,197.40	38.67	39.93	9.45	0.24	25.02	152.31	73.75	78.56	1.939		
11,250.00	11,247.40	11,247.40	11,247.40	38.85	40.09	9.45	0.24	25.02	152.31	73.42	78.89	1.931		
11,300.00	11,297.40	11,302.60	11,297.40	39.03	40.29	9.45	0.24	25.02	152.31	73.04	79.27	1.921		
11,350.00	11,347.40	11,347.40	11,347.40	39.20	40.45	9.45	0.24	25.02	152.31	72.71	79.60	1.913		
11,400.00	11,397.40	11,402.60	11,397.40	39.38	40.65	9.45	0.24	25.02	152.31	72.33	79.98	1.904		
11,450.00	11,447.40	11,447.40	11,447.40	39.55	40.81	9.45	0.24	25.02	152.31	71.99	80.31	1.896		
11,500.00	11,497.40	11,502.60	11,497.40	39.73	41.01	9.45	0.24	25.02	152.31	71.62	80.69	1.888		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference(Site):	Tatanka Federal Locations	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Offset Design													Offset Site Error:	0.00 ft
Tatanka Federal Locations - Tatanka Federal 001H - Tatanka 001 - Plan #1													Offset Well Error:	0.00 ft
Survey Program: 0-Copy of MWD														
Reference		Offset		Semi Major Axis			Distance					Warning		
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (ft)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
11,550.00	11,547.40	11,547.40	11,547.40	39.91	41.17	9.45	0.24	25.02	152.31	71.28	81.03	1.880		
11,600.00	11,597.40	11,602.60	11,597.40	40.08	41.37	9.45	0.24	25.02	152.31	70.91	81.40	1.871		
11,650.00	11,647.40	11,647.40	11,647.40	40.26	41.53	9.45	0.24	25.02	152.31	70.57	81.74	1.863		
11,700.00	11,697.40	11,702.60	11,697.40	40.43	41.73	9.45	0.24	25.02	152.31	70.20	82.11	1.855		
11,750.00	11,747.40	11,747.40	11,747.40	40.61	41.89	9.45	0.24	25.02	152.31	69.86	82.45	1.847		
11,800.00	11,797.40	11,802.60	11,797.40	40.79	42.08	9.45	0.24	25.02	152.31	69.49	82.82	1.839		
11,850.00	11,847.40	11,847.40	11,847.40	40.96	42.25	9.45	0.24	25.02	152.31	69.15	83.16	1.832		
11,900.00	11,897.40	11,902.60	11,897.40	41.14	42.44	9.45	0.24	25.02	152.31	68.77	83.53	1.823		
11,950.00	11,947.40	11,947.40	11,947.40	41.32	42.60	9.45	0.24	25.02	152.31	68.44	83.87	1.816		
12,000.00	11,997.40	11,997.40	11,997.40	41.49	42.78	9.45	0.24	25.02	152.31	68.08	84.23	1.808 SF		
12,050.00	12,047.40	12,036.62	12,036.59	41.67	42.92	9.38	1.46	25.01	153.89	68.50	84.39	1.824		
12,100.00	12,097.40	12,075.00	12,074.72	41.84	43.06	9.11	5.73	24.97	159.34	75.07	84.27	1.891		
12,150.00	12,147.40	12,110.88	12,109.95	42.02	43.19	8.71	12.48	24.90	168.59	84.82	83.76	2.013		
12,200.00	12,197.40	12,146.31	12,144.15	42.20	43.31	8.22	21.72	24.81	181.49	98.45	83.05	2.185		
12,250.00	12,247.40	12,180.19	12,176.12	42.37	43.42	7.69	32.91	24.69	197.86	115.74	82.12	2.409		
12,300.00	12,297.40	12,212.29	12,205.61	42.55	43.52	7.16	45.58	24.57	217.44	136.40	81.04	2.683		
12,315.13	12,312.54	12,221.64	12,214.03	42.60	43.55	7.00	49.63	24.53	223.96	143.27	80.69	2.776		
12,325.00	12,322.40	12,227.67	12,219.42	42.64	43.57	7.39	52.34	24.50	228.27	147.81	80.45	2.837		
12,350.00	12,347.37	12,242.88	12,232.86	42.72	43.61	6.99	59.46	24.43	238.86	159.03	79.83	2.992		
12,375.00	12,372.25	12,258.02	12,246.00	42.81	43.65	6.65	66.97	24.35	248.99	169.82	79.18	3.145		
12,400.00	12,396.96	12,275.00	12,260.45	42.90	43.70	6.32	75.89	24.26	258.67	179.98	78.69	3.287		
12,425.00	12,421.44	12,288.09	12,271.37	42.98	43.75	6.07	83.11	24.19	267.85	190.08	77.77	3.444		
12,450.00	12,445.62	12,303.03	12,283.58	43.06	43.79	5.83	91.71	24.11	278.55	199.53	77.02	3.591		
12,475.00	12,469.43	12,317.92	12,295.48	43.14	43.85	5.62	100.66	24.02	284.77	208.52	76.25	3.735		
12,500.00	12,492.82	12,332.75	12,307.05	43.22	43.90	5.44	109.94	23.92	292.48	217.03	75.45	3.877		
12,525.00	12,515.71	12,350.00	12,320.13	43.29	43.96	5.26	121.18	23.81	299.71	224.82	74.88	4.002		
12,550.00	12,538.05	12,362.30	12,329.21	43.37	44.00	5.12	129.48	23.73	306.39	232.60	73.79	4.152		
12,575.00	12,559.76	12,375.00	12,338.36	43.44	44.05	5.00	138.29	23.64	312.58	239.86	72.72	4.298		
12,600.00	12,580.80	12,391.69	12,350.01	43.51	44.11	4.88	150.23	23.52	318.23	246.17	72.06	4.416		
12,625.00	12,601.11	12,406.34	12,359.90	43.58	44.17	4.78	161.05	23.41	323.36	252.19	71.17	4.543		
12,650.00	12,620.62	12,420.97	12,369.43	43.64	44.23	4.69	172.14	23.30	327.97	257.68	70.28	4.666		
12,675.00	12,639.29	12,435.57	12,378.60	43.71	44.29	4.62	183.50	23.19	332.04	262.65	69.39	4.785		
12,700.00	12,657.06	12,450.00	12,387.32	43.77	44.35	4.55	195.00	23.07	335.57	267.10	68.48	4.900		
12,725.00	12,673.89	12,464.72	12,395.85	43.84	44.42	4.50	206.99	22.95	338.57	270.97	67.60	5.009		
12,750.00	12,689.73	12,479.27	12,403.91	43.90	44.48	4.46	219.10	22.83	341.02	274.31	66.71	5.112		
12,775.00	12,704.53	12,493.81	12,411.60	43.96	44.55	4.43	231.44	22.71	342.93	277.10	65.83	5.209		
12,800.00	12,718.26	12,508.34	12,418.91	44.02	44.63	4.40	244.01	22.58	344.30	279.33	64.97	5.300		
12,825.00	12,730.88	12,525.00	12,426.80	44.08	44.71	4.39	258.67	22.44	345.13	280.82	64.31	5.367		
12,850.00	12,742.35	12,537.39	12,432.34	44.14	44.78	4.38	269.76	22.33	345.39	282.09	63.30	5.457		
12,875.00	12,752.64	12,550.00	12,437.68	44.20	44.85	4.39	281.18	22.21	345.12	282.78	62.35	5.536		
12,900.00	12,761.73	12,566.45	12,444.19	44.26	44.94	4.40	296.28	22.06	344.29	282.56	61.73	5.577		
12,925.00	12,769.58	12,580.98	12,449.51	44.31	45.03	4.42	309.80	21.92	342.93	281.92	61.01	5.621		
12,950.00	12,776.19	12,595.52	12,454.41	44.37	45.12	4.45	323.49	21.79	341.01	280.69	60.32	5.653		
12,975.00	12,781.52	12,610.07	12,458.90	44.43	45.21	4.50	337.33	21.65	338.56	278.88	59.68	5.673		
13,000.00	12,785.56	12,625.00	12,463.07	44.48	45.31	4.55	351.66	21.51	335.56	276.45	59.11	5.677		
13,025.00	12,788.31	12,639.22	12,466.62	44.54	45.41	4.61	365.43	21.37	332.03	273.47	58.56	5.670		
13,050.00	12,789.76	12,653.82	12,469.83	44.59	45.51	4.68	379.68	21.23	327.95	269.87	58.09	5.646		
13,065.13	12,790.00	12,662.67	12,471.57	44.63	45.57	4.73	388.35	21.14	325.23	267.40	57.83	5.624		
13,100.00	12,790.00	12,683.23	12,474.98	44.71	45.72	4.78	408.62	20.94	319.48	262.12	57.34	5.571		
13,150.00	12,790.00	12,713.14	12,478.38	44.84	45.96	4.83	438.34	20.64	313.80	256.91	56.88	5.516		
13,200.00	12,790.00	12,743.37	12,479.91	44.97	46.20	4.85	468.52	20.34	311.26	254.51	56.75	5.485		
13,223.95	12,790.00	12,761.37	12,480.00	45.05	46.36	4.86	486.51	20.18	311.12	254.32	56.80	5.478		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference Site:	Tatanka Federal Locations	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Offset Design														Offset Site Error:	0.00 ft	
Tatanka Federal Locations - Tatanka Federal 001H - Tatanka 001 - Plan #1														Offset Well Error:	0.00 ft	
Survey Program: 0-Copy of MWD																
Reference	Offset	Semi Major Axis		Distance		Distance		Minimum Separation		Separation Factor		Warning				
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N-S (ft)	+E-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor				
13,250.00	12,790.00	12,787.42	12,480.00	45.14	46.59	4.85	512.57	19.90	311.12	254.26	56.85	5.472				
13,300.00	12,790.00	12,837.42	12,480.00	45.30	47.08	4.85	562.56	19.40	311.11	254.14	56.97	5.461				
13,350.00	12,790.00	12,887.42	12,480.00	45.50	47.60	4.85	612.56	18.90	311.11	254.01	57.10	5.449				
13,400.00	12,790.00	12,937.42	12,480.00	45.69	48.17	4.85	662.56	18.40	311.11	253.87	57.24	5.435				
13,450.00	12,790.00	12,987.42	12,480.00	45.91	48.77	4.84	712.56	17.90	311.11	253.72	57.39	5.421				
13,500.00	12,790.00	13,037.42	12,480.00	46.13	49.43	4.84	762.55	17.40	311.11	253.56	57.55	5.406				
13,550.00	12,790.00	13,087.42	12,480.00	46.38	50.11	4.84	812.55	16.90	311.11	253.38	57.72	5.390				
13,600.00	12,790.00	13,137.42	12,480.00	46.63	50.84	4.83	862.55	16.40	311.11	253.20	57.91	5.373				
13,650.00	12,790.00	13,187.42	12,480.00	46.91	51.59	4.83	912.55	15.90	311.11	253.00	58.10	5.355				
13,700.00	12,790.00	13,237.42	12,480.00	47.18	52.40	4.83	962.54	15.40	311.10	252.80	58.30	5.336				
13,750.00	12,790.00	13,287.42	12,480.00	47.49	53.22	4.83	1,012.54	14.90	311.10	252.58	58.52	5.316				
13,800.00	12,790.00	13,337.42	12,480.00	47.79	54.08	4.82	1,062.54	14.40	311.10	252.36	58.74	5.296				
13,850.00	12,790.00	13,387.42	12,480.00	48.12	54.96	4.82	1,112.54	13.90	311.10	252.12	58.98	5.275				
13,900.00	12,790.00	13,437.42	12,480.00	48.44	55.89	4.82	1,162.53	13.40	311.10	251.87	59.23	5.253				
13,950.00	12,790.00	13,487.42	12,480.00	48.79	56.82	4.82	1,212.53	12.90	311.10	251.62	59.48	5.230				
14,000.00	12,790.00	13,537.42	12,480.00	49.14	57.80	4.81	1,262.53	12.40	311.10	251.35	59.75	5.207				
14,050.00	12,790.00	13,587.42	12,480.00	49.52	58.78	4.81	1,312.53	11.90	311.10	251.07	60.02	5.183				
14,100.00	12,790.00	13,637.42	12,480.00	49.89	59.81	4.81	1,362.52	11.40	311.09	250.79	60.31	5.159				
14,150.00	12,790.00	13,687.42	12,480.00	50.28	60.84	4.80	1,412.52	10.90	311.09	250.49	60.60	5.133				
14,200.00	12,790.00	13,737.42	12,480.00	50.68	61.90	4.80	1,462.52	10.40	311.09	250.19	60.90	5.108				
14,250.00	12,790.00	13,787.42	12,480.00	51.10	62.98	4.80	1,512.52	9.90	311.09	249.87	61.22	5.082				
14,300.00	12,790.00	13,837.42	12,480.00	51.51	64.08	4.80	1,562.51	9.40	311.09	249.55	61.54	5.055				
14,350.00	12,790.00	13,887.42	12,480.00	51.95	65.19	4.79	1,612.51	8.90	311.09	249.22	61.87	5.028				
14,400.00	12,790.00	13,937.42	12,480.00	52.38	66.32	4.79	1,662.51	8.40	311.09	248.88	62.21	5.001				
14,450.00	12,790.00	13,987.42	12,480.00	52.84	67.47	4.79	1,712.51	7.90	311.09	248.53	62.56	4.973				
14,500.00	12,790.00	14,037.42	12,480.00	53.29	68.63	4.79	1,762.50	7.40	311.08	248.17	62.91	4.945				
14,550.00	12,790.00	14,087.42	12,480.00	53.76	69.81	4.78	1,812.50	6.90	311.08	247.80	63.28	4.916				
14,600.00	12,790.00	14,137.42	12,480.00	54.24	71.00	4.78	1,862.50	6.40	311.08	247.43	63.65	4.887				
14,650.00	12,790.00	14,187.42	12,480.00	54.73	72.21	4.78	1,912.50	5.90	311.08	247.05	64.03	4.858				
14,700.00	12,790.00	14,237.42	12,480.00	55.22	73.43	4.78	1,962.49	5.40	311.08	246.66	64.42	4.829				
14,750.00	12,790.00	14,287.42	12,480.00	55.72	74.65	4.77	2,012.49	4.90	311.08	246.26	64.82	4.799				
14,800.00	12,790.00	14,337.42	12,480.00	56.23	75.89	4.77	2,062.49	4.40	311.08	245.86	65.22	4.770				
14,850.00	12,790.00	14,387.42	12,480.00	56.75	77.14	4.77	2,112.49	3.90	311.08	245.44	65.63	4.740				
14,900.00	12,790.00	14,437.42	12,480.00	57.27	78.41	4.76	2,162.48	3.40	311.07	245.02	66.05	4.710				
14,950.00	12,790.00	14,487.42	12,480.00	57.80	79.68	4.76	2,212.48	2.90	311.07	244.60	66.48	4.679				
15,000.00	12,790.00	14,537.42	12,480.00	58.34	80.96	4.76	2,262.48	2.40	311.07	244.16	66.91	4.649				
15,050.00	12,790.00	14,587.42	12,480.00	58.89	82.24	4.76	2,312.48	1.90	311.07	243.72	67.35	4.619				
15,100.00	12,790.00	14,637.42	12,480.00	59.44	83.54	4.75	2,362.47	1.40	311.07	243.27	67.80	4.588				
15,150.00	12,790.00	14,687.42	12,480.00	60.00	84.85	4.75	2,412.47	0.90	311.07	242.82	68.25	4.558				
15,200.00	12,790.00	14,737.42	12,480.00	60.56	86.16	4.75	2,462.47	0.40	311.07	242.36	68.71	4.527				
15,250.00	12,790.00	14,787.42	12,480.00	61.13	87.48	4.75	2,512.47	-0.10	311.07	241.89	69.17	4.497				
15,300.00	12,790.00	14,837.42	12,480.00	61.71	88.81	4.74	2,562.46	-0.60	311.06	241.42	69.65	4.466				
15,350.00	12,790.00	14,887.42	12,480.00	62.29	90.14	4.74	2,612.46	-1.10	311.06	240.94	70.12	4.436				
15,400.00	12,790.00	14,937.42	12,480.00	62.88	91.48	4.74	2,662.46	-1.60	311.06	240.45	70.61	4.405				
15,450.00	12,790.00	14,987.42	12,480.00	63.48	92.83	4.73	2,712.46	-2.10	311.06	239.96	71.10	4.375				
15,500.00	12,790.00	15,037.42	12,480.00	64.07	94.18	4.73	2,762.45	-2.60	311.06	239.47	71.59	4.345				
15,550.00	12,790.00	15,087.42	12,480.00	64.68	95.54	4.73	2,812.45	-3.10	311.06	238.96	72.10	4.315				
15,600.00	12,790.00	15,137.42	12,480.00	65.28	96.90	4.73	2,862.45	-3.60	311.06	238.46	72.60	4.284				
15,650.00	12,790.00	15,187.42	12,480.00	65.90	98.27	4.72	2,912.45	-4.10	311.06	237.94	73.11	4.254				
15,700.00	12,790.00	15,237.42	12,480.00	66.52	99.65	4.72	2,962.44	-4.60	311.06	237.42	73.63	4.225				
15,750.00	12,790.00	15,287.42	12,480.00	67.14	101.02	4.72	3,012.44	-5.10	311.05	236.90	74.15	4.195				
15,800.00	12,790.00	15,337.42	12,480.00	67.77	102.41	4.72	3,062.44	-5.60	311.05	236.37	74.68	4.165				

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference Site:	Tatanka Federal Locations	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Offset Design													Offset Site Error:	0.00 ft
Tatanka Federal Locations - Tatanka Federal 001H - Tatanka 001 - Plan #1													Offset Well Error:	0.00 ft
Survey Program: 0-Copy of MWD														
Reference		Offset		Semi Major Axis			Distance					Warning		
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Tooface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor		
15,850.00	12,790.00	15,387.42	12,480.00	68.40	103.79	4.71	3,112.44	-6.10	311.05	235.84	75.21	4.136		
15,900.00	12,790.00	15,437.42	12,480.00	69.04	105.19	4.71	3,162.43	-6.60	311.05	235.30	75.75	4.106		
15,950.00	12,790.00	15,487.42	12,480.00	69.68	106.58	4.71	3,212.43	-7.10	311.05	234.76	76.29	4.077		
16,000.00	12,790.00	15,537.42	12,480.00	70.32	107.98	4.70	3,262.43	-7.60	311.05	234.21	76.84	4.048		
16,050.00	12,790.00	15,587.42	12,480.00	70.97	109.38	4.70	3,312.43	-8.10	311.05	233.66	77.39	4.019		
16,100.00	12,790.00	15,637.42	12,480.00	71.62	110.79	4.70	3,362.42	-8.60	311.05	233.10	77.95	3.991		
16,150.00	12,790.00	15,687.42	12,480.00	72.28	112.20	4.70	3,412.42	-9.10	311.04	232.54	78.51	3.962		
16,200.00	12,790.00	15,737.42	12,480.00	72.94	113.61	4.69	3,462.42	-9.60	311.04	231.97	79.07	3.934		
16,250.00	12,790.00	15,787.42	12,480.00	73.60	115.03	4.69	3,512.42	-10.10	311.04	231.40	79.64	3.906		
16,300.00	12,790.00	15,837.42	12,480.00	74.27	116.45	4.69	3,562.41	-10.60	311.04	230.83	80.21	3.878		
16,350.00	12,790.00	15,887.42	12,480.00	74.94	117.87	4.69	3,612.41	-11.10	311.04	230.25	80.79	3.850		
16,400.00	12,790.00	15,937.42	12,480.00	75.61	119.30	4.68	3,662.41	-11.60	311.04	229.67	81.37	3.823		
16,450.00	12,790.00	15,987.42	12,480.00	76.29	120.73	4.68	3,712.41	-12.10	311.04	229.09	81.95	3.795		
16,500.00	12,790.00	16,037.42	12,480.00	76.97	122.16	4.68	3,762.40	-12.60	311.04	228.50	82.54	3.768		
16,550.00	12,790.00	16,087.42	12,480.00	77.65	123.59	4.67	3,812.40	-13.10	311.03	227.91	83.13	3.742		
16,600.00	12,790.00	16,137.42	12,480.00	78.33	125.03	4.67	3,862.40	-13.60	311.03	227.31	83.72	3.715		
16,650.00	12,790.00	16,187.42	12,480.00	79.02	126.46	4.67	3,912.40	-14.10	311.03	226.71	84.32	3.689		
16,700.00	12,790.00	16,237.42	12,480.00	79.71	127.91	4.67	3,962.39	-14.60	311.03	226.11	84.92	3.663		
16,750.00	12,790.00	16,287.42	12,480.00	80.40	129.35	4.66	4,012.39	-15.10	311.03	225.50	85.53	3.637		
16,800.00	12,790.00	16,337.42	12,480.00	81.10	130.79	4.66	4,062.39	-15.60	311.03	224.89	86.14	3.611		
16,850.00	12,790.00	16,387.42	12,480.00	81.80	132.24	4.66	4,112.39	-16.10	311.03	224.28	86.75	3.585		
16,900.00	12,790.00	16,437.42	12,480.00	82.50	133.69	4.66	4,162.38	-16.60	311.03	223.66	87.36	3.560		
16,950.00	12,790.00	16,487.42	12,480.00	83.20	135.14	4.65	4,212.38	-17.10	311.02	223.05	87.98	3.535		
17,000.00	12,790.00	16,537.42	12,480.00	83.91	136.59	4.65	4,262.38	-17.60	311.02	222.42	88.60	3.510		
17,050.00	12,790.00	16,587.42	12,480.00	84.62	138.05	4.65	4,312.38	-18.10	311.02	221.80	89.22	3.486		
17,100.00	12,790.00	16,637.42	12,480.00	85.32	139.51	4.64	4,362.37	-18.60	311.02	221.17	89.85	3.462		
17,150.00	12,790.00	16,687.42	12,480.00	86.04	140.96	4.64	4,412.37	-19.10	311.02	220.54	90.48	3.438		
17,200.00	12,790.00	16,737.42	12,480.00	86.75	142.42	4.64	4,462.37	-19.60	311.02	219.91	91.11	3.414		
17,250.00	12,790.00	16,787.42	12,480.00	87.47	143.89	4.64	4,512.37	-20.10	311.02	219.27	91.74	3.390		
17,300.00	12,790.00	16,837.42	12,480.00	88.19	145.35	4.63	4,562.36	-20.60	311.02	218.64	92.38	3.367		
17,350.00	12,790.00	16,887.42	12,480.00	88.91	146.81	4.63	4,612.36	-21.10	311.02	217.99	93.02	3.344		
17,400.00	12,790.00	16,937.42	12,480.00	89.63	148.28	4.63	4,662.36	-21.60	311.01	217.35	93.66	3.321		
17,450.00	12,790.00	16,987.42	12,480.00	90.35	149.75	4.63	4,712.36	-22.10	311.01	216.71	94.31	3.298		
17,457.49	12,790.00	16,994.91	12,480.00	90.46	149.97	4.63	4,719.84	-22.17	311.01	216.61	94.40	3.295		
17,500.00	12,790.00	17,037.42	12,480.00	91.08	151.22	4.62	4,762.35	-22.60	311.01	216.06	94.95	3.275		
17,550.00	12,790.00	17,087.42	12,480.00	91.81	152.69	4.62	4,812.35	-23.10	311.01	215.41	95.60	3.253		
17,587.86	12,790.00	17,125.28	12,480.00	92.36	153.80	4.62	4,850.21	-23.48	311.01	214.91	96.10	3.236		
17,589.83	12,790.00	17,124.71	12,480.00	92.39	153.78	4.62	4,849.64	-23.47	311.02	214.84	96.18	3.234		
17,590.55	12,790.00	17,124.71	12,480.00	92.40	153.78	4.62	4,849.64	-23.47	311.03	214.81	96.21	3.233		


CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference Site:	Tatanka Federal Locations	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors/are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Reference Depths are relative to GL 3064' + 25' RKB @ 3089.00ft (TBD) Coordinates are relative to: Tatanka Federal 006H
 Offset Depths are relative to Offset Datum Coordinate System is US State Plane 1983, New Mexico Eastern Zone
 Central Meridian is 104° 20' 0.000 W Grid Convergence at Surface is: 0.52°

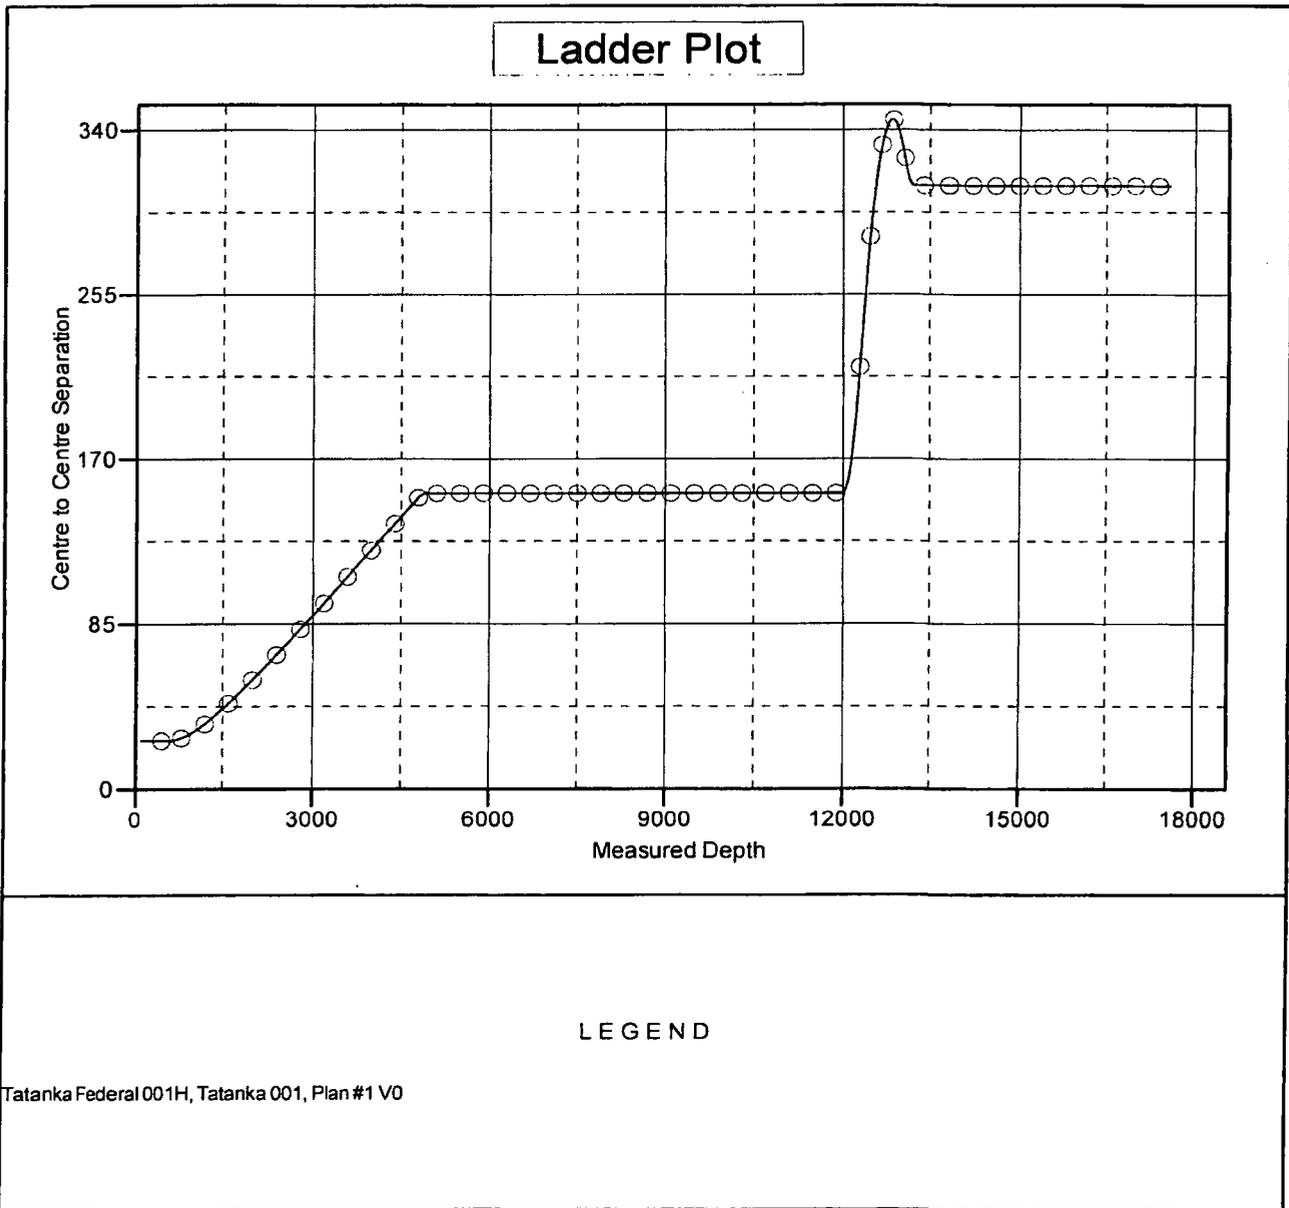




Anticollision Report

Company:	Rosehill Operating	Local Co-ordinate Reference:	Well Tatanka Federal 006H
Project:	Lea County, NM (NAD 83)	TVD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Reference Site:	Tatanka Federal Locations	MD Reference:	GL 3064' + 25' RKB @ 3089.00ft (TBD)
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Tatanka Federal 006H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at	2.00 sigma
Reference Wellbore	Wellbore #1	Database:	EDM 5000.14 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Reference Datum

Reference Depths are relative to GL 3064' + 25' RKB @ 3089.00ft (TBD) Coordinates are relative to: Tatanka Federal 006H
 Offset Depths are relative to Offset Datum Coordinate System is US State Plane 1983, New Mexico Eastern Zone
 Central Meridian is 104° 20' 0.000 W Grid Convergence at Surface is: 0.52°

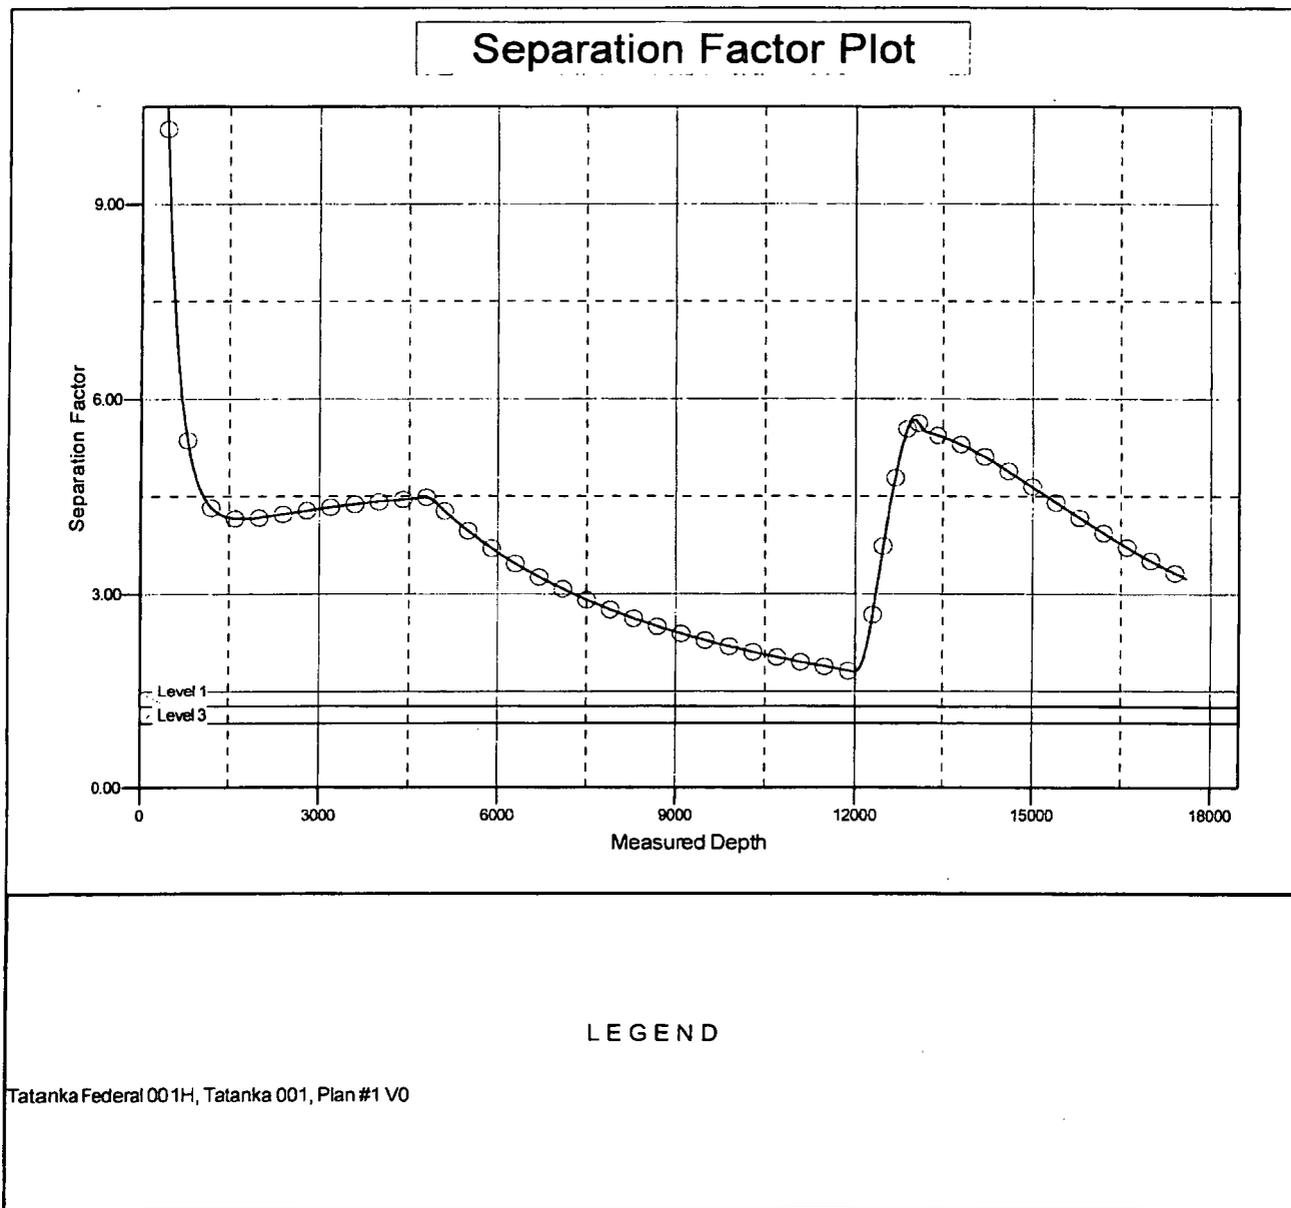

Surface Use Plan of Operations

Introduction

The following surface use plan of operations will be followed and carried out once the APD is approved. No other disturbance will be created other than what was submitted in this surface use plan. If any other surface disturbance is needed after the APD is approved, a BLM approved sundry notice or right of way application will be acquired prior to any new surface disturbance.

Before any surface disturbance is created, stakes or flagging will be installed to mark boundaries of permitted areas of disturbance, including soils storage areas. As necessary, slope, grade, and other construction control stakes will be placed to ensure construction in accordance with the surface use plan. All boundary markers will be maintained in place until final construction cleanup is completed. If disturbance boundary markers are disturbed or knocked down, they will be replaced before construction proceeds.

If terms and conditions are attached to the approved APD and amend any of the proposed actions in this surface use plan, we will adhere to the terms and conditions.

1. Existing Roads

- a. The existing access road route to the proposed project is depicted on Proposed Facilities Plan Map. Improvements to the driving surface will be done where necessary. No new surface disturbance will be done, unless otherwise noted in the New or Reconstructed Access Roads section of this surface use plan..
- b. The existing access road route to the proposed project does not cross lease or unit boundaries, so a BLM right- of-way grant will not be acquired for this proposed road route.
- c. The operator will improve or maintain existing roads in a condition the same as or better than before operations begin. The operator will repair pot holes, clear ditches, repair the crown, etc. All existing structures on the entire access route such as cattleguards, other range improvement projects, culverts, etc. will be properly repaired or replaced if they are damaged or have deteriorated beyond practical use.
- d. We will prevent and abate fugitive dust as needed, whether created by vehicular traffic, equipment operations, or wind events. BLM written approval will be acquired before application of surfactants, binding agents, or other dust suppression chemicals on roadways.

2. New or Reconstructed Access Roads

- a. An access road will be needed for this proposed project. See the survey plat for the location of the access road.
- b. The length of access road needed to be constructed for this proposed project is about 7310 feet.
- c. The maximum driving width of the access road will be 20 feet. The maximum width of surface disturbance when constructing the new East-West access road will not exceed 150 feet. The maximum width of surface disturbance for existing access road with utility line will not exceed 75 feet. All areas outside of the driving surface will be revegetated.
- d. The access road will be constructed with 6 inches of compacted caliche.

e. When the road travels on fairly level ground, the road will be crowned and ditched with a 2% slope from the tip of the road crown to the edge of the driving surface. The ditches will be 3 feet wide with 3:1 slopes. See Road Cross Section diagram below.

- f. The access road will be constructed with a ditch on each side of the road.
- g. The maximum grade for the access road will be 1 percent.
- h. No turnouts will be constructed on the proposed access road.
- i. An appropriately sized cattleguard sufficient to carry out the project will be installed and maintained at the fence crossing(s). Prior to cutting the fence, the fence will be braced and tied off on both sides of the passageway with H braces to protect the integrity of the fence line. See the survey plat for the location of the proposed cattle guard.
- j. No BLM right-of-way grant is needed for the construction of this access road.
- k. No culverts will be constructed for this proposed access road.
- l. No low water crossings will be constructed for the access road.
- m. Since the access road is on level ground, no lead-off ditches will be constructed for the proposed access road.
- n. Newly constructed or reconstructed roads, on surface under the jurisdiction of the Bureau of Land Management, will be constructed as outlined in the BLM "Gold Book" and to meet the standards of the anticipated traffic flow and all anticipated weather requirements as needed. Construction will include ditching, draining, crowning and capping or sloping and dipping the roadbed as necessary to provide a well-constructed and safe road.

3. Location of Existing Wells

- a. Proposed Facilities Plan Map of the APD depicts all known wells within a one mile radius of the proposed well.
- b. There is no other information regarding wells within a one mile radius.

4. Location of Existing and/or Proposed Production Facilities

- a. All permanent, lasting more than 6 months, above ground structures including but not limited to pumpjacks, storage tanks, barrels, pipeline risers, meter housing, etc. that are not subject to safety requirements will be painted a non-reflective paint color, Shale Green, from the BLM Standard Environmental Colors chart, unless another color is required in the APD Conditions of Approval.
- b. A 3-phase Test separator will be connected to each wellhead on the well pad, it will be strategically placed to allow for maximum interim reclamation, recontouring, and revegetation of the well location.
- c. Production from the proposed well will be transported to the production facility named Tatanka 11S Tank Battery. The location of the facility is as follows: SW Qtr of the SE Qtr of Sec.11, T26S, R35E.

- c.i. We plan to connect to the new 6 inch carbon steel line and 6 inch and 4 inch buried Fiberspar gathering pipelines along the north side the proposed well pads A, C and F to collect all the gas and liquid fluids to transfer to the 11S production facility, as described in Surface Use Plan for Tatanka Federal #001H.
- c.ii. The proposed pipeline does not cross lease boundaries, so a right of way grant will not need to be acquired from the BLM.

If any plans change regarding the production facility or other infrastructure (pipeline, electric line, etc.), we will submit a sundry notice or right of way (if applicable) prior to installation or construction.

5. Location and Types of Water

- a. The location of the water well is as follows: Current plan is to use the following: Beckham water source is from mega pit located in Section 6-26S-36E or City of Jal municipal water well located in Section 13-26S-35E.
- b. The operator will use established or constructed oil and gas roads to transport water to the well site. The operator will try to utilize the identified access route in the surface use plan.

6. Construction Material

- a. Clean caliche from BLM or third party source will be used.

7. Methods for Handling Waste

- a. Drilling fluids and produced oil and water from the well during drilling and completion operations will be stored safely and disposed of properly in an NMOCD approved disposal facility.
- b. Garbage and trash produced during drilling and completion operations will be collected in a trash container and disposed of properly at a state approved disposal facility. All trash on and around the well site will be collected for disposal.
- c. Human waste and grey water will be properly contained and disposed of properly at a state approved disposal facility.
- d. After drilling and completion operations, trash, chemicals, salts, frac sand and other waste material will be removed and disposed of properly at a state approved disposal facility.
- e. The well will be drilled utilizing a closed loop system. Drill cutting will be properly disposed of into steel tanks and taken to an NMOCD approved disposal facility.

8. Ancillary Facilities

- a. No ancillary facilities will be needed for this proposed project.

9. Well Site Layout

- a. The following information is presented in the well site survey plat or diagram:
 - a.i. reasonable scale (near 1":400')
 - a.ii. well pad dimensions
 - a.iii. well pad orientation
 - a.iv. drilling rig components
 - a.v. proposed access road
 - a.vi. elevations of all points

- a.vii. topsoil stockpile
- a.viii. reserve pit location/dimensions if applicable
- a.ix. other disturbances needed (flare pit, stinger, frac farm pad, etc.)
- a.x. existing structures within the 600' x 600' archaeological surveyed area (pipelines, electric lines, well pads, etc)
- b. The proposed drilling pad was staked and surveyed by a professional surveyor. The attached survey plat of the well site depicts the drilling pad layout as staked.

c. The submitted survey plat does depict all the necessary information required by Onshore Order No. 1.

d. Topsoil Salvaging

d.i. Grass, forbs, and small woody vegetation, such as mesquite will be excavated as the topsoil is removed. Large woody vegetation will be stripped and stored separately and respread evenly on the site following topsoil respreading. Topsoil depth is defined as the top layer of soil that contains 80% of the roots. In areas to be heavily disturbed, the top 6 inches of soil material, will be stripped and stockpiled on the perimeter of the well location and along the perimeter of the access road to control run-on and run-off, to keep topsoil viable, and to make redistribution of topsoil more efficient during interim reclamation. Stockpiled topsoil should include vegetative material. Topsoil will be clearly segregated and stored separately from subsoils. Contaminated soil will not be stockpiled, but properly treated and handled prior to topsoil salvaging.

10. Plans for Surface Reclamation

Reclamation Objectives

- i. The objective of interim reclamation is to restore vegetative cover and a portion of the landform sufficient to maintain healthy, biologically active topsoil; control erosion; and minimize habitat and forage loss, visual impact, and weed infestation, during the life of the well or facilities.
- ii. The long-term objective of final reclamation is to return the land to a condition similar to what existed prior to disturbance. This includes restoration of the landform and natural vegetative community, hydrologic systems, visual resources, and wildlife habitats. To ensure that the long-term objective will be reached through human and natural processes, actions will be taken to ensure standards are met for site stability, visual quality, hydrological functioning, and vegetative productivity.
- iii. The BLM will be notified at least 3 days prior to commencement of any reclamation procedures.
- iv. If circumstances allow, interim reclamation and/or final reclamation actions will be completed no later than 6 months from when the final well on the location has been completed or plugged. We will gain written permission from the BLM if more time is needed.
- v. Interim reclamation will be performed on the well site after the well is drilled and completed. Reclamation Diagram depicts the location and dimensions of the planned interim reclamation for the well site.

Interim Reclamation Procedures (If performed)

1. Within 30 days of well completion, the well location and surrounding areas will be cleared of, and maintained free of, all materials, trash, and equipment not required for production.
2. In areas planned for interim reclamation, all the surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads.

3. The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.
4. Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations including cuts & fills. To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.
5. Proper erosion control methods will be used on the area to control erosion, runoff and siltation of the surrounding area.
6. The interim reclamation will be monitored periodically to ensure that vegetation has reestablished and that erosion is controlled.

Final Reclamation (well pad, buried pipelines, etc.)

1. Prior to final reclamation procedures, the well pad, road, and surrounding area will be cleared of material, trash, and equipment.
2. All surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads.
3. All disturbed areas, including roads, pipelines, pads, production facilities, and interim reclaimed areas will be recontoured to the contour existing prior to initial construction or a contour that blends indistinguishably with the surrounding landscape. Topsoil that was spread over the interim reclamation areas will be stockpiled prior to recontouring. The topsoil will be redistributed evenly over the entire disturbed site to ensure successful revegetation.
4. After all the disturbed areas have been properly prepared, the areas will be seeded with the proper BLM seed mixture, free of noxious weeds. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.
5. Proper erosion control methods will be used on the entire area to control erosion, runoff and siltation of the surrounding area.
6. All unused equipment and structures including pipelines, electric line poles, tanks, etc. that serviced the well will be removed.
7. All reclaimed areas will be monitored periodically to ensure that revegetation occurs, that the area is not redisturbed, and that erosion is controlled.

11. Surface Ownership

- a. The surface ownership of the proposed project is Federal.

12. Other Information

- a. Onsite was conducted 11/1/17. Hydraulic Frac submittal will be provided at a later date. The flow line for this well will be 4" or less in diameter. Elevation diagrams can be furnished upon request. We request a waiver of the three-day BLM notification of interim reclamation activities.