

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*Lease Serial No.
NMM136226

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		8. Well Name and No. LESLIE FED COM 217H
2. Name of Operator MATADOR PRODUCTION COMPANY		9. API Well No. 30-025-44547-00-X1
3a. Address 5400 LBJ FREEWAY SUITE 1500 DALLAS, TX 75240	3b. Phone No. (include area code) Ph: 575-623-6601 Ext: 2465	10. Field and Pool or Exploratory Area DOGIE DRAW-DELAWARE
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 17 T25S R35E SWSE 300FSL 2085FEL 32.123959 N Lat, 103.387756 W Lon		11. County or Parish, State LEA COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

BLM Bond No. NMB001079
Surety Bond No. RLB0015172

Matador requests a variance to run 7 5/8" BTC casing inside 9 5/8" BTC casing which will be less than the 0.422" stand off regulation. Matador has met with Christopher Walls and Mustafa Haque as well as other BLM representatives and determined that this would be acceptable as long as the 7 5/8" flush casing was run throughout the entire 300+' cement tie back section between 9 5/8" and 7 5/8" casing.

See attached APD table and other attachments.

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

14. I hereby certify that the foregoing is true and correct. Electronic Submission #407178 verified by the BLM Well Information System For MATADOR PRODUCTION COMPANY, sent to the Hobbs Committed to AFMSS for processing by PRISCILLA PEREZ on 03/16/2018 (18PP0768SE)	
Name (Printed/Typed) TAMMY R LINK	Title PRODUCTION ANALYST
Signature (Electronic Submission)	Date 03/08/2018

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <u>MUSTAFA HAQUE</u>	Title <u>PETROLEUM ENGINEER</u>	Date <u>04/04/2018</u>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office <u>Hobbs</u>

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

Name	Hole Size	Casing Size	Wt/Grade	Thread Collar	Setting Depth	Top Cement
Surface	17-1/2"	13-3/8" (new)	54.5# J-55	BTC	1000	Surface
Intermediate	12-1/4"	9-5/8" (new)	40# J-55	BTC	5600	Surface
Intermediate 2 Top	8-3/4"	7-5/8" (new)	29.7# P-110	BTC	5300	4600
Intermediate 2 Middle	8-3/4"	7-5/8" (new)	29.7# P-110	VAM HTF-NR	11850	4600
Intermediate 2 Bottom	8-3/4"	7" (new)	29# P-110	BTC	12790	4600
Production Top	6-1/8"	5-1/2" (new)	20# P-110	BTC/TXP	11750	12200
Production Bottom	6-1/8"	4-1/2" (new)	13.5# P-110	BTC/TXP	17282	12200

Name	Type	Sacks	Yield	Weight	Blend
Surface	Lead	700	1.82	12.8	Class C + Bentonite + 2% CaCL2 + 3% NaCl + LCM
	Tail	400	1.38	14.8	Class C + 5% NaCl + LCM
TOC = 0'		100% Excess		Centralizers per Onshore Order 2.III.B.1f	
Intermediate	Lead	1250	1.82	12.8	Class C + Bentonite + 2% CaCL2 + 3% NaCl + LCM
	Tail	540	1.38	14.8	Class C + 5% NaCl + LCM
TOC = 0'		100% Excess		2 on btm jt, 1 on 2nd jt, 1 every 4th jt to surface	
Intermediate 2	Lead	550	2.36	11.5	TXI + Fluid Loss + Dispersant + Retarder + LCM
	Tail	300	1.38	14.8	TXI + Fluid Loss + Dispersant + Retarder + LCM
TOC = 4600'		60% Excess		2 on btm jt, 1 on 2nd jt, 1 every 4th jt to top of tail cement (500' above TOC)	
Production	Tail	510	1.17	15.8	Class H + Fluid Loss + Dispersant + Retarder + LCM
TOC = 12,200'		25% Excess		2 on btm jt, 1 on 2nd jt, 1 every other jt to top of curve	

Name	Type	Sacks	Yield	Weight
Surface	Lead	700	1.82	12.8
	Tail	400	1.38	14.8
TOC = 0'		100% Excess		
Intermediate	Lead	1250	1.82	12.8
	Tail	540	1.38	14.8
TOC = 0'		100% Excess		
Intermediate 2	Lead	550	2.36	11.5
	Tail	300	1.38	14.8
TOC = 4600'		60% Excess		
Production	Tail	510	1.17	15.8
TOC = 12,200'		25% Excess		


Blend
Class C + Bentonite + 2% CaCL ₂ + 3% NaCl + LCM
Class C + 5% NaCl + LCM
Centralizers per Onshore Order 2.III.B.1f
Class C + Bentonite + 2% CaCL ₂ + 3% NaCl + LCM
Class C + 5% NaCl + LCM
2 on btm jt, 1 on 2nd jt, 1 every 4th jt to surface
TXI + Fluid Loss + Dispersant + Retarder + LCM
TXI + Fluid Loss + Dispersant + Retarder + LCM
2 on btm jt, 1 on 2nd jt, 1 every 4th jt to top of tail cement (500' above TOC)
Class H + Fluid Loss + Dispersant + Retarder + LCM
2 on btm jt, 1 on 2nd jt, 1 every other jt to top of curve

CONNECTION DATA SHEET (Imperial Units)



Connection: VAM® HTF-NR 7,625" 29,70# P110EC
 Alternate Drift: 6,750"

Drawing: PD-101836P PD-101836B Isolated connection

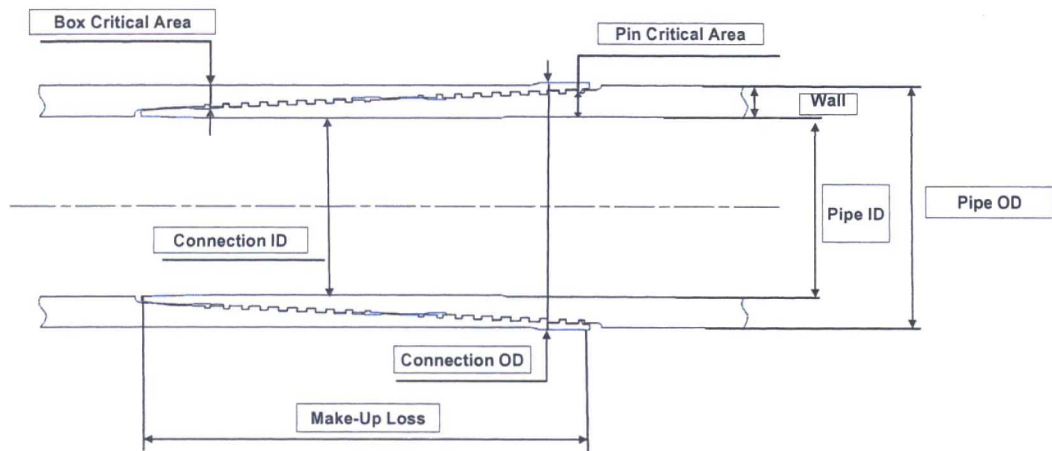

OD	WEIGHT	WALL	GRADE	API DRIFT
7,625"	29,70 lb/ft	0,375"	P110EC	6,750"

PIPE BODY PROPERTIES:			CONNECTION PROPERTIES:		
Outside Diameter	inch	7,625	Connection OD (nom)	inch	7,701
Internal Diameter	inch	6,875	Connection ID	inch	6,782
Nominal Area	sqin.	8,541	Coupling Length	inch	N/A
			Make-up Loss	inch	4,657
			Box critical area	%PBYS	58%
			Pin critical area	%PBYS	67%
Yield Strength	klb	1 068	Yield Strength	klb	619
Ultimate Strength	klb	1 153	Ultimate strength	klb	669
			Structural compression	klb	776
			Compression with sealability	klb	371
MIYP	psi	10 760	MIYP	psi	10 760
Collapse Pressure	psi	5 670	Ext Pressure Resistance	psi	5 670
			Regular Make-up Torque	ft.lb	
			Min		9 600
			Opt		11 300
			Max		13 000
			Maximum Torque with Sealability	ft.lb	58 500
			Maximum Torsional Value	ft.lb	73 000

No one knows VAM like VAM

uk@vamfieldservice.com
 dubai@vamfieldservice.com
 angela@vamfieldservice.com
 singapore@vamfieldservice.com



usa@vamfieldservice.com
 brazil@vamfieldservice.com
 canada@vamfieldservice.com
 mexico@vamfieldservice.com

88 VAM Specialists available worldwide 24/7 for Pig Site Assistance



Designed by :
 X. MENCAGLIA

Reference: VRCC16-1177
 Revision : 0
 Date : July 19, 2016

For the latest performance data, always visit our website: www.tenaris.com

February 02 2017



Connection: TenarisXP® BTC
Casing/Tubing: CAS
Coupling Option: REGULAR

Size: 5.500 in.
Wall: 0.361 in.
Weight: 20.00 lbs/ft
Grade: P110-IC
Min. Wall Thickness: 87.5 %

PIPE BODY DATA			
GEOMETRY			
Nominal OD	5.500 in.	Nominal Weight	20.00 lbs/ft
Nominal ID	4.778 in.	Wall Thickness	0.361 in.
Plain End Weight	19.83 lbs/ft	Standard Drift Diameter	4.653 in.
		Special Drift Diameter	N/A
PERFORMANCE			
Body Yield Strength	641 x 1000 lbs	Internal Yield	12630 psi
Collapse	12100 psi	SMYS	110000 psi
TENARISXP® BTC CONNECTION DATA			
GEOMETRY			
Connection OD	6.100 in.	Coupling Length	9.450 in.
Critical Section Area	5.828 sq. in.	Threads per in.	5.00
		Connection ID	4.766 in.
		Make-Up Loss	4.204 in.
PERFORMANCE			
Tension Efficiency	100 %	Joint Yield Strength	641 x 1000 lbs
Structural Compression Efficiency	100 %	Structural Compression Strength	641 x 1000 lbs
External Pressure Capacity	12100 psi	Internal Pressure Capacity ⁽¹⁾	12630 psi
		Structural Bending ⁽²⁾	92 %/100 ft
ESTIMATED MAKE-UP TORQUES			
Minimum	11270 ft-lbs	Optimum	12520 ft-lbs
		Maximum	13770 ft-lbs
OPERATIONAL LIMIT TORQUES			
Operating Torque	21500 ft-lbs	Yield Torque	23900 ft-lbs
BLANKING DIMENSIONS			
Blanking Dimensions			

(1) Internal Pressure Capacity related to structural resistance only. Internal pressure leak resistance as per

section 10.3 API 5C3 / ISO 10400 - 2007.

(2) Structural rating, pure bending to yield (i.e no other loads applied)

(3) Torque values calculated for API Modified thread compounds with Friction Factor=1. For other thread compounds please contact us at licensees@oilfield.tenaris.com. Torque values may be further reviewed.

For additional information, please contact us at contact-tenarishydril@tenaris.com

For the latest performance data, always visit our website: www.tenaris.com

February 02 2017



Connection: TenarisXP® BTC
Casing/Tubing: CAS
Coupling Option: REGULAR

Size: 4.500 in.
Wall: 0.290 in.
Weight: 13.50 lbs/ft
Grade: P110-ICY
Min. Wall Thickness: 87.5 %

PIPE BODY DATA			
GEOMETRY			
Nominal OD	4.500 in.	Nominal Weight	13.50 lbs/ft
Nominal ID	3.920 in.	Wall Thickness	0.290 in.
Plain End Weight	13.05 lbs/ft	Standard Drift Diameter	3.795 in.
		Special Drift Diameter	N/A
PERFORMANCE			
Body Yield Strength	479 x 1000 lbs	Internal Yield	14100 psi
Collapse	11620 psi	SMYS	125000 psi
TENARISXP® BTC CONNECTION DATA			
GEOMETRY			
Connection OD	5.000 in.	Coupling Length	9.075 in.
Critical Section Area	3.836 sq. in.	Threads per in.	5.00
		Connection ID	3.908 in.
		Make-Up Loss	4.016 in.
PERFORMANCE			
Tension Efficiency	100 %	Joint Yield Strength	479 x 1000 lbs
Structural Compression Efficiency	100 %	Structural Compression Strength	479 x 1000 lbs
External Pressure Capacity	11620 psi	Internal Pressure Capacity ⁽¹⁾	14100 psi
		Structural Bending ⁽²⁾	127 °/100 ft
ESTIMATED MAKE-UP TORQUES ⁽¹⁾			
Minimum	6950 ft-lbs	Optimum	7720 ft-lbs
		Maximum	8490 ft-lbs
OPERATIONAL LIMIT TORQUES			
Operating Torque	10500 ft-lbs	Yield Torque	12200 ft-lbs
BLANKING DIMENSIONS			
Blanking Dimensions			

(1) Internal Pressure Capacity related to structural resistance only. Internal pressure leak resistance as per

section 10.3 API 5C3 / ISO 10400 - 2007.

(2) Structural rating, pure bending to yield (i.e no other loads applied)

(3) Torque values calculated for API Modified thread compounds with Friction Factor=1. For other thread compounds please contact us at licensees@oilfield.tenaris.com. Torque values may be further reviewed.

For additional information, please contact us at contact-tenarishydril@tenaris.com

PECOS DISTRICT DRILLING OPERATIONS CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Matador Production Company
LEASE NO.:	NMNM136226
WELL NAME & NO.:	217H – Leslie Fed Com
SURFACE HOLE FOOTAGE:	300'/S & 2085'/E
BOTTOM HOLE FOOTAGE:	240'/N & 2130'/E
LOCATION:	Section 17, T.25 S., R.35 E., NMPM
COUNTY:	Lea County, New Mexico

Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP

All previous COAs still apply except for the following:

Second intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

1. The minimum required fill of cement behind the **7 5/8 X 7** inch 2nd intermediate casing is:

☒ Cement as proposed. Operator shall provide method of verification.

2. The minimum required fill of cement behind the **5 1/2 X 4 1/2** inch production casing is:

☒ Cement as proposed. Operator shall provide method of verification.

MHH 04042018

GENERAL REQUIREMENTS

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.