

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-31272
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. V-3273
7. Lease Name or Unit Agreement Name Eidson Ranch AQB State
8. Well Number 2
9. OGRID Number 025575
10. Pool name or Wildcat Wildcat Morrow

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 S. 4th Street, Artesia, NM 88210

4. Well Location
Unit Letter Q : 2080 feet from the South line and 660 feet from the East line
Section 5 Township 16S Range 33E NMPM Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4218' GR

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type Steel Depth to Groundwater N/A Distance from nearest fresh water well N/A Distance from nearest surface water N/A

Pit Liner Thickness: N/A mil Below-Grade Tank: Volume N/A bbls; Construction Material N/A

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P & A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

**THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS.**

Propose to Plug & Abandon as follows:

- 1) RIH and set CIBP @ 13200'. Dump 35' cement on plug.
- 2) TIH w/tubing to 13165'. Circulate hole w/9.5# mud and spot 100' cement plug 10700-10600'. Spot 100' cement plug 7500-7400'.
- 3) Perforate @ 4522'. Place 100' cement plug inside and outside of casing 4522-4422'. WOC and tag plug. Spot 100' cement plug 2800-2700'. Spot 100' cement plug 1470-1370'. Spot 100' cement plug 465-365'.
- 4) Spot 10 sx plug @ surface.
- 5) Cut off casing, install marker and clean up location.

(Proposed Schematic Attached)

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Stormi Davis TITLE Regulatory Compliance Technician DATE 4-24-06

Type or print name Stormi Davis E-mail address: stormid@ypcnm.com Telephone No. 505-748-1471

For State Use Only

APPROVED BY: Harry W. Wink DATE APR 25 2006

Conditions of Approval (if any) FIELD REPRESENTATIVE II / STAFF MANAGER

Well Name: Eidson Ranch Unit No. 1 Field: _____

Location: 2080' FSL & 660' FEL Sec. 5-16S-33E Lea Co., NM


GL: 4218' Zero: _____ AGL: _____ KB: 4235'

Spud Date: 6-30-91 Completion Date: 7-26-94

Comments: Well drilled by YPC. P&A'd in 1994.

Casing Program

Size/Wt/Grade/Conn	Depth Set
13 3/8" 54.5# J55	415'
8 5/8" 32# S80 & J55	4472'
5 1/2" 17# S95 & N80	13650'

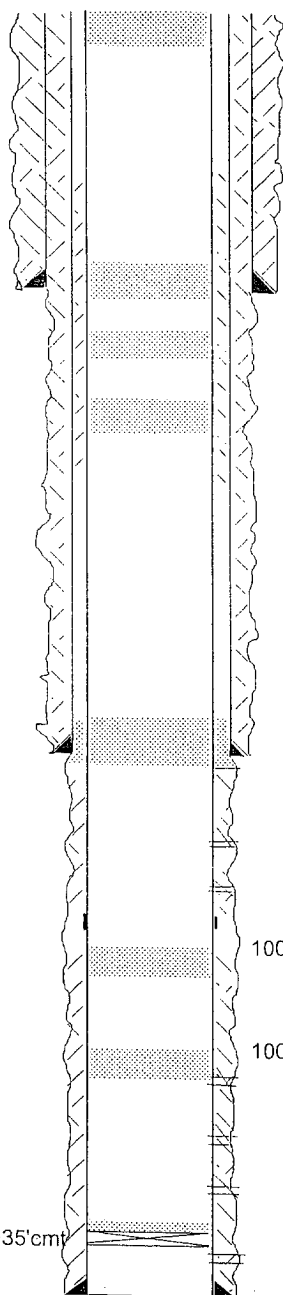

10 sx cement plug @ surface

PROPOSED CONFIGURATION

100' cement plug 465-365'

13 3/8" csg @ 415'. Cmtd w/ 450 sx. Cmt circ.

100' cement plug 1470-1370'

100' cement plug 2800-2700'

5 1/2" csg cut @ 2800' Rejoined casing. Cemented w/ 150 sx/

Perf @ 4522'. Place 100' cement plug 4522-4422'

8 5/8" csg @ 4472'. Cmtd w/ 1950 sx. Cmt circ.

TOC 4620'

San Andres perms 5714-25' -Squeezed

Glorieta perms 5899-5910' - Squeezed w/ 200 sx

DV tool @ 6079' (by CBL)

100' cement plug 7500-7400'

100' cement plug 10700-10600'

Wolfcamp perms 10707-30' & 10771-82' -Squeezed

Seamon perms 11040-43', 11079-83', 11096-11100' -Squeezed
11106-08'

L. Canyon perms 11761-91' - Squeezed

Morrow perms 13224'-13232' & 13239-13248'

5 1/2" csg @ 13650'. Cmtd 1st stg w/ 1100 sx. Cmtd 2nd stg w/ 300 sx.

CIBP @ 13200+35' cmt

TD 13660'
Cleaned out to 13400'

SKETCH NOT TO SCALE

DATE: 4/18/06 EIDSON2C