

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-22519	5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name Quail Queen Unit	
8. Well Number: 13	
9. OGRID Number 4323	
10. Pool name or Wildcat Quail, Queen	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3967' GL	

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	
2. Name of Operator Chevron USA, Inc	
3. Address of Operator 6301 Deauville Blvd., Midland, TX 79706	
4. Well Location Unit Letter L : 2310 feet from the SOUTH line and 330 feet from the WEST line Section 13 Township 19S Range 34E NMPM County Lea	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3967' GL	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐

OTHER: ☐

INT TO PA TM
P&A NR
P&A R

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 8 5/8" 24# @ 403': TOC @ surface; 4 1/2" 9.5/10.5/11.6# @ 5300': TOC @ surface 350 SX

Chevron USA INC respectfully requests to abandon this well as follows:

NOT ENOUGH
CMT TO CIRC
?

- MIRU, pull rods, N/U BOPE, pull tubing
- Set CIBP @ 4550'. Circulate 9.5 ppg gel KCl and pressure test casing to 500 psi for 10 minutes. If there is pressure on the annulus, run CBL and discuss results w/ engineer & NMOCD to identify potential squeeze zones to isolate the Yates
- Spot 95 sx CL C cement plug f/ 4550' t/ 3240' (Perfs, Yates, B. Salt).
- Spot 25 sx CL C cement plug f/ 1947' t/ 1610' (T. Salt, Anhy) 1897' t/ 1610'
- Spot 35 sx CL C cement plug f/ 453' t/ surface (Shoe, Fresh Water) CIRC TO SURFACE
- Cut all casings & anchors & remove 3' below grade. Weld on dry hole marker. Clean location.
- All cement plugs class "C" with closed loop system used.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

5/25/2018

X Nick Glann

Nick Glann
Well Abandonment Engineer

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

SIGNATURE Signed by: Nick Glann

E-mail address: nglann@chevron.com PHONE: 432-687-7786

For State Use Only

APPROVED BY: Matt W. Pritchard TITLE Petroleum Engr. Specialist DATE 05/31/2018

Conditions of Approval (if any):

C103 INTENT TO P&A EXPIRES
1 YEAR FROM DATE OF APPROVAL

Quail Queen #13 Current Wellbore Diagram (UCAL50500)

Well-----Quail Queen #13

Field-----Quail

County--Lea

State-----New Mexico

Chevron FG3316

API #-----30-025-22519

Status-----SI

Battery

Surf. Loc-----2310' FSL & 330' FWL

Lat & Long-----32.6591700, -103.5206800

Section-----13

Township & Range 19S & 34E

Spud Date-----4/19/1968

8-5/8", @ 403' (J-55 24#)
CMT CIRC (7-7/8" HOLE)

INDICATE FORMATION TOPS IN

Southeastern New Mexico

T. Anhy	1860'	T. Canyon	
T. Salt	1897'	T. Strawn	
D. Salt	3340'	T. Atoka	
T. Yates	3614'	T. Miss	
T. 7 Rivers		T. Devonian	
T. Queen	4865'	T. Silurian	
T. Penrose	5137'	T. Montoya	
T. San Andres		T. Simpson	
T. Glorieta		T. McKee	

SEVEN RIVERS PERFS

4,592', 4,632'
4,776', 4,781', 4,874'
4,886', 4,975'


Perfs squeezed
in 2009

QUEEN PERF DETAIL

5,142', 5,148', 5,198'

Tubing String Quantity (Top-Bottom Depth) Desc

143 @ (0-4528) J-55 2.375 OD/ 4.70# T&C External Upset 1.995 ID 1.901
1 @ (4528-4531) Tubing Anchor/Catcher 2.375-
19 @ (4531-5134) J-55 2.375 OD/ 4.70# T&C External Upset 1.995 ID 1.901
2 @ (5134-5196) J-55 2.375 OD/ 4.70# T&C External Upset 1.995 ID 1.901 Drift - Internal Plastic
1 @ (5196-5197) Seat Nipple - Standard (2.375) Cup Type-
1 @ (5196-5200) Tubing Perforation-
1 @ (5197-5201) Unknown Grade/Thread/Weight 2.875 OD-
1 @ (5197-5201) Unknown Grade/Thread/Weight 2.875 OD-
1 @ (5197-5201) Unknown Grade/Thread/Weight 2.875 OD-
1 @ (5197-5201) Unknown Grade/Thread/Weight 2.875 OD-
1 @ (5197-5201) Perforated Tubing Sub (Unknown Size)-
1 @ (5201-5202) Bull Plug Mud Anchor 2.375-
Rod String Quantity (Top-Bottom Depth) Desc
1 @ (0-18) 1.250 (1 1/4 in.) Spray Metal x 18-
1 @ (18-22) 0.875 (7/8 in.) D x 4 Rod Sub-
88 @ (22-2222) 0.875 (7/8 in.) D x 25 Rod-
111 @ (2222-4997) 0.750 (3/4 in.) D x 25 Rod-
8 @ (4997-5197) 1.250 (1 1/4 in.) K x 25 Sinker Bar-
1 @ (5197-5201) 0.875 (7/8 in.) D x 4 Rod Sub - Rod Guides-Molded (3 per rod)-
1 @ (5201-5217) Rod Pump (Insert) (NON-SERIALIZED) - 20-125-R H BC -16-4 (Bore = 1.25)-

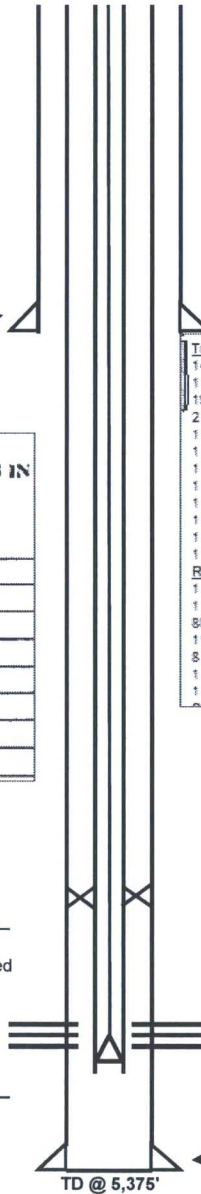

4-1/2", @ 5,300' (J-55; 9.5#, 10.5# & 11.6#)
CMT CIRC (7-7/8" HOLE)

Quail Queen #13 Proposed Wellbore Diagram (UCAL50500)

Well-----Quail Queen #13

Field-----Quail

County---Lea

State-----New Mexico

Chevno FG3316

API #-----30-025-22519

Status---SI

Battery

Surf. Loc----- 2310' FSL & 330' FWL

Lat & Long----- 32.6591700 , -103.5206800

Section----- 13

Township & Range 19S & 34E

Spud Date----- 4/19/1968

8-5/8", @ 403' (J-55 24#)
CMT CIRC (7-7/8" HOLE)

Spot 35 sx CL C cmt f/ 453' t/ surface (Shoe, Fresh Water)

INDICATE FORMATION TOPS IN

Southeastern New Mexico

T. Anhy	1860'	T. Canyon	
T. Salt	1897'	T. Strawn	
B. Salt	3340'	T. Atoka	
T. Yates	3614'	T. Miss	
T. 7 Rivers		T. Devonian	
T. Queen	4865'	T. Silurian	
T. Greyburg ^{Penrose}	5137'	T. Montoya	
T. San Andres		T. Simpson	
T. Glorieta		T. McKee	

Spot 25 sx CL C cmt f/ 1947' t/ 1610' (T. Salt, Anhy)

SEVEN RIVERS PERFS

4,592', 4,632'
4,776', 4,781', 4,874'
4,888', 4,975'

Perfs squeezed
in 2009

QUEEN PERF DETAIL

5,142', 5,148', 5,198'

Spot 95 sx CL C cmt f/ 4550' t/ 3240' (Perfs, Yates, B. Salt)
Set CIBP @ 4550'

TD @ 5,375'

4-1/2", @ 5,300' (J-55; 9.5#, 10.5# & 11.6#)
CMT CIRC (7-7/8" HOLE)