

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
NMNM118726

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

7. If Unit or CA/Agreement, Name and/or No.

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.
ANTIETAM 9 FED COM 705H

2. Name of Operator
EOG RESOURCES INCORPORATED
Contact: STAN WAGNER
E-Mail: stan_wagner@eogresources.com

9. API Well No.
30-025-44347-00-X1

3a. Address
MIDLAND, TX 79702

3b. Phone No. (include area code)
Ph: 432-686-3689

10. Field and Pool or Exploratory Area
WC RED HILLS

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 9 T25S R33E NENW 41FNL 1552FWL
32.152241 N Lat, 103.580750 W Lon

Carlsbad Field Office
OCD Hobbs

11. County or Parish, State
LEA COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original APD
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

EOG Resources requests an amendment to our approved APD for this well to reflect a change in casing design as attached.

Change to a 4-string casing design.

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #401268 verified by the BLM Well Information System
For EOG RESOURCES INCORPORATED, sent to the Hobbs
Committed to AFMSS for processing by PRISCILLA PEREZ on 01/25/2018 (18PP0466SE)**

Name (Printed/Typed) STAN WAGNER

Title REGULATORY ANALYST

Signature (Electronic Submission)

Date 01/17/2018

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By **ACCEPTED**

ZOTA STEVENS
Title PETROLEUM ENGINEER

Date 06/04/2018

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Hobbs

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

Revised Permit Information 1/17/18:

Well Name: Antietam 9 Fed Com No. 705H

Location:

SL: 41' FNL & 1552' FWL, Section 9, T-25-S, R-33-E, Lea Co., N.M.

BHL: 2410' FNL & 1644' FWL, Section 16, T-25-S, R-33-E, Lea Co., N.M.

Casing Program:

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
17.5"	0 - 1,100'	13.375"	54.5#	J55	STC	1.125	1.25	1.60
12.25"	0-4,000'	9.625"	40#	J55	LTC	1.125	1.25	1.60
12.25"	4,000' - 4,900'	9.625"	40#	HCK55	LTC	1.125	1.25	1.60
8.75"	0 - 11,400'	7.625"	29.7#	HCP110	FXL	1.125	1.25	1.60
6.75"	0 - 10,900'	5.5"	20#	P110EC	DWC CIS MS	1.125	1.25	1.60
6.75"	0'-19,866'	5.5"	20#	P110EC	VAM SFC	1.125	1.25	1.60

Variance is requested for annular clearance of the 5-1/2" x 7-5/8" to the top of cement.

Cement Program:

Depth	No. Sacks	Wt. lb/gal	Yld Ft ³ /ft	Slurry Description
1,100'	697	13.5	1.74	Lead: Class 'C' + 4.00% Bentonite + 2.00% CaCl ₂ (TOC @ Surface)
	333	14.8	1.35	Tail: Class 'C' + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate + 2.0% KCl (1.06 lb/sk)
4,900'	692	12.7	2.22	Lead: Class C + 0.15% C-20 + 11.63 pps Salt + 0.1% C-51 + 0.75% C-41P (TOC @ Surface)
	303	14.8	1.32	Tail: Class C + 0.13% C-20
11,400'	375	10.8	3.67	Lead: Class C + 0.40% D013 + 0.20% D046 + 0.10% D065 + 0.20% D167 (TOC @ 4,400')
	400	14.8	2.38	Tail: Class H + 94.0 pps D909 + 0.25% D065 + 0.30% D167 + 0.02% D208 + 0.15% D800
19,866'	950	14.8	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 10,900')

Mud Program:


Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 - 1,100'	Fresh - Gel	8.6-8.8	28-34	N/c
1,100' - 4,900'	Brine	10.0-10.2	28-34	N/c
4,900' - 11,400'	Oil Base	8.7-9.4	58-68	N/c - 6
11,400' - 19,866' Lateral	Oil Base	10.0-11.5	58-68	3 - 6

Antietam 9 Fed Com #705H
Lea County, New Mexico

41' FNL
1552' FWL
Section 9
T-25-S, R-33-E

Proposed Wellbore
Revised 1/17/18
API: 30-025-*****

KB: 3,465'
GL: 3,440'

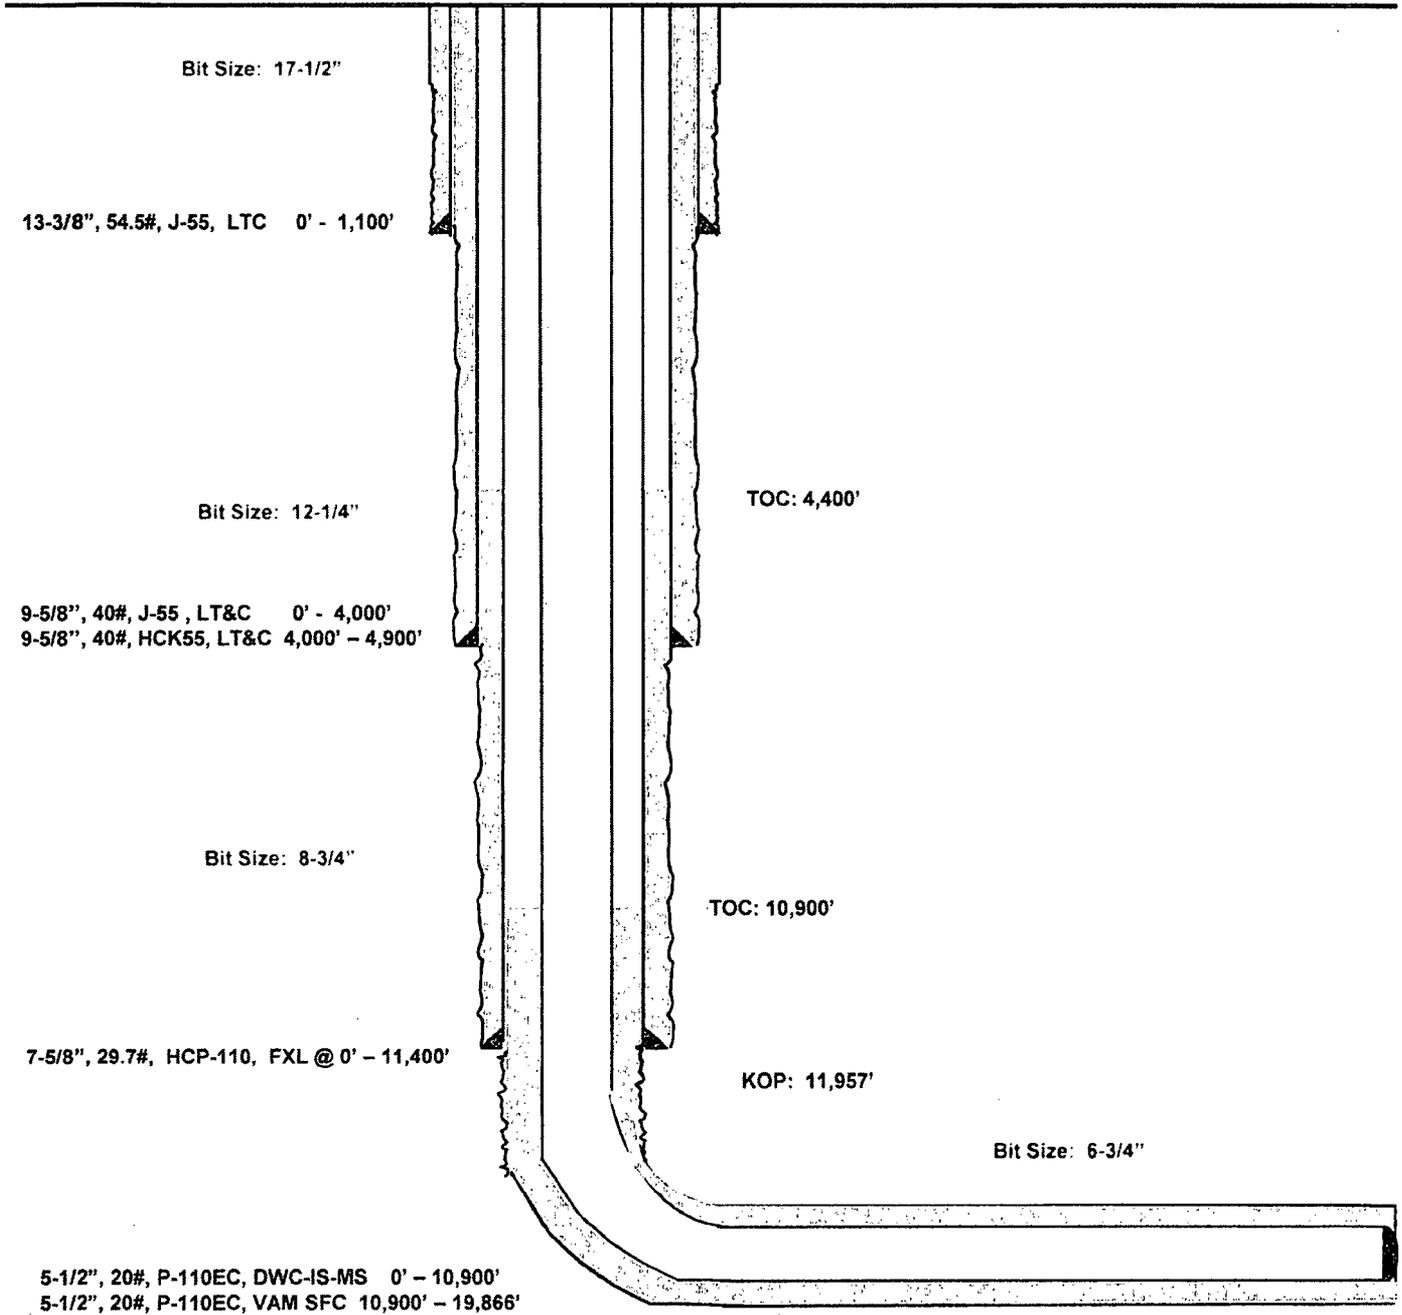

Lateral: 19,866' MD, 12,434' TVD
Upper Most Perf:
330' FNL & 1646' FWL Sec. 9
Lower Most Perf:
2310' FNL & 1643' FWL Sec. 16
BH Location: 2410' FNL & 1644' FWL
Section 16
T-25-S, R-33-E