

HOBBS OCD

AUG 16 2018

**Carlsbad Field Office
OCD Hobbs**

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

*MIN R
SUR F*

RECEIVED
UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM128368
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name LITTLE BEAR FEDERAL COM 4H
2. Name of Operator COG OPERATING LLC (229137)		7. If Unit or CA Agreement, Name and No.
3a. Address 600 West Illinois Ave Midland TX 79701		8. Lease Name and Well No. (322258) LITTLE BEAR FEDERAL COM 4H
3b. Phone No. (include area code) (432)683-7443		9. API Well No. 30-025-45100
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface SWSW / 384 FSL / 1151 FWL / LAT 32.523378 / LONG -103.570105 At proposed prod. zone NESW / 2440 FSL / 1650 FWL / LAT 32.543561 / LONG -103.568493		10. Field and Pool, or Exploratory WILDCAT / BONE SPRING 447h
14. Distance in miles and direction from nearest town or post office* 14 miles		11. Sec., T, R, M. or Blk. and Survey or Area SEC 33 / T20S / R34E / NMP
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 200 feet	16. No. of acres in lease 600	17. Spacing Unit dedicated to this well 240
18. Distance from proposed location* to nearest well, drilling, completed, 762 feet applied for, on this lease, ft.	19. Proposed Depth 11384 feet / 18893 feet	20. BLM/BIA Bond No. on file FED: NMB000215
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3804 feet	22. Approximate date work will start* 08/01/2018	23. Estimated duration 30 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature (Electronic Submission)	Name (Printed Typed) Mayte Reyes / Ph: (575)748-6945	Date 04/19/2018
Title Regulatory Analyst		
Approved by (Signature) (Electronic Submission)	Name (Printed Typed) Christopher Walls / Ph: (575)234-2234	Date 08/07/2018
Title Petroleum Engineer		
Office CARLSBAD		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

GCP Rec 08/16/18

APPROVED WITH CONDITIONS
Approval Date: 08/07/2018

*Ko
08/16/18*

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

1. SHL: SWSW / 384 FSL / 1151 FWL / TWSP: 20S / RANGE: 34E / SECTION: 33 / LAT: 32.523378 / LONG: -103.570105 (TVD: 0 feet, MD: 0 feet)
PPP: SESW / 330 FSL / 1650 FWL / TWSP: 20S / RANGE: 34E / SECTION: 33 / LAT: 32.52323 / LONG: -103.568486 (TVD: 11384 feet, MD: 11501 feet)
BHL: NESW / 2440 FSL / 1650 FWL / TWSP: 20S / RANGE: 34E / SECTION: 28 / LAT: 32.543561 / LONG: -103.568493 (TVD: 11384 feet, MD: 18893 feet)

BLM Point of Contact

Name: Priscilla Perez

Title: Legal Instruments Examiner

Phone: 5752345934

Email: pperez@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL



APD ID: 10400029550

Submission Date: 04/19/2018

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

Well Type: OIL WELL

Well Work Type: Drill



Show Final Text

Section 1 - General

APD ID: 10400029550

Tie to previous NOS?

Submission Date: 04/19/2018

BLM Office: CARLSBAD

User: Mayte Reyes

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM128368

Lease Acres: 600

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: COG OPERATING LLC

Operator letter of designation:

Operator Info

Operator Organization Name: COG OPERATING LLC

Operator Address: 600 West Illinois Ave

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)683-7443

Operator Internet Address: RODOM@CONCHO.COM

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WILDCAT

Pool Name: BONE SPRING

Is the proposed well in an area containing other mineral resources? USEABLE WATER,POTASH

Operator Name: COG OPERATING CO

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

Describe other minerals:

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: LITTLE BEAR FEDERAL COM

Number: 4H, 5H AND 9H

Well Class: HORIZONTAL

Number of Legs:

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: EXPLORATORY (WILDCAT)

Describe sub-type:

Distance to town: 14 Miles

Distance to nearest well: 762 FT

Distance to lease line: 200 FT

Reservoir well spacing assigned acres Measurement: 240 Acres

Well plat: COG_Little_Bear_4H_C102_20180418092644.pdf

Well work start Date: 08/01/2018

Duration: 30 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	384	FSL	115 1	FWL	20S	34E	33	Aliquot SWS W	32.52337 8	- 103.5701 05	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 128368	380 4	0	0
KOP Leg #1	384	FSL	115 1	FWL	20S	34E	33	Aliquot SWS W	32.52337 8	- 103.5701 05	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 128368	380 4	0	0
PPP Leg #1	330	FSL	165 0	FWL	20S	34E	33	Aliquot SESW	32.52323	- 103.5684 86	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 128368	- 758 0	115 01	113 84



APD ID: 10400029550

Submission Date: 04/19/2018

Operator Name: COG OPERATING LLC

Highlighted data
reflects the most
recent changes

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1	QUATERNARY	3804	0	0		NONE	No
2	RUSTLER	1971	1833	1833		NONE	No
3	TOP SALT	1891	1913	1913	SALT	NONE	No
4	BASE OF SALT	243	3561	3561	ANHYDRITE	NONE	No
5	YATES	101	3703	3703	LIMESTONE	OTHER : Salt Water	No
6	CAPITAN REEF	-162	3966	3966		OTHER : Salt Water	No
7	CANYON	-1865	5669	5669		NATURAL GAS,OIL	No
8	BRUSHY CANYON	-3258	7062	7062		NATURAL GAS,OIL,POTASH	Yes
9	BONE SPRING LIME	-4999	8803	8803		NATURAL GAS,OIL	No
10	UPPER AVALON SHALE	-5320	9124	9124		NATURAL GAS,OIL	No
11	---	-5388	9192	9192		NATURAL GAS,OIL	No
12	BONE SPRING 1ST	-6029	9833	9833		NATURAL GAS,OIL	No
13	BONE SPRING 2ND	-6578	10382	10382	SANDSTONE	NATURAL GAS,OIL	No
14	BONE SPRING 3RD	-7365	11169	11169		NATURAL GAS,OIL	Yes
15	WOLFCAMP	-7689	11493	11493		NATURAL GAS,OIL	No

Section 2 - Blowout Prevention

Operator Name: COG OPERATING L

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

Pressure Rating (PSI): 3M

Rating Depth: 5695

Equipment: Annular. Accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

COG_Little_Bear_4H_3M_Choke_20180418093415.pdf

BOP Diagram Attachment:

COG_Little_Bear_4H_3M_BOP_20180418093423.pdf

COG_Little_Bear_4H_Flex_Hose_20180716075752.pdf

Pressure Rating (PSI): 5M

Rating Depth: 11384

Equipment: Annular, Blind Ram, Pipe Ram. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for specs and hydrostatic test chart.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

COG_Little_Bear_4H_5M_Choke_20180418093340.pdf

BOP Diagram Attachment:

COG_Little_Bear_4H_5M_BOP_20180418093348.pdf

COG_Little_Bear_4H_Flex_Hose_20180716075803.pdf

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1860	0	1860	-6999	-7974	1860	J-55	54.5	STC	1.33	4.18	DRY	5.07	DRY	5.07
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	5695	0	5695	-6999	-18749	5695	L-80	40	LTC	1.2	1.3	DRY	3.19	DRY	3.19
3	PRODUCTION	8.75	5.5	NEW	API	N	0	18893	0	18893	-6999	-24211	18893	P-110	17	LTC	1.34	2.4	DRY	2.3	DRY	2.3

Casing Attachments

Casing ID: 1 String Type: SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Little_Bear_4H_Casing_20180418093506.pdf

Operator Name: COG OPERATING L

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

Casing Attachments

Casing ID: 2 String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Little_Bear_4H_Casing_20180418093458.pdf

Casing ID: 3 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_Little_Bear_4H_Casing_20180418093452.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1860	810	2	12.7	1620	50	Lead: 35:65:6 C Blend	As needed
SURFACE	Tail		0	1860	250	1.34	14.8	335	50	Class C	2% CaCl2
INTERMEDIATE	Lead		0	5695	310	1.98	12.7	613	50	Lead: 35:65:6 C Blend	As needed
INTERMEDIATE	Tail		0	5695	200	1.34	14.8	268	50	Tail: Class C	2% CaCl
PRODUCTION	Lead		0	1889 3	1340	2.5	11.9	3350	35	50:50:10 H Blend	As needed

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Tail		0	1889 3	2200	1.24	14.4	2728	35	50:50:2 Class H Blend	As needed

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
1860	5695	OTHER : Saturated Brine	9.8	10.2							Saturated Brine
0	1860	OTHER : FW Gel	8.6	8.8							FW Gel
5695	1889 3	OTHER : Cut Brine	8.6	9.4							Cut Brine

Operator Name: COG OPERATING L.

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

None planned

List of open and cased hole logs run in the well:

CNL,GR

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5565

Anticipated Surface Pressure: 3060.52

Anticipated Bottom Hole Temperature(F): 170

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

COG_Little_Bear_4H_H2S_Schem_20180418093920.pdf

COG_Little_Bear_4H_H2S_SUP_20180418093936.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

COG_Little_Bear_4H_AC_Report_20180418093956.pdf

COG_Little_Bear_4H_Direct_Plan_20180418094002.pdf

Other proposed operations facets description:


Other proposed operations facets attachment:

COG_Little_Bear_4H_GCP_20180418094022.pdf


COG_Little_Bear_4H_Drill_Prog_20180723125307.pdf

Other Variance attachment:


3M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

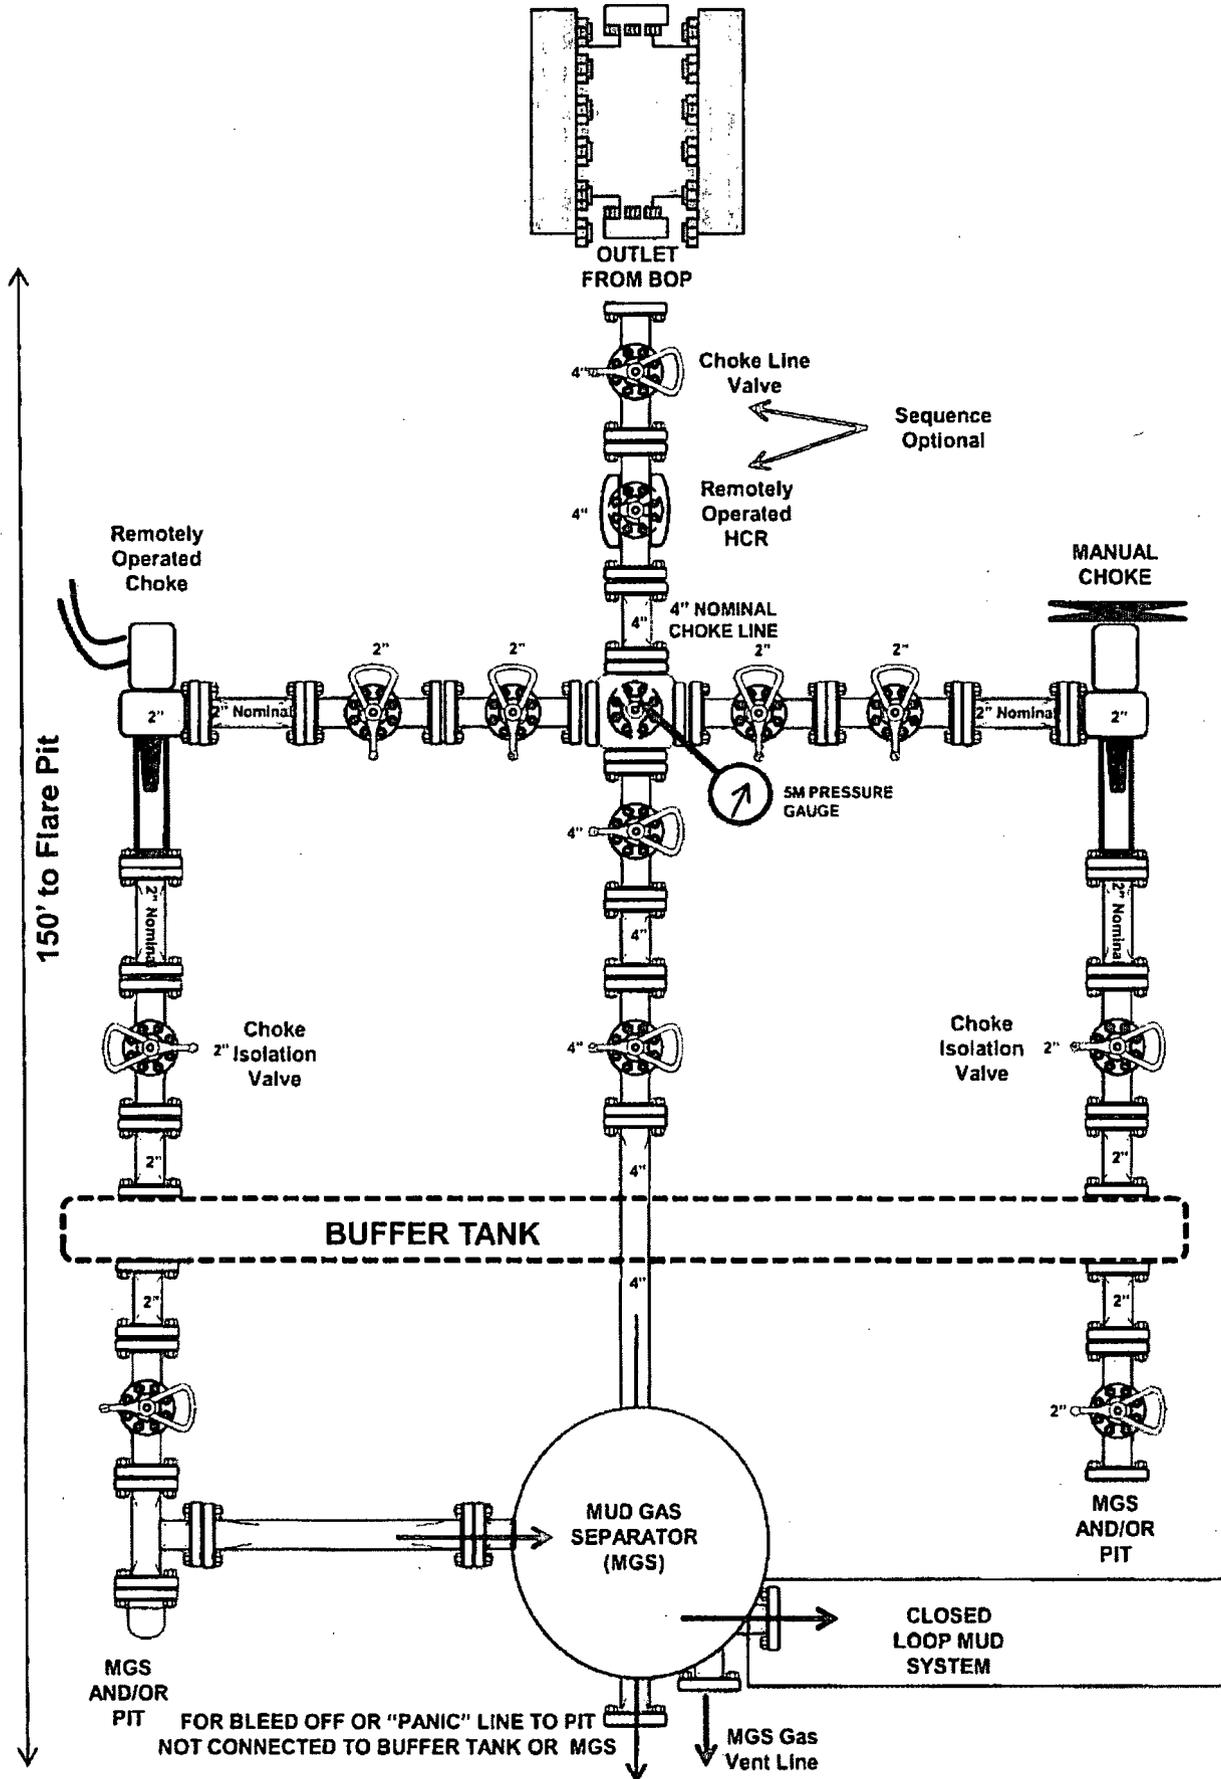

5M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

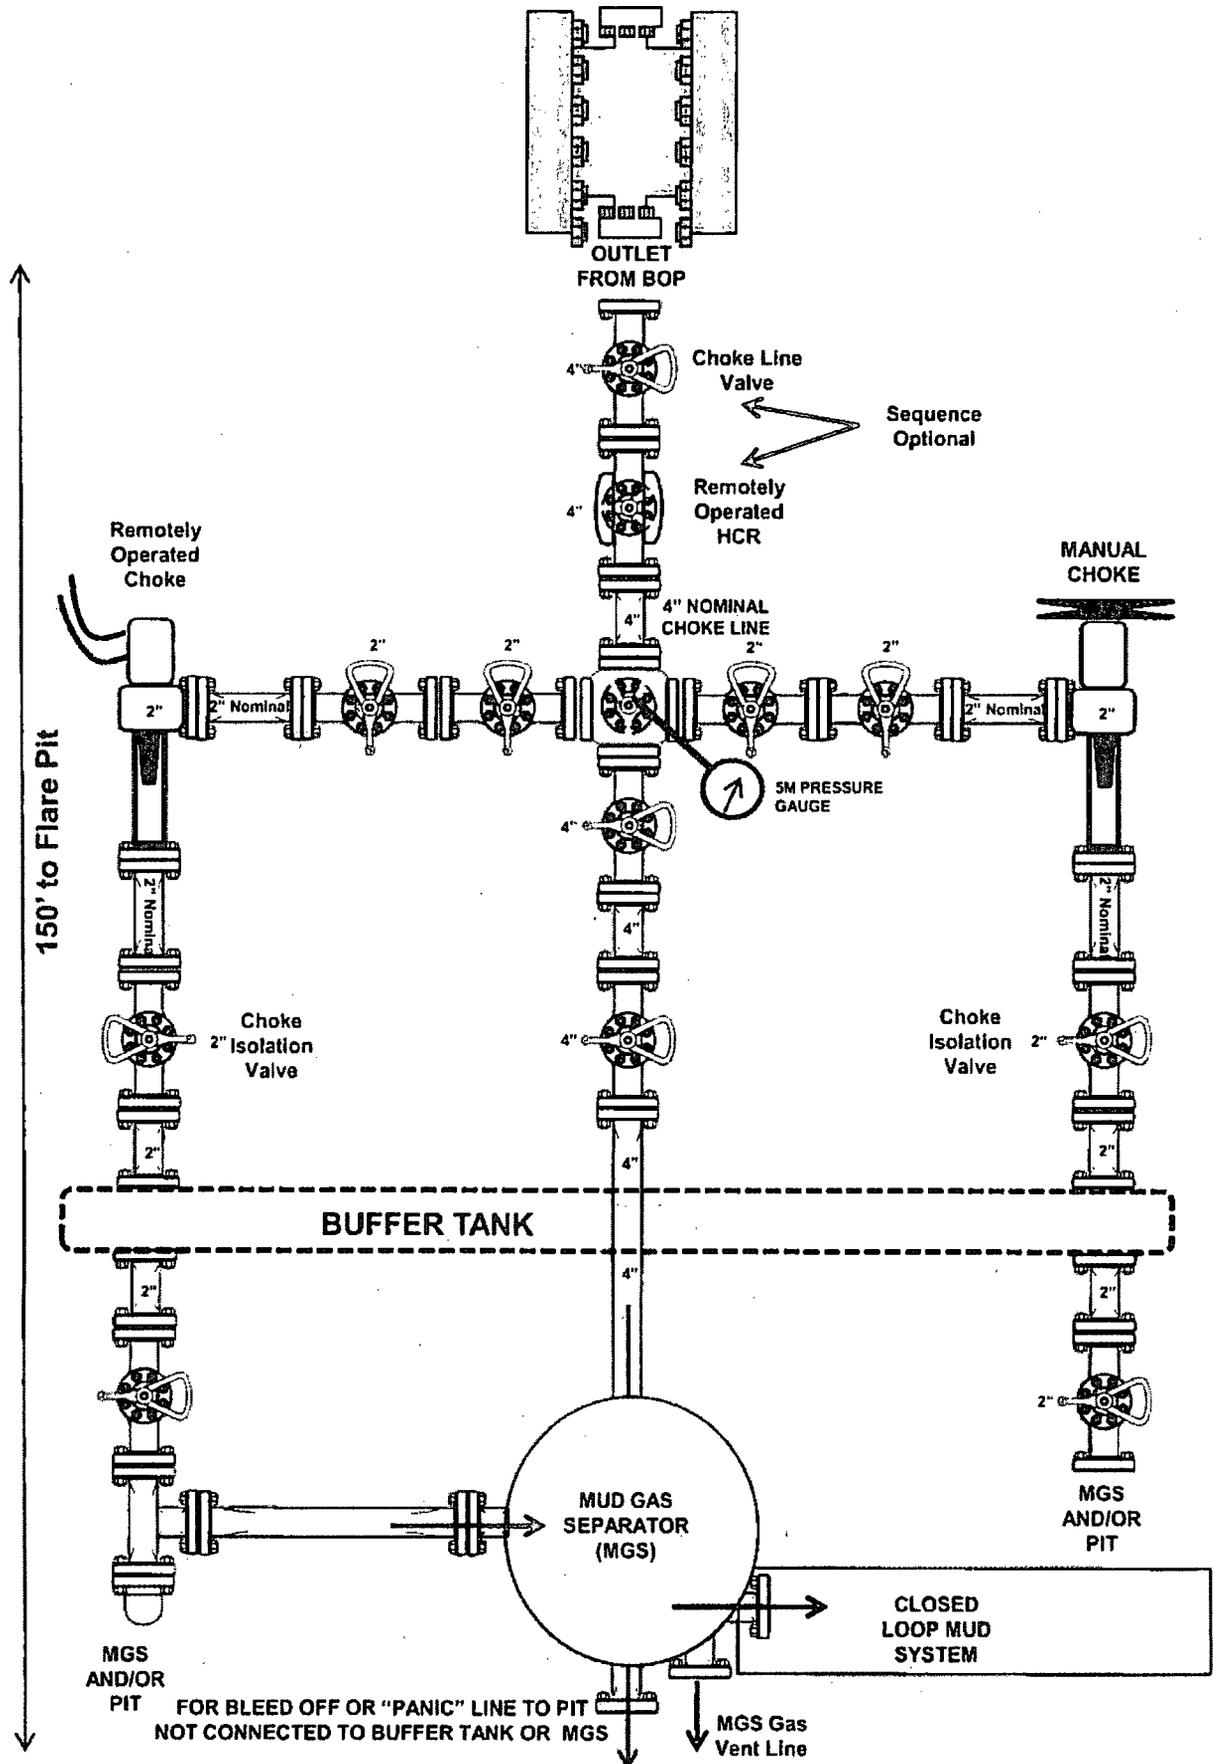

3,000 psi BOP Schematic

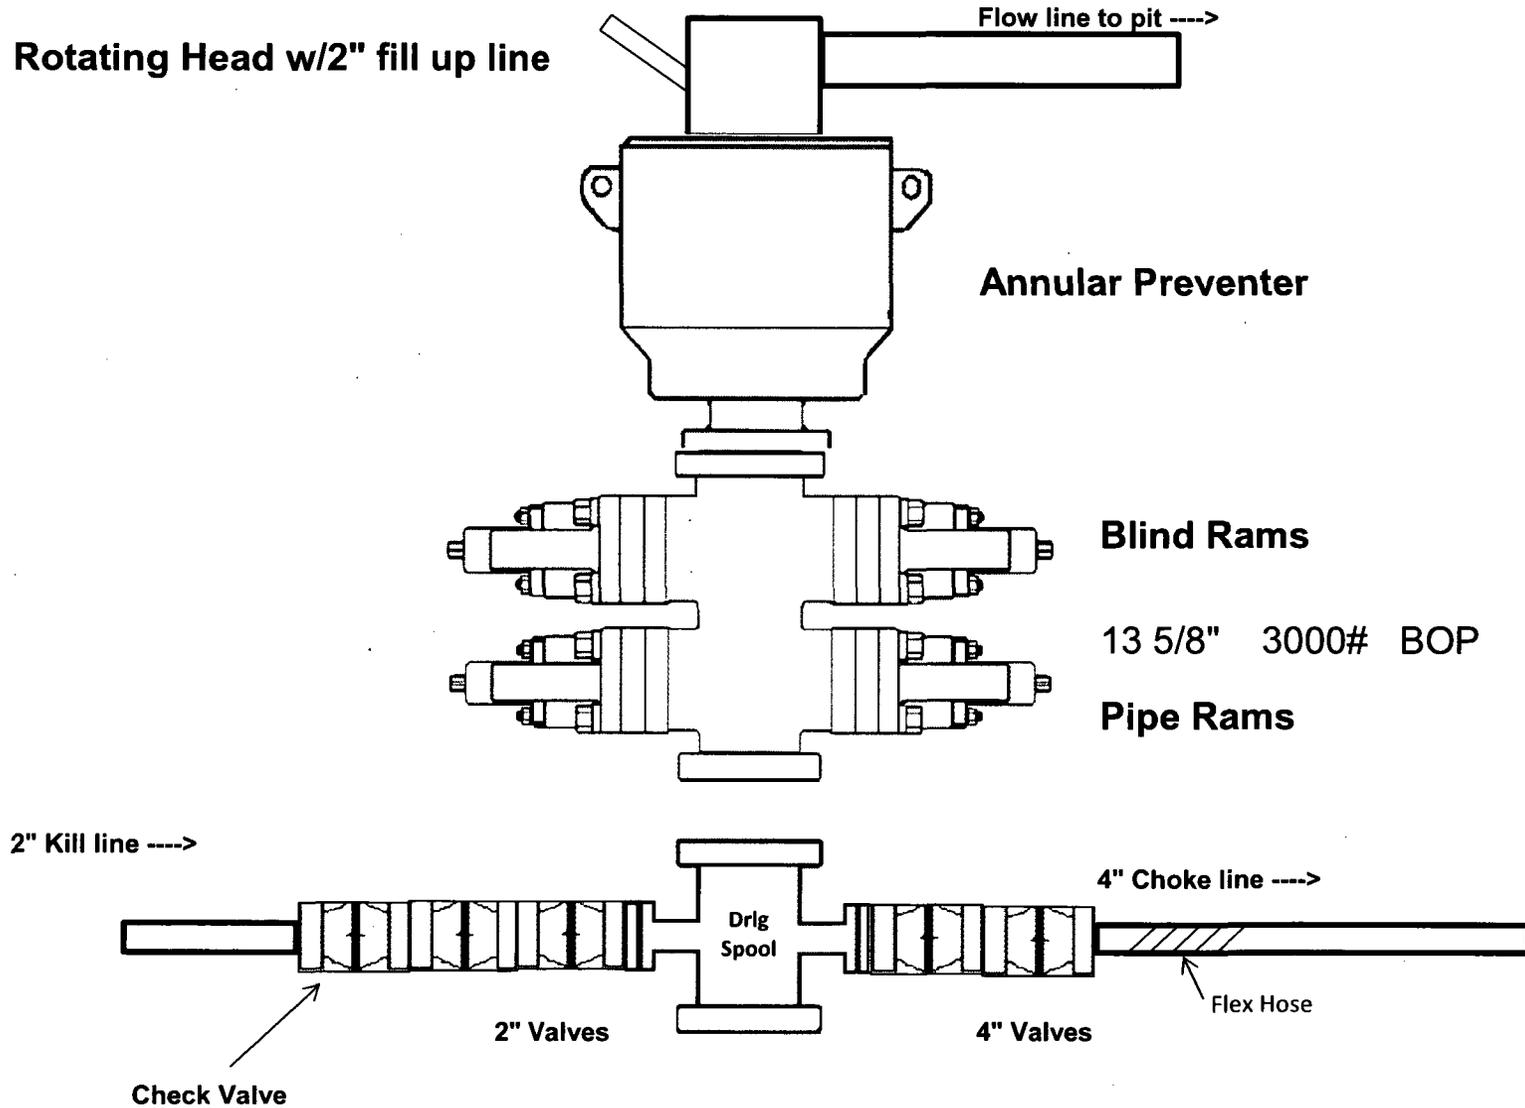



TECHNIP Umbilicals Inc.
COFLEXIP® Products and
Solutions

Quality Control Department

Control Report Dated 6/27/2017

COFLEXIP® Products and Solutions FLEXIBLE PIPE TEST CERTIFICATE

Customer OFS CANADA INC

Line Number L16883

Line Serial Number L16883-201

Part Number 076 60414 05 05

Application 3" X 30' 10K CHOKE / KILL LINE

COFLEXIP® Products Division certifies that the results of the test and controls performed on the above mentioned flexible pipe is as follows:

Internal Diameter	3	inches
Length	30.46	feet
Working Pressure	10000	psi
Test Pressure	15000	psi
As per attached recorder chart	4	hours
Test Duration		



THIRD PARTY INSPECTION FIRM OR CUSTOMER REPRESENTATIVE

[Signature] 6-28-17

TU-INC. QUALITY CONTROL

Test Configuration 12 Zone

Production Information Input

Customer ID OFS CANADA INC	
Line S/N L16883-201	Technician JUAN

QC Information Input


QC Insp ABEL	Third Party BY
Witness? Yes	Test Procedure SEC 01.60
Special Instructions	


Station 05

Station Information	
Pressure Transducer S/N 1178274	Temperature S/N 723A
Stable Press 16700	Test Press 15000
Calib. Due 10/18/2017 8:45:42 AM	Pressure Range 0 - 30000

Calibration	
Raw Minimum 0.020000	Eng Minimum 0.000000
Raw Maximum 0.030000	Eng Maximum 3000.000000

XY Graph

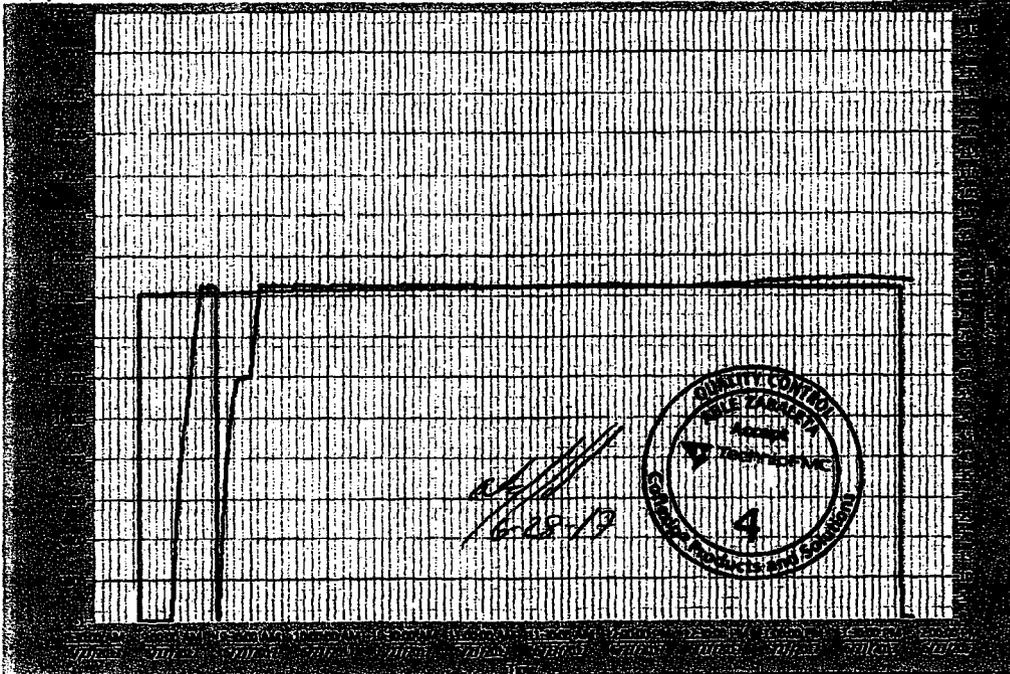




ContiTech

Asset # E56384

CONTITECH RUBBER Industrial Kft.	No. QC-DB- 607/ 2014
	Page: 6 / 98

927-20 Hose, Choke 4"x30' - Data Pkg.

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE		CERT. N°: 1672	
PURCHASER: ContiTech Oil & Marine Corp.		P.O. N°: 4500464782	
CONTITECH RUBBER order N°: 539274	HOSE TYPE: 4" ID	Choke and Kill Hose	
HOSE SERIAL N°: 68587	NOMINAL / ACTUAL LENGTH: 9,14 m / 9,11 m		
W.P. 68,9 MPa 10000 psi	T.P. 103,4 MPa 15000 psi	Duration:	60 min.
Pressure test with water at ambient temperature			
See attachment. (1 page)			
→	10 Min.		
↑	50 MPa		
COUPLINGS Type	Serial N°	Quality	Heat N°
4" coupling with	2914 2793	AISI 4130	A1423N
4 1/16" 10K API b.w. Flange end		AISI 4130	58701
Not Designed For Well Testing		API Spec 16 C	
Fire Rated		Temperature rate: "B"	
All metal parts are flawless			
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.			
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.			
COUNTRY OF ORIGIN HUNGARY/EU			
Date:	Inspector	Quality Control	
05. September 2014.		ContiTech Rubber Industrial Kft. Quality Control Dept.  	


Younis
 Control Dept.
 Industrial Kft.
 Control Dept.

1,000 sec
 2014/09/05 00:41:39.000
 2014/09/05 03:02:45.000

Sampling Int.
 Start Time
 Stop Time

File Name : 000046_68587.68574.GEV.....000060_68587.68574.GEV
 File Message : 68587.68574
 Device Type : GX1D
 Serial No. : S5P608400
 Data Count : 8487
 Print Group : Press-Temp
 Print Range : 2014/09/05 00:41:39.000 - 2014/09/05 03:02:45.000
 Comment :

Data No.	Cursor A	Cursor B	Difference
3630	3630	7630	3600
Absolute Time	2014/09/05 01:47:09.000	2014/09/05 02:47:09.000	01:00:00.000
Tag Comment	Value A	Value B	Value B-A
Pressure[bar]	1050.82	1050.59	-0.23
Ambient Temperature[C]	23.36	23.10	-0.25

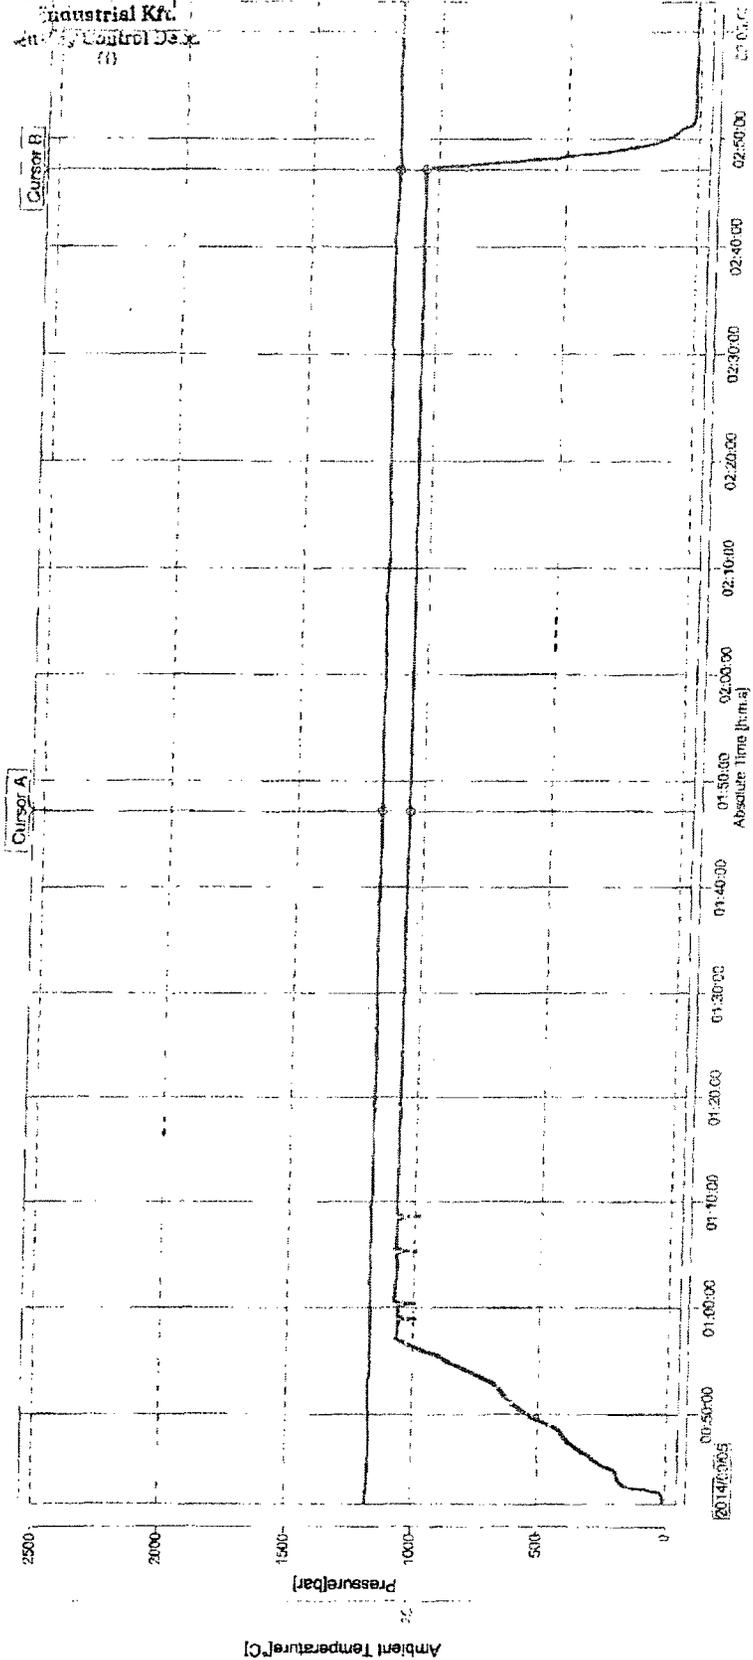


10min/div



Hose Data Sheet

CRI Order No.	539274
Customer	ContiTech Oil & Marine Corp.
Customer Order No	4500464782 CBC615472
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16C - MONOGRAMMED
Inside dia in inches	4
Length	30 ft
Type of coupling one end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 ST/STINLAID RING GROOVE - SOUR
Type of coupling other end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 ST/ST INLAID RING GROOVE - SOUR
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	Yes
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	Yes
Lifting collar	Yes
Element C	Yes
Safety chain	Yes
Safety wire rope	No
Max. design temperature [°C]	100
Min. design temperature [°C]	-20
Min. Bend Radius operating [m]	1,50
Min. Bend Radius storage [m]	1,50
Electrical continuity	The Hose is electrically continuous
Type of packing	STEEL PALLET

5,000 psi BOP Schematic

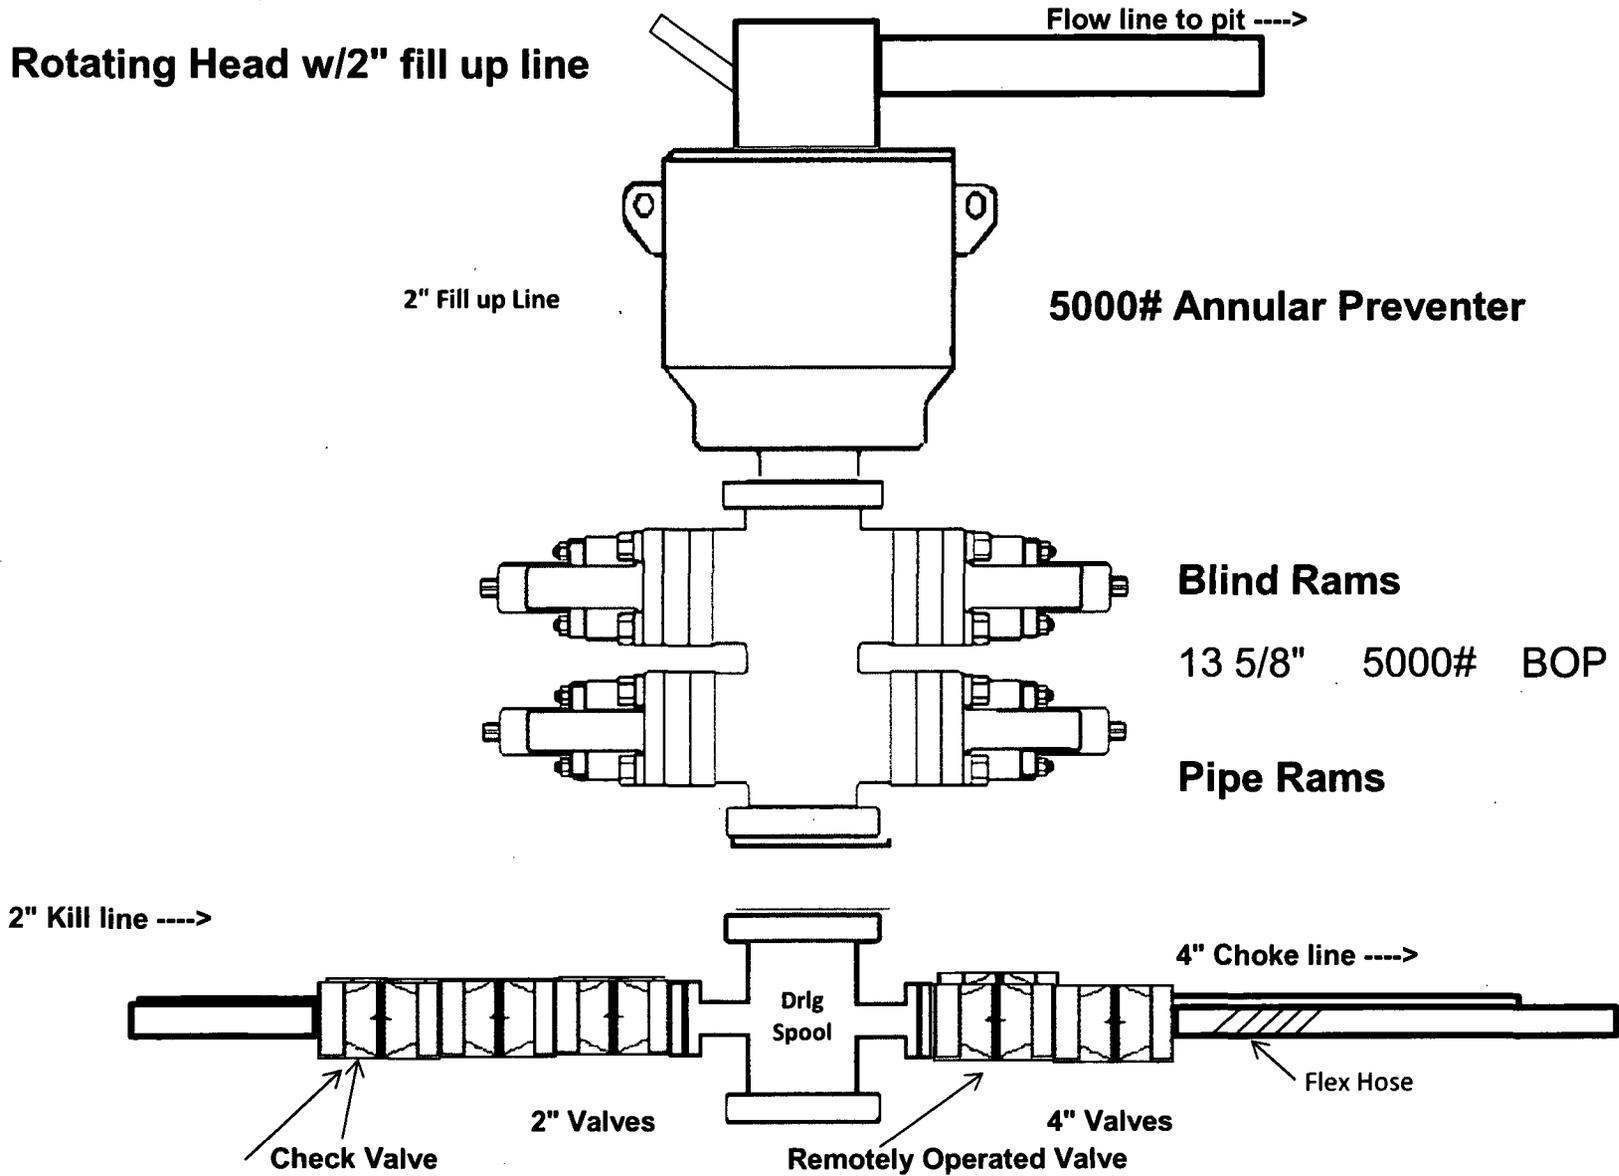



TECHNIP Umbilicals Inc.
COFLEXIP® Products and
Solutions

Quality Control Department

Control Report Dated 6/27/2017

COFLEXIP® Products and Solutions FLEXIBLE PIPE TEST CERTIFICATE

Customer OFS CANADA INC

Line Number L16883


Line Serial Number L16883-201

Part Number 076 60414 05 05

Application 3" X 30' 10K CHOKE / KILL LINE

COFLEXIP® Products Division certifies that the results of the test and controls performed on the above mentioned flexible pipe is as follows:

Internal Diameter	3	inches
Length	30.46	feet
Working Pressure	10000	psi
Test Pressure	15000	psi
As per attached recorder chart	4	hours
Test Duration		

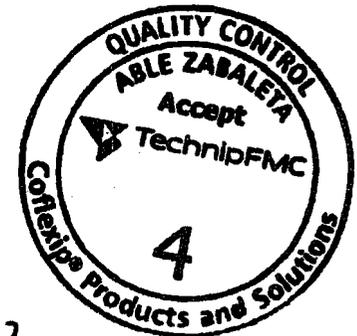

[Signature] 6-28-17
TU-INC. QUALITY CONTROL

THIRD PARTY INSPECTION FIRM OR CUSTOMER REPRESENTATIVE

Test Configuration 12 Zone

Production Information Input

Customer ID OFS CANADA INC	
Line S/N L16883-201	Technician JUAN

QC Information Input


QC Insp ABE	Third Party BV
Witness? Yes	Test Procedure SIC 01: 60
Special Instructions	


Station 05

Station Information	
Pressure Transducer S/N 1178574	Temperature S/N 713A
Stable Press 18200	Test Press 15000
Calib. Date 18/10/2017 8:45:42 AM	Pressure Range 0 - 20000

Calibration	
Raw Maximum 0.00000	Eng Minimum 0.00000
Raw Minimum 0.00000	Eng Maximum 30000.00000

XV Graph

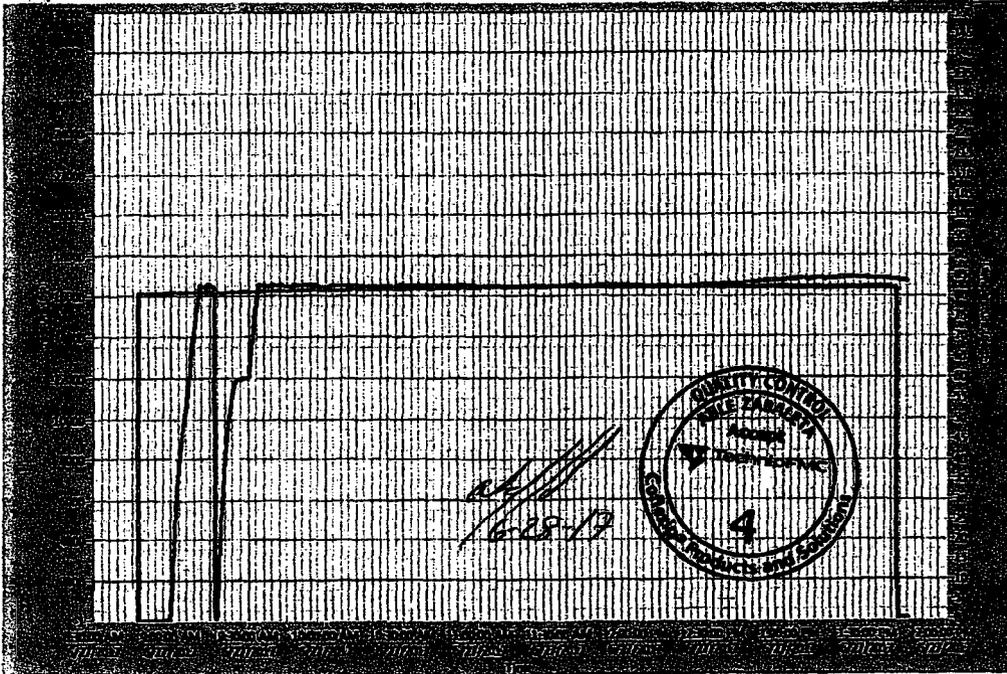



ContiTech

Asset # E56384

CONTITECH RUBBER Industrial Kft.	No: QC-DB- 607/2014 Page: 6 / 98
-------------------------------------	-------------------------------------

927-20 Hose, Choke 4"x30' - Data Pkg.

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE		CERT. N°:	1672
PURCHASER: ContiTech Oil & Marine Corp.		P.O. N°:	4500464782
CONTITECH RUBBER order N°: 539274	HOSE TYPE: 4" ID	Choke and Kill Hose	
HOSE SERIAL N°: 68587	NOMINAL / ACTUAL LENGTH: 9,14 m / 9,11 m		
W.P. 68,9 MPa 10000 psi	T.P. 103,4 MPa 15000 psi	Duration:	60 min.

Pressure test with water at ambient temperature

See attachment. (1 page)

→ 10 Min.
↑ 50 MPa

COUPLINGS Type	Serial N°	Quality	Heat N°
4" coupling with	2914 2793	AISI 4130	A1423N
4 1/16" 10K API b.w. Flange end		AISI 4130	58701

Not Designed For Well Testing

API Spec 16 C

Fire Rated

Temperature rate: "B"

All metal parts are flawless

WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.

STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.

COUNTRY OF ORIGIN HUNGARY/EU

Date: 05. September 2014.	Inspector	Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. <i>[Signature]</i>
------------------------------	-----------	---

File Name : 000046_68587,68574.GEV,.....000060_68587,68574.GEV

File Message : 68587,68574

Device Type : GX10

Serial No. : SSF606400


Data Count : 8487

Print Group : Press-Temp
 Print Range : 2014/08/05 00:41:39.000 - 2014/09/05 03:02:45.000
 Comment :

1.000 sec
 Sampling Int. : 2014/09/05 00:41:39.000
 Start Time : 2014/09/05 03:02:45.000
 Stop Time :

Date No.	Cursor A	Cursor B	Difference
	3930	7530	3600
Absolute Time	2014/08/05 01:47:09.000	2014/09/05 02:47:09.000	01:00:00.000
Tag Comment	Value A	Value B	Value B-A
Pressure[bar]	1050.82	1050.59	-0.23
Ambient Temperature[C]	23.35	23.10	-0.25

Yuan Qian
 Quality Control Dept.
 Industrial KFC
 Quality Control Dept.

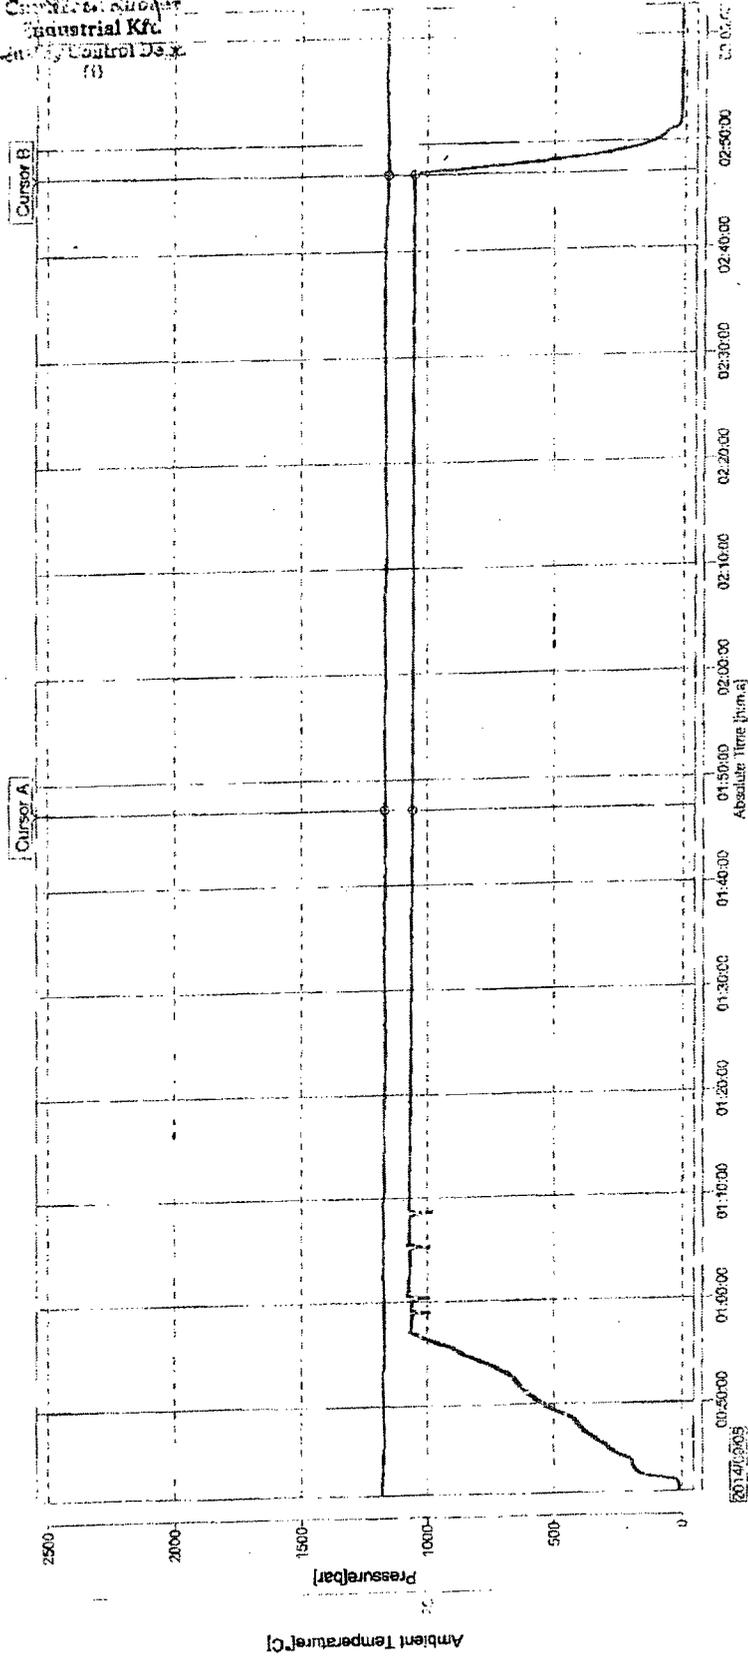

000046



Hose Data Sheet

CRI Order No.	539274
Customer	ContiTech Oil & Marine Corp.
Customer Order No	4500464782 CBC615472
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16C - MONOGRAMMED
Inside dia in inches	4
Length	30 ft
Type of coupling one end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 ST/STINLAID RING GROOVE - SOUR
Type of coupling other end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 ST/ST INLAID RING GROOVE - SOUR
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	Yes
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	Yes
Lifting collar	Yes
Element C	Yes
Safety chain	Yes
Safety wire rope	No
Max. design temperature [°C]	100
Min. design temperature [°C]	-20
Min. Bend Radius operating [m]	1,50
Min. Bend Radius storage [m]	1,50
Electrical continuity	The Hose is electrically continuous
Type of packing	STEEL PALLET

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Body
	From	To							
13.5"	0	975	10.75"	45.5	N80	BTC	5.54	1.20	23.44
9.875"	0	11750	7.625"	29.7	P110	BTC	1.29	1.11	3.11
6.75"	0	11250	5.5"	23	P110	BTC	1.95	2.04	3.25
6.75"	11250	17,212	5"	18	P110	BTC	1.95	2.04	3.25
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface and All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

The 5" casing will be run back 500' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.

Casing Program

Hole Size	Casing		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	875	13.375"	54.5	J55	STC	2.82	1.27	10.78
12.25"	0	4000	9.625"	40	J55	LTC	1.22	1.00	3.25
12.25"	4000	4875	9.625"	40	L80	LTC	1.21	1.45	5.73
8.75"	0	14,768	5.5"	17	P110	LTC	1.50	2.69	2.54
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
 All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1860	13.375"	54.5	J55	STC	1.33	4.18	5.07
12.25"	0	5695	9.625"	40	L80	LTC	1.20	1.30	3.19
8.75"	0	18,893	5.5"	17	P110	LTC	1.34	2.40	2.30
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
 All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1860	13.375"	54.5	J55	STC	1.33	4.18	5.07
12.25"	0	5695	9.625"	40	L80	LTC	1.20	1.30	3.19
8.75"	0	18,893	5.5"	17	P110	LTC	1.34	2.40	2.30
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
 All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h


Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1860	13.375"	54.5	J55	STC	1.33	4.18	5.07
12.25"	0	5695	9.625"	40	L80	LTC	1.20	1.30	3.19
8.75"	0	18,893	5.5"	17	P110	LTC	1.34	2.40	2.30
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.
 All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

COG Operating LLC
H₂S Equipment Schematic
Terrain: Shinnery sand hills.

Well pad will be 400' x 400'
with cellar in center of pad

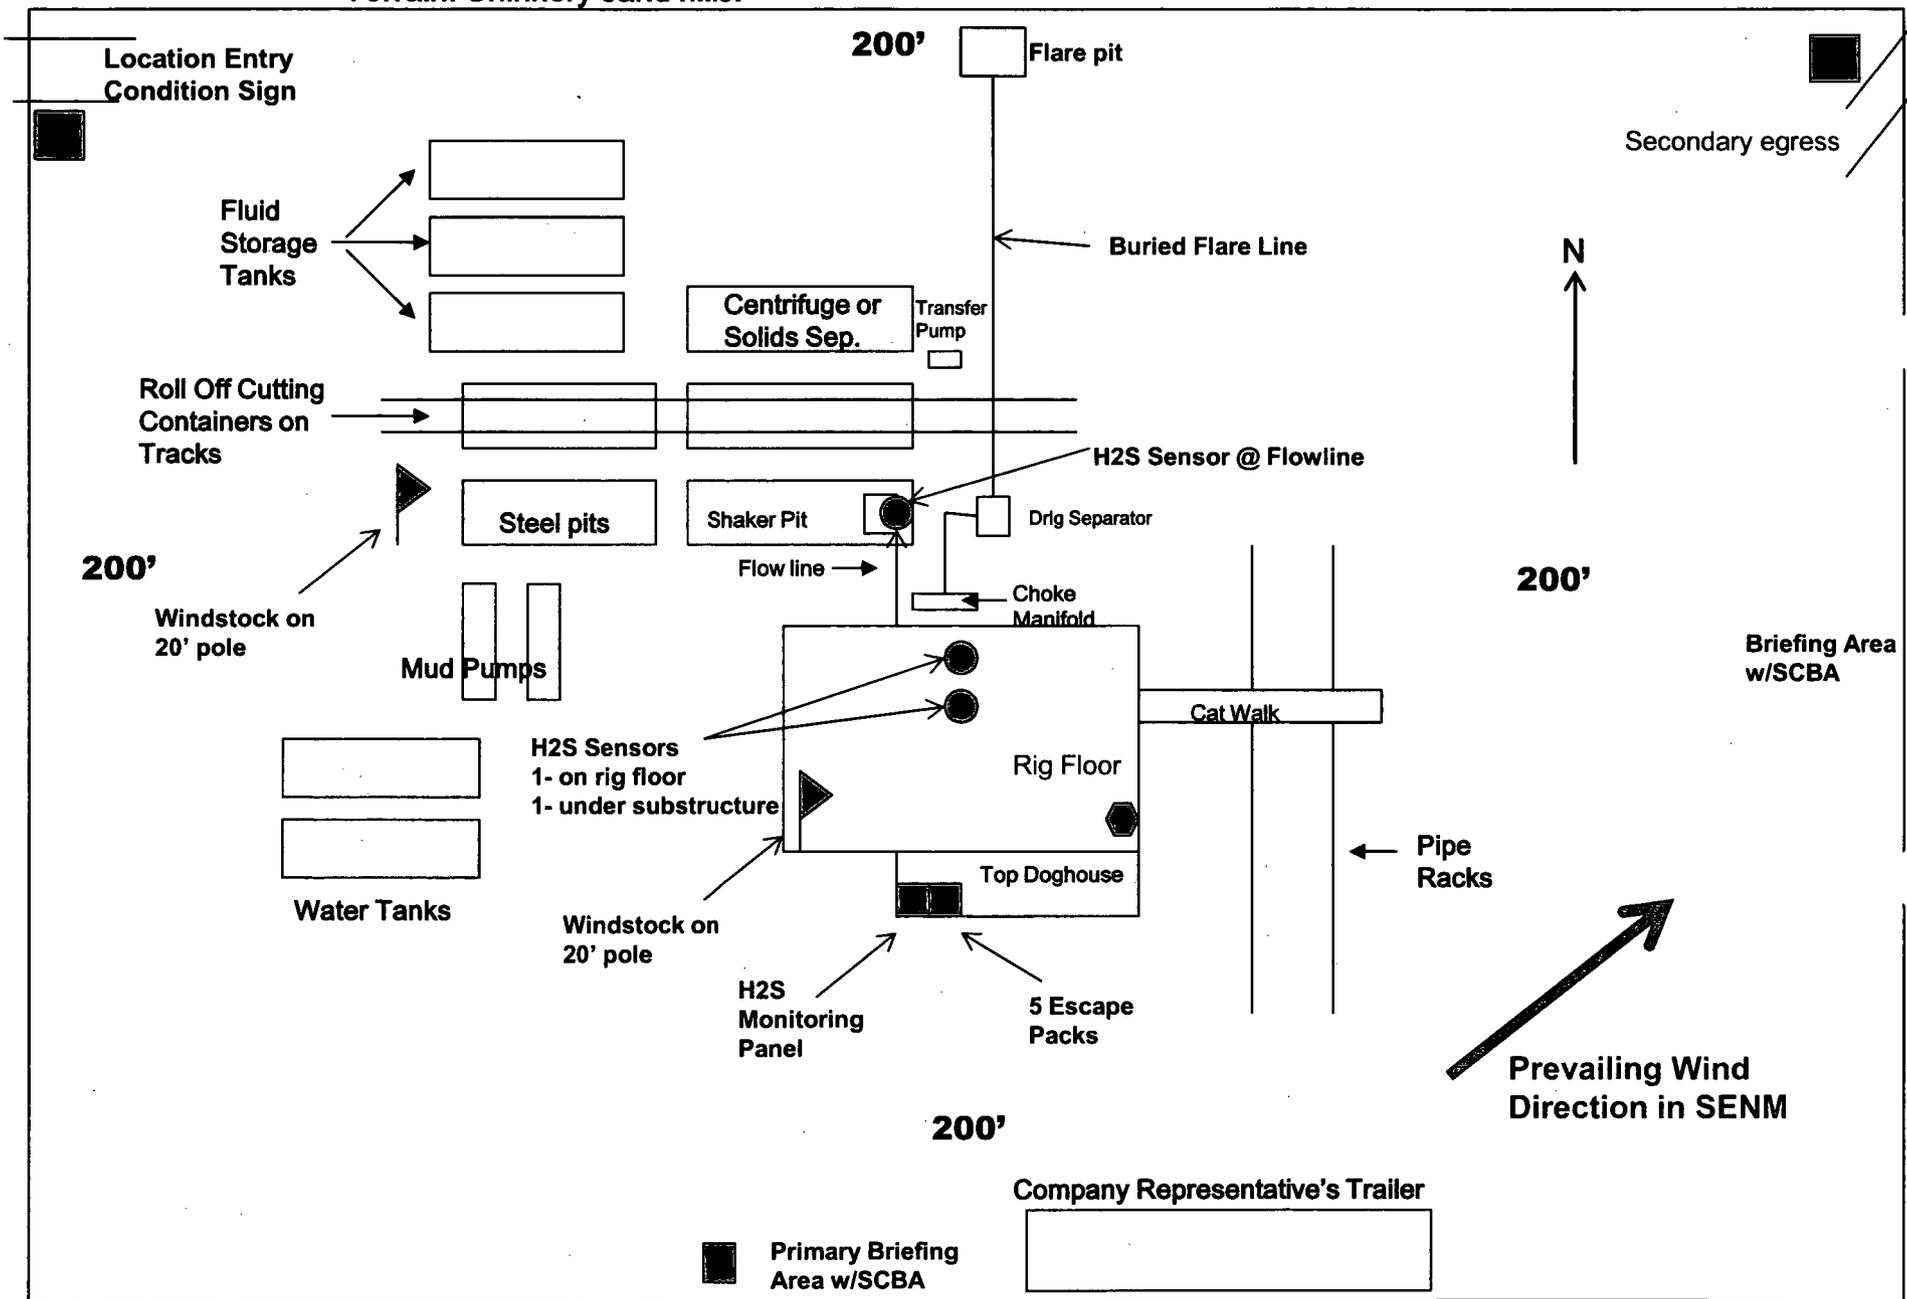

Surface Use Plan
COG Operating LLC
Little Bear Federal Com 4H
SHL: 384' FSL & 1151' FWL UL M
Section 33, T20S, R34E
BHL: 2440' FSL & 1650' FWL UL K
Section 28, T20S, R34E
Lea County, New Mexico

OPERATOR CERTIFICATION


I hereby certify that I, or persons under my direct supervision, have inspected the drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or COG Operating LLC, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 4th day of APRIL, 2018.

Signed: Mayte Reyes

Printed Name: Mayte Reyes
Position: Regulatory Analyst
Address: 2208 W. Main Street, Artesia, NM 88210
Telephone: (575) 748-6945
E-mail: mreyes1@concho.com
Field Representative (if not above signatory): Rand French
Telephone: (575) 748-6940. E-mail: rfrench@concho.com

COG Operating LLC
Rig Plat & Closed Loop Equipment Diagram

Well pad will be 400' X 400'
with cellar in center of pad

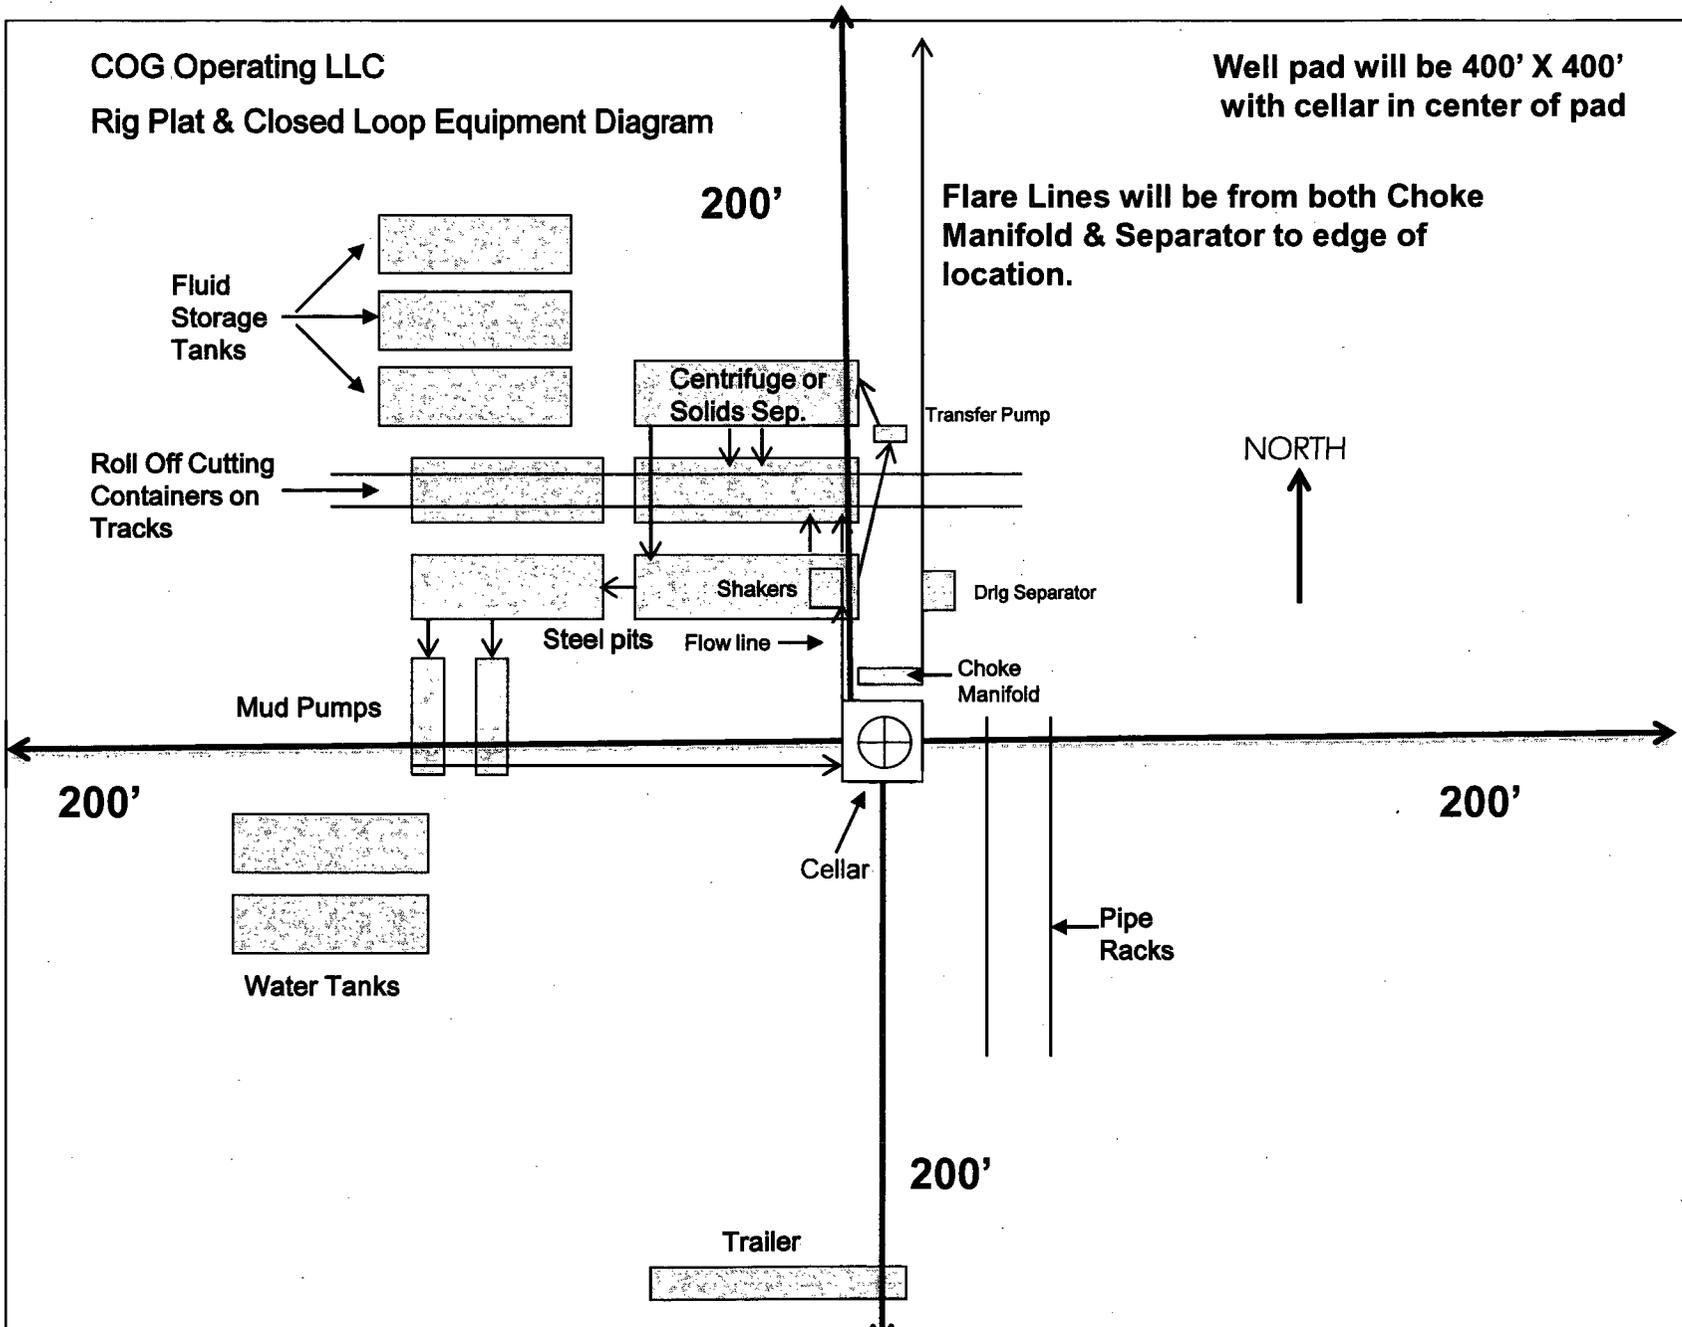

Flare Lines will be from both Choke
Manifold & Separator to edge of
location.

NORTH
↑

Exhibit 1

"I further certify that COG will comply with Rule 19.15.17
NMAC by using a Closed Loop System."

COG Operating, LLC - Little Bear Federal Com 4H

1. Geologic Formations

TVD of target	11,384' EOL	Pilot hole depth	NA
MD at TD:	18,893'	Deepest expected fresh water:	702'

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Quaternary Fill	Surface	Water	
Rustler	1833	Water	
Top of Salt	1913	Salt	
Base of Salt	3561	Salt	
Yates	3703	Salt Water	
Capitan Reef	3966	Salt Water	
Base of Reef/ CYCN	5669	Oil/Gas	
Brushy Canyon	7062	Oil/Gas	
Bone Spring Lime	8803	Oil/Gas	
U. Avalon Shale	9124	Oil/Gas	
L. Avalon Shale	9192	Oil/Gas	
1st Bone Spring Sand	9833	Oil/Gas	
2nd Bone Spring Sand	10382	Oil/Gas	
3rd Bone Spring Sand	11169	Target Oil/Gas	
Wolfcamp	11493	Not Penetrated	

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1860	13.375"	54.5	J55	STC	1.33	4.18	5.07
12.25"	0	5695	9.625"	40	L80	LTC	1.20	1.30	3.19
8.75"	0	18,893	5.5"	17	P110	LTC	1.34	2.40	2.30
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Intermediate burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Assigned injection well API number?

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Injection well name:

Injection well API number:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB000215

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

Operator Name: COG OPERATING LLC

Well Name: LITTLE BEAR FEDERAL COM

Well Number: 4H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
EXIT Leg #1	231 0	FSL	165 0	FWL	20S	34E	28	Aliquot NESW 3	32.54320 3	- 103.5684 93	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 003925 6	- 734 3	187 63	111 47
BHL Leg #1	244 0	FSL	165 0	FWL	20S	34E	28	Aliquot NESW 1	32.54356 1	- 103.5684 93	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 003925 6	- 758 0	188 93	113 84