

HOBBS 
AUG 16 2018

RECEIVED

Carlsbad Field Office
OCD Hobbs

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

MIN F
JULY P

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM136221
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator MARATHON OIL PERMIAN LLC (372098)		7. If Unit or CA Agreement, Name and No.
3a. Address 5555 San Felipe St. Houston TX 77056		8. Lease Name and Well No. (322256) DOGIE-DRAWFED COM 25 34 1 1H
3b. Phone No. (include area code) (713)629-6600		9. API Well No. 30-028-45092
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface NWSW / 2600 FSL / 626 FWL / LAT 32.1302683 / LONG -103.4468005 At proposed prod. zone SWSW / 330 FSL / 330 FWL / LAT 32.109524 / LONG -103.4477547		10. Field and Pool, or Exploratory (96340) RED HILLS / BONE SPRING, EAST
14. Distance in miles and direction from nearest town or post office* 64.7 miles	12. County or Parish LEA	13. State NM
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 2600 feet	16. No. of acres in lease 160	17. Spacing Unit dedicated to this well 240
18. Distance from proposed location* to nearest well, drilling, completed, 30 feet applied for, on this lease, ft.	19. Proposed Depth 12440 feet / 19419 feet	20. BLM/BIA Bond No. on file FED: WYB002107
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3330 feet	22. Approximate date work will start* 04/05/2018	23. Estimated duration 30 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature (Electronic Submission)	Name (Printed/Typed) Melissa Szudera / Ph: (713)296-3179	Date 12/14/2017
Title REGULATORY COMPLIANCE REPRESENTATIVE		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Christopher Walls / Ph: (575)234-2234	Date 08/09/2018
Title Petroleum Engineer		
Office CARLSBAD		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

OCP Rec 08/16/18

Ka * (Instructions on page 2)
08/16/18

APPROVED WITH CONDITIONS
Approval Date: 08/09/2018

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications.

Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

- I. SHL: NWSW / 2600 FSL / 626 FWL / TWSP: 25S / RANGE: 34E / SECTION: 14 / LAT: 32.1302683 / LONG: -103.4468005 (TVD: 0 feet, MD: 0 feet)
- PPP: NWNW / 0 FSL / 330 FWL / TWSP: 25S / RANGE: 34E / SECTION: 23 / LAT: 32.123125 / LONG: -103.447746 (TVD: 12353 feet, MD: 14469 feet)
- PPP: NWSW / 2309 FSL / 330 FWL / TWSP: 25S / RANGE: 34E / SECTION: 14 / LAT: 32.1294706 / LONG: -103.4477559 (TVD: 12322 feet, MD: 12700 feet)
- BHL: SWSW / 330 FSL / 330 FWL / TWSP: 25S / RANGE: 34E / SECTION: 23 / LAT: 32.109524 / LONG: -103.4477547 (TVD: 12440 feet, MD: 19419 feet)

BLM Point of Contact

Name: Katrina Ponder
Title: Geologist
Phone: 5752345969
Email: kponder@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL



APD ID: 10400025502

Submission Date: 12/14/2017

Operator Name: MARATHON OIL PERMIAN LLC



Well Name: DOGIE DPAW FED COM 25 34 14 FD

Well Number: 111

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400025502

Tie to previous NOS?

Submission Date: 12/14/2017

BLM Office: CARLSBAD

User: Melissa Szudera

Title: REGULATORY COMPLIANCE
REPRESENTATIVE

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM136221

Lease Acres: 160

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: MARATHON OIL PERMIAN LLC

Operator letter of designation:

Operator Info

Operator Organization Name: MARATHON OIL PERMIAN LLC

Operator Address: 5555 San Felipe St.

Zip: 77056

Operator PO Box:

Operator City: Houston

State: TX

Operator Phone: (713)629-6600

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Mater Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: DOGIE DPAW FED COM 25 34 14 FD

Well Number: 111

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: RED HILLS

Pool Name: BONE SPRING;
EAST

Operator Name: MARATHON OIL FERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB 1H Well Number: 111

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Describe other minerals:

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: DOGIE Number 2004 DRAW FED COM

Well Class: HORIZONTAL

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 64.7 Miles

Distance to nearest well: 30 FT

Distance to lease line: 2600 FT

Reservoir well spacing assigned acres Measurement: 240 Acres

Well plat: App_2__Dogie_Draw_Fed_Com_25_34_14_TB_1H__Certified_C_102_20180702150645.pdf

Well work start Date: 01/05/2018

Duration: 30 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 21653

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	260 0	FSL	626	FWL	25S	34E	14	Aliquot NWS W	32.13026 83	- 103.4468 005	LEA	NEW MEXI CO	NEW MEXI CO	F	FEE	333 0	0	0
KOP Leg #1	260 0	FSL	330	FWL	25S	34E	14	Aliquot NWS W	32.13026 83	- 103.4477 559	LEA	NEW MEXI CO	NEW MEXI CO	F	FEE	- 841 3	117 50	117 43
PPP Leg #1	230 9	FSL	330	FWL	25S	34E	14	Aliquot NWS W	32.12947 06	- 103.4477 559	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 136221	- 899 2	127 00	123 22



APD ID: 10400025502

Submission Date: 12/14/2017

Highlighted data reflects the most recent changes

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1	RUSTLER	2425	905	905	DOLOMITE, ANHYDRITE	OTHER : Brine	No
2	SALADO	1018	1408	1408	SALT, ANHYDRITE	OTHER : Brine	No
3	CASTILE	-1181	3607	3608	OTHER : Base Salt	OTHER : Brine	No
4	BASE OF SALT	-2705	5131	5132	OTHER : Limy Sands	OTHER : Brine	No
5	LAMAR	-2990	5416	5417	OTHER : Sand/Shales	OIL	No
6	BELL CANYON	-3021	5447	5448	OTHER : Sands/Shale	OIL	No
7	CHERRY CANYON	-4330	6756	6759	OTHER : Sands/Carbonates	OIL	No
8	BRUSHY CANYON	-5630	8056	8060	OTHER : Sands/Carbonate	OIL	No
9	BONE SPRING	-6939	9365	9370	OTHER : Sands/Carbonate	OIL	No
10	BONE SPRING 1ST	-7966	10392	10398	OTHER : Sands/Carbonate	OIL	No
11	BONE SPRING 2ND	-8544	10970	10977	OTHER : Sands/Carbonate	OIL	No
12	BONE SPRING 3RD	-9588	12014	12037	OTHER : Sands/Carbonates	OIL	Yes

Section 2 - Blowout Prevention

Pressure Rating (PSI): 1000

Rating Depth: 15152

Equipment: 10 5/8 Annular and Double Ram installed on Intermediate I, Intermediate II and Production Liner Casing Strings with minimum WP of 10,000.

Requesting Variance? YES

Variance requires: A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart. We also need a variance for the use of a 5000 (PSI) annular preventer on 10,000 (PSI) BOP stack. See attached well control plan and BOP schematic.
Testing Procedure - BOP/BOP-E will be tested by an independent service company to 250 psi low and the high pressure indicated above per Operator Order 2 requirements. The System may be upgraded to a higher pressure but will be tested to the

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

working pressure of 1000 psi. See attached. If this system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily log sheets. Other accessories to the BOP equipment will include a Kellyhead, full opening safety valve, Annular BOP and choke line and choke manifold. See attached schematic. Formation integrity test will be performed per Onshore Order #2. On Equibratory wells or on that portion of any well approved for a 600 BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Order #2 and Order #11111.1. A mud bowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation of the surface casing with the well casing testing requirements for a minimum of 20 days. If any seal element to reduce pressure in the system must be tested. See attached schematic.

Choke Diagram Attachment:

- Drill_2_Choke__Dogie_Draw_Fed_Com_25_34_14_Pad__Choke_and_Kill_Hoses_20180702150812.pdf
- Drill_2_Choke__Dogie_Draw_Fed_Com_25_34_14_Pad__Choke_Line_System_20180702150826.pdf
- Drill_2_Choke__Dogie_Draw_Fed_Com_25_34_14_Pad__Choke_Manifold_20180702150836.pdf
- Drill_2_Choke_SUPO_9__Dogie_Draw_Fed_Com_25_34_14_Pad__Closed_Loop_System_Diagram_20180702150848.pdf

BOP Diagram Attachment:

- Drill_2_BOP__10M_Flex. BOPE_x_5M_ANNULAR.BLM__1_2_20180702150922.pdf
- Drill_2_BOP__Dogie_Draw_Fed_Com_25_34_14_TB_1H__Well_Head_Attachment_20180702150932.pdf
- Drill_2_BOP__Marathon_Permian__Drilling_Well_Control_Plan_06_05_2018__1_2_20180702150944.pdf
- Drill_2_BOP__WHTH_DESIGN_2_DRAWING__1_2_20180702150955.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1000	0	1000	3330	2330	1000	J-55	54.5	BUTT	1.125	1.125	BUOY	1.8	BUOY	1.8
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	5420	0	5420	3330	-2090	5420	K-55	40	BUTT	1.125	1.125	BUOY	1.8	BUOY	1.8
3	PRODUCTION	8.75	5.5	NEW	API	N	0	19419	0	19419	0	-16089	19419	P-110	20	BUTT	1.125	1.125	BUOY	1.8	BUOY	1.8

Casing Attachments

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Drill_3__Dogie_Draw_Fed_Com_25_34_14_TB_1H__Casing_Design_Limits__13.375_inch_20180702151023.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Drill_3__Dogie_Draw_Fed_Com_25_34_14_TB_1H__Casing_Design_Limits__9.625_inch_20180702151039.pdf

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Drill_3__Dogie_Draw_Fed_Com_25_34_14_TB_1H__Casing_Design_Limits__5.5_inch_20180702151055.pdf

Section 4 - Cement

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	800	636	1.75	13.5	1112	100	Class C	3 lbm/sk granular LCM + 0.1250 lbm/sk Poly-EFlake
SURFACE	Tail		800	1000	230	1.36	14.8	313	100	Class C	0.25 % Accelerator
INTERMEDIATE	Lead		0	4820	1420	1.73	12.8	2456	75	Class C	0.02 Gal/Sx Defoamer + 0.5% Extender + 1% Accelerator
INTERMEDIATE	Tail		4820	5420	240	1.33	14.8	320	50	Class C	0.07 % Retarder
PRODUCTION	Lead		5220	11750	987	2.81	11	2770	70	Class H	0.1% viscofier + 0.25 lb/sx defoamer + 5% retarder
PRODUCTION	Tail		11750	19419	2068	1.22	14.5	2529	30	Class H	2% extender + 0.25% defoamer + 0.5% fluid loss + 0.2% dispersant

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: The necessary mud products for additional weight and fluid loss control will be on location at all times.

Describe the mud monitoring system utilized: Losses or gains in the mud system will be monitored visually/manually as well as with an electronic PVT.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
1000	5420	OTHER : Brine	9.9	10.2							

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1000	WATER-BASED MUD	8.4	8.8							
1250 0	1987 3	OIL-BASED MUD	12	12.5							
5420	1941 9	OTHER : Cut Brine	9	10.2							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

None Planned.

List of open and cased hole logs run in the well:



Coring operation description for the well:

None Planned.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 6842

Anticipated Surface Pressure: 4105.2

Anticipated Bottom Hole Temperature(F): 165

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Drill_7__Dogie_Draw_Fed_Com_25_34_14_Pad__H2S_Contingency_Plan_Diagram_20180702151137.pdf

Drill_7__Dogie_Draw_Fed_Com_25_34_14_Pad__H2S_Contingency_Plan_20180702151146.pdf

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Drill_8_PD__Dogie_Draw_Fed_Com_25_34_14_TB_1H__Drilling_Plan_20180702151223.pdf

Drill_8_PD__Dogie_Draw_Fed_Com_25_34_14_TB_1H__Planned_Directional_20180702152113.pdf

Drill_8_PD__Dogie_Draw_Fed_Com_25_34_14_Pad__Mineral_Ownership_Plat_20180703064959.pdf

Other proposed operations facets description:

- Kelly cock will be in the drill string at all times.
- A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor unobstructed and readily accessible at all times.
- Hydrogen Sulfide detection equipment will be in operation after drilling out the surface casing shoe until the production casing is cemented. Breathing equipment will be on location upon drilling the surface casing shoe until total depth is reached. If Hydrogen Sulfide is encountered, measured amounts and formations will be reported to the BLM.

Potential Hazards:

- H2S detection equipment will be in operation after drilling out the surface casing shoe until the production casing has been cemented. Breathing equipment will be on location from drilling out the surface shoe until production casing is cemented. If H2S is encountered the operator will comply with Onshore Order #6.
- No abnormal temperatures or pressures are anticipated. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.
- No losses are anticipated at this time.
- All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well.
- Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.

Other proposed operations facets attachment:

Drill_8__Dogie_Draw_Fed_Com_23_25_34_14_Wells_3__Gas_Capture_Plan__11_30_2017_20180702151301.pdf

Other Variance attachment:

QUALITY CONTROL	No.: QC-DB- 380 / 2012
	Page : 1 / 61
Hose No.: 63389, 63390, 63391 63392, 63393	Revision : 0
	Date: 28. August 2012.
	Prepared by : <i>Szabolcs Linder</i>
	Appr. by: <i>Szabolcs Linder</i>

CHOKER AND KILL HOSES

id.: 3" 69 MPa x 35 ft (10,67 m)

DATA BOOK

Purchaser: H & P

Purchaser Order No.:

ContiTech Rubber Order No.: 531895

ContiTech Beattie Co. Order No.: 006227

NOT DESIGNED FOR WELL TESTING

CONTENT

	<u>Page</u>
1. API QMS Certificate (No.: 0760)	3.
2. American Petroleum Institute Certificate of Authority To Use the Official API Monogram (No.: 16C-0004)	4.
3. Quality Control Inspection and Test Certificates (No.: 1595, 1596, 1597, 1598, 1599)	5-9.
4. Hose Data Sheet	10.
5. Metal Parts	
5.1. Raw Material Quality Certificates (No.: EUR-240960, EUR-251871, 81687/12-0)	11-14.
5.2. Hardness Test Reports (No.: HB 2150/12, HB 2151/12, HB 2159/12)	15-17.
5.3. Ultrasonic Test Reports (No.: U12/124, U12/126, U12/129, U12/127)	18-21.
5.4. NDT Examiner Certificate (Name: Joó Imre)	22-23.
5.5. Welding Procedure Specification (No.: 140-60)	24-27.
5.6. Welding Procedure Qualification Record (No.: BUD 0600014/1)	28-29.
5.7. Welder's Approval Test Certificates (No.: RK-1894628-A1-X2, RK-1894628-A1-X-1, RK-2096656-B, RK-1894628-A1-X3, RK1079715-A1-X)	30-41.
5.8. Welding Log Sheets (No.: 240, 241)	42-43.
5.9. Visual Examination Record (No.: 696/12)	44.
5.10. NDT Examiner Certificate (Name: Benkő Péter)	45-46.
5.11. Radiographic Test Certificates (No.: 1458/12, 1459/12, 1460/12, 1461/12, 1462/12)	47-51.
5.12. NDT Examiner Certificate (Name: Ménesi István)	52-53.
5.13. MP Examination Record (No.: 1262/12)	54.
5.14. NDT Examiner Certificate (Name: Oravecz Gábor)	55-56.
6. Steel Cord	
6.1. Inspection Certificate (No.: 437089)	57.
7. Outside Stripwound Tube	
7.1. Inspection Certificate (No.: 917781/001)	58.
8. Certificate of Calibration (Manometer Serial No.: 0227-073)	59-61.



ContiTech Rubber
Industrial Kft.
Quality Control Dept.
(1)



Certificate of Registration

APIQR REGISTRATION NUMBER
0760

This certifies that the quality management system of
CONTITECH RUBBER INDUSTRIAL LTD.
 Budapesti ut 10
 Szeged
 Hungary

has been assessed by the American Petroleum Institute Quality Registrar (APIQR®) and found it to be in conformance with the following standard:
ISO 9001:2008

The scope of this registration and the approved quality management system applies to the
Design and Manufacture of High Pressure Hoses

APIQR® approves the organization's justification for excluding:
No Exclusions Identified as Applicable

COPY

Effective Date: October 15, 2010
 Expiration Date: October 15, 2013
 Registered Since: October 15, 2007

W. Dan Whittaker
 Manager of Operations, APIQR


Accredited by Member of
 the International
 Accreditation Forum
 Multilateral Recognition
 Arrangement for Quality
 Management Systems



This certificate is valid for the period specified herein. The registered organization must continually meet all requirements of APIQR's Registration Program and the requirements of the Registration Agreement. Registration is maintained and regularly monitored through annual full system audits. Further clarifications regarding the scope of this certificate and the applicability of ISO 9001 standard requirements may be obtained by consulting the registered organization. This certificate has been issued from APIQR offices located at 1120 L Street, N.W., Washington, D.C. 20004-4070, U.S.A.. It is the property of APIQR, and must be returned upon request. To verify the authenticity of this certificate, go to www.api.org/composite/itd.



2000-11-15 10:29:11 AM

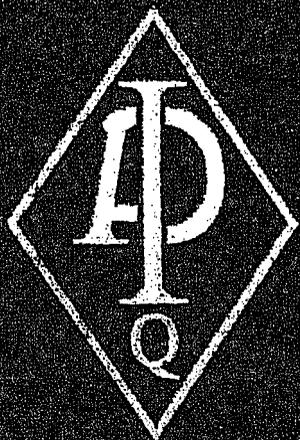

**American
Petroleum
Institute**



Certificate of Authority to use the Official API Monogram

License Number: 16C-0004

ORIGINAL

The American Petroleum Institute hereby grants to

CONTITECH RUBBER INDUSTRIAL LTD.
Budapesti ut 10
Szeged
Hungary

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and API Spec 16C and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram should be used in conjunction with this certificate number: 16C-0004

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following product: Flexible Choke and Kill Lines

QMS Exclusions: No Exclusions Identified as Applicable

COPY

Effective Date: OCTOBER 15, 2010



Expiration Date: OCTOBER 15, 2013

To verify the authenticity of this license, go to www.api.org/compositelist.

American Petroleum Institute

Director of Global Industry Services

CONTITECH RUBBER Industrial Kft.	No:QC-DB- 380 /2012
Page: 4 /61	

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1599	
PURCHASER: ContiTech Beattie Co.			P.O. N°: 006227		
CONTITECH ORDER N°: 531895	HOSE TYPE: 3" ID		Choke and Kill Hose		
HOSE SERIAL N°: 63393	NOMINAL / ACTUAL LENGTH: 10,67 m / 10,72 m				
W.P. 68,9 MPa 10000 psi	T.P. 103,4 MPa 15000 psi	Duration: 60 min.			
Pressure test with water at ambient temperature					
See attachment. (1 page)					
↑ 10 mm = 10 Min.					
→ 10 mm = 20 MPa					
COUPLINGS Type	Serial N°		Quality	Heat N°	
3" coupling with 4 1/16" 10K API Flange end	2156	2153	AISI 4130	20231	
			AISI 4130	34031	
NOT DESIGNED FOR WELL TESTING				API Spec 16 C	
				Temperature rate:"B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date: 23. August 2012.	Inspector		Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. (1)		
			 		

CONTITECH RUBBER Industrial Kft.	No:QC-DB- 380 /2012 Page: 10 /61
-------------------------------------	-------------------------------------



Hose Data Sheet

CRI Order No.	531895
Customer	ContiTech Beattie Co.
Customer Order No	PO6227 Pbc13080-H&P
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16 C
Inside dia in inches	3
Length	35 ft
Type of coupling one end	FLANGE 4 1/16" API SPEC 6A TYPE 6BX FOR 10000 PSI C/W BX155RING GROOVE
Type of coupling other end	FLANGE 4 1/16" API SPEC 6A TYPE 6BX FOR 10000 PSI C/W BX155 RING GROOVE
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	NOT FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	No
Lining	OIL RESISTANT
Safety clamp	No
Lifting collar	No
Element C	No
Safety chain	No
Safety wire rope	No
Max. design temperature [°C]	100
Min. design temperature [°C]	-20
MBR operating [m]	1,60
MBR storage [m]	1,40
Type of packing	WOODEN CRATE ISPM-15



Certificate of Conformity

ContiTech

Certificate Number 953233-4	COM Order Reference 953233	Customer Name & Address HELMERICH & PAYNE DRILLING CO 1434 SOUTH BOULDER AVE TULSA, OK 74119 USA	
Customer Purchase Order No: 740053080		Project:	
Test Center Address ContiTech Oil & Marine Corp. 11535 Brittmoore Park Drive Houston, TX 77041 USA		Accepted by COM Inspection Signed: Roger Suarez Date: 5/11/17	Accepted by Client Inspection

We certify that the items detailed below meet the requirements of the customer's Purchase Order referenced above, and are in conformance with the specifications given below.

Item	Part No.	Description	Qty	Serial Number	Specifications
30		RECERTIFICATION - 3" ID 10K Choke and Kill Hose x 35 ft OAL	1	63393	ContiTech Standard

Hydrostatic Test Certificate



ContiTech

Certificate Number 953233-4	COM Order Reference 953233	Customer Name & Address HELMERICH & PAYNE DRILLING CO 1434 SOUTH BOULDER AVE TULSA, OK 74119 USA	
Customer Purchase Order No: 740053080			
Project:			
Test Center Address ContiTech Oil & Marine Corp. 11535 Brittmoore Park Drive Houston, TX 77041 USA	Accepted by COM Inspection Signed: Roger Suarez Date: 5/11/13	Accepted by Client Inspection	

We certify that the goods detailed hereon have been inspected as described below by our Quality Management System, and to the best of our knowledge are found to conform the requirements of the above referenced purchase order as issued to ContiTech Oil & Marine Corporation.

Item	Part No.	Description	Qty	Serial Number	Work Press	Test Press	Test Time (minutes)
30		RECERTIFICATION - 3" ID 10K Choke and Kill Hose x 35 ft OAL	1	63393	10,000 psi	15,000 psi	60

63393


6 AM

JOB # 45-20-10081
 PBC # 45-20-20
 HOSE DESCRIPTION: 3" ID 10k Chloro butyl
 TEST PRESSURE: 1500 psi
 CHART RECORDER # 1500
 CHART SETTING: 1000
 CBC REPRESENTATIVE: G. B. Baker
 DATE: 5-6-70



CHART NO. MC MP-20000-150F


METER _____
 CHART PUT ON _____ M
 LOCATION _____
 REMARKS _____
 TAKEN OFF _____ M

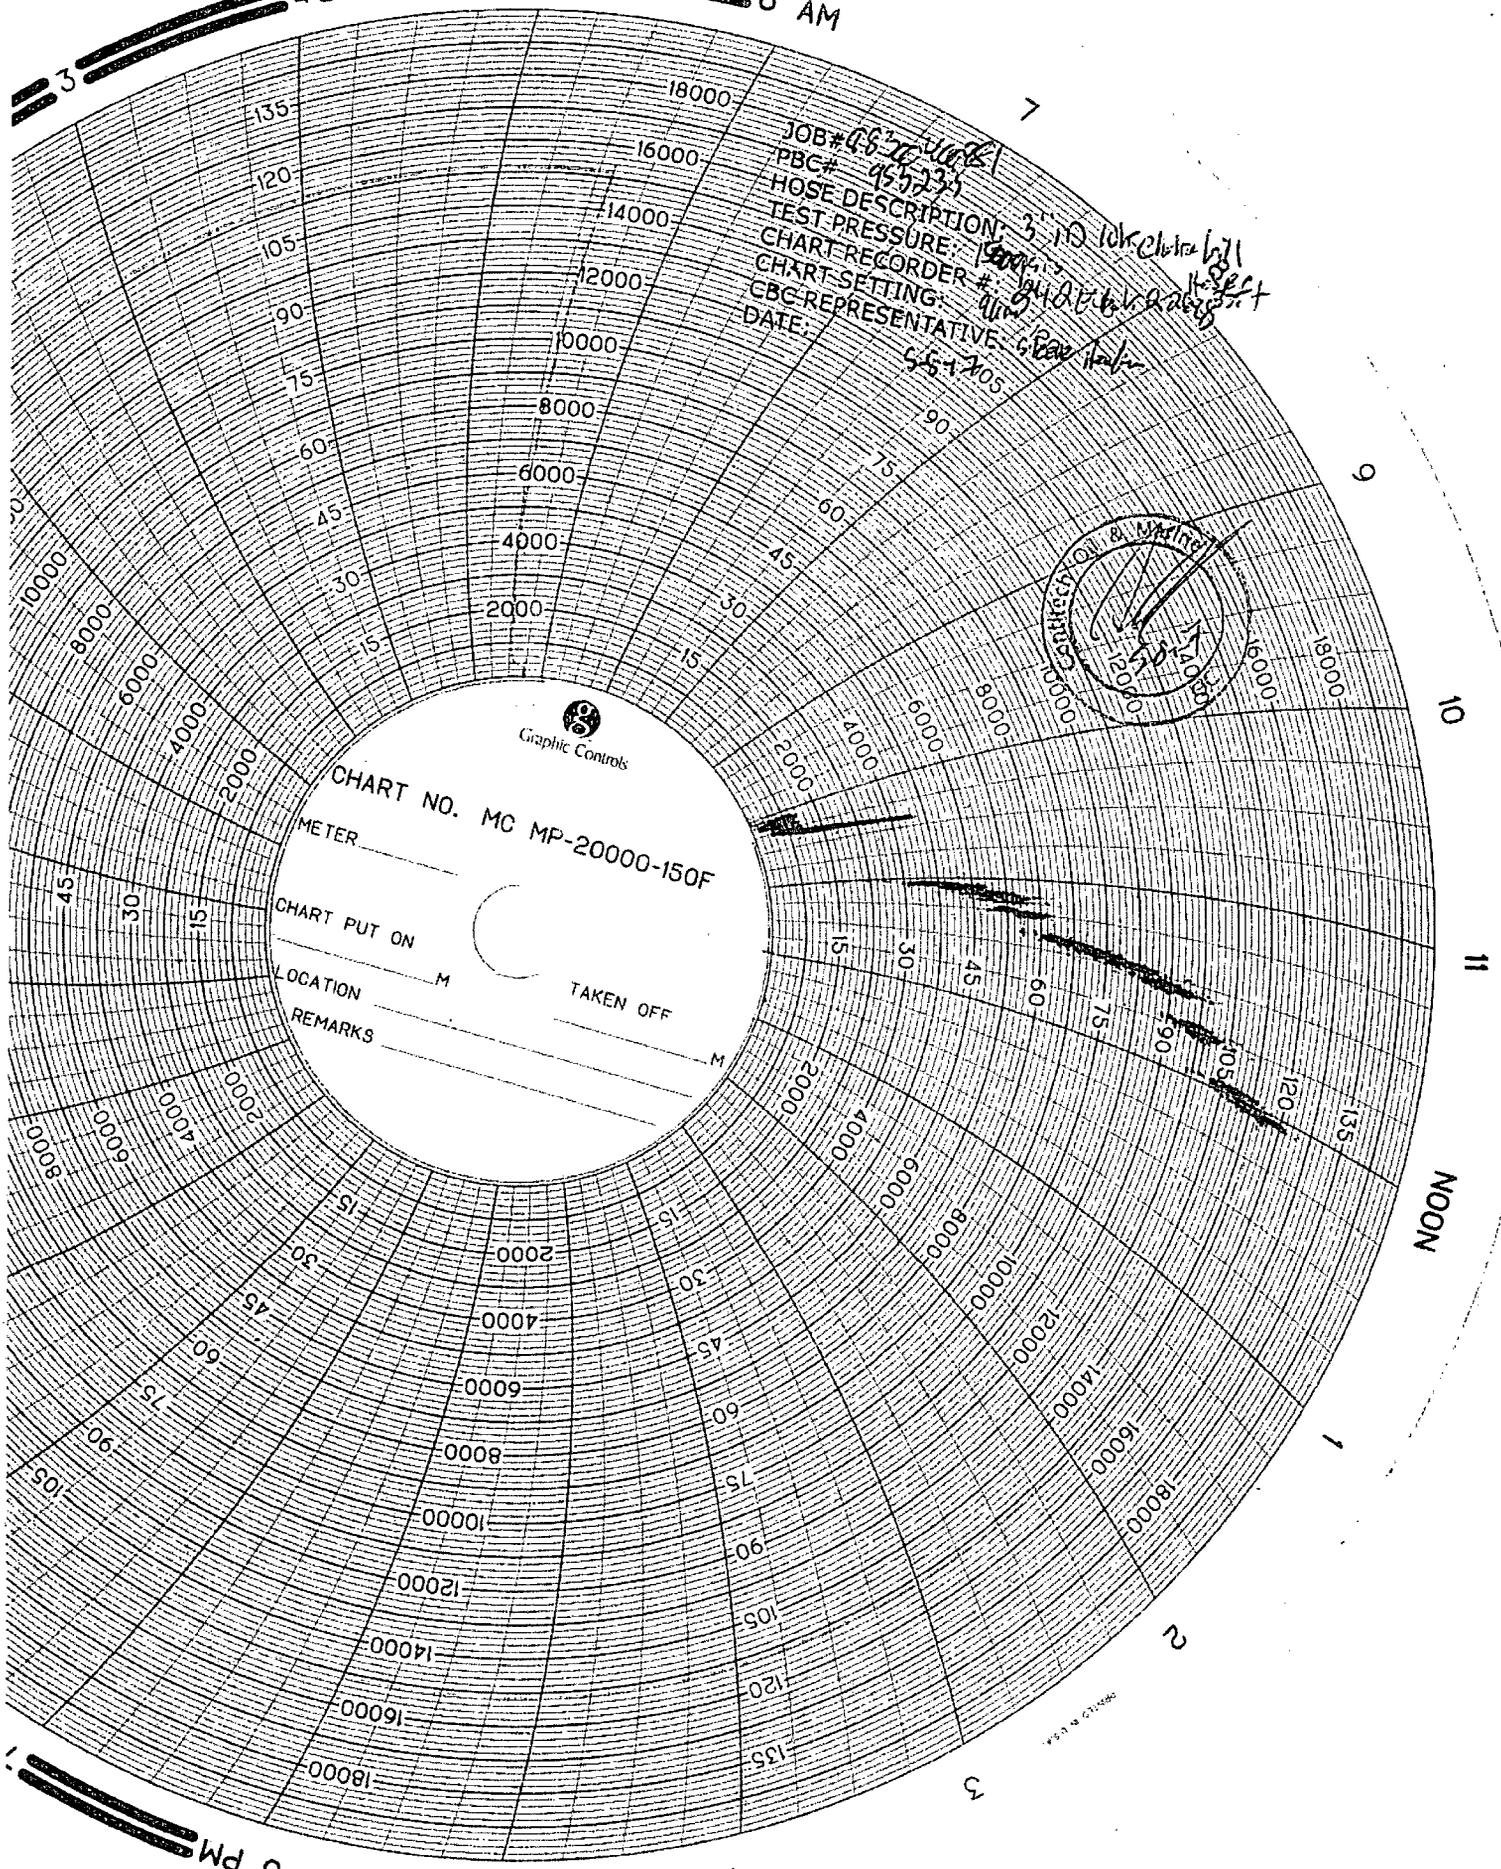


NOON

6 PM

4

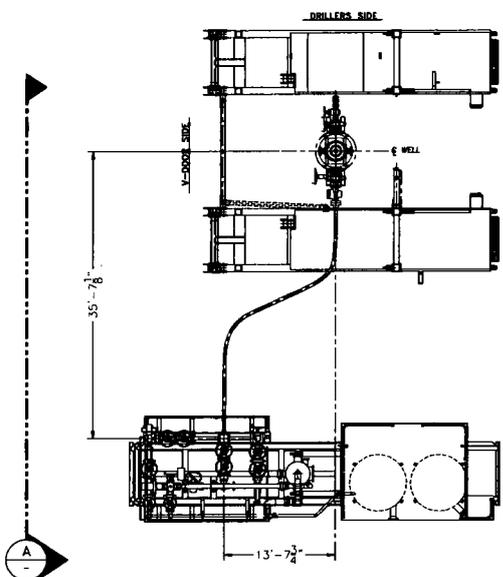

PLAN VIEW

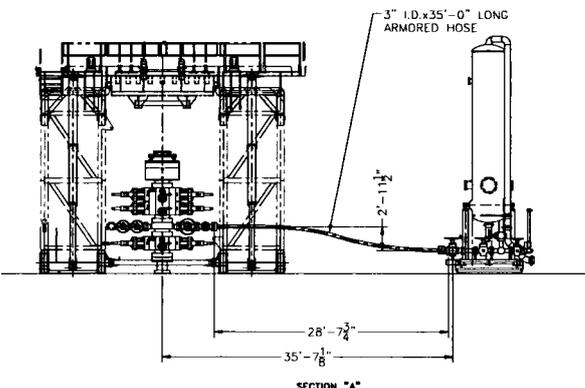


SECTION "A"


ISSUED FOR FABRICATION
 December-19-2007
 DRAFTSMAN _____
 ENGINEER _____

PROPRIETARY
 THIS DRAWING AND THE IDEAS AND INFORMATION INCLUDED HEREIN ARE THE PROPERTY OF HELMERICH & PAYNE INTERNATIONAL DRILLING CO. AND ARE NOT TO BE REPRODUCED, DISTRIBUTED OR DISCLOSED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF A QUALIFIED OFFICER OF HELMERICH & PAYNE INTL. DRILLING CO.

REV	DATE	DESCRIPTION	BY
△			
△			
△			
△	12/18/07	REMOVED SHEET TOTAL CALLOUT	JW

HELMERICH & PAYNE INTERNATIONAL DRILLING CO.		TITLE	
PROJECT		CHOKE LINE SYSTEM FLEXRIG3	
CUSTOMER		DATE: 4-10-07	
DRWN	JBC	DATE	ENG. NO.
SCALE	3/16"=1'	SHEET	2 OF 8
		210-P1-07	
		REV A	

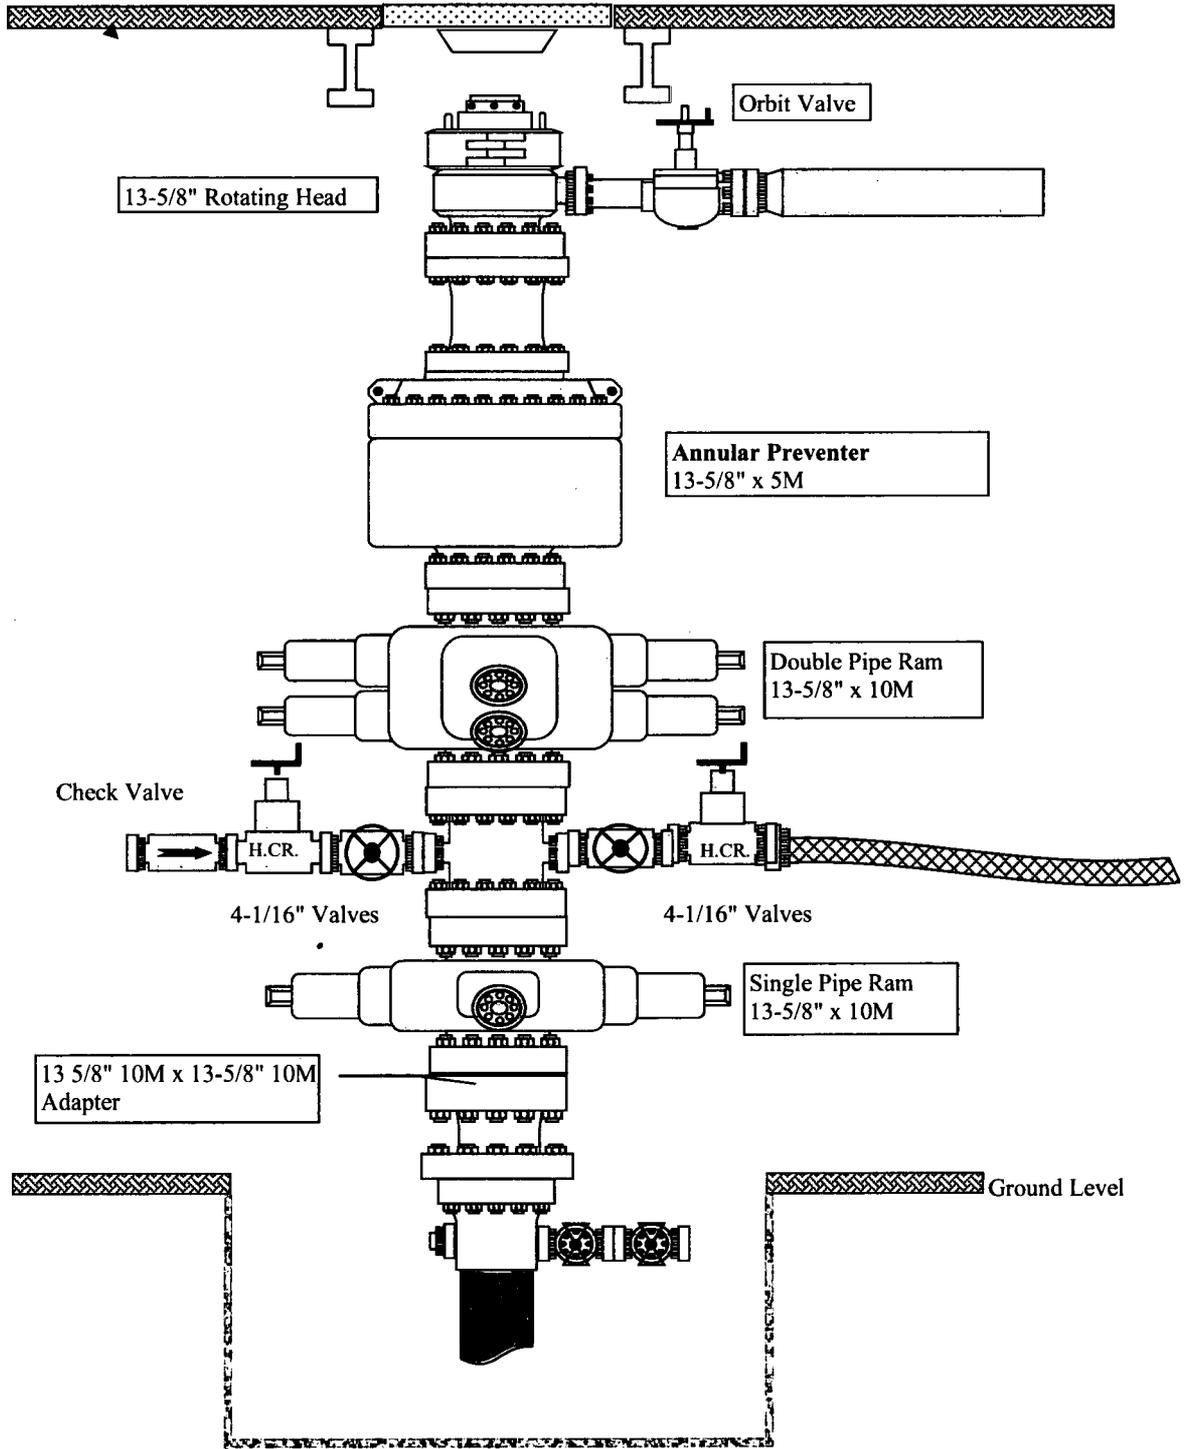

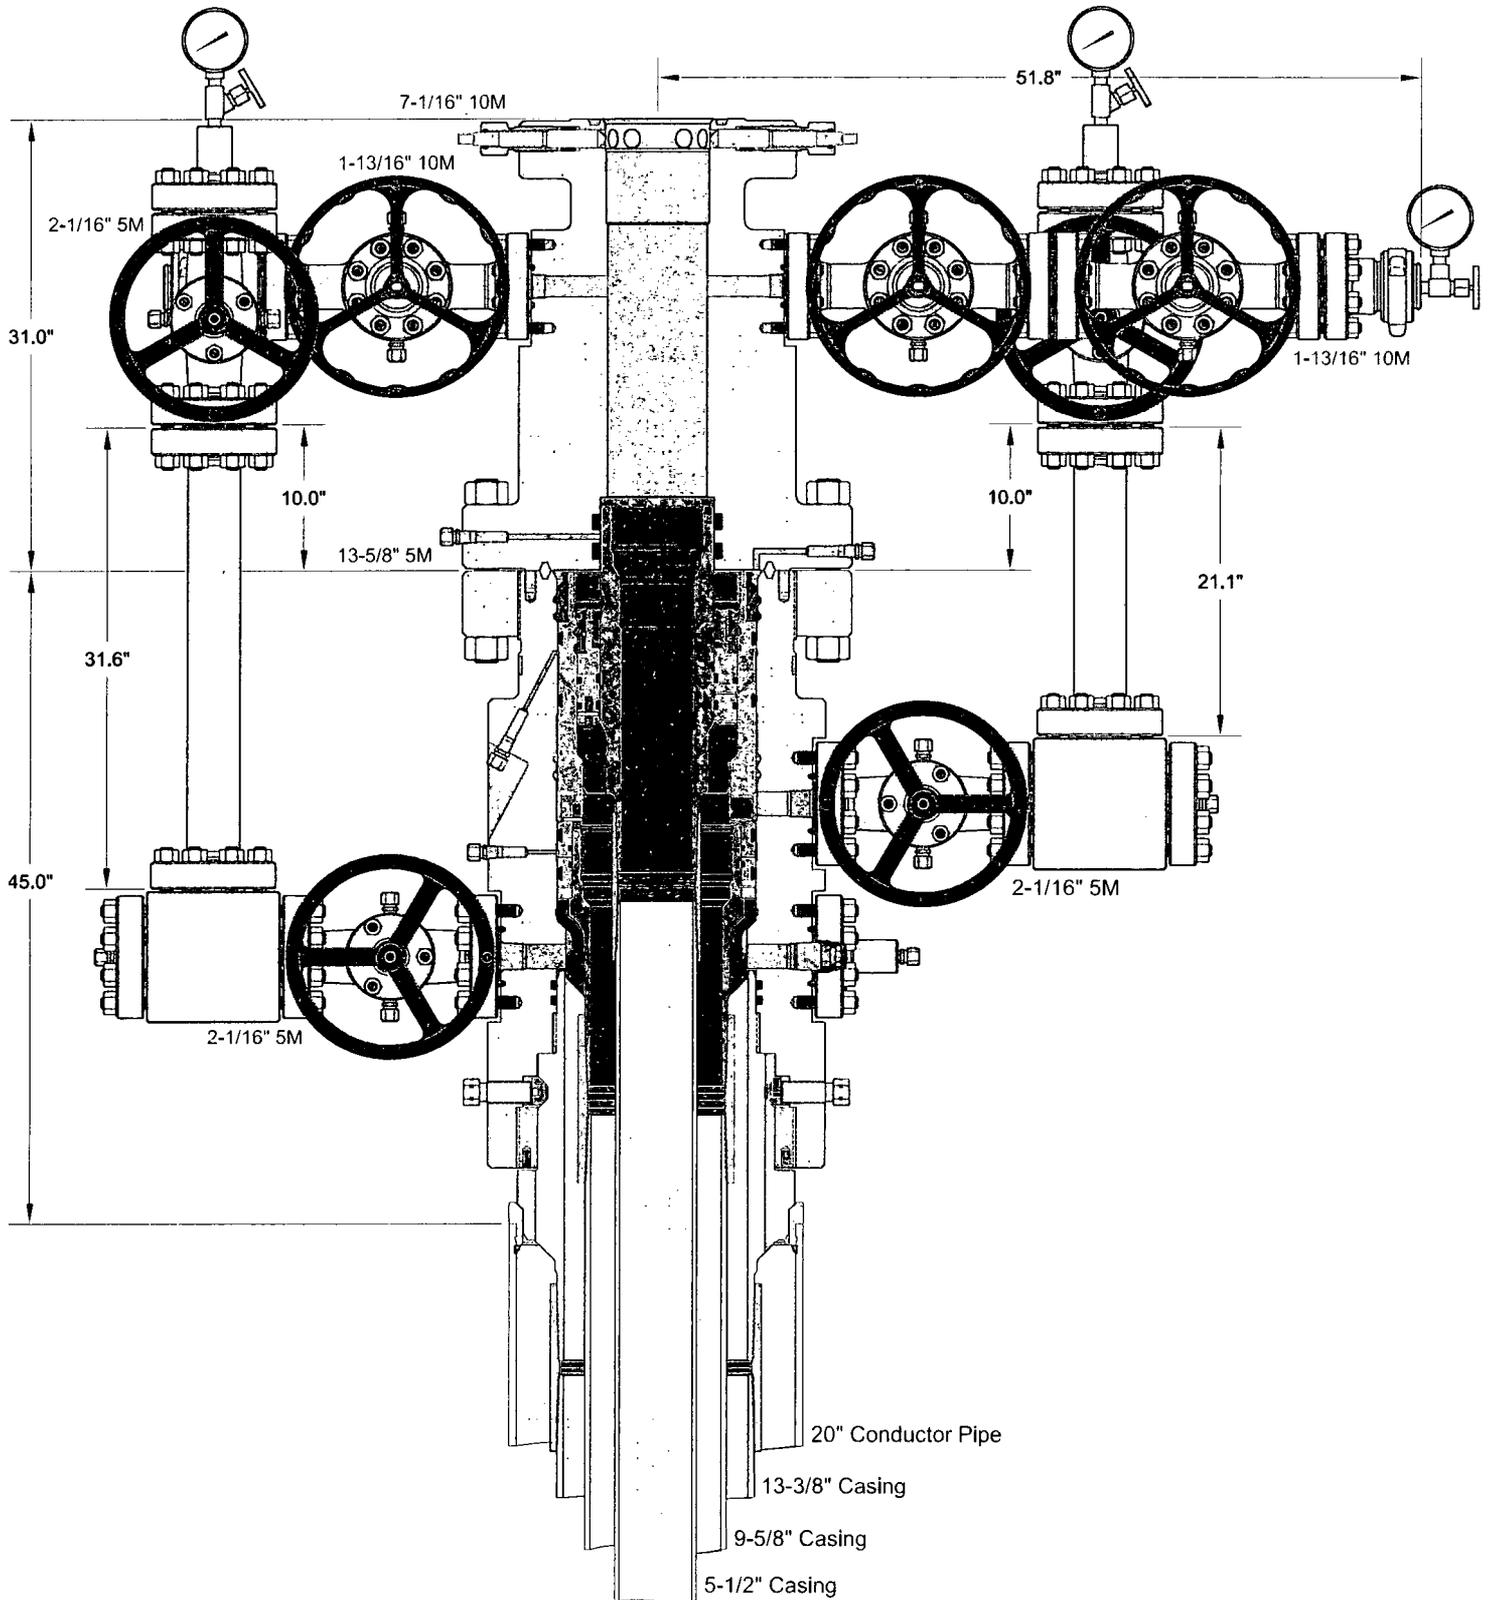

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

CACTUS WELLHEAD LLC

MARATHON OIL COMPANY
CARLSBAD, NM

13-3/8" x 9-5/8" x 5-1/2" 15M MBU-3T-CFL Wellhead Assembly
With 13-5/8" 5M x 7-1/16" 10M CTH-DBLHPS Tubing Head
and 9-5/8" & 5-1/2" Pin Down Casing Hangers

DRAWN	DLE	24JUL17
APPRV		
DRAWING NO.	ODE0001625	

1. DRILLING WELL CONTROL PLAN

1.1 WELL CONTROL - CERTIFICATIONS

Required IADC/IWCF Well Control Certifications Supervisor Level:

Any personnel who supervises or operates the BOP must possess a valid current IADC training certification and photo identification. This would include the onsite drilling supervisor, tool pusher/rig manager, driller, and any personnel that will be acting in these capacities. Another example of this may be a wireline or snubbing crew rigged up on the rig to assist the rig, the operator of each system must also have a valid control certification for their level of operation.

BLM recognizes IADC training as the industry approved accredited training. Online self-certifications will not be acceptable. Enforcement actions for the lack of a valid Supervisory Level certificate shall be prompt action to correct the deficiency. **Enforcement actions include but are not limited to immediate replacement of personnel lacking certifications, drilling operations being shut down or installment of a 10M annular.**

IADC Driller Level for all Drillers and general knowledge for the Assistant Driller, Derrick Hands, Floor Hands and Motor Hands is recognized by the BLM; however, a Driller Level certification will need to be presented only if acting in a temporary Driller Level certification capacity.

Well Control-Position/Roles

IADC Well control training and certification is targeted toward each role, e.g., Supervisor Level toward those who direct, Driller Level to those who act, Introductory to those who need to know.

- **Supervisor Level**
 - Specifies and has oversight that the correct actions are carried out
 - Role is to supervise well control equipment, training, testing, and well control events
 - Directs the testing of BOP and other well control equipment
 - Regularly direct well control crew drills
 - Land based rigs – usually runs the choke during a well kill operation
 - Due to role on the rig, training and certification is targeted more toward management of well control and managing an influx out of the well

- **Driller Level**
 - Performs an action to prevent or respond to well control accident
 - Role is to monitor the well via electronic devices while drilling and detect unplanned influxes
 - Assist with the testing of BOP and other well control equipment
 - Regularly assist with well control crew drills
 - When influx is detected, responsible to close the BOP
 - Due to role on the rig, training and certification is targeted more toward monitoring and shutting the well in (closing the BOP) when an influx is detected

(Well Control-Positions/Roles Continued)

- **Derrick Hand, Assistant Driller Introductory Level**
 - Role is to assist Driller with kick detection by physically monitoring the well at the mixing pits/tanks
 - Regularly record mud weights/viscosity for analysis by the Supervisor level and mud engineer so pre-influx signs can be detected
 - Mix required kill fluids as directed by Supervisor or Driller
 - Due to role on the rig, training and certification is targeted more toward monitoring for influxes, either via mud samples or visual signs on the pits/tanks

- **Motorman, Floor Hand Introductory Level**
 - Role is to assist the Supervisor, Driller, or Derrick Hand with detecting influxes
 - Be certain all valves are aligned for proper well control as directed by Supervisor
 - Perform Supervisor or Driller assigned tasks during a well control event
 - Due to role on the rig, training and certification is targeted more toward monitoring for influxes

1.2 WELL CONTROL-COMPONENT AND PREVENTER COMPATIBILITY CHECKLIST

The table below, which covers the drilling and casing of the 10M Stack portion of the well, outlines the tubulars and the compatible preventers in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the rating of the annular preventer.

- Example 6-1/8" Production hole section, 10M requirement

Component	OD	Preventer	RWP
Drill pipe	4"	Upper and Lower 3.5-5.5" VBRs	10M
HWDP	4"	Upper and Lower 3.5-5.5" VBRs	10M
Drill collars and MWD tools	4.75-5"	Upper and Lower 3.5-5.5" VBRs	10M
Mud Motor	4.75-5.25"	Upper and Lower 3.5-5.5" VBRs	10M
Production casing	4.5"	Upper and Lower 3.5-5.5" VBRs	10M
ALL	0-13-5/8"	Annular	5M
Open-hole	-	Blind Rams	10M

- VBR = Variable Bore Ram. Compatible range listed in chart.

1.3 WELL CONTROL-BOP TESTING

BOP Test will be completed per Onshore Oil and Gas Order #2 Well Control requirements. The 5M Annular Preventer on a required 10M BOP stack will be tested to 70 % of rated working

pressure including a 10 minute low pressure test. Pressure shall be maintained at least 10 minutes.

1.4 WELL CONTROL - DRILLS

The following drills are conducted and recorded in the Daily Drilling Report and the Contractor's reporting system while engaged in drilling operations:

Type	Frequency	Objective	Comments
Shallow gas kick drill - drilling	Once per well with crew on tour	Response training to a shallow gas influx	To be done prior to drilling surface hole if shallow gas is noted
Kick drill - drilling	Once per week per crew	Response training to an influx while drilling (bit on bottom)	Only one kick drill per week per crew is required, alternating between drilling and tripping.
Kick drill - tripping	Once per week per crew	Response training to an influx while tripping (bit off bottom). Practice stabbing TIW valve	

1.5 WELL CONTROL – MONITORING

- Drilling operations which utilize static fluid levels in the wellbore as the active barrier element, a means of accurately monitoring fill-up and displacement volumes during trips are available to the driller and operator. A recirculating trip tank is installed and equipped with a volume indicator easily read from the driller's / operator's position. This data is recorded on a calibrated chart recorder or digitally. The actual volumes are compared to the calculated volumes.
- The On-Site Supervisor ensures hole-filling and pit monitoring procedures are established and documented for every rig operation.
- The well is kept full of fluid with a known density and monitored at all times even when out of the hole.
- Flow checks are a minimum of 15 minutes.
- A flow check is made:
 - In the event of a drilling break.
 - After indications of down hole gains or losses.
 - Prior to all trips out of the hole.
 - After pulling into the casing shoe.
 - Before the BHA enters the BOP stack.
 - If trip displacement is incorrect.

Well Control-Monitoring (Continued)

- Prior to dropping a survey instrument.
- Prior to dropping a core ball.

- After a well kill operation.
- When the mud density is reduced in the well.
- Flow checks may be made at any time at the sole discretion of the driller or his designate. The Onsite Supervisor ensures that personnel are aware of this authority and the authority to close the well in immediately without further consultation.
- Record slow circulating rates (SCR) after each crew change, bit trip, and 500' of new hole drilled and after any variance greater than 0.2 ppg in MW. Slow pump rate recordings should include return flow percent, TVD, MD & pressure. SCR's will be done on all pumps at 30, 40 & 50 SPM. Pressures will be recorded at the choke panel. SCR will be recorded in the IADC daily report and ORB Wellview daily report
- Drilling blind (i.e. without returns) is permissible only in known lithology where the absence of hydrocarbons has been predetermined and written approval of the Drilling Manager.
- All open hole logs to be run with pack-off or lubricator.
- The Drilling Contractor has a fully working pit level totalizer / monitoring system with read out for the driller and an audible alarm set to 10 BBL gain / loss volume. Systems are selectable to enable monitoring of all pits in use. Pit volumes are monitored at all times, especially when transferring fluids. Both systems data is recorded on a calibrated chart recorder or electronically.
- The Drilling Contractor has a fully working return mud flow indicator with drillers display and an audible alarm, and is adjustable to record any variance in return volumes.

1.6 WELL CONTROL – SHUT IN

- The “hard shut in” method (i.e. against a closed choke using either an annular or ram type preventer) is the Company standard.
- The HCR(s) or failsafe valves are left closed during drilling to prevent any erosion and buildup of solids. The adjustable choke should also be left closed.
- The rig specific shut in procedure, the BOP configuration along with space-out position for the tool joints is posted in the Driller’s control cabin or doghouse.
- No well kill operation commences until there is a plan agreed by the Superintendent, On-Site Supervisor and the Drilling Manager.
- During a well kill by circulation, constant bottom hole pressure is maintained throughout.
- Kill sheets are maintained by the Driller and posted in the Driller’s control cabin or doghouse. The sheet is updated at a minimum every 500 feet.

2. SHUT-IN PROCEDURES:

2.1 PROCEDURE WHILE DRILLING

- Sound alarm (alert crew)

- Space out drill string – Stop rotating, pick the drill string up off bottom, and space out to ensure no tool joint is located in the BOP element selected for initial closure.
- Shut down pumps (stop pumps and observe well.)
- Shut-in Well - If flow is suspected or confirmed, close uppermost applicable BOP element. (HCR and choke will already be in the closed position.)
 - **Note:** Either the uppermost pipe ram or annular preventer can be used.
- Confirm shut-in
- Notify toolpusher/company representative
- Gather all relevant data required:
 - SIDPP and SICP
 - Hole Depth and Hole TVD
 - Pit gain
 - Time
 - Kick Volume
 - Pipe depth
 - MW in, MW out
 - SPR's (Slow Pump Rate's)
- Regroup and identify forward plan (let well stabilize, update kill sheet, inventory mud additives and mud volumes on location)
- Company Representative, Drilling Superintendent, Drilling Engineer and Drilling Manager will discuss well control kill method to be utilized. A verbal Risk Assessment and preferred kill method will be finalized. Initial Risk Assessment will be finalized within 1 hour of initial shut in.
- **No well kill operation commences until there is a plan agreed by the Superintendent, On-Site Supervisor and the Drilling Contractor PIC.**
- Recheck all pressures and fluid volume on accumulator unit
- If pressure has built or is anticipated during the kill to reach 1,000 psi or greater, the annular preventer will not be used as the primary pressure control device and operations will swap to the upper BOP pipe ram.

2.2 PROCEDURE WHILE TRIPPING

- Sound alarm (alert crew)
- Stab full opening safety valve in the drill string and close.
- Space out drill string (ensure no tool joint is located in the BOP element selected for initial closure).
- Shut down pumps (stop pumps and observe well.)
- Shut-in Well - If flow is suspected or confirmed, close uppermost applicable BOP element. (HCR and choke will already be in the closed position.)
 - **Note:** Either the uppermost pipe ram or annular preventer can be used.
- Confirm shut-in
- Notify tool pusher/company representative
- Gather all relevant data required:
 - SIDPP and SICP
 - Hole Depth and Hole TVD
 - Pit gain

Procedure While Tripping (Continued)

- Time
- Kick Volume
- Pipe depth

- MW in, MW out
 - SPR's (Slow Pump Rate's)
- Regroup and identify forward plan (let well stabilize, update kill sheet, inventory mud additives and mud volumes on location)
- Company Representative, Drilling Superintendent, Drilling Engineer and Drilling Manager will discuss well control kill method to be utilized. A verbal Risk Assessment and preferred kill method will be finalized. Initial Risk Assessment will be finalized within 1 hour of initial shut in.
- **No well kill operation commences until there is a plan agreed by the Superintendent, On-Site Supervisor and the Drilling Contractor PIC.**
- Recheck all pressures and fluid volume on accumulator unit
- If pressure has built or is anticipated during the kill to reach 1,000 psi or greater, the annular preventer will not be used as the primary pressure control device and operations will swap to the upper BOP pipe ram.

2.3 PROCEDURE WHILE RUNNING CASING

- Sound alarm (alert crew)
- Stab crossover and full opening safety valve and close
- Space out casing (ensure no coupling is located in the BOP element selected for initial closure).
- Shut down pumps (stop pumps and observe well.)
- Shut-in Well - If flow is suspected or confirmed, close uppermost applicable BOP element. (HCR and choke will already be in the closed position.)
 - **Note:** Either the uppermost pipe ram or annular preventer can be used.
- Confirm shut-in
- Notify tool pusher/company representative
- Gather all relevant data required:
 - SIDPP and SICP
 - Hole Depth and Hole TVD
 - Pit gain
 - Time
 - Kick Volume
 - Pipe depth
 - MW in, MW out
 - SPR's (Slow Pump Rate's)
- Regroup and identify forward plan (let well stabilize, update kill sheet, inventory mud additives and mud volumes on location)
- Company Representative, Drilling Superintendent, Drilling Engineer and Drilling Manager will discuss well control kill method to be utilized. A verbal Risk Assessment and preferred kill method will be finalized. Initial Risk Assessment will be finalized within 1 hour of initial shut in.
- **No well kill operation commences until there is a plan agreed by the Superintendent, On-Site Supervisor and the Drilling Contractor PIC.**
- Recheck all pressures and fluid volume on accumulator unit
- If pressure has built or is anticipated during the kill to reach 1,000 psi or greater, the annular preventer will not be used as the primary pressure control device and operations will swap to the upper BOP pipe ram.

2.4 PROCEDURE WITH NO PIPE IN HOLE (OPEN HOLE)

- Sound alarm (alert crew)
- Shut-in with blind rams or BSR. (HCR and choke will already be in the closed position.)
- Confirm shut-in

- Notify toolpusher/company representative
- Gather all relevant data required:
 - Shut-In Pressure
 - Hole Depth and Hole TVD
 - Pit gain
 - Time
 - Kick Volume
 - MW in, MW out
 - SPR's (Slow Pump Rate's)
- Regroup and identify forward plan (let well stabilize, update kill sheet, inventory mud additives and mud volumes on location)
- Company Representative, Drilling Superintendent, Drilling Engineer and Drilling Manager will discuss well control kill method to be utilized. A verbal Risk Assessment and preferred kill method will be finalized. Initial Risk Assessment will be finalized within 1 hour of initial shut in.
- **No well kill operation commences until there is a plan agreed by the Superintendent, On-Site Supervisor and the Drilling Contractor PIC.**
- Recheck all pressures and fluid volume on accumulator unit.

2.5 PROCEDURE WHILE PULLING BHA THRU STACK


- PRIOR to pulling last joint of drill pipe thru the stack.
- Perform flow check, if flowing.
- Sound alarm (alert crew).
- Stab full opening safety valve and close
- Space out drill string with tool joint just beneath the upper pipe ram.
- Shut-in using upper pipe ram. (HCR and choke will already be in the closed position).
- Confirm shut-in.
- Notify toolpusher/company representative
- Read and record the following:
 - SIDPP and SICP
 - Pit gain
 - Time
- Regroup and identify forward plan
- **With BHA in the stack and compatible ram preventer and pipe combo immediately available.**
 - Sound alarm (alert crew)
 - Stab crossover and full opening safety valve and close
 - Space out drill string with upset just beneath the compatible pipe ram.
 - Shut-in using compatible pipe ram. (HCR and choke will already be in the closed position.)
 - Confirm shut-in
 - Notify toolpusher/company representative
 - Read and record the following:
 - SIDPP and SICP
 - Pit gain

Procedures While Pulling BHA thru Stack (Continued)

- Time
- Regroup and identify forward plan

- **With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.**
 - Sound alarm (alert crew)
 - If possible to pick up high enough, pull string clear of the stack and follow “Open Hole” scenario.
 - If impossible to pick up high enough to pull the string clear of the stack:
 - Stab crossover, make up one joint/stand of drill pipe, and full opening safety valve and close
 - Space out drill string with tool joint just beneath the upper pipe ram.
 - Shut-in using upper pipe ram. (HCR and choke will already be in the closed position.)
 - Confirm shut-in
 - Notify toolpusher/company representative
 - Read and record the following:
 - SIDPP and SICP
 - Pit gain
 - Time

WH&TH Design # 2

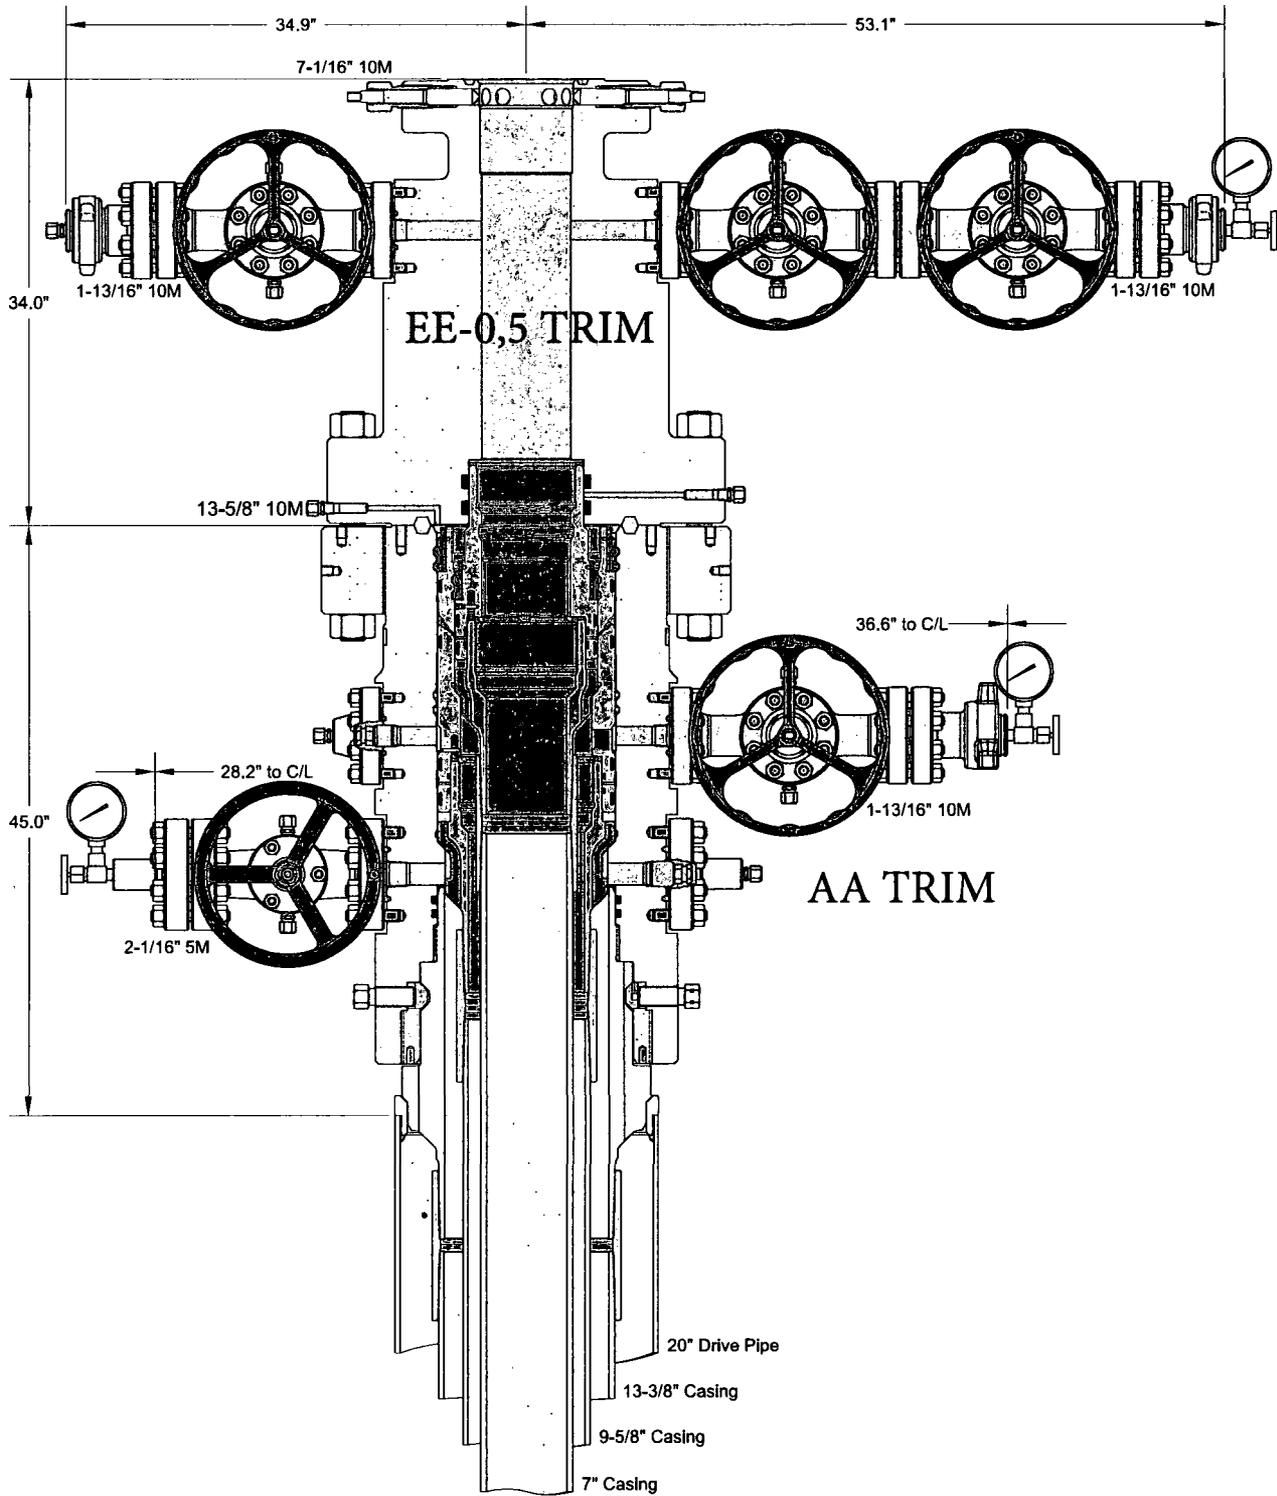

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.


CACTUS WELLHEAD LLC

MARATHON OIL COMPANY

20" x 13-3/8" x 9-5/8" x 7" MBU-3T-CFL-R-DBLO Wellhead
 13-5/8" 10M x 7-1/16" 10M CTH-DBLHPS Tubing Head (34" LG)
 Utilizing Pin Down Mandrel Casing Hangers

DRAWN	DLE	23AUG17
APPRV		
DRAWING NO.	ODE0001825	

I&TH Design # 2

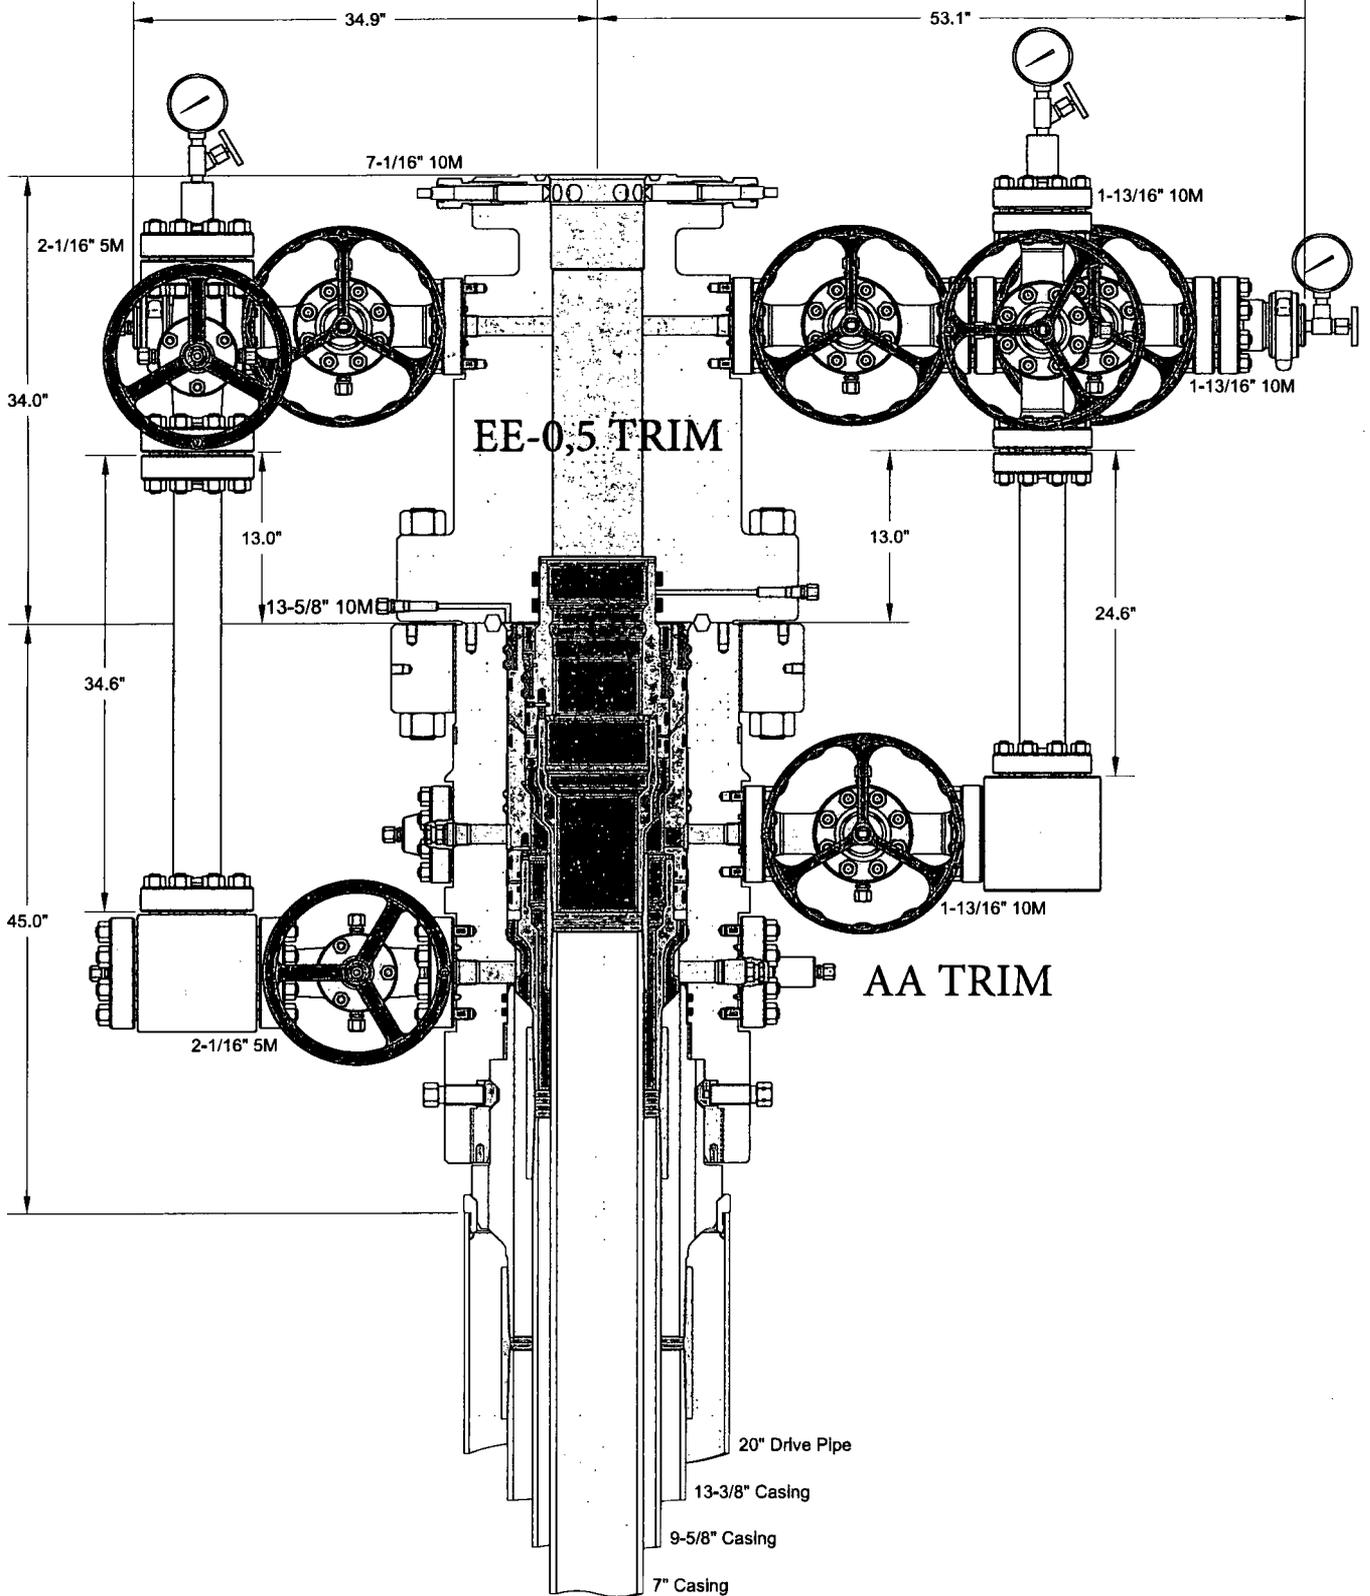

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

CACTUS WELLHEAD LLC

MARATHON OIL COMPANY

20" x 13-3/8" x 9-5/8" x 7" MBU-3T-CFL-R-DBLO Wellhead
 13-5/8" 10M x 7-1/16" 10M CTH-DBLHPS Tubing Head (34" LG)
 Utilizing Pin Down Mandrel Casing Hangers With Annulus Risers

DRAWN	DLE	23AUG17
APPRV		
DRAWING NO.	ODE0001825	

MARATHON OIL PERMIAN LLC

DRILLING AND OPERATIONS PLAN

WELL NAME / NUMBER: DOGIE DRAW FED COM 25 34 14 TB 1H

STATE: NEW MEXICO

COUNTY: LEA

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	TWSP	Range	Section	Aliquot/Lot/Trac	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL	2600	FSL	626	FWL	25S	34E	14	NWSW	32.13026828 N	103.44680051 W	Lea	NM	NMP	F	NMNM136221	3330	0	0
KOP	2600	FSL	330	FWL	25S	34E	14	NWSW	32.13026828 N	103.44775587 W	Lea	NM	NMP	F	NMNM136221	- 8413	11750	11743
PPP	2309	FSL	330	FWL	25S	34E	14	NWSW	32.12947063 N	103.44775587 W	Lea	NM	NMP	F	NMNM136221	- 8992	12700	12322
EXIT	0	FSL	330	FWL	25S	34E	14	SWSW	32.12312498 N	103.44774601 W	Lea	NM	NMP	F	NMNM136221	- 9023	14469	12353
PPP	0	FSL	330	FWL	25S	34E	23	NWNW	32.12312498 N	103.44774601 W	Lea	NM	NMP	F	NMNM132944	- 9023	14469	12353
EXIT	330	FSL	330	FWL	25S	34E	23	SWSW	32.10952400 N	103.44775466 W	Lea	NM	NMP	F	NMNM132944	- 9110	19419	12440
BHL	330	FSL	330	FWL	25S	34E	23	SWSW	32.10952400 N	103.44775466 W	Lea	NM	NMP	F	NMNM132944	- 9110	19419	12440

1. GEOLOGIC NAME OF SURFACE FORMATION

a. Permian

2. ESTIMATED TOPS OF GEOLOGICAL MARKERS & DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS

Formation	True Vertical Depth (ft)	Measured Depth (ft)	Lithologies	Mineral Resources	Producing Formation
Rustler	905	905	Anhydrite/Dolomite	BRINE	N
Salado	1,408	1,408	Salt/Anhydrite	BRINE	N
Castile	3,607	3,608	Base Salt	BRINE	N
Base of Salt	5,131	5,132	Limy Sands	BRINE	N
Lamar	5,416	5,417	Sand/Shales	OIL	Y
Bell Canyon	5,447	5,448	Sands/Shale	OIL	Y
Cherry Canyon	6,756	6,759	Sands/Carbonates	OIL	Y
Brushy Canyon	8,056	8,060	Sands/Carbonates	OIL	Y
Bone Spring	9,365	6,370	Sands/Carbonates	OIL	Y
1st Bone Spring Sand	10,392	10,398	Sands/Carbonates	OIL	Y
2nd Bone Spring Sand	10,970	10,977	Sands/Carbonates	OIL	Y
3rd Bone Spring Sand	12,014	12,037	Sands/Carbonates	OIL	Y

DEEPEST EXPECTED FRESH WATER: 400' TVD

ANTICIPATED BOTTOM HOLE PRESSURE: 6,842 psi

ANTICIPATED BOTTOM HOLE TEMPERATURE: 165 °F

ANTICIPATED ABNORMAL PRESSURE: N

ANTICIPATED ABNORMAL TEMPERATURE: N

3. CASING PROGRAM

String Type	Hole Size	Csg Size	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Weight (lbs/ft)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
Surface	<u>17 1/2</u>	<u>13 3/8</u>	<u>0</u>	<u>1000</u>	<u>0</u>	<u>1000</u>	<u>54.5</u>	<u>J55</u>	<u>BTC</u>	<u>3.27</u>	<u>1.71</u>	<u>4.83</u>
Intermediate	<u>12 1/4</u>	<u>9 5/8</u>	<u>0</u>	<u>5420</u>	<u>0</u>	<u>5420</u>	<u>40</u>	<u>K55</u>	<u>BTC</u>	<u>1.25</u>	<u>1.19</u>	<u>2.18</u>
Production	<u>8 3/4</u>	<u>5 1/2</u>	<u>0</u>	<u>19419</u>	<u>0</u>	<u>12440</u>	<u>20</u>	<u>P110</u>	<u>BTC</u>	<u>1.61</u>	<u>1.29</u>	<u>2.04</u>

Minimum safety factors: Burst 1.125 Collapse 1.125 Tension 1.8 Wet/1.6 Dry

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

4. CEMENT PROGRAM:

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity (sx)	Yield (ft3/sx)	Density (ppg)	Slurry Volume (ft3)	Excess (%)	Cement Type	Additives
Surface	Lead	--	0	800	636	1.747	13.5	1112	100	Class C	3 lbm/sk granular LCM + 0.1250 lbm/sk Poly-E-Flake
Surface	Tail	--	800	1000	230	1.364	14.8	313	100	Class C	0.25 % Accelerator
Intermediate	Lead	--	0	4820	1420	1.73	12.8	2456	75	Class C	0.02 Gal/Sx Defoamer + 0.5% Extender + 1% Accelerator
Intermediate	Tail	--	4820	5420	240	1.33	14.8	320	50	Class C	0.07 % Retarder
Production	Lead	--	5220	11750	987	2.807	11	2770	70	Class H	0.1% viscofier + 0.25 lb/sx defoamer + 5% retarder
Production	Tail	--	11750	19419	2068	1.223	14.5	2529	30	Class H	2% extender + 0.25% defoamer + 0.5% fluid loss + 0.2% dispersant

Stage tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. Stage tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Pilot hole depth: N/A TVD/MD

KOP: N/A TVD/MD

Plug top	Plug Bottom	Excess (%)	Quantity (sx)	Density (ppg)	Yield (ft3/sx)	Water gal/sk	Slurry Description and Cement Type

Attach plugging procedure for pilot hole.

5. PRESSURE CONTROL EQUIPMENT

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
12 ¼"	13 5/8	5000	Annular	x	5000
			Blind Ram		
			Pipe Ram		
			Double Ram	x	
			Other*		
8 ¾"	13 5/8	5000	Annular	x	5000
			Blind Ram		
			Pipe Ram		
			Double Ram	x	
			Other*		
6 1/8"	13 5/8	5000	Annular	x	5000
			Blind Ram		
			Pipe Ram		
			Double Ram	x	
			Other*		

*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock, full opening safety valve / inside BOP and choke lines and choke manifold. See attached schematics.

Y	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?
Y	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. See attached schematic.

6. MUD PROGRAM:

Top Depth	Bottom Depth	Mud Type	Min. Weight (ppg)	Max. Weight (ppg)	Additional Characteristics
<u>0</u>	<u>1000</u>	<u>Water Based Mud</u>	<u>8.4</u>	<u>8.8</u>	
<u>1000</u>	<u>5420</u>	<u>Brine</u>	<u>9.9</u>	<u>10.2</u>	
<u>5420</u>	<u>19419</u>	<u>Cut Brine</u>	<u>9.0</u>	<u>10.2</u>	

Losses or gains in the mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times.

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT

- a. A Kelly cock will be in the drill string at all times.
- b. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor unobstructed and readily accessible at all times.
- c. Hydrogen Sulfide detection equipment will be in operation after drilling out the surface casing shoe until the production casing is cemented. Breathing equipment will be on location upon drilling the surface casing shoe until total depth is reached. **If Hydrogen Sulfide is encountered , measured amounts and formations will be reported to the BLM**

8. LOGGING / CORING AND TESTING PROGRAM:

- A. Mud Logger: Intermediate shoe to TD.
- B. DST's: None.
- C. Open Hole Logs: GR while drilling from Intermediate casing shoe to TD.

9. POTENTIAL HAZARDS:

- A. H2S detection equipment will be in operation after drilling out the surface casing shoe until the production casing has been cemented. Breathing equipment will be on location from drilling out the surface shoe until production casing is cemented. If H2S is encountered the operator will comply with Onshore Order #6.
- B. No abnormal temperatures or pressures are anticipated. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.
- C. No losses are anticipated at this time.
- D. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well.
- E. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS

Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon as possible after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 30 days.



APD ID: 10400025502

Submission Date: 12/14/2017

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data reflects the most recent changes

[Show Final Text](#)

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

SUPO_1__Dogie_Draw_Fed_Com_25_34_14_Pad___Existing_Road_Map_Plat_20180702151318.pdf

Existing Road Purpose: ACCESS FLUID TRANSPORT Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

SUPO_2__Dogie_Draw_Fed_Com_25_34_14_Pad___Proposed_Lease_Road_20180703070232.pdf

New road type: LOCAL

Length: 30.73 Feet Width (ft.): 20
Max slope (%): 3 Max grade (%): 3

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 14

New road access erosion control: Road will be crowned to allow proper water drainage and BMP will be used to control erosion.

New road access plan or profile prepared? NO

New road access plan attachment:

Access road engineering design? NO

Access road engineering design attachment:

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Access surfacing type: OTHER

Access topsoil source: ONSITE

Access surfacing type description: Caliche

Access onsite topsoil source depth: 6

Offsite topsoil source description:

Onsite topsoil removal process: Strip a minimum of 6" topsoil and temporarily pile while road is being constructed. After the road has been constructed, the topsoil will be spread and seeded along the road ditch in Marathon's ROW.

Access other construction information:

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2%. The road shall conform to cross section and plans for typical road construction found in the BLM Gold Book.

Road Drainage Control Structures (DCS) description: Road will be crowned to allow proper water drainage and ditching will be constructed on both side of the road.

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Additional Attachment(s):

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

SUPO_3__Dogie_Draw_Fed_Com_25_34_14_Pad__Existing_Well_Location_Map_20180702151406.pdf

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: Production Facility is proposed on the east side of the proposed well pad and will run from pad edge SE for 238', S for 300' then W for 180'. The flare equipment will be located along the south edge of the pad north of the proposed interim reclamation. - No open top tanks will be used. - Open vent exhaust stacks will be modified to prevent birds or bats from entering, discourage perching, roosting, and nesting. - The proposed CTB will have a secondary containment 1.5 times the holding capacity of largest storage tank. - All above ground structures will be painted a nonreflective shale green for blending with the surrounding environment. - The proposed CTB will have oil and water truck hauled from the facility. - There are 10 - 750 bbl steel tanks for oil storage and 24 - 750 bbl steel tanks for water storage

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

planned for the CTB. Pipelines: No off pad pipelines will be installed. Powerlines: No powerlines, power will be provided via a natural gas generator.

Production Facilities map:

SUPO_4_9___Dogie_Draw_Fed_Com_25_34_14___Facility_Layout_Plat_20180702151422.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: STIMULATION

Describe type:

Source latitude: 32.0816

Source datum: NAD83

Water source permit type: PRIVATE CONTRACT

Source land ownership: PRIVATE

Water source transport method: PIPELINE

Source transportation land ownership: PRIVATE

Water source volume (barrels): 147500

Source volume (gal): 6195000

Water source use type: STIMULATION

Describe type:

Source latitude: 32.1937

Source datum: NAD83

Water source permit type: PRIVATE CONTRACT

Source land ownership: PRIVATE

Water source transport method: PIPELINE

Source transportation land ownership: PRIVATE

Water source volume (barrels): 147500

Source volume (gal): 6195000

Water source use type: STIMULATION

Describe type:

Source latitude: 32.108

Source datum: NAD83

Water source permit type: PRIVATE CONTRACT

Source land ownership: PRIVATE

Water source transport method: PIPELINE

Water source type: FRESH WATER LAKE

Source longitude: -103.3546

Source volume (acre-feet): 19.011732

Water source type: FRESH WATER LAKE

Source longitude: -103.4002

Source volume (acre-feet): 19.011732

Water source type: FRESH WATER LAKE

Source longitude: -103.3259

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Source transportation land ownership: PRIVATE


Water source volume (barrels): 147500

Source volume (acre-feet): 19.011732

Source volume (gal): 6195000

Water source and transportation map:

SUPO_5__Dogie_Draw_Fed_Com_25_34_14_Pad__Proposed_Water_Line_Plat_20180702151516.pdf

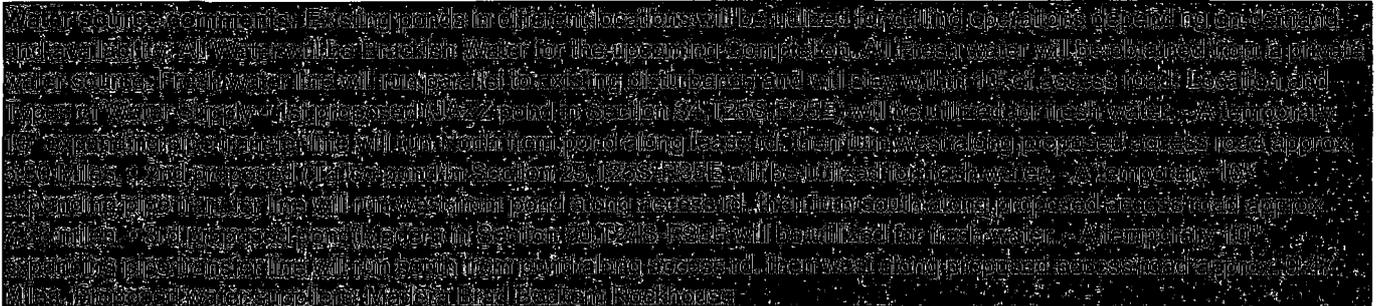

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Construction Materials description: Caliche will be used to construct well pad and roads. Material will be purchased from a private permitted pit. The proposed source of construction material will be located: - Source 1: Bert Madera's mineral pit located in section 6, T25S, R35E - Source 2: Bert Madera's mineral pit located in section 26, T24S, R34E Payment shall be made by construction contractor. Notification shall be given to BLM at (575) 234-5909 at least 3 working days prior to commencing construction of well pad or related infrastructure.

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: All chemicals, salts, frac sand, produced oil, produced water and other waste material produced during drilling and completion operations.

Amount of waste: 5100 barrels

Waste disposal frequency : Daily

Safe containment description: Open Top Tanks

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE

Disposal type description:

Disposal location description: Waste will be removed and disposed of properly at a state approved disposal facility.

Waste type: GARBAGE

Waste content description: Garbage and trash produced during drilling and completion operations

Amount of waste: 1200 pounds

Waste disposal frequency : Weekly

Safe containment description: All garbage will be stored in secure containers with lids.

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE

Disposal type description:

Disposal location description: All garbage will be collected and disposed of properly at a State approved disposal facility.

Waste type: SEWAGE

Waste content description: Human waste and grey water.

Amount of waste: 600 barrels

Waste disposal frequency : Weekly

Safe containment description: Portable toilets and sewage tanks.

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE

Disposal type description:

Disposal location description: All sewage waste will be disposed of properly at a State approved disposal facility.

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.) **Reserve pit width (ft.)**

Reserve pit depth (ft.) **Reserve pit volume (cu. yd.)**

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? YES

Description of cuttings location The well will be drilled utilizing a closed loop system. Drill cutting will be properly disposed of into steel tanks and taken to an NMOCD approved disposal facility.

Cuttings area length (ft.) **Cuttings area width (ft.)**

Cuttings area depth (ft.) **Cuttings area volume (cu. yd.)**

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

SUPO_9__Dogie_Draw_Fed_Com_25_34_14_Pad____Vacinity_and_Existing_Road_Map_Topo_20180702151625.pdf

SUPO_9__Dogie_Draw_Fed_Com_25_34_14_Pad____Well_Location_Plat_Feet_20180702151635.pdf

SUPO_9__Dogie_Draw_Fed_Com_25_34_14_Pad____Well_Pad_Plat_Acres_20180702151644.pdf

SUPO_4_9__Dogie_Draw_Fed_Com_25_34_14____Facility_Layout_Plat_20180702151655.pdf

Comments: Exterior well pad dimensions are approximate 630' by 706', see attached plats for pad shape and footages. This pad will have 6 total wells. Interior well pad dimensions from first point of entry (well head) are: - Dogie Draw Federal Com 25

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

34 14 TB 1H - N-410', S-220', E-470', W-236'. - Dogie Draw Federal Com 25 34 14 WA 2H - N-410', S-220', E-440', W-266'. - Dogie Draw Federal Com 25 34 14 AV 24H - N-410', S-220', E-410', W-296'. Production Facility is proposed on the east side of the proposed well pad and will run from pad edge SE for 238', S for 300' then W for 180'. See attached Facility Layout Plat (also attached in SUPO section 4). Total disturbance area needed for construction activities will be 9.16 acres, long term disturbance will be 6.74 acres. Topsoil will be placed on the west side of the pad (630' x 30') to accommodate interim reclamation activities. Cut and fill will be minimal.

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: DOGIE DRAW FED COM

Multiple Well Pad Number: 290-8

Recontouring attachment:

SUPO_10__Dogie_Draw_Fed_Com_25_34_14__IR_Plat_20180702151719.pdf

Drainage/Erosion control construction: During construction, BMP will be used to control erosion, runoff and siltation of surrounding area.

Drainage/Erosion control reclamation: BMP will be used to control erosion, runoff and siltation of surrounding area.

Well pad proposed disturbance (acres): 9.16	Well pad interim reclamation (acres): 2.42	Well pad long term disturbance (acres): 6.74
Road proposed disturbance (acres): 0.0141	Road interim reclamation (acres): 0.0042	Road long term disturbance (acres): 0.0099
Powerline proposed disturbance (acres): 0	Powerline interim reclamation (acres): 0	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres): 0	Pipeline interim reclamation (acres): 0	Pipeline long term disturbance (acres): 0
Other proposed disturbance (acres): 0	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0
Total proposed disturbance: 9.1741	Total interim reclamation: 2.4242	Total long term disturbance: 6.7499

Disturbance Comments:

Reconstruction method: For Interim Reclamation: • Within 6 months of first production, the well location and surrounding areas will be cleared of, and maintained free of, all materials, trash, and equipment not required for production. A plan will be submitted showing where interim reclamation will be completed in order to allow for safe operations, protection of the environment outside of drilled well, and following best management practices found in the BLM "Gold Book". • In areas planned for interim reclamation, all the surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads. • The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation. • Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations including cuts & fills. To seed the area, the proper BLM LPC seed mixture free of noxious weeds, will be used. • Proper erosion control methods will be used on the area to control erosion, runoff and siltation of the surrounding area. • The interim reclamation will be monitored periodically to ensure that vegetation has reestablished. For Final Reclamation: • Prior to final reclamation procedures, the well pad, road, and surrounding area will be cleared of material, trash, and equipment. • All surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads. • All disturbed areas, including roads, pipelines, pads, production facilities, and interim reclaimed areas will be recontoured to the contour existing prior to initial construction or a contour that blends in distinguishably with the surrounding landscape. Topsoil that was spread over the interim reclamation areas will be stockpiled prior to recontouring. The topsoil will be redistributed evenly over the entire disturbed site to ensure successful revegetation. • After all the disturbed areas have been properly prepared; the areas will be seeded with the proper BLM LPC seed mixture

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

free of noxious weeds. • Proper erosion control methods will be used on the entire area to control erosion, runoff and siltation of the surrounding area.

Topsoil redistribution: During Interim Reclamation, Marathon will grab and evenly redistribute topsoil across the reclaimed area (disc plowing if needed) and seed accordingly. During final reclamation, Marathon will grab and evenly redistribute topsoil across the entire disturbed area (disc plowing if needed) area and seed accordingly.

Soil treatment: Stockpile and seeded until used for interim or final reclamation. Topsoil and subsoil will be piled separately.

Existing Vegetation at the well pad:

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road:

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline:

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances:

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Seed use location:

PLS pounds per acre:

Proposed seeding season:

Seed Summary	
Seed Type	Pounds/Acre

Total pounds/Acre:

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name:

Last Name:

Phone:

Email:

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: Marathon Oil will control weeds per Federal, County and State regulations by contracting a certified third party sprayer.

Weed treatment plan attachment:

Monitoring plan description: Marathon Oil will monitor monthly during growing season for weeds through routine inspections.

Monitoring plan attachment:

Success standards: Maintain all disturbed areas as per Gold Book Standards.

Pit closure description: N/A

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: PRIVATE OWNERSHIP

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Fee Owner: Mark and Annett McCloy Trustees

Fee Owner Address: P.O. Box 795, Tatum, NM 88267

Phone: (432)914-4459

Email:

Surface use plan certification: YES

Surface use plan certification document:

Dogie_Draw_Federal_Com_25_34_14_PAD__SUP_Certification_Letter_20171213091232.pdf

Surface access agreement or bond: Agreement

Surface Access Agreement Need description: Marathon Oil is currently working on the SUA for this pad.

Surface Access Bond BLM or Forest Service:

BLM Surface Access Bond number:

USFS Surface access bond number:

Section 12 - Other Information

Right of Way needed? NO

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? YES

Previous Onsite information: Performed 11/28/2017. Marathon Oil Attendees: Brian Hall and Nancy Pohl BLM Attendee: Colleen Cepero-Rios

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 14 TB

Well Number: 1H

Other SUPO Attachment

SUPO_12__Dogie_Draw_Fed_Com_25_34_14_Pad__No_Arch_Survey_Letter_20180702151737.pdf

EXISTING ACCESS ROADS

DOGIE DRAW FED COM 25-34-14 / ENDER WIGGINS F C 25-34-14


SEC. 14 TWP. 25-S RGE. 34-E

SURVEY: N.M.P.M.

COUNTY: LEA

OPERATOR: MARATHON OIL PERMIAN LLC

U.S.G.S. TOPOGRAPHIC MAP: WOODLEY FLAT, N.M.

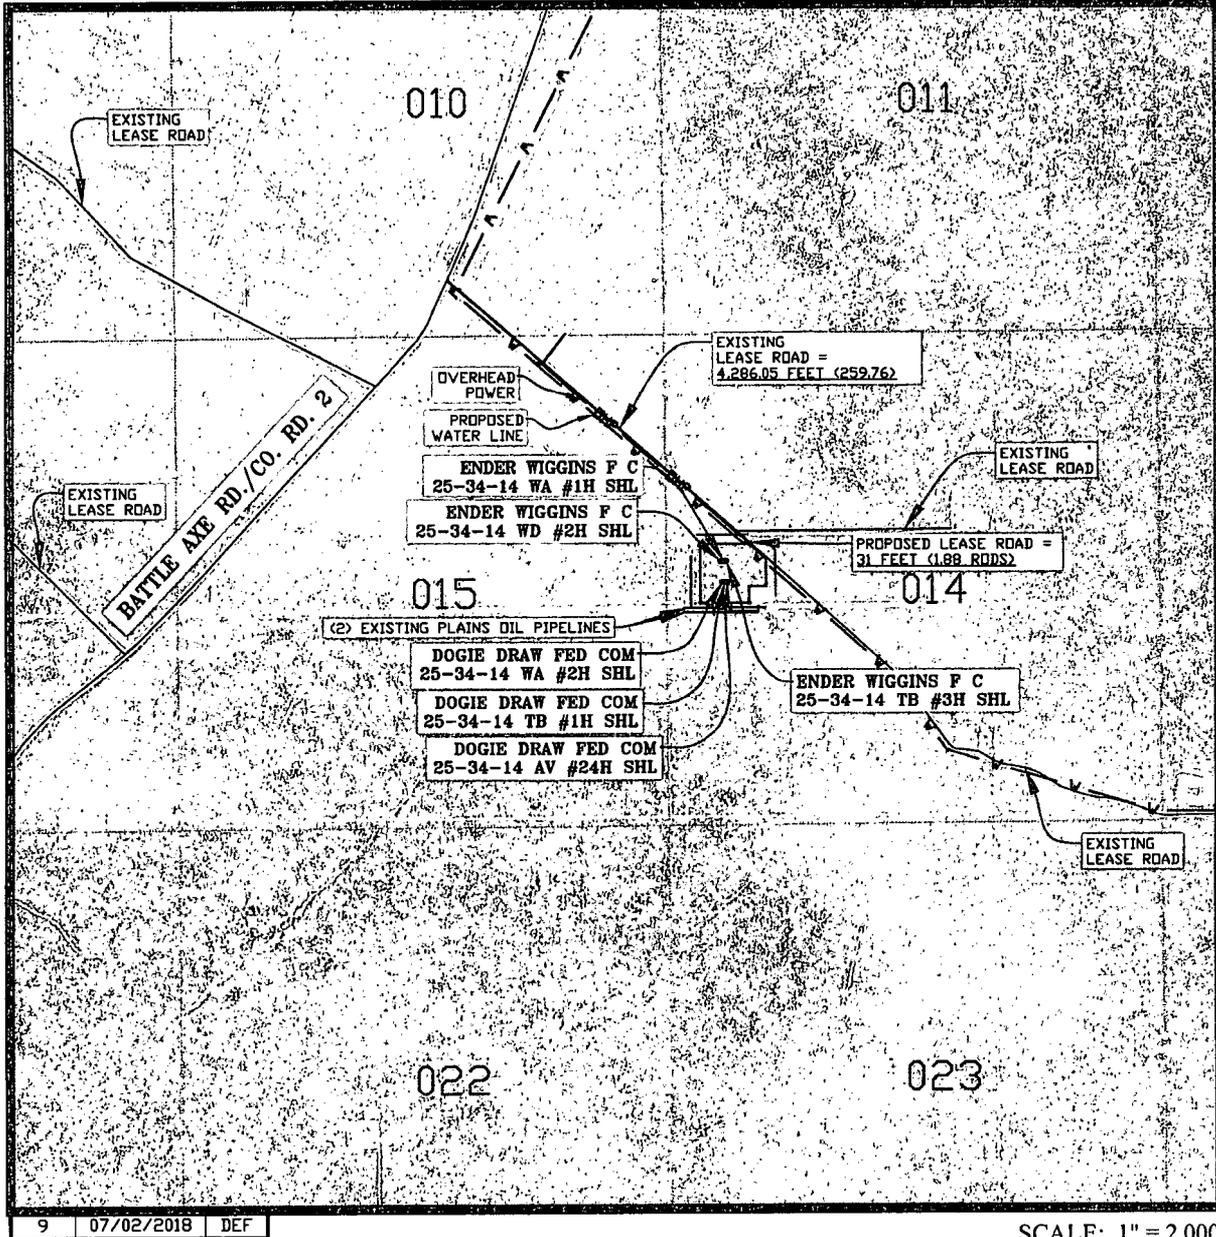

9 07/02/2018 DEF

SCALE: 1" = 2,000

LEGEND

- PROPOSED WELL PAD —————
- ARCH SURVEY LIMITS - - - - -
- EXISTING LEASE ROAD —————
- PROPOSED LEASE ROAD —————
- SECTION LINE - - - - -
- PI/BEND ○
- WELLS •

SHEET 1 OF 6

PREPARED BY:
 R-SQUARED GLOBAL, LLC
 1309 LOUISVILLE AVENUE, MONROE, LA 71201
 318-323-6900 OFFICE
 JOB No. R3755

EXHIBIT "A"

NM-LE-0001.00060
LEA COUNTY, NM
DOGIE DRAW FED COM 25-34-14
PROPOSED LEASE ROAD
MARATHON OIL PERMIAN LLC

SHEET 1 OF 2

FIELD NOTES DESCRIBING

The centerline of a 20 foot wide proposed lease road easement, being 0.01 acres of land. Said easement being located in Section 14, Township 25 South, Range 34 East, New Mexico Principal Meridian, Lea County, New Mexico.

Being more particularly described as lying 10 feet on each side of the following described centerline (see Detail "A" sheet 2 of 2):

BEGINNING at a point from which a 2 inch iron pipe with a 3 inch GLO cap found for the Southwest corner of said Section 14, bears S 15°40'31" W a distance of 3,128.66 feet.

THENCE continue crossing said Section 14 the following course and distance:

N 00°00'00" W a distance of 30.73 feet to the *POINT OF TERMINATION* from which a 2 inch iron pipe with a 2-1/2 inch GLO cap found for the Northwest corner of said Section 14, bears N 21°50'28" W a distance of 2,408.00 feet.

The total length of the proposed lease road easement in said Section 14 shall be 30.73 feet (1.86 rods), and shall contain 0.01 acres of land.

The edges of the permanent easement shall be parallel with the centerline of the easement until reaching the boundaries of the subject tract of land.

All bearings and coordinates refer to NAD 83, New Mexico State Plane Coordinate System, East Zone, U.S. Survey Feet. (All bearings and distances are grid measurements.)

Title information furnished by Marathon Oil Permian LLC.

Reference accompanying Certificate of Survey prepared in conjunction with this legal description for easement.

STATE OF NEW MEXICO
COUNTY OF LEA

I, Lloyd P. Short, New Mexico Professional Surveyor No. 21653, do hereby certify that this easement survey plat and the actual survey on the ground upon which it is based were performed by me or under my direct supervision; that I am responsible for this survey; that this survey meets the minimum standards for surveying in New Mexico; and that it is true and correct to the best of my knowledge and belief. I further certify that this survey is not a land division or subdivision as defined in the New Mexico Subdivision Act and that this instrument is an easement survey plat crossing an existing tract or tracts.




LLOYD P. SHORT, PS No. 21653 DATE: DECEMBER 13, 2017

A handwritten signature in cursive script that reads "Lloyd P. Short".

R-SQUARED GLOBAL, LLC
PROJECT NO. R3755

Modification in any way of the foregoing description terminates liability of Surveyor.

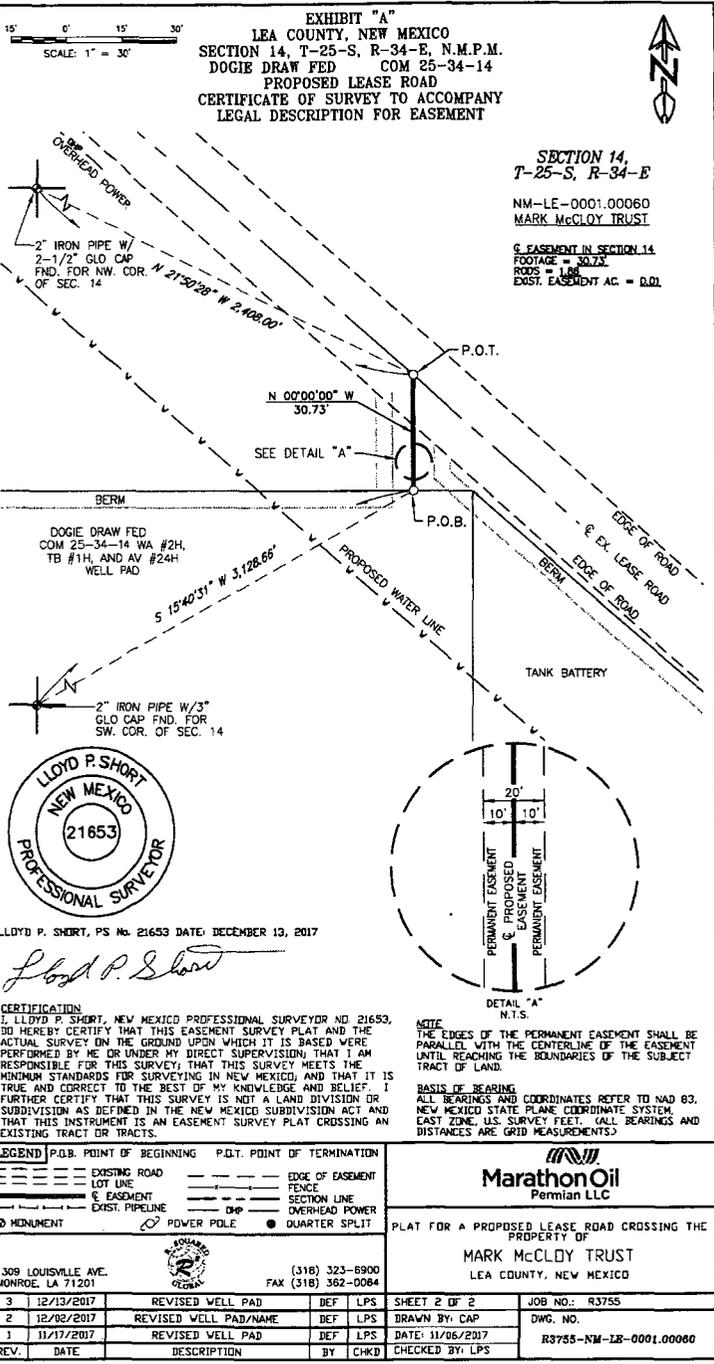



Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?


Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

BLM Map

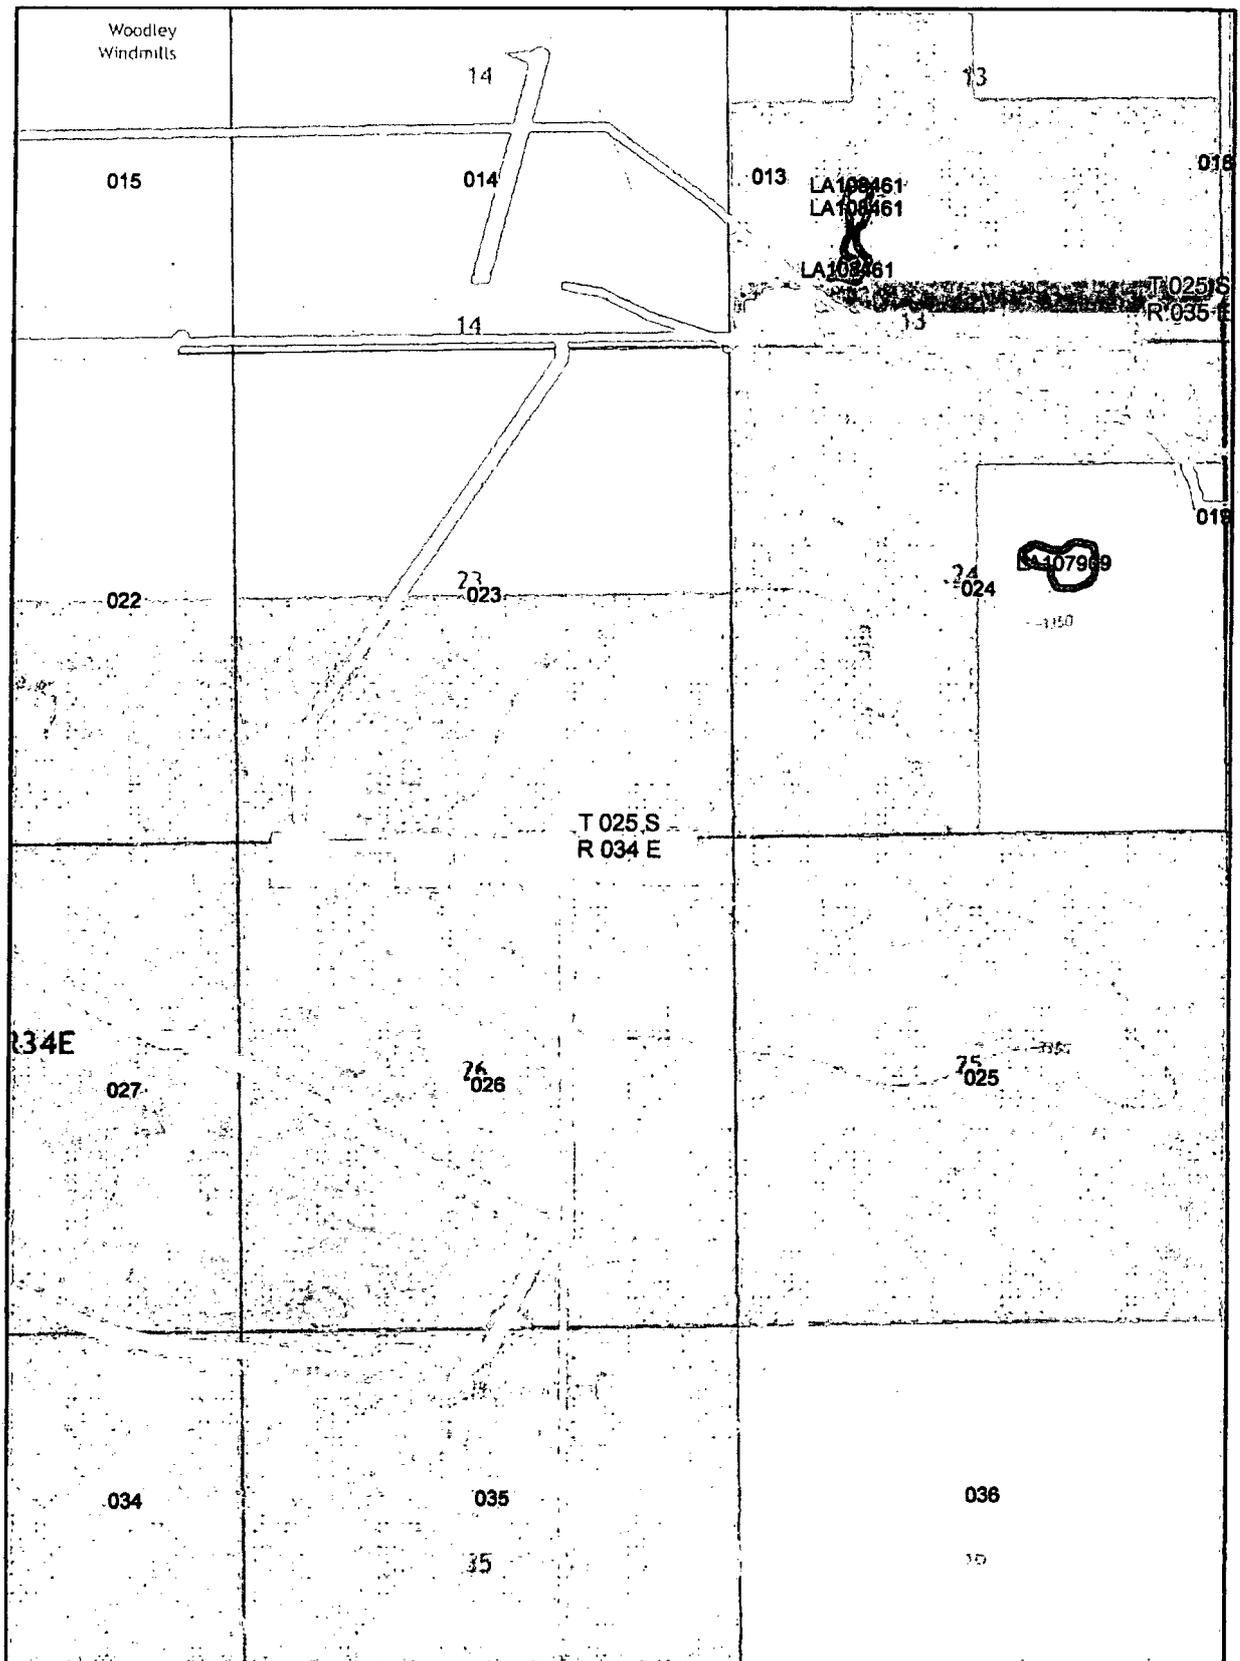

1:24,000

680 340 0 680 Meters



Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Information

Federal/Indian APD: FED

BLM Bond number: WYB002107

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: DOGIE DRAW FED COM 25 34 23

Well Number: 1H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
PPP Leg #1	0	FSL	330	FWL	25S	34E	23	Aliquot NWN W 5	32.12312 - 103.4477 46		LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 132944	- 902 3	144 69	123 53
EXIT Leg #1	330	FSL	330	FWL	25S	34E	23	Aliquot SWS W 4	32.10952 - 103.4477 547		LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 132944	- 911 0	194 19	124 40
BHL Leg #1	330	FSL	330	FWL	25S	34E	23	Aliquot SWS W 4	32.10952 - 103.4477 547		LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 132944	- 911 0	194 19	124 40