

MIN F
SURF S

Form 3160-3
(June 2015)

Carlsbad Field Office

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs
HOBBS OCD

APPLICATION FOR PERMIT TO DRILL OR REENTER

SEP 05 2018

1a. Type of work: DRILL REENTER

1b. Type of Well: Oil Well Gas Well Other

1c. Type of Completion: Hydraulic Fracturing Single Zone Multiple Zone

RECEIVED

5. Lease Serial No.
NMNM066271

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.
GAUCHO UNIT (30863)
28H

2. Name of Operator
DEVON ENERGY PRODUCTION COMPANY LP (6177)

9. API Well No.
30-025-45167

3a. Address
333 West Sheridan Avenue Oklahoma City OK 73102

3b. Phone No. (include area code)
(405)552-6571

10. Field and Pool, or Exploratory
WC-025 G-06 S223421L; BONE SPRING (97922)

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface SESE / 375 FSL / 640 FEL / LAT 32.3564504 / LONG -103.5027534
At proposed prod. zone NWNE / 330 FNL / 1897 FEL / LAT 32.3690279 / LONG -103.5067963

11. Sec., T. R. M. or Blk. and Survey or Area
SEC 30 / T22S / R34E / NMP

14. Distance in miles and direction from nearest town or post office* 12. County or Parish 13. State

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 375 feet
16. No. of acres in lease 160
17. Spacing Unit dedicated to this well 160

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1873 feet
19. Proposed Depth 10435 feet / 15003 feet
20. BLM/BIA Bond No. in file FED: CO1104

21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3434 feet
22. Approximate date work will start* 08/25/2018
23. Estimated duration 45 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be requested by the BLM.

25. Signature (Electronic Submission) Name (Printed/Typed) Rebecca Deal / Ph: (405)228-8429 Date 03/13/2018

Title Regulatory Compliance Professional

Approved by (Signature) (Electronic Submission) Name (Printed/Typed) Cody Layton / Ph: (575)234-5959 Date 08/23/2018

Title Assistant Field Manager Lands & Minerals Office CARLSBAD

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GCP Dec 09/10/18

KZ 09/10/18

APPROVED WITH CONDITIONS
Approval Date: 08/23/2018

(Continued on page 2)

*(Instructions on page 2)

Don't
steal

SL

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

1. SHL: SESE / 375 FSL / 640 FEL / TWSP: 22S / RANGE: 34E / SECTION: 30 / LAT: 32.3564504 / LONG: -103.5027534 (TVD: 0 feet, MD: 0 feet)
PPP: SESE / 330 FSL / 743 FEL / TWSP: 22S / RANGE: 34E / SECTION: 30 / LAT: 32.35645 / LONG: -103 (TVD: 10370 feet, MD: 10800 feet)
BHL: NWNE / 330 FNL / 1897 FEL / TWSP: 22S / RANGE: 34E / SECTION: 30 / LAT: 32.3690279 / LONG: -103.5067963 (TVD: 10435 feet, MD: 15003 feet)

BLM Point of Contact

Name: Tenille Ortiz

Title: Legal Instruments Examiner

Phone: 5752342224

Email: tortiz@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

08/23/2018

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Rebecca Deal

Signed on: 03/12/2018

Title: Regulatory Compliance Professional

Street Address: 333 West Sheridan Avenue

City: Oklahoma City

State: OK

Zip: 73102

Phone: (405)228-8429

Email address: Rebecca.Deal@dvn.com

Field Representative

Representative Name: Travis Phibbs

Street Address: 6488 Seven Rivers Hwy

City: Artesia

State: NM

Zip: 88210

Phone: (575)748-9929

Email address: travis.phibbs@dvn.com



APD ID: 10400028282

Submission Date: 03/13/2018


Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Well Type: OIL WELL

Well Work Type: Drill



Show Final Text

Section 1 - General

APD ID: 10400028282

Tie to previous NOS?

Submission Date: 03/13/2018

BLM Office: CARLSBAD

User: Rebecca Deal

Title: Regulatory Compliance
Professional

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM066271

Lease Acres: 160

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: DEVON ENERGY PRODUCTION COMPANY LP

Operator letter of designation:

Operator Info

Operator Organization Name: DEVON ENERGY PRODUCTION COMPANY LP

Operator Address: 333 West Sheridan Avenue

Zip: 73102

Operator PO Box:

Operator City: Oklahoma City State: OK

Operator Phone: (405)552-6571

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Mater Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: GAUCHO UNIT

Well Number: 28H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WC-025 G-06
S223421L; BONE SPRING

Pool Name: BONE SPRING

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Describe other minerals:

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:

Number: 1

GAUCHO 30 WELLPAD

Well Class: HORIZONTAL

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town:

Distance to nearest well: 1873 FT

Distance to lease line: 375 FT

Reservoir well spacing assigned acres Measurement: 160 Acres

Well plat: Gaucho_Unit_28H_C_102_Signed_20180717080908.pdf

Well work start Date: 08/25/2018

Duration: 45 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	375	FSL	640	FEL	22S	34E	30	Aliquot SESE	32.3564504	-103.5027534	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 066271	3434	0	0
KOP Leg #1	50	FSL	743	FEL	22S	34E	30	Aliquot SESE	32.35645	-103.50275	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 066271	-6363	9909	9797
PPP Leg #1	330	FSL	743	FEL	22S	34E	30	Aliquot SESE	32.35645	-103	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 066271	-6936	10800	10370

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
EXIT Leg #1	330	FNL	189 7	FEL	22S	34E	30	Aliquot NWNE	32.36902 79	- 103.5067 963	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 069596	- 700 1	150 03	104 35
BHL Leg #1	330	FNL	189 7	FEL	22S	34E	30	Aliquot NWNE	32.36902 79	- 103.5067 963	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 069596	- 700 1	150 03	104 35

APD ID: 10400028282

Submission Date: 03/13/2018

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Well Type: OIL WELL

Well Work Type: Drill



[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1	---	3434	0	0	OTHER : Surface	NONE	No
2	RUSTLER	1229	2205	2205	SANDSTONE	NONE	No
3	SALADO	1029	2405	2405	SALT	NONE	No
4	BASE OF SALT	-606	4040	4040	SALT	NONE	No
5	DELAWARE	-1776	5210	5210	SANDSTONE	NATURAL GAS,OIL	No
6	BRUSHY CANYON	-3741	7175	7175	SANDSTONE	NATURAL GAS,OIL	No
7	BONE SPRINGS	-5046	8480	8480	LIMESTONE	NATURAL GAS,OIL	No
8	BONE SPRING 1ST	-6046	9480	9480	SANDSTONE	NATURAL GAS,OIL	No
9	BONE SPRING 2ND	-6601	10035	10035	SANDSTONE	NATURAL GAS,OIL	Yes

Section 2 - Blowout Prevention

Pressure Rating (PSI): 3M

Rating Depth: 10435

Equipment: BOP/BOPE will be installed per Onshore Oil & Gas Order #2 requirements prior to drilling below 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system. BOP/BOPE will be tested by an independent service company per Onshore Oil & Gas Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP stack to the choke manifold. See attached for specs for hydrostatic test chart.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.


Choke Diagram Attachment:

Gaucho_Unit_28H_3M_BOPE_CK_20180312095741.pdf

ACCESS ROAD PLAT

ACCESS ROAD TO CONNECT THE GAUCHO 30 PAD 1 (GAUCHO UNIT 28H, 26H, 31H, 33H) AND THE GAUCHO 30 CTB 1

DEVON ENERGY PRODUCTION COMPANY, L.P.
CENTERLINE SURVEY OF AN ACCESS ROAD CROSSING
SECTIONS 29, 30, TOWNSHIP 22 SOUTH, RANGE 34 EAST, N.M.P.M.
LEA COUNTY, STATE OF NEW MEXICO
JULY 13, 2018

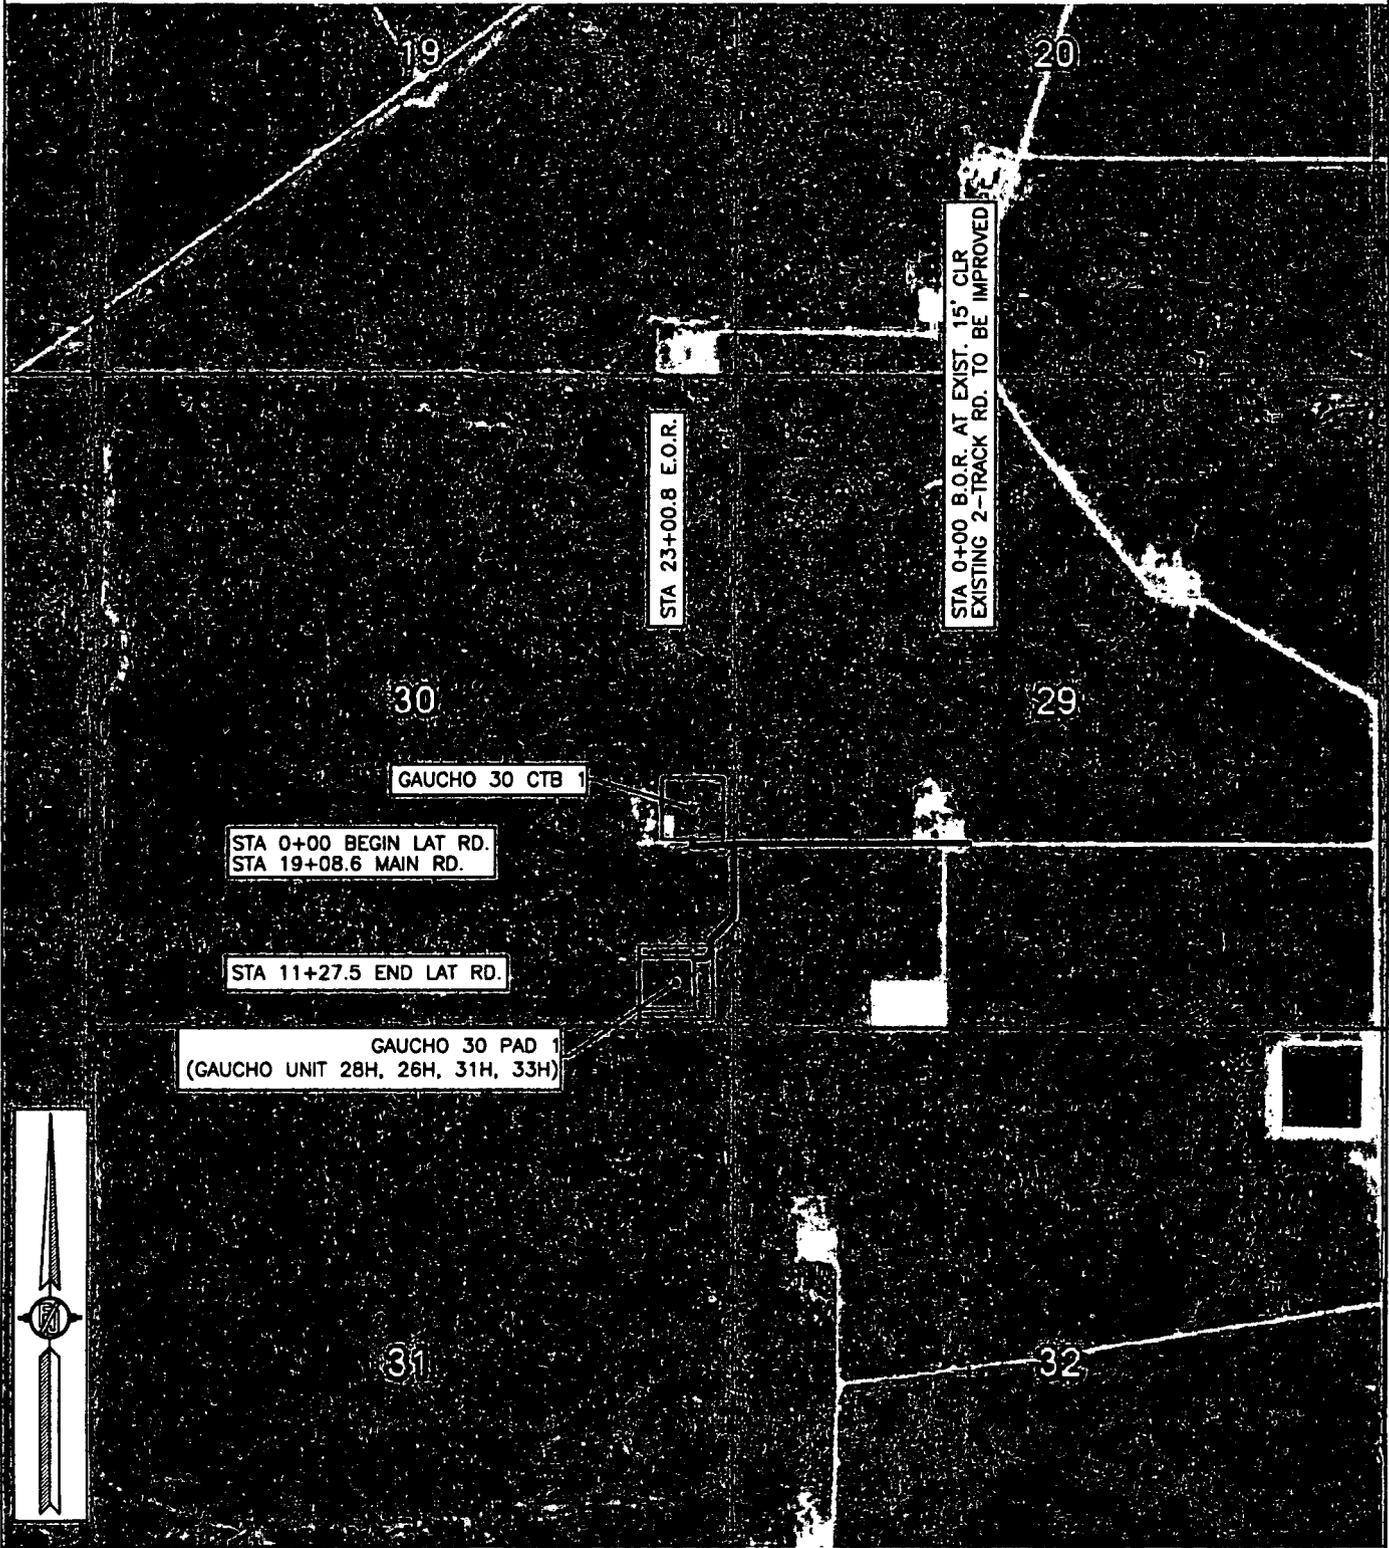

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

GaUCHO_Unit_28H_3M_BOPE_CK_20180312095741.pdf

BOP Diagram Attachment:

GaUCHO_Unit_28H_3M_BOPE_CK_20180312095803.pdf

Pressure Rating (PSI): 3M

Rating Depth: 5250

Equipment: BOP/BOPE will be installed per Onshore Oil & Gas Order #2 requirements prior to drilling below 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system. BOP/BOPE will be tested by an independent service company per Onshore Oil & Gas Order #2 requirements and MASP (Maximum Anticipated Surface Pressure) calculations. If the system is upgraded, all the components installed will be functional and tested.

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP stack to the choke manifold. See attached for specs for hydrostatic test chart.

Testing Procedure: A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Choke Diagram Attachment:

GaUCHO_Unit_28H_3M_BOPE_CK_20180312095536.pdf

BOP Diagram Attachment:

GaUCHO_Unit_28H_3M_BOPE_CK_20180312095607.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	20	16.0	NEW	API	N	0	1860	0	1860			1860	J-55	75	OTHER - BTC	1.125	1	BUOY	1.6	BUOY	1.6
2	INTERMEDIATE	13.5	11.875	NEW	API	N	0	3500	0	3500			3500	OTHER	71.8	OTHER - VAM HD-L	1.125	1	BUOY	1.6	BUOY	1.6
3	INTERMEDIATE	10.625	8.625	NEW	API	N	0	5250	0	5250			5250	OTHER	32	LTC	1.125	1	BUOY	1.6	BUOY	1.6
4	PRODUCTION	7.875	5.5	NEW	API	N	0	15003	0	10435			15003	P-110	17	OTHER - BTC	1.125	1	BUOY	1.6	BUOY	1.6

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Flagler_8_Fed_25H_Surf_Csg_Ass_20180312141028.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Flagler_8_Fed_25H_Int_Csg_Ass_20180312141039.pdf

Casing ID: 3 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Flagler_8_Fed_25H_Int_Csg_Ass_20180312141053.pdf

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Casing Attachments

Casing ID: 4 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Flagler_8_Fed_25H_Prod_Csg_Ass_20180312141103.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MID	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1360	1079	1.73	13.5	1867	75	C - SEE DRILLING PLAN W/ CONTINGENCY PLANS	100% Class C Cement: 4% BWOC Bentonite + 0.125 lbs/sack Poly-E-Flake
SURFACE	Tail		1360	1860	584	1.33	14.8	777	75	C	0.125 lbs/sack Poly-E-Flake
INTERMEDIATE	Lead		0	3000	696	1.87	12.9	1302	50	C	Poz (Fly Ash): 6% BW'OC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
INTERMEDIATE	Tail		3000	3500	157	1.33	14.8	209	50	C	0.125 lbs/sack Poly-E-Flake
INTERMEDIATE	Lead		0	4750	587	1.96	12.5	1151	25	C	Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
INTERMEDIATE	Tail		4750	5250	112	1.18	15.6	132	25	C	0.125 lbs/sack Poly-E-Flake
PRODUCTION	Lead		4750	9909	338	2.81	11	950	10	NEOCEM	N/A
PRODUCTION	Tail		9909	15003	678	1.47	13.2	997	10	NEOCEM	N/A

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1860	WATER-BASED MUD	8.6	8.8				2			
5250	1500 3	SALT SATURATED	8.5	9				12			
1860	3500	SALT SATURATED	10	10.5				2			
3500	5250	SALT SATURATED	8.8	10				2			

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will run GRMWD from TD to from KOP. Cement bond logs will be run in vertical to determine top of cement. Stated logs run will be in the Completion Report and submitted to the BLM.

List of open and cased hole logs run in the well:

CALIPER,CBL,DS,GR,MUDLOG

Coring operation description for the well:

N/A

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4884

Anticipated Surface Pressure: 2588.3

Anticipated Bottom Hole Temperature(F): 160

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

GaUCHO_Unit_28H_H2S_Plan_20180313071628.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

GaUCHO_Unit_28H_Dir_Svy_20180312142809.pdf

Other proposed operations facets description:


DIRECTIONAL SURVEY & AC PLAN
MULTI-BOWL VERBIAGE
MULTI-BOWL WELLHEAD
CLOSED LOOP DESIGN
CO-FLEX
DRILLING PLAN
SPUDDER RIG
GCP FORM

Other proposed operations facets attachment:


GaUCHO_Unit_28H_Clsd_Loop_20180312143145.pdf
GaUCHO_Unit_28H_MB_Verb_3M_20180312143145.pdf
GaUCHO_Unit_28H_Spudder_Rig_Info_20180312143146.pdf
GaUCHO_Unit_28H_MB_Wellhd_3M_4_STRING_20180314111723.pdf
GaUCHO_Unit_28H_GCP_Form_20180702130204.pdf
GaUCHO_Unit_28H_Drlg_Plan_w_Cont_20180705080740.pdf

Other Variance attachment:


GaUCHO_Unit_28H_Co_flex_20180312143200.pdf

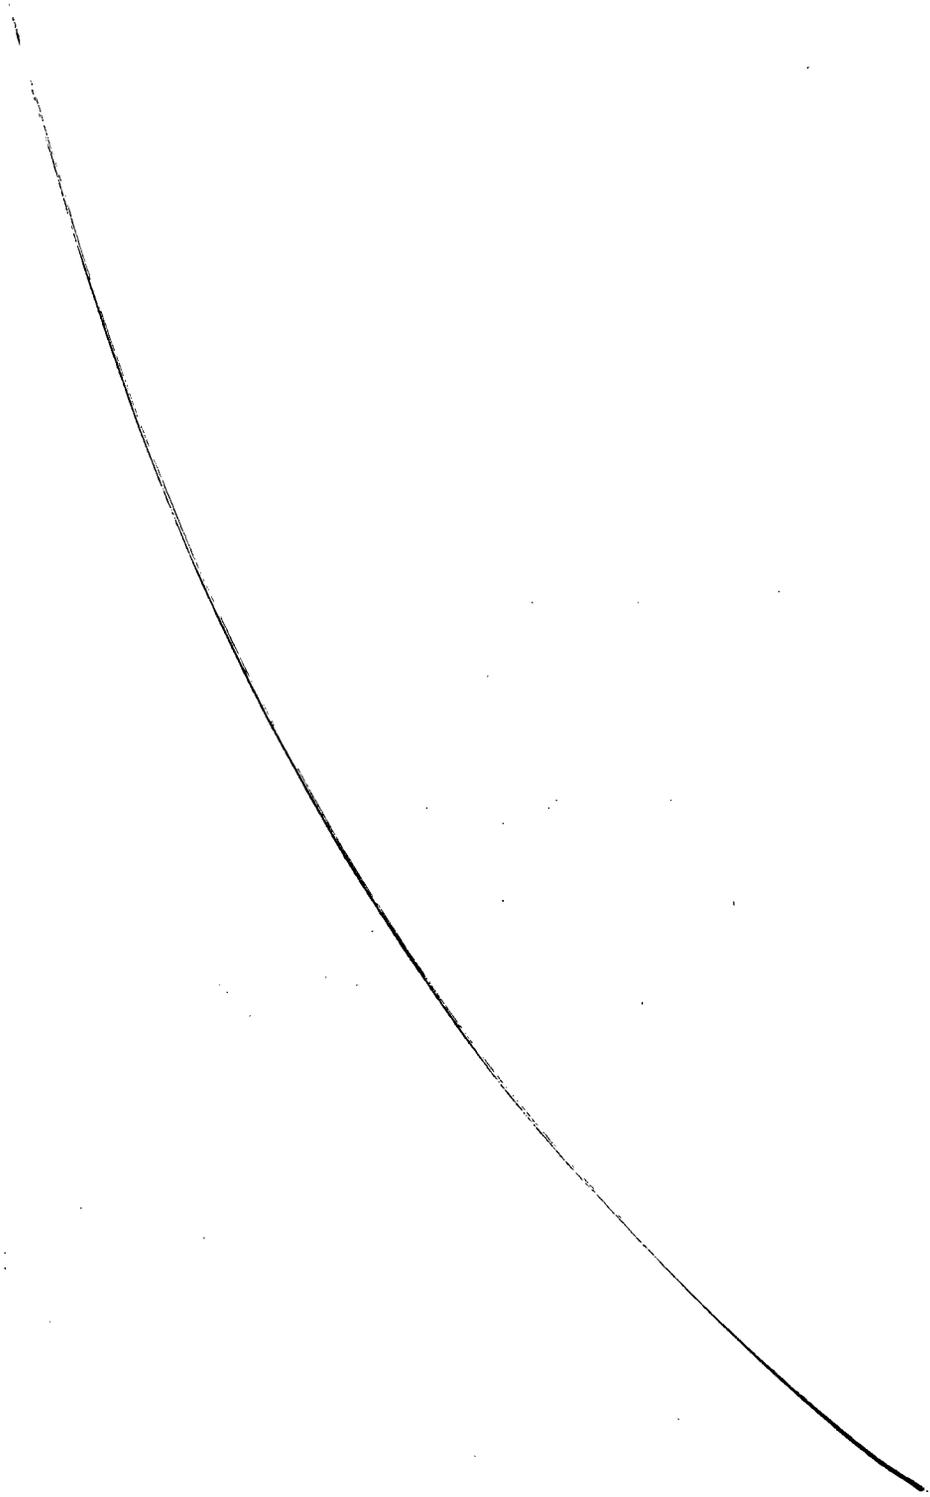


13-5/8" 3M BOPE & Closed Loop Equipment Schematic

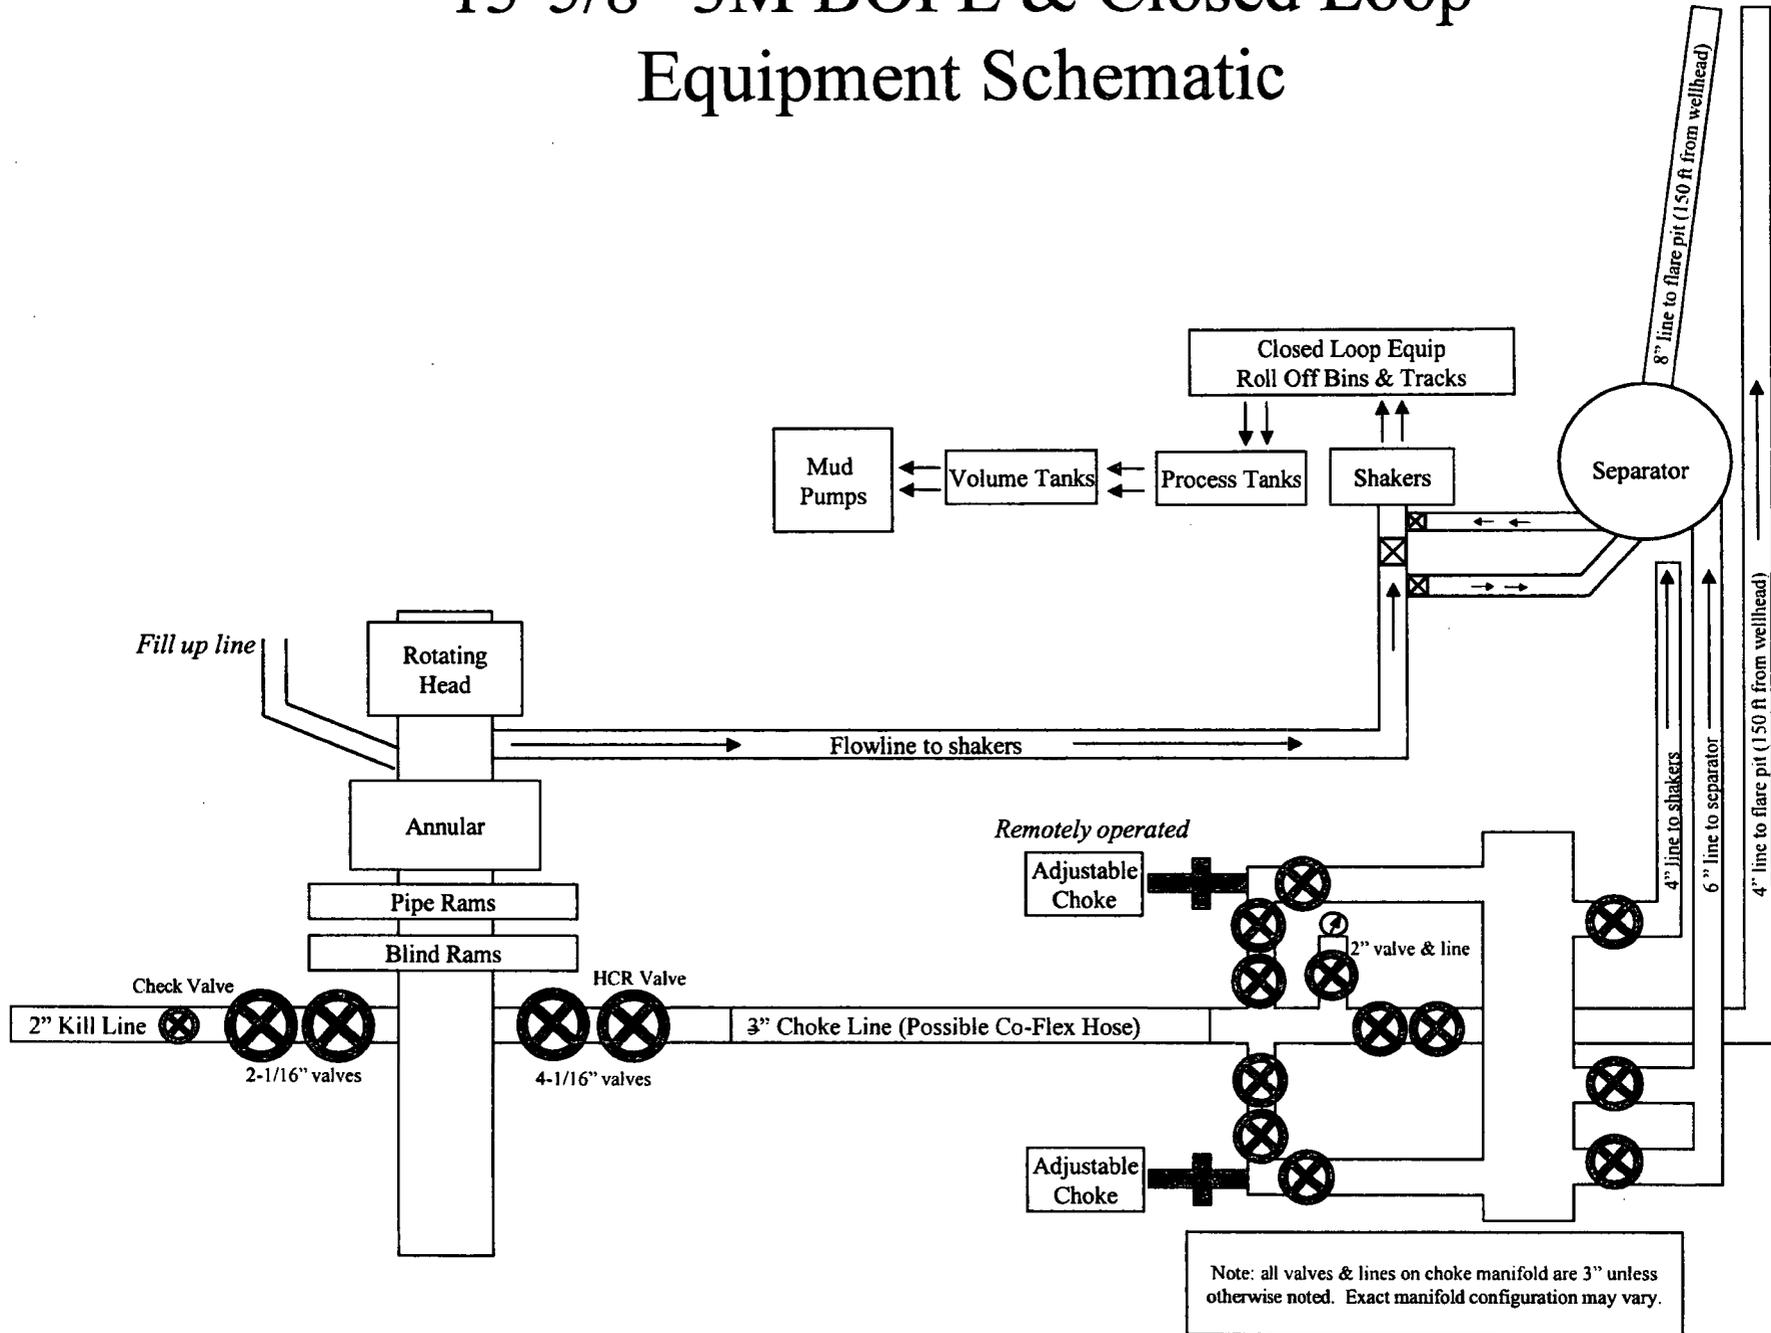


13-5/8" 3M BOPE & Closed Loop Equipment Schematic

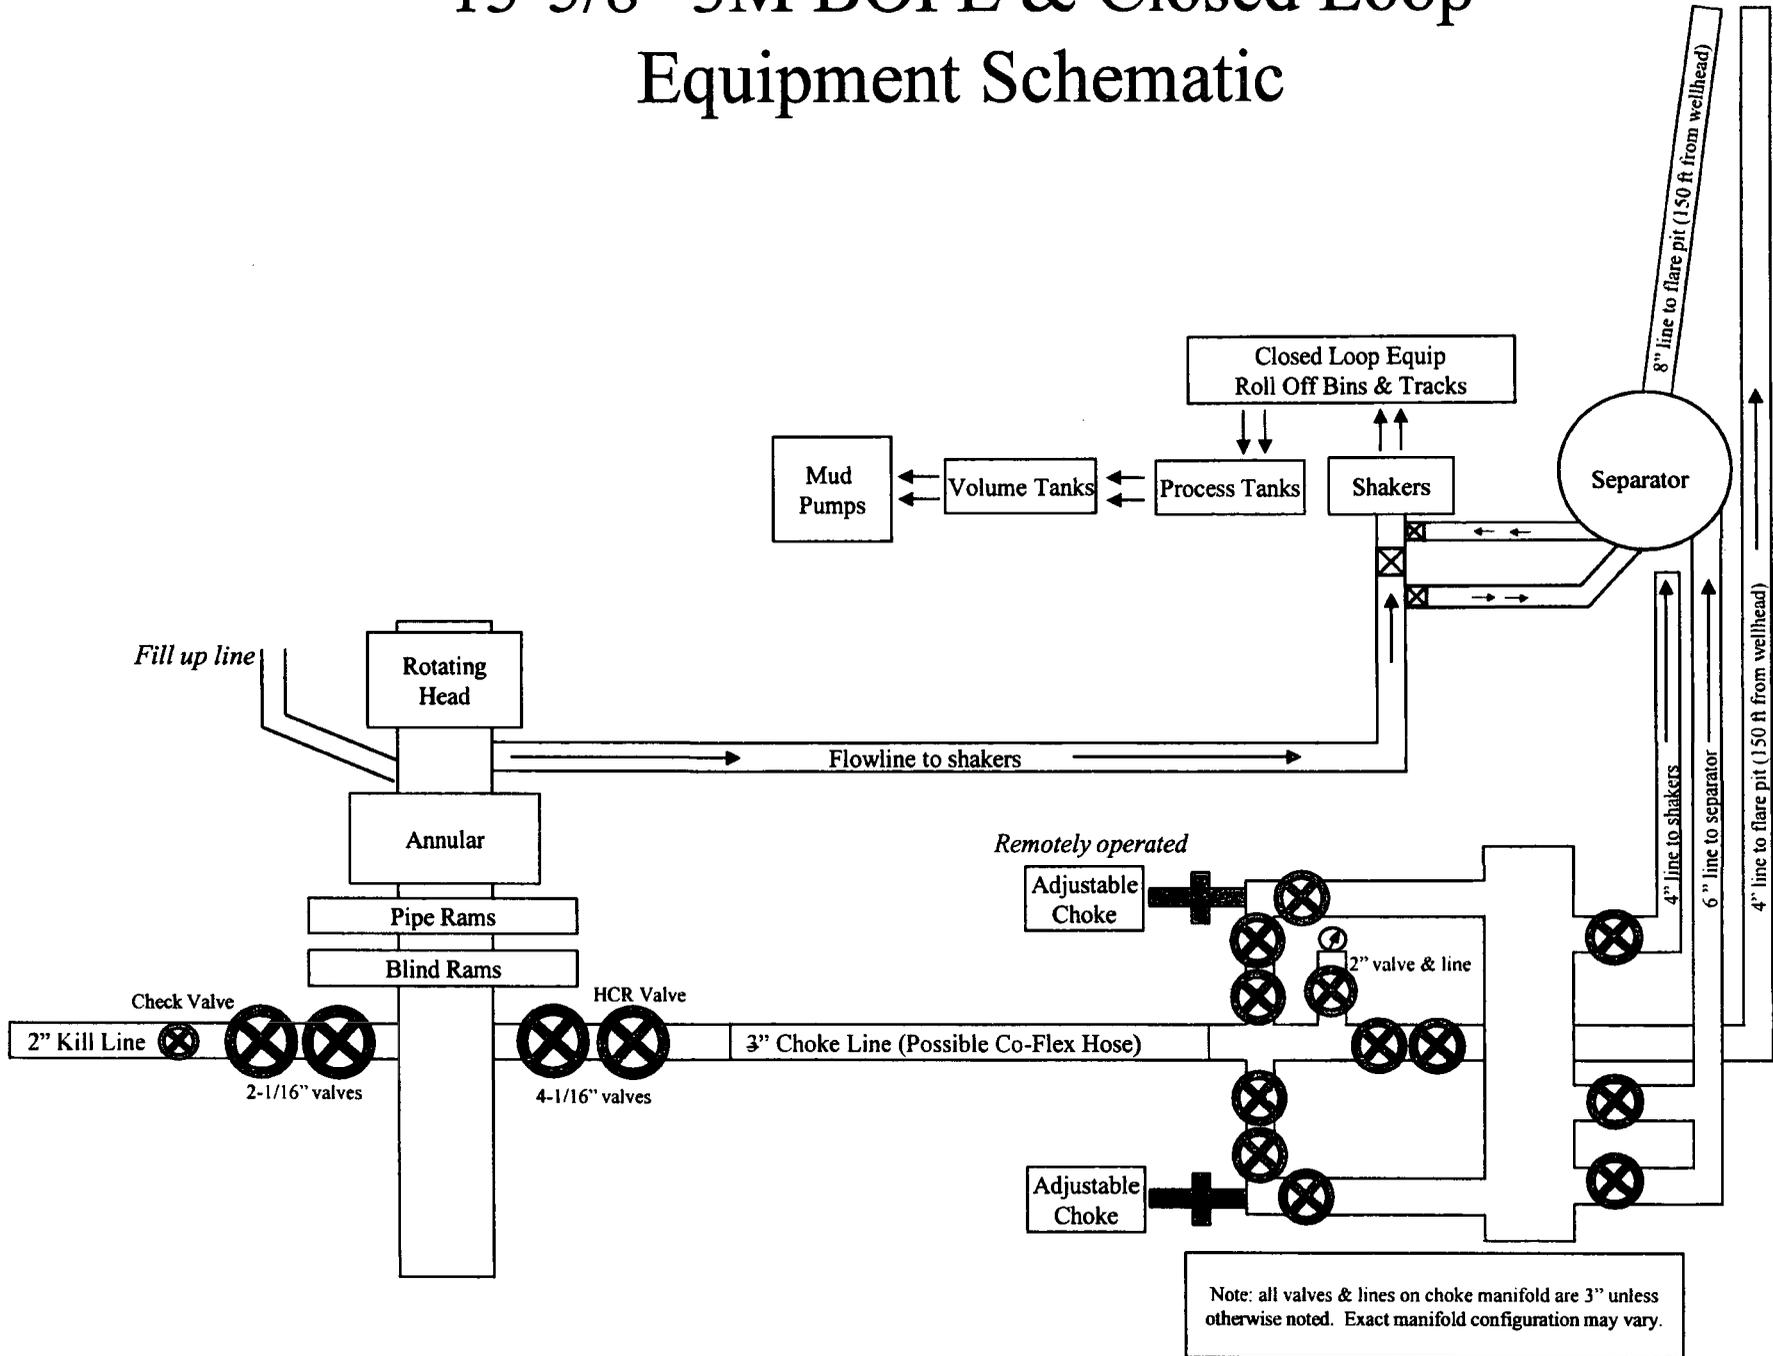

13-5/8" 3M BOPE & Closed Loop Equipment Schematic

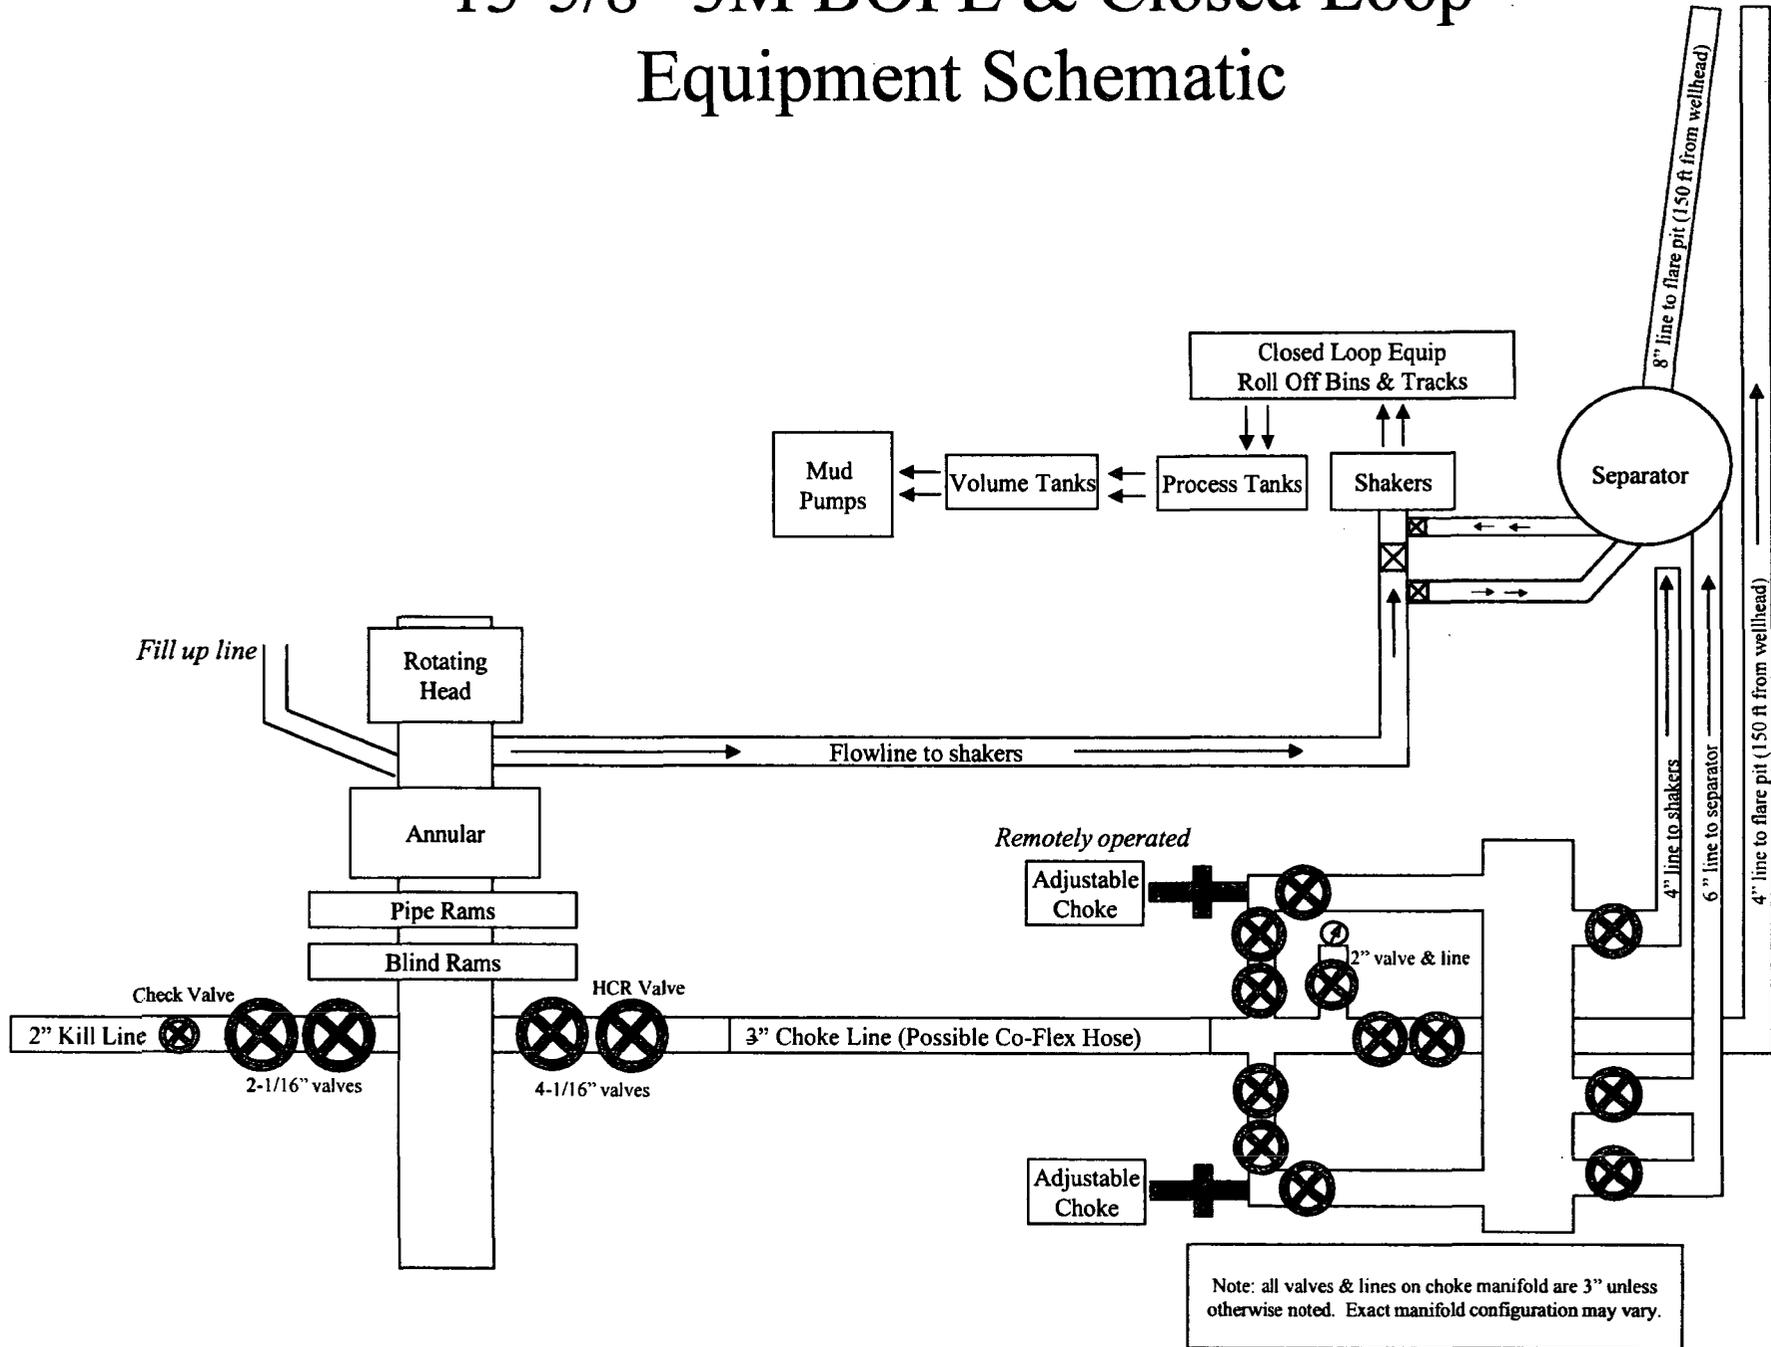

13-5/8" 3M BOPE & Closed Loop Equipment Schematic

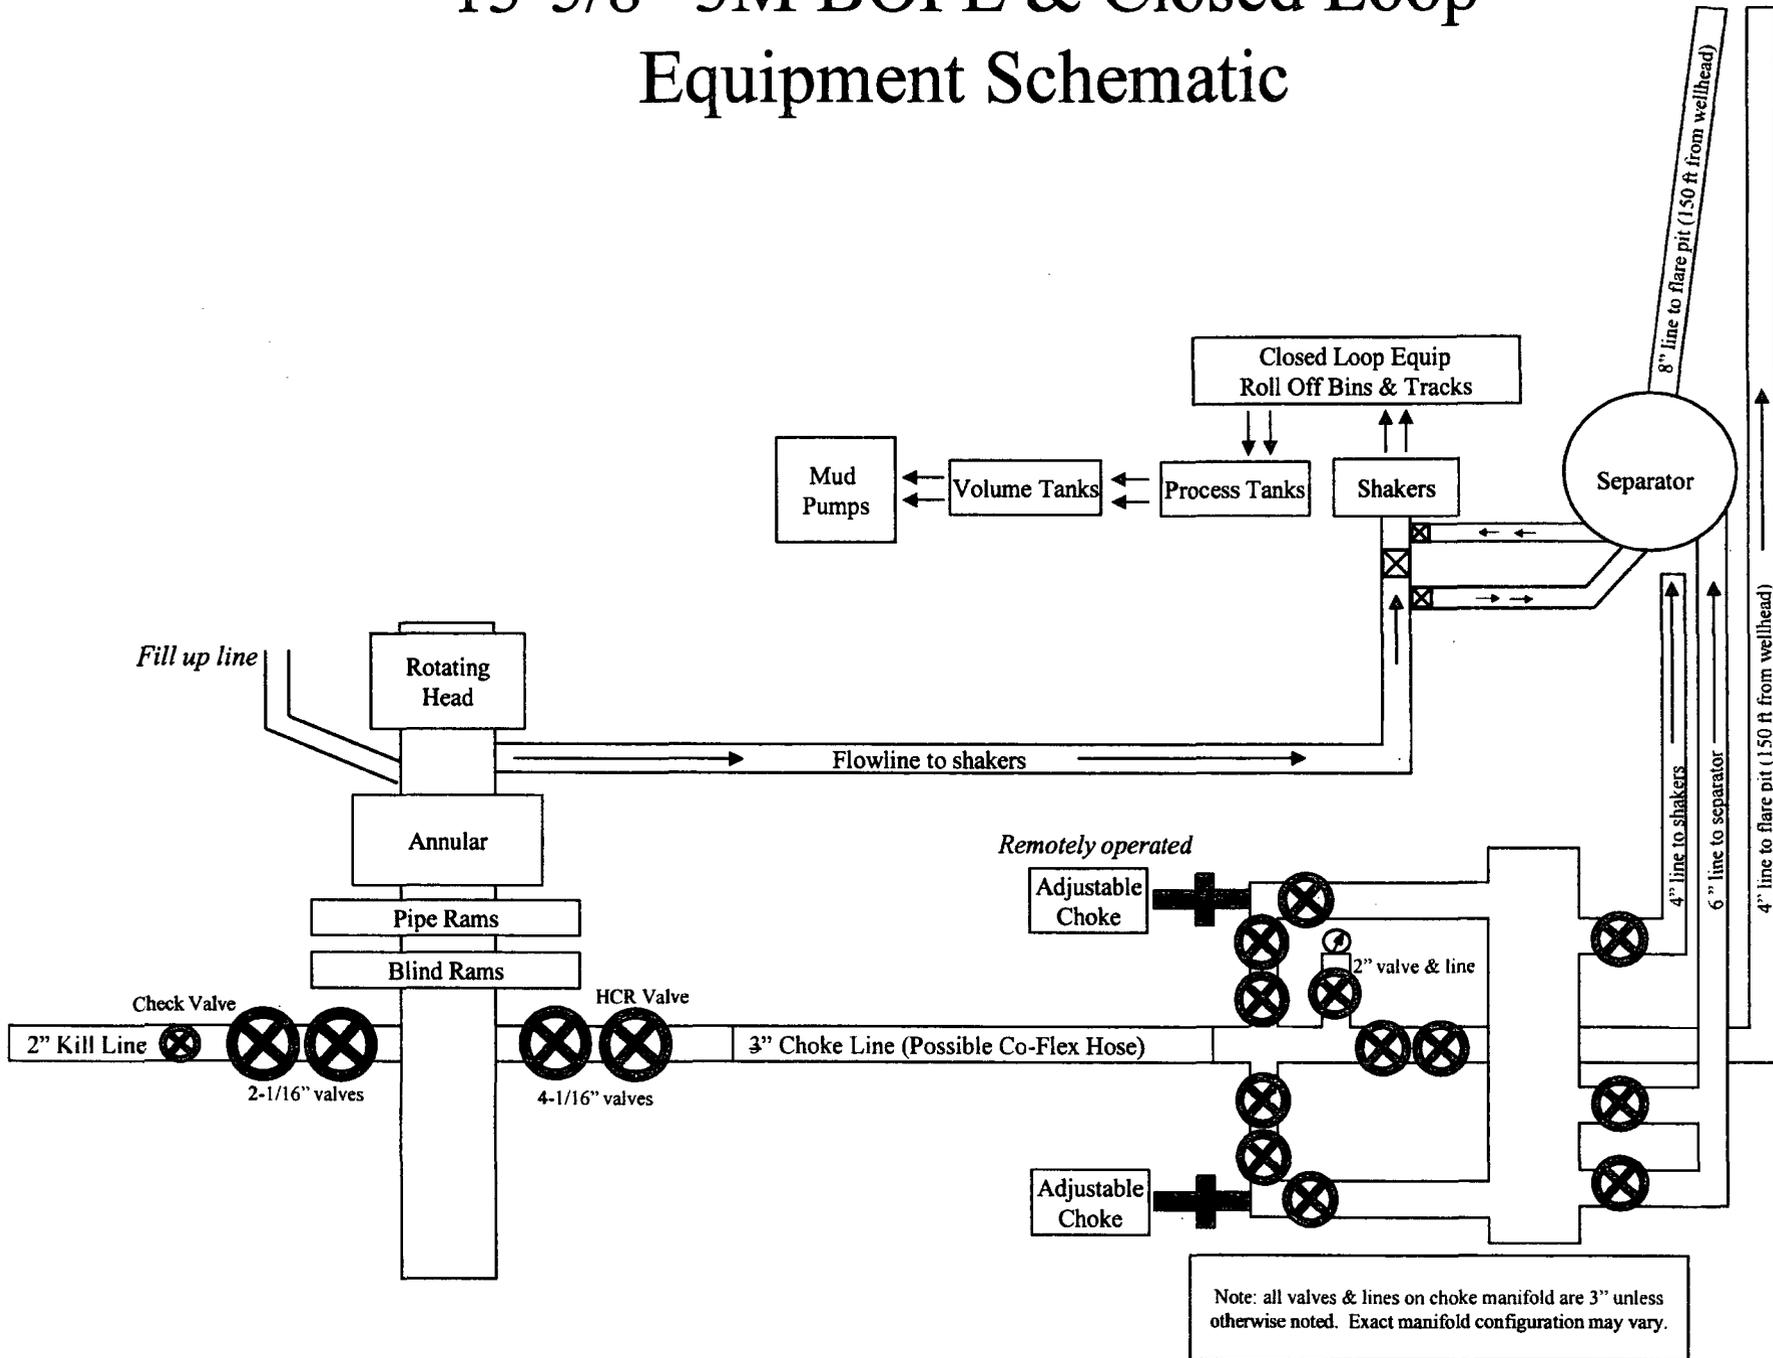

Casing Assumptions and Load Cases

Surface

All casing design assumptions were ran in Stress Check to determine safety factor which meet or exceed both Devon Energy and BLM minimum requirements. All casing strings will be filled while running in hole in order to not exceed collapse rating of the pipe.

Surface Casing Burst Design		
Load Case	External Pressure	Internal Pressure
Pressure Test	Formation Pore Pressure	Max mud weight of next hole-section plus Test psi
Drill Ahead	Formation Pore Pressure	Max mud weight of next hole section
Displace to Gas	Formation Pore Pressure	Dry gas from next casing point

Surface Casing Collapse Design		
Load Case	External Pressure	Internal Pressure
Full Evacuation	Water gradient in cement, mud above TOC	None
Cementing	Wet cement weight	Water (8.33ppg)

Surface Casing Tension Design	
Load Case	Assumptions
Overpull	100kips
Runing in hole	3 ft/s
Service Loads	N/A

Casing Assumptions and Load Cases

Intermediate

All casing design assumptions were ran in Stress Check to determine safety factor which meet or exceed both Devon Energy and BLM minimum requirements. All casing strings will be filled while running in hole in order to not exceed collapse rating of the pipe.

Intermediate Casing Burst Design		
Load Case	External Pressure	Internal Pressure
Pressure Test	Formation Pore Pressure	Max mud weight of next hole-section plus Test psi
Drill Ahead	Formation Pore Pressure	Max mud weight of next hole section
Fracture @ Shoe	Formation Pore Pressure	Dry gas

Intermediate Casing Collapse Design		
Load Case	External Pressure	Internal Pressure
Full Evacuation	Water gradient in cement, mud above TOC	None
Cementing	Wet cement weight	Water (8.33ppg)

Intermediate Casing Tension Design	
Load Case	Assumptions
Overpull	100kips
Runing in hole	2 ft/s
Service Loads	N/A

Casing Assumptions and Load Cases

Intermediate

All casing design assumptions were ran in Stress Check to determine safety factor which meet or exceed both Devon Energy and BLM minimum requirements. All casing strings will be filled while running in hole in order to not exceed collapse rating of the pipe.

Intermediate Casing Burst Design		
Load Case	External Pressure	Internal Pressure
Pressure Test	Formation Pore Pressure	Max mud weight of next hole-section plus Test psi
Drill Ahead	Formation Pore Pressure	Max mud weight of next hole section
Fracture @ Shoe	Formation Pore Pressure	Dry gas

Intermediate Casing Collapse Design		
Load Case	External Pressure	Internal Pressure
Full Evacuation	Water gradient in cement, mud above TOC	None
Cementing	Wet cement weight	Water (8.33ppg)

Intermediate Casing Tension Design	
Load Case	Assumptions
Overpull	100kips
Runing in hole	2 ft/s
Service Loads	N/A

Casing Assumptions and Load Cases

Production

All casing design assumptions were ran in Stress Check to determine safety factor which meet or exceed both Devon Energy and BLM minimum requirements. All casing strings will be filled while running in hole in order to not exceed collapse rating of the pipe.

Production Casing Burst Design		
Load Case	External Pressure	Internal Pressure
Pressure Test	Formation Pore Pressure	Fluid in hole (water or produced water) + test psi
Tubing Leak	Formation Pore Pressure	Packer @ KOP, leak below surface 8.6 ppg packer fluid
Stimulation	Formation Pore Pressure	Max frac pressure with heaviest frac fluid

Production Casing Collapse Design		
Load Case	External Pressure	Internal Pressure
Full Evacuation	Water gradient in cement, mud above TOC.	None
Cementing	Wet cement weight	Water (8.33ppg)

Production Casing Tension Design	
Load Case	Assumptions
Overpull	100kips
Runing in hole	2 ft/s
Service Loads	N/A

A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Devon proposes using a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 3000 (3M) psi.

- Wellhead will be installed by wellhead representatives.
- If the welding is performed by a third party, the wellhead representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- Wellhead representative will install the test plug for the initial BOP test.
- Wellhead company will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off, the pack-off and the lower flange will be tested to 3M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time.
- If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted.
- Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating.
- Devon will test the casing to 0.22 psi/ft or 1500 psi, whichever is greater, as per Onshore Order #2.

After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system and will undergo a 250 psi low pressure test followed by a 3,000 psi high pressure test. The 3,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2.

After running the 9-5/8' intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 3M will already be installed on the wellhead.

The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.

Devon's proposed wellhead manufactures will be FMC Technologies, Cactus Wellhead, or Cameron.

Devon Energy
APD VARIANCE DATA

OPERATOR NAME: Devon Energy

1. SUMMARY OF Variance:



Devon Energy respectfully requests approval for the following additions to the drilling plan:

1. Potential utilization of a spudder rig to pre-set surface casing.

2. Description of Operations

1. A spudder rig contractor may move in their rig to drill the surface hole section and pre-set surface casing on this well.
 - a. After drilling the surface hole section, the rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
 - b. Rig will utilize fresh water based mud to drill surface hole to TD.
2. The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
3. A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on two wingvalves.
 - a. A means for intervention will be maintained while the drilling rig is not over the well.
4. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
5. Drilling operation will be performed with the big rig. At that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The BLM will be contacted / notified 24 hours before the big rig moves back on to the pad with the pre-set surface casing.
6. Devon Energy will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
7. Once the rig is removed, Devon Energy will secure the wellhead area by placing a guard rail around the cellar area.

RIO BLANCO 4-33 FED COM 1H
CACTUS 168

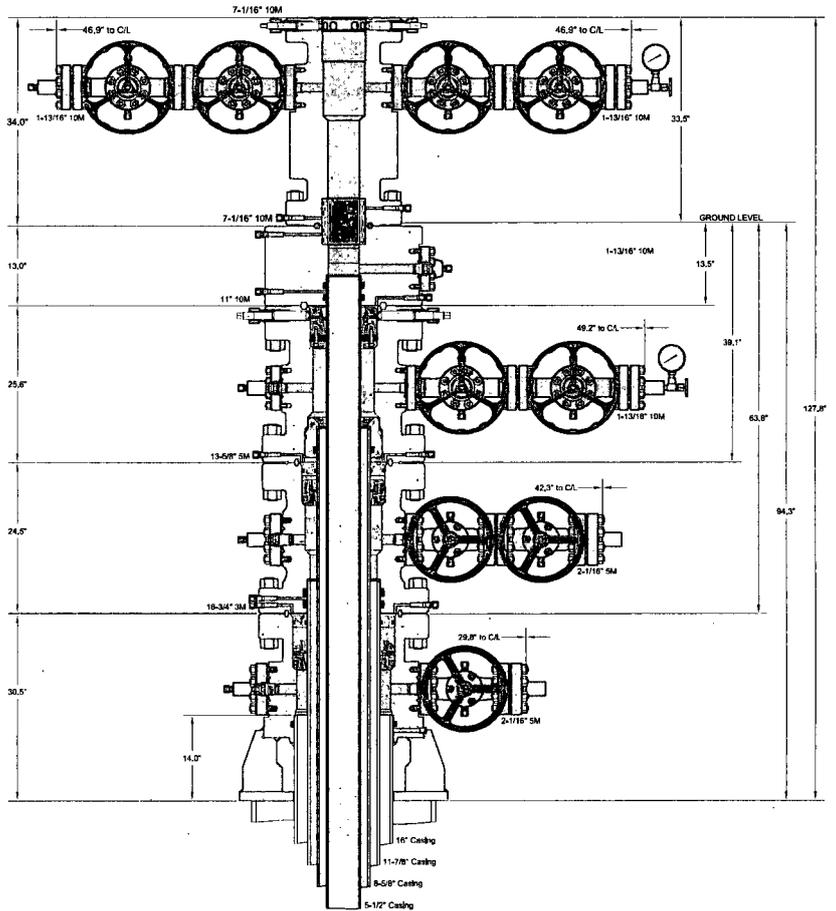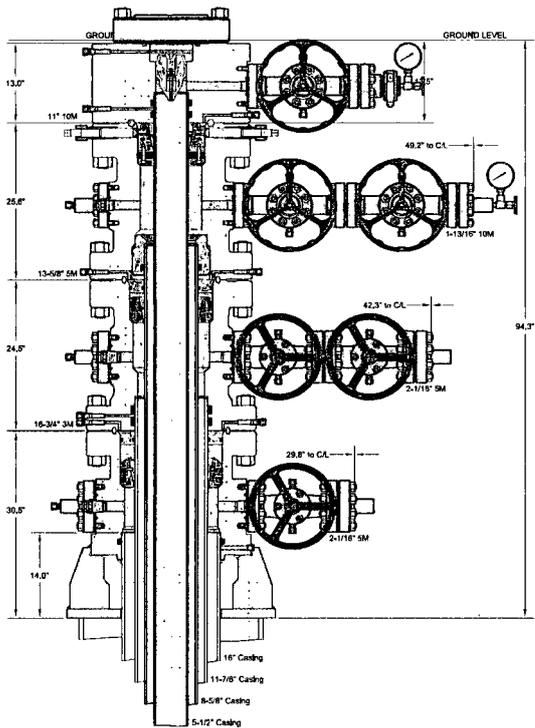

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

CACTUS WELLHEAD LLC

(30") x 16" x 11-7/8" x 8-5/8" x 5-1/2" Conventional Wellhead
With 7-1/16" 10M x 7-1/16" 10M CTH-EN Tubing Head,
And Conventional Slip Style Casing Hangers

DEVON ENERGY CORPORATION

DRAWN	DLE	01DEC17
APPRV		

DRAWING NO. ODE0001941



Quotation

Quote Number : ODE0001941

MIDLAND WAREHOUSE
8001 GROENING STREET
ODESSA TX 79765
Phone: 432-653-0306

Date: 12/01/2017

Valid For 30 Days

Page 1 of 7

Bill To: 7323

DEVON ENERGY CORPORATION
PO BOX 3198
OKLAHOMA CITY OK 73101-3198
US

Ship To: 0

DEVON ENERGY CORPORATION
PO BOX 3198
OKLAHOMA CITY OK 73101-3198
US

Quantity	Price	Ext Price
----------	-------	-----------

(30") 16" x 11-7/8" x 8-5/8" x 5-1/2"

DEVON ENERGY

DELAWARE BASIN

CONVENTIONAL WELLHEAD ASSEMBLY

(30") 16" x 11-7/8" x 8-5/8" x 5-1/2"

QUOTATION SUMMARY:

- CASING HEAD ASSEMBLY - \$14,476.49
- 16" RENTAL TOOLS - \$950.00 PER WELL FOR 45 DAYS; \$35.00 PER DAY THEREAFTER
- CASING SPOOL ASSEMBLY - \$21,258.99
- 13" RENTAL TOOLS - \$650.00 PER WELL FOR 45 DAYS; \$20.00 PER DAY THEREAFTER
- CASING SPOOL ASSEMBLY - \$14,151.54
- 11" RENTAL TOOLS - \$650.00 PER WELL FOR 45 DAYS; \$20.00 PER DAY THEREAFTER
- DSPA ASSEMBLY - \$10,769.68
- TUBING HEAD ASSEMBLY - \$15,735.51

CACTUS CONTACT:

DEREK DONNELL

MOBILE: 405-388-6662

EMAIL: derek.donnell@cactuswellhead.com

NOTE: THE FOLLOWING QUOTATION DOES NOT INCLUDE OTHER APPLICABLE MILEAGE AND SERVICES THAT WILL BE CHARGED AT TIME OF INVOICING.



Quotation

Quote Number : **ODE0001941**

MIDLAND WAREHOUSE
 8001 GROENING STREET
 ODESSA TX 79765
 Phone: 432-653-0306

Date: 12/01/2017

Valid For 30 Days

		Quantity	Price	Ext Price
CASING HEAD ASSEMBLY				
1	122465 CSGHD,CW,C2,16-3/4 3M X 16 SOW,W/2 2-1/16 5M FP,ORING,15.25 MIN BORE & 34.0 BASEPLATE,W/6 GUSSETS,W/2 4 X 3 GROUT SLOTS,6A-PU-EE-NL-1-2	1.00	13,439.00	13,439.00
2	610003 VLV,CW1,2-1/16 3/5M FE AA/DD-NL (API 6A LU AA/DD-NL PSL1 PR2)	1.00	759.00	759.00
3	VR2 VR PLUG,CW,1-1/2 (1.900) SHARP VEE X 1-1/4 HEX,API 6A-DD-NL	1.00	39.12	39.12
4	200002 FLG,COMP,CW,2-1/16 5M X 2 LP,6A-KU-EE-NL-1	2.00	73.60	147.20
5	BP2T BULL PLUG,CW,2 LP X 1/2 LP,API 6A DD-NL	2.00	25.04	50.08
6	FTG1 FTG,GRS.VENTED CAP,1/2 NPT,ALLOY NON-NACE	1.00	6.85	6.85
7	R24 RING GASKET,R24,2-1/16 3/5M	3.00	5.48	16.44
8	780067 STUD,ALL-THD W/2 NUTS,BLK,7/8-9UNC X 6-1/2,A193 GR B7/A194 GR 2H,NO PLATING	8.00	2.35	18.80
				14,476.49
16" RENTAL TOOLS				
9	AR4 Advance Rental Charge 45 Day 16" CONVENTIONAL RENTAL TOOLS = \$ 950.00 PER WELL FOR 45 DAYS; \$35.00 PER DAY THEREAFTER RENTAL TOOLS INCLUDE THE FOLLOWING ITEMS: PN 104884: COMB TEST PLUG/RET TOOL,CW,16-3/4 X 4-1/2 IF (NC50) BOX BTM & TOP,W/1-1/4 LP BYPASS,FAB PN 113590: WBUSH,CW,C2-(BP),16-3/4 X 15.25 ID X 12.0 LG,W/ORING GROOVE NOTE: CUSTOMER IS RESPONSIBLE FOR LOST, DAMAGED OR BEYOND REPAIR RENTAL TOOLS. RENTAL CHARGES MAY NOT BE APPLIED TO THE PURCHASE PRICE OF EQUIPMENT.	1.00	950.00	950.00
				950.00
CASING SPOOL ASSEMBLY				
10	122501 CSGSPL,CW,C2-DBLHPS,11-7/8,16-3/4 3M X 13-5/8 5M,W/2 2-1/16 5M FP,FRG,6A-PU-AA-1-2	1.00	12,435.00	12,435.00
11	610003 VLV,CW1,2-1/16 3/5M FE AA/DD-NL (API 6A LU AA/DD-NL PSL1 PR2)	2.00	759.00	1,518.00



Quotation

Quote Number : ODE0001941

MIDLAND WAREHOUSE
 8001 GROENING STREET
 ODESSA TX 79765
 Phone: 432-653-0306

Date: 12/01/2017

Valid For 30 Days

		Quantity	Price	Ext Price
12	VR2 VR PLUG,CW,1-1/2 (1.900) SHARP VEE X 1-1/4 HEX,API 6A-DD-NL	1.00	39.12	39.12
13	200002 FLG,COMP,CW,2-1/16 5M X 2 LP,6A-KU-EE-NL-1	2.00	73.60	147.20
14	BP2T BULL PLUG,CW,2 LP X 1/2 LP,API 6A DD-NL	2.00	25.04	50.08
15	FTG1 FTG,GRS,VENTED CAP,1/2 NPT,ALLOY NON-NACE	1.00	6.85	6.85
16	R24 RING GASKET,R24,2-1/16 3/5M	4.00	5.48	21.92
17	780067 STUD,ALL-THD W/2 NUTS,BLK,7/8-9UNC X 6-1/2,A193 GR B7/A194 GR 2H,NO PLATING	16.00	2.35	37.60
18	109865 CSGHGR,C21,16-3/4 X 11-7/8,6A-PU-AA-3-1	1.00	4,775.00	4,775.00
19	122499 PRISEAL,H,16-3/4 X 11-7/8,6A-U-AA-1-1	1.00	1,550.00	1,550.00
20	R66 RING GASKET,R66,16-3/4 3M	1.00	78.22	78.22
21	780087 STUD,ALL-THD W/2 NUTS,BLK,1-5/8-8UN X 12-3/4,A193 GR B7/A194 GR 2H,NO PLATING	20.00	30.00	600.00
				21,258.99

13" RENTAL TOOLS

22	AR4 13" CONVENTIONAL RENTAL TOOLS = \$ 650.00 PER WELL FOR 45 DAYS; \$20.00 PER DAY THEREAFTER	1.00	650.00	650.00
----	---	------	--------	--------

RENTAL TOOLS INCLUDE THE FOLLOWING ITEMS:

PN 104467: COMB TEST PLUG/RET TOOL,CW,13-5/8 X 4-1/2 IF(NC50) BOX BTM & TOP, W/1-1/4 LP BYPASS & SPRING LOADED DOGS

PN 102232: WBUSH,CW,C2-(BP),13-5/8 X 12.50 ID X 12 LG,W/ORING GROOVE

NOTE: CUSTOMER IS RESPONSIBLE FOR LOST, DAMAGED OR BEYOND REPAIR RENTAL TOOLS. RENTAL CHARGES MAY NOT BE APPLIED TO THE PURCHASE PRICE OF EQUIPMENT.



Quotation

Quote Number : ODE0001941

MIDLAND WAREHOUSE
 8001 GROENING STREET
 ODESSA TX 79765
 Phone: 432-653-0306

Date: 12/01/2017

Valid For 30 Days

		Quantity	Price	Ext Price
CASING SPOOL ASSEMBLY				
23	115405 CSGSPL,CW,C2-BP-HPS,12-5/8,13-5/8 5M X 11 10M,W/2 1-13/16 10M FP,RND BAR,6A-PU-AA-1-2	1.00	7,000.00	7,000.00
24	103605 SECSEAL,CW,HPS,12-5/8 X 8-5/8,F/3-1/2 CUTOFF,NACE	1.00	785.00	785.00
25	107412 VLV,CW,SB100,1-13/16 10M FE BB/EE-0,5 (API 6A LU BB/EE-0,5 PSL3 PR2) QPQ TRIM, API 6A PR2 ANNEX F	2.00	1,650.00	3,300.00
26	VR1 VR PLUG,CW,1-1/4 (1.660) LP X 1-1/4 HEX,API 6A-DD-NL	1.00	39.12	39.12
27	200010 FLG,COMP,1-13/16 10M X 2 LP,5000 PSI MAX WP,4130 60K,6A-KU-EE-NL-1	2.00	74.33	148.66
28	BP2T BULL PLUG,CW,2 LP X 1/2 LP,API 6A DD-NL	2.00	25.04	50.08
29	FTG1 FTG,GRS.VENTED CAP,1/2 NPT,ALLOY NON-NACE	1.00	6.85	6.85
30	BX151 RING GASKET,BX151,1-13/16 10/15/20M	4.00	6.26	25.04
31	780080 STUD,ALL-THD W/2 NUTS,BLK,3/4-10UNC X 5-1/2,A193 GR B7/A194 GR 2H,NO PLATING	16.00	1.96	31.36
32	BX160 RING GASKET,BX160,13-5/8 5M	1.00	78.30	78.30
33	780087 STUD,ALL-THD W/2 NUTS,BLK,1-5/8-8UN X 12-3/4,A193 GR B7/A194 GR 2H,NO PLATING	16.00	30.00	480.00
34	NVA NEEDLE VALVE,MFA,1/2 10M	1.00	47.25	47.25
35	PG5M PRESSURE GAUGE,5M,4-1/2 FACE,LIQUID FILLED,1/2 NPT	1.00	47.88	47.88
36	103603 CSGHGR,C21,13-5/8 X 8-5/8	1.00	1,365.00	1,365.00
37	103611 PRISEAL,H,13-5/8 X 8-5/8	1.00	747.00	747.00



Quotation

Quote Number : ODE0001941

MIDLAND WAREHOUSE
 8001 GROENING STREET
 ODESSA TX 79765
 Phone: 432-653-0306

Date: 12/01/2017

Valid For 30 Days

			Quantity	Price	Ext Price
					14,151.54
11" RENTAL TOOLS					
38	AR4	Advance Rental Charge 45 Day	1.00	650.00	650.00
11" CONVENTIONAL RENTAL TOOLS = \$ 650.00 PER WELL FOR 45 DAYS; \$20.00 PER DAY THEREAFTER					
RENTAL TOOLS INCLUDE THE FOLLOWING ITEMS:					
PN 800001: COMB TEST PLUG/RET TOOL,CW,11 X 4-1/2 IF (NC50) BOX BTM & TOP,W/1-1/4 LP BYPASS & SPRING LOADED DOGS					
PN 220004: WBUSH,CW,C2-(BP),11 OD X 9 ID X 12 LG,W/ORING GROOVE					
NOTE: CUSTOMER IS RESPONSIBLE FOR LOST, DAMAGED OR BEYOND REPAIR RENTAL TOOLS. RENTAL CHARGES MAY NOT BE APPLIED TO THE PURCHASE PRICE OF EQUIPMENT.					
39	RNM	Rental Charge Minimum	0.00	65.00	0.00
STUDDER TA CAP RENTAL = \$65.00 PER DAY					
PN 107928: TA CAP,CW,5-1/2,11 10M FLG,W/2 LP OUTLET,F/5.75 CUTOFF,5000 PSI MAX WP,6A-PU-EE-NL-1-1					
NOTE: CUSTOMER IS RESPONSIBLE FOR LOST, DAMAGED OR BEYOND REPAIR RENTAL EQUIPMENT. RENTAL CHARGES MAY NOT BE APPLIED TO THE PURCHASE PRICE OF EQUIPMENT.					
					650.00
DSPA ASSEMBLY					
40	110046		1.00	7,665.00	7,665.00
DSPA,CW,DBLHPS,5-1/2,11 10M X 7-1/16 10M,W/1 1-13/16 10M FP,VR THD & 7 SEAL PKT TOP,W/5 HBPV,6A-PU-EE-NL-1-1					
41	107412		1.00	1,650.00	1,650.00
VLV,CW,SB100,1-13/16 10M FE BB/EE-0,5 (API 6A LU BB/EE-0,5 PSL3 PR2) QPQ TRIM, API 6A PR2 ANNEX F					
42	100981		1.00	550.00	550.00
ADPT,FH,1-13/16 10M X 2 FIG 1502 X 1/2 NPT,NACE SVC					
43	BX151		2.00	6.26	12.52
RING GASKET,BX151,1-13/16 10/15/20M					
44	780080		8.00	1.96	15.68
STUD,ALL-THD W/2 NUTS,BLK,3/4-10UNC X 5-1/2,A193 GR B7/A194 GR 2H,NO PLATING					
45	BX158		1.00	91.35	91.35
RING GASKET,BX158,11 10/15/20M					
46	NVA		1.00	47.25	47.25
NEEDLE VALVE,MFA,1/2 10M					
47	PG10M		1.00	47.88	47.88
PRESSURE GAUGE,10M,4-1/2 FACE, LIQUID FILLED,1/2 NPT					



Quotation

Quote Number : ODE0001941

MIDLAND WAREHOUSE
 8001 GROENING STREET
 ODESSA TX 79765
 Phone: 432-653-0306

Date: 12/01/2017

Valid For 30 Days

		Quantity	Price	Ext Price
48	BPV5T BPV,H,5 ONE WAY,4130,HYDRO TESTED & API 6A MONOGRAM	0.00	2,950.00	0.00
	NOTE: OPTIONAL SALE ITEM; PRICE NOT INCLUDED IN TOTAL OPTIONAL RENTAL RATE = \$90.00 PER DAY			
49	50019 CSGHGR.C22,11 X 5-1/2	1.00	690.00	690.00
				10,769.68
	TUBING HEAD ASSEMBLY			
50	191012 TBGHD,CW,CTH-EN,7,7-1/16 10M FLG X 7-1/16 10M FLG,W/2 1-13/16 10M FP,17-4PH LDS,34.0 LG,6A-PU-EE-0,5-1-1	1.00	7,999.00	7,999.00
51	107412 VLV,CW,SB100,1-13/16 10M FE BB/EE-0,5 (API 6A LU BB/EE-0,5 PSL3 PR2) QPQ TRIM, API 6A PR2 ANNEX F	4.00	1,650.00	6,600.00
52	200010 FLG,COMP,1-13/16 10M X 2 LP,5000 PSI MAX WP,4130 60K,6A-KU-EE-NL-1	2.00	74.33	148.66
53	BP2T BULL PLUG,CW,2 LP X 1/2 LP,API 6A DD-NL	2.00	25.04	50.08
54	FTG1 FTG,GRS,VENTED CAP,1/2 NPT,ALLOY NON-NACE	1.00	6.85	6.85
55	BX151 RING GASKET,BX151,1-13/16 10/15/20M	6.00	6.26	37.56
56	780080 STUD,ALL-THD W/2 NUTS,BLK,3/4-10UNC X 5-1/2,A193 GR B7/A194 GR 2H,NO PLATING	32.00	1.96	62.72
57	BX156 RING GASKET,BX156,7-1/16 10/15/20M	1.00	31.30	31.30
58	105119 SEAL SUB,CW,7 X 7.38 LG,W/5.13 ID,6A-PU-EE-NL-1	1.00	704.21	704.21
59	NVA NEEDLE VALVE,MFA,1/2 10M	1.00	47.25	47.25
60	PG10M PRESSURE GAUGE,10M,4-1/2 FACE, LIQUID FILLED,1/2 NPT	1.00	47.88	47.88



Quotation

Quote Number : ODE0001941

MIDLAND WAREHOUSE
8001 GROENING STREET
ODESSA TX 79765
Phone: 432-653-0306

Date: 12/01/2017

Valid For 30 Days

Page 7 of 7

			Quantity	Price	Ext Price
--	--	--	----------	-------	-----------

RENTAL BLIND FLANGE

61	RNM	Rental Charge Minimum	1.00	15.00	15.00
RENTAL BLIND FLANGE = \$ 15.00 PER DAY					

RENTAL INCLUDES THE FOLLOWING ITEM:

PN 191003: FLG,BLIND,CW,7-1/16 10M X 1/2 LP,4.53 LG,W/FOUR 3/4-10UNC-2B LIFT THREADS,6A-PU-EE-NL-1-1

NOTE: CUSTOMER IS RESPONSIBLE FOR LOST, DAMAGED OR BEYOND REPAIR RENTAL EQUIPMENT.
RENTAL CHARGES MAY NOT BE APPLIED TO THE PURCHASE PRICE OF EQUIPMENT.

15.00

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC .

For Acceptance of this Quotation
Please Contact Ph: 713-626-8800
sales@cactuswellhead.com

Matl:	76,392.21
Labor:	0.00
Misc:	2,265.00
Sales Tax:	0.00
Total:	<u>78,657.21</u>

Devon Energy, Gaucho Unit 28H

1. Geologic Formations

TVD of target	10435	Pilot hole depth	N/A
MD at TD:	15003	Deepest expected fresh water:	

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Rustler	1810		
Top of Salt	2000		
Base of Salt	3425		
Capitan	3873		
Delaware	5200		
Brushy Canyon	7420		
1 st BSPG Lime	8525		
1 st BSPG Sand	9550		
2 nd BSPG Sand	10120		
3 rd BSPG Lime	10507		
3 rd BSPG Sand	11232		

*H₂S, water flows, loss of circulation, abnormal pressures, etc.

Devon Energy, Gaucho Unit 28H

2. Casing Program (Primary Design)

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn	Min SF Collapse	Min SF Burst	Min SF Tension
	From	To							
20"	0'	1,860	16"	75	J-55	BTC	1.125	1.00	1.6 Dry 1.8 Wet
13.5"	0	3,500'	11.875"	71.8	Q-125 HC	Vam HD-L	1.125	1.00	1.6 Dry 1.8 Wet
10.625"	0	5,250'	8.625"	32	K55 HC	LTC	1.125	1.00	1.6 Dry 1.8 Wet
7.875"	0	TD	5.5"	17	P110	BTC	1.125	1.00	1.6 Dry 1.8 Wet
BLM Minimum Safety Factor							1.125	1.00	1.6 Dry 1.8 Wet

- All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h Must have table for contingency casing
- Rustler top will be validated via drilling parameters (i.e. reduction in ROP) and surface casing setting depth revised accordingly if needed.
- Variance is requested for collapse rating on intermediate 1 and 2 casing. Operator will keep pipe full while running casing.
- Int casing shoe will be selected based on drilling data, gamma, and flows experienced while drilling. Setting depth with be revised accordingly if needed.
- A variance is requested to wave the centralizer requirement for the intermediate and production casing strings if drilling conditions dictate.

Casing Program (Alternate Design)

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn	Min SF Collapse	Min SF Burst	Min SF Tension
	From	To							
26"	0	1,500'	20"	106.5	J-55	BTC	1.125	1.00	1.6 Dry 1.8 Wet
		1,850'	20"	133	J-55	BTC	1.125	1.00	1.6 Dry 1.8 Wet
17.5"	0	3,500'	13.375"	68	J-55	BTC	1.125	1.00	1.6 Dry 1.8 Wet
12.25"	0	5,250'	9.625"	40	J-55	BTC	1.125	1.00	1.6 Dry 1.8 Wet
8.75"	0	TD	5.5"	17	P110	BTC	1.125	1.00	1.6 Dry 1.8 Wet
BLM Minimum Safety Factor							1.125	1.00	1.6 Dry 1.8 Wet

- All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h Must have table for contingency casing
- Rustler top will be validated via drilling parameters (i.e. reduction in ROP) and surface casing setting depth revised accordingly if needed.
- Variance is requested for collapse rating on intermediate 1 and 2 casing. Operator will keep pipe full while running casing.
- Int casing shoe will be selected based on drilling data, gamma, and flows experienced while drilling. Setting depth with be revised accordingly if needed.

Devon Energy, Gaucho Unit 28H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Devon Energy, Gaucho Unit 28H

3. Cementing Program (Primary Design)

Casing	# Sk	Wt. lb/gal	H ₂ O gal/sk	Yld ft ³ /sack	500# Comp. Strength (hours)	Slurry Description
16" Surface	1079	13.5	9.22	1.73	12	Lead: 100% Class C Cement: 4% BWOC Bentonite + 0.125 lbs/sack Poly-E-Flake
	584	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
16" Surface Top Out	1200	14.8	6.32	1.33	6	Primary: Neat Class C Cement
11.875" Int 1	696	12.9	9.81	1.87	14	Lead: (65:35) Class C Cement: Poz (Fly Ash) + 5% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	157	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
11.875" Int 1 Top Out	2235	13.5	9.22	1.73	12	Lead: 100% Class C Cement: 4% BWOC Bentonite + 0.125 lbs/sack Poly-E-Flake
8.625" Int 2	587	12.5	10.89	1.96	20	Lead: (65:35) Class H Cement: Poz (Fly Ash) + 5% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	112	15.6	5.28	1.18	7.5	Tail: Class H Cement + 0.125 lbs/sack Poly-E-Flake
8.625" Int 2 Two Stage	390	12.5	9.81	1.87	14	Lead: (65:35) Class C Cement: Poz (Fly Ash) + 5% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	55	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
	135	12.5	10.89	1.96	20	Lead: (65:35) Class H Cement: Poz (Fly Ash) + 5% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	120	15.6	5.28	1.18	7.5	Tail: Class H Cement + 0.125 lbs/sack Poly-E-Flake
5.5" Prod	338	11	17.38	2.81	20	Lead: NeoCem®
	678	13.2	7.46	1.47	6	Tail: NeoCem®

DV tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. If cement is not returned to surface during the primary cement job on the surface casing string, a planned top job will be conducted immediately after completion of the primary job.

Casing String	TOC	%
16" Surface	0ft	75%
11.875" Intermediate 1	0ft	50%
8.625" Intermediate 2	0ft	25%
8.625" Intermediate 2 (Two Stage)	1 st Stage = 3550ft / 2 nd Stage = 0ft	25%
5.5" Prod	4750'	10%

Devon Energy, Gaucho Unit 28H

Cementing Program (Alternate Design)

Casing	# Sks	Wt. lb/gal	H ₂ O gal/sk	Yld ft ³ /sack	500# Comp. Strength (hours)	Slurry Description
20" Surface	2695	13.7	8.89	1.73	7	Lead: Class C Cement + 2% Bentonite + 5lb/sk Salt
	1200	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
20" Surface Top Out	1200	14.8	6.32	1.33	6	Primary: Neat Class C Cement
13.375" Int 1	618	12.9	9.81	1.87	14	Lead: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	504	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
13.375" Int 1 Two Stage	1020	12.9	9.81	1.87	14	Lead: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	390	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
	DV Tool = 1960ft					
	915	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
9.625" Int 2	423	12.9	9.81	1.87	14	Lead: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	177	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
9.625" Int 2 Two Stage	310	12.9	9.81	1.87	14	Lead Stage 1: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	313	14.8	6.32	1.33	6	Tail Stage 1: Class C Cement + 0.125 lbs/sack Poly-E-Flake
	585	12.9	9.81	1.87	14	Lead Stage 2: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	85	14.8	6.32	1.33	6	Tail Stage 2: Class C Cement + 0.125 lbs/sack Poly-E-Flake
5.5" Prod	523	11	17.38	2.811	20	Lead: NeoCem®
	1571	13.2	7.46	1.468	6	Tail: NeoCem®

DV tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. If cement is not returned to surface during the primary cement job on the surface casing string, a planned top job will be conducted immediately after completion of the primary job.

Casing String	TOC	% Excess
20" Surface	0ft	100%
13.375" Intermediate	0ft	75%
13.375" Intermediate (Two Stage)	1 st Stage = 1960ft / 2 nd Stage = 0ft	75%
9.625" Intermediate	0ft	50%
9.625" Intermediate (Two Stage)	1 st Stage = 3450ft / 2 nd Stage = 0ft	50%
5.5" Prod	4750'	10%

Devon Energy, Gaucho Unit 28H

4. Pressure Control Equipment (Primary Casing Design)

BOP installed and tested before drilling which hole?	Size	Min Required WP	Type	✓	Tested to:
13-1/2"	13-5/8"	3M	Annular	x	50% testing pressure
			Blind Ram		3M
			Pipe Ram		
			Double Ram		
			Other*		
10-5/8"	13-5/8"	3M	Annular	x	50% testing pressure
			Blind Ram		3M
			Pipe Ram		
			Double Ram	x	
			Other*		
7-5/8"	13-5/8"	3M	Annular	x	50% testing pressure
			Blind Ram		3M
			Pipe Ram		
			Double Ram	x	
			Other*		

*Specify if additional ram is utilized.

N | A variance is requested for the use of a diverter on the surface casing. See attached for schematic.

Pressure Control Equipment (Alternate Casing Design)

BOP installed and tested before drilling which hole?	Size	Min Required WP	Type	✓	Tested to:
17-1/2"	21-1/4"	2M	Annular	x	50% of working pressure
			Blind Ram		2M
			Pipe Ram		
			Double Ram		
			Other*		
12-1/4"	13-5/8"	10M	Annular	x	50% testing pressure
			Blind Ram		10M
			Pipe Ram		
			Double Ram	x	
			Other*		
8-3/4"	13-5/8"	10M	Annular	x	50% testing pressure
			Blind Ram		10M
			Pipe Ram		
			Double Ram	x	
			Other*		

*Specify if additional ram is utilized.

N | A variance is requested for the use of a diverter on the surface casing. See attached for schematic.

Devon Energy, Gaucho Unit 28H

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	1,860'	FW Gel	8.6-8.8	28-34	N/C
1,860'	3,500'	Saturated Brine	10.0	28-34	N/C
3,500'	5,250'	Cut brine/brine	8.8-10	28-34	N/C
5,250'	TD	Cut brine	8.5-9.2	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.	
x	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No Logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain
	Coring? If yes, explain

Additional logs planned	Interval
Resistivity	Int. shoe to KOP
Density	Int. shoe to KOP
X CBL	Production casing
X Mud log	Intermediate shoe to TD
PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	4,884 psi
Abnormal Temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H ₂ S) monitors will be installed prior to drilling out the surface shoe. If H ₂ S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
N	H ₂ S is present
Y	H ₂ S Plan attached

Devon Energy, Gaucho Unit 28H

8. Other facets of operation

Is this a walking operation? Yes

1. In the event the spudder rig is unable to drill the surface holes the drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
2. The drilling rig will then batch drill the intermediate sections with either OBM or cut brine and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
3. The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Yes

1. Spudder rig will move in and drill surface hole.
 - a. Rig will utilize fresh water based mud to drill 17½" surface hole to TD. Solids control will be handled entirely on a closed loop basis.
2. After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
3. The wellhead will be installed and tested once the 13-3/8" surface casing is cut off and the WOC time has been reached.
4. A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
5. Spudder rig operations is expected to take 4-5 days per well on a multi well pad.
6. The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
7. Drilling operations will be performed with the drilling rig. At that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments

Directional Plan

Other, describe



Fluid Technology

ContiTech Beattie Corp.
Website: www.contitechbeattie.com

Monday, June 14, 2010

RE: Drilling & Production Hoses
Lifting & Safety Equipment

To Helmerich & Payne,

A Continental ContiTech hose assembly can perform as intended and suitable for the application regardless of whether the hose is secured or unsecured in its configuration. As a manufacturer of High Pressure Hose Assemblies for use in Drilling & Production, we do offer the corresponding lifting and safety equipment, this has the added benefit of easing the lifting and handling of each hose assembly whilst affording hose longevity by ensuring correct handling methods and procedures as well as securing the hose in the unlikely event of a failure; but in no way does the lifting and safety equipment affect the performance of the hoses providing the hoses have been handled and installed correctly. It is good practice to use lifting & safety equipment but not mandatory.


Should you have any questions or require any additional information/clarifications then please do not hesitate to contact us.

ContiTech Beattie is part of the Continental AG Corporation and can offer the full support resources associated with a global organization.

Best regards,

Robin Hodgson
Sales Manager
ContiTech Beattie Corp

ContiTech Beattie Corp,
11535 Brittonmoore Park Drive,
Houston, TX 77041
Phone: +1 (832) 327-0141
Fax: +1 (832) 327-0148
www.contitechbeattie.com



RIG 212



QUALITY DOCUMENT

PHOENIX RUBBER INDUSTRIAL LTD.

6728 Szeged, Budapest út 10. Hungary • H-6701 Szeged, P. O. Box 152
Phone: (3662) 566-737 • Fax: (3662) 566-738

SALES & MARKETING: H-1092 Budapest, Ráday u. 42-44. Hungary • H-1440 Budapest, P. O. Box 28
Phone: (361) 456-4200 • Fax: (361) 217-2972, 456-4273 • www.latinusemerge.hu

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE			CERT. N°: 552	
PURCHASER: Phoenix Beattie Co.			P.O. N°: 1519FA-871	
PHOENIX RUBBER order N°: 170466	HOSE TYPE: 3" ID		Choke and Kill Hose	
HOSE SERIAL N°: 34128	NOMINAL / ACTUAL LENGTH: 11,43 m			
W.P. 68,96 MPa 10000 psi	T.P. 103,4 MPa 15000 psi	Duration: 60 min.		
Pressure test with water at ambient temperature				
See attachment. (1 page)				
↑ 10 mm = 10 Min. → 10 mm = 25 MPa				
COUPLINGS				
Type	Serial N°	Quality	Heat N°	
3" coupling with 4 1/16" Flange end	720 719	AISI 4130	C7626	
		AISI 4130	47357	
API Spec 16 C Temperature rate: "B"				
All metal parts are flawless				
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.				
Date: 29. April. 2002.	Inspector	Quality Control PHOENIX RUBBER Industrial Ltd. Hose Inspection and Welded Tube Dept. PHOENIX RUBBER Q.C.		

14094-66

40920-0-00015 N800C

8			
GN	+0.002	0	14:00
RD	+0.002	0	14:00
SL	+0.002	0	14:00
7			
GN	+0.002	0	13:45
RD	+0.002	0	13:45
SL	+0.002	0	13:45
6			
GN	+0.002	0	13:28
RD	+0.002	0	13:28
SL	+0.002	0	13:28
5			
GN	+0.002	0	13:08
RD	+0.002	0	13:08
SL	+0.002	0	13:08
4			
3			
2			

[Signature]
PHOENIX RUBBER
 Industrial Ltd.
 Hose Inspection and
 Certification Dept.

VERIFIED TRUE CO.
 PHOENIX RUBBER CO.
[Signature]



APD ID: 10400028282	Submission Date: 03/13/2018	 Show Final Text
Operator Name: DEVON ENERGY PRODUCTION COMPANY LP		
Well Name: GAUCHO UNIT	Well Number: 28H	
Well Type: OIL WELL	Well Work Type: Drill	

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

GaUCHO_Unit_28H_Access_Rd_20180312144356.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? YES

Existing Road Improvement Description: Improve road to accommodate Drilling and Completion operations.

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

GaUCHO_Unit_28H_New_Access_Rd_20180312144454.pdf

GaUCHO_Unit_28H_ACC_RD_G_30_PAD_1_AND_G_30_CTB_1_20180717080607.pdf

New road type: LOCAL

Length: 214 **Feet** **Width (ft.):** 30

Max slope (%): 6 **Max grade (%):** 4

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 14

New road access erosion control: Water Drainage Ditch

New road access plan or profile prepared? YES

New road access plan attachment:

GaUCHO_Unit_28H_New_Access_Rd_20180312144556.pdf

GaUCHO_Unit_28H_ACC_RD_G_30_PAD_1_AND_G_30_CTB_1_20180717080619.pdf

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Access road engineering design? YES

Access road engineering design attachment:

GaUCHO_Unit_28H_New_Access_Rd_20180312144605.pdf

GaUCHO_Unit_28H_ACC_RD_G_30_PAD_1_AND_G_30_CTB_1_20180717080627.pdf

Access surfacing type: OTHER

Access topsoil source: ONSITE

Access surfacing type description: CALICHE

Access onsite topsoil source depth: 6

Offsite topsoil source description:

Onsite topsoil removal process: See attached Interim reclamation diagram.

Access other construction information:

Access miscellaneous information: CTB ACCESS RD PLAT ATTACHED IN SEC. 4

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: N/A

Road Drainage Control Structures (DCS) description: Water Drainage Ditch

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Additional Attachment(s):

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

GaUCHO_Unit_28H_OneMiMap_20180312144710.pdf

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: GAUCHO 30 WELLPAD 1 & GAUCHO 30 CTB1 - SIX ATTACHMENT - CTB ACCESS RD., CTB ELECTRIC, CTB PAD PLAT, WELL PAD PLAT, ELECTRIC AND FLOWLINE (BURIED). GAS, WATER AND CRUED CONNECTS WILL BE HANDLED BY THIRD PARTY

Production Facilities map:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

GaUCHO_Unit_28H_CTB_1_ELE_20180312144919.PDF

GaUCHO_Unit_28H_CTB_1_PAD_20180312144928.pdf

GaUCHO_Unit_28H_PAD_1_20180312144929.pdf

GaUCHO_Unit_28H_PAD_1_TO_CTB_1_FL_20180312144929.pdf

GaUCHO_Unit_28H_WP_1_ELE_20180312144930.PDF

GaUCHO_Unit_28H_Access_Rd_CTB_20180705080822.pdf

GaUCHO_Unit_28H_ACC_RD_G_30_PAD_1_AND_G_30_CTB_1_20180717080938.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Water source use type: STIMULATION

Water source type: RECYCLED

Describe type:

Source latitude:

Source longitude:

Source datum:

Water source permit type: OTHER

Source land ownership: FEDERAL

Water source transport method: PIPELINE

Source transportation land ownership: FEDERAL

Water source volume (barrels): 85000

Source volume (acre-feet): 10.955914

Source volume (gal): 3570000

Water source and transportation map:

GAUCHO_UNIT_28H_Water_Map_20180312145554.pdf

Water source comments: The attached Water Transfer Map is a proposal only and the final route and documentation will be provided by a Devon contractor prior to installation. When available Devon will always follow existing disturbance.

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Construction Materials description: Dirt fill and caliche will be used to construct well pad. See attached map.

Construction Materials source location attachment:

GaUCHO_Unit_28H_Caliche_Map_20180312145804.pdf

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Water Based Cuttings

Amount of waste: 1824 barrels

Waste disposal frequency : Daily

Safe containment description: N/A

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: All cuttings will disposed of at R360, Sundance, or equivalent.

Waste type: FLOWBACK

Waste content description: Produced water and flowback water

Amount of waste: 2000 barrels

Waste disposal frequency : Daily

Safe containment description: N/A

Safe containmant attachment:

Waste disposal type: OFF-LEASE INJECTION **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: This well will be connected to the GaUCHO SWD system that will dispose water in either one of 3 Devon SWDs or a 3rd party SWD.

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Waste type: COMPLETIONS/STIMULATION

Waste content description: Flow back water during completion operations.

Amount of waste: 3000 barrels

Waste disposal frequency : One Time Only

Safe containment description: N/A

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: Various disposal locations in Lea and Eddy counties.

Waste type: PRODUCED WATER

Waste content description: Produced water

Amount of waste: 2000 barrels

Waste disposal frequency : Daily

Safe containment description: N/A

Safe containmant attachment:

Waste disposal type: OFF-LEASE INJECTION **Disposal location ownership:** COMMERCIAL

Disposal type description:

Disposal location description: This well will be connected to the Gaucho SWD system that will dispose water in either one of 3 Devon SWDs or a 3rd party SWD.

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.) **Reserve pit width (ft.)**

Reserve pit depth (ft.) **Reserve pit volume (cu. yd.)**

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? NO

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Description of cuttings location

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

GaUCHO_Unit_28H_Well_Layout_20180313071642.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: GAUCHO 30 WELLPAD

Multiple Well Pad Number: 1

Recontouring attachment:

GaUCHO_Unit_28H_Interim_Recl_20180312150739.pdf

Drainage/Erosion control construction: All areas disturbed shall be reclaimed as early and as nearly as practicable to their original condition or their final land use and shall be maintained to control dust and minimize erosion to the extent practicable.

Drainage/Erosion control reclamation: Topsoils and subsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability and preservation of surface water flow patterns. The disturbed area then shall be reseeded in the first favorable growing season.

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Well pad proposed disturbance (acres): 8.266	Well pad interim reclamation (acres): 6.013	Well pad long term disturbance (acres): 2.253
Road proposed disturbance (acres): 0.147	Road interim reclamation (acres): 0	Road long term disturbance (acres): 0.147
Powerline proposed disturbance (acres): 0.4	Powerline interim reclamation (acres): 0	Powerline long term disturbance (acres): 0.4
Pipeline proposed disturbance (acres): 1.224	Pipeline interim reclamation (acres): 0	Pipeline long term disturbance (acres): 1.224
Other proposed disturbance (acres): 0	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0
Total proposed disturbance: 10.037	Total interim reclamation: 6.013	Total long term disturbance: 4.024

Disturbance Comments:

Reconstruction method: Operator will use Best Management Practices"BMP" to mechanically recontour to obtain the desired outcome.

Topsoil redistribution: Topsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability and preservation of surface water flow patterns.

Soil treatment: Topsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability and preservation of surface water flow patterns.

Existing Vegetation at the well pad: Shinnery, yucca, grasses and mesquite.

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Shinnery, yucca, grasses and mesquite.

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Shinnery, yucca, grasses and mesquite.

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: Shinnery, yucca, grasses and mesquite.

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Seed use location:

PLS pounds per acre:

Proposed seeding season:

Seed Summary	
Seed Type	Pounds/Acre

Total pounds/Acre:

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name: TRAVIS

Last Name: PHIBBS

Phone: (575)748-9929

Email: TRAVIS.PHIBBS@DVN.COM

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: Maintain weeds on an as need basis.

Weed treatment plan attachment:

Monitoring plan description: Monitor as needed.

Monitoring plan attachment:

Success standards: N/A

Pit closure description: N/A

Pit closure attachment:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

Section 11 - Surface Ownership

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: EXISTING ACCESS ROAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: PIPELINE

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: GAUCHO UNIT

Well Number: 28H

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? YES

Use APD as ROW? YES

ROW Type(s): 281001 ROW - ROADS,288101 ROW – O&G Facility Sites,289001 ROW- O&G Well Pad,FLPMA (Powerline),Other

ROW Applications

SUPO Additional Information: SEE SEC 4 FOR FACILITY INFO. PERMITTING 4 WELLS ON PAD. SEE C-102 PACKET FOR GRADING PLAN

Use a previously conducted onsite? YES

Previous Onsite information: CONDUCTED 10/3/2017

Other SUPO Attachment



Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?


Lined pit bond number:

Lined pit bond amount:


Additional bond information attachment:

**SECTION 30, TOWNSHIP 22 SOUTH, RANGE 34 EAST, N.M.P.M.
LEA COUNTY, STATE OF NEW MEXICO
INTERIM SITE BUILD PLAN**


- B - GAUCHO UNIT 26H
- C - GAUCHO UNIT 31H
- D - GAUCHO UNIT 33H

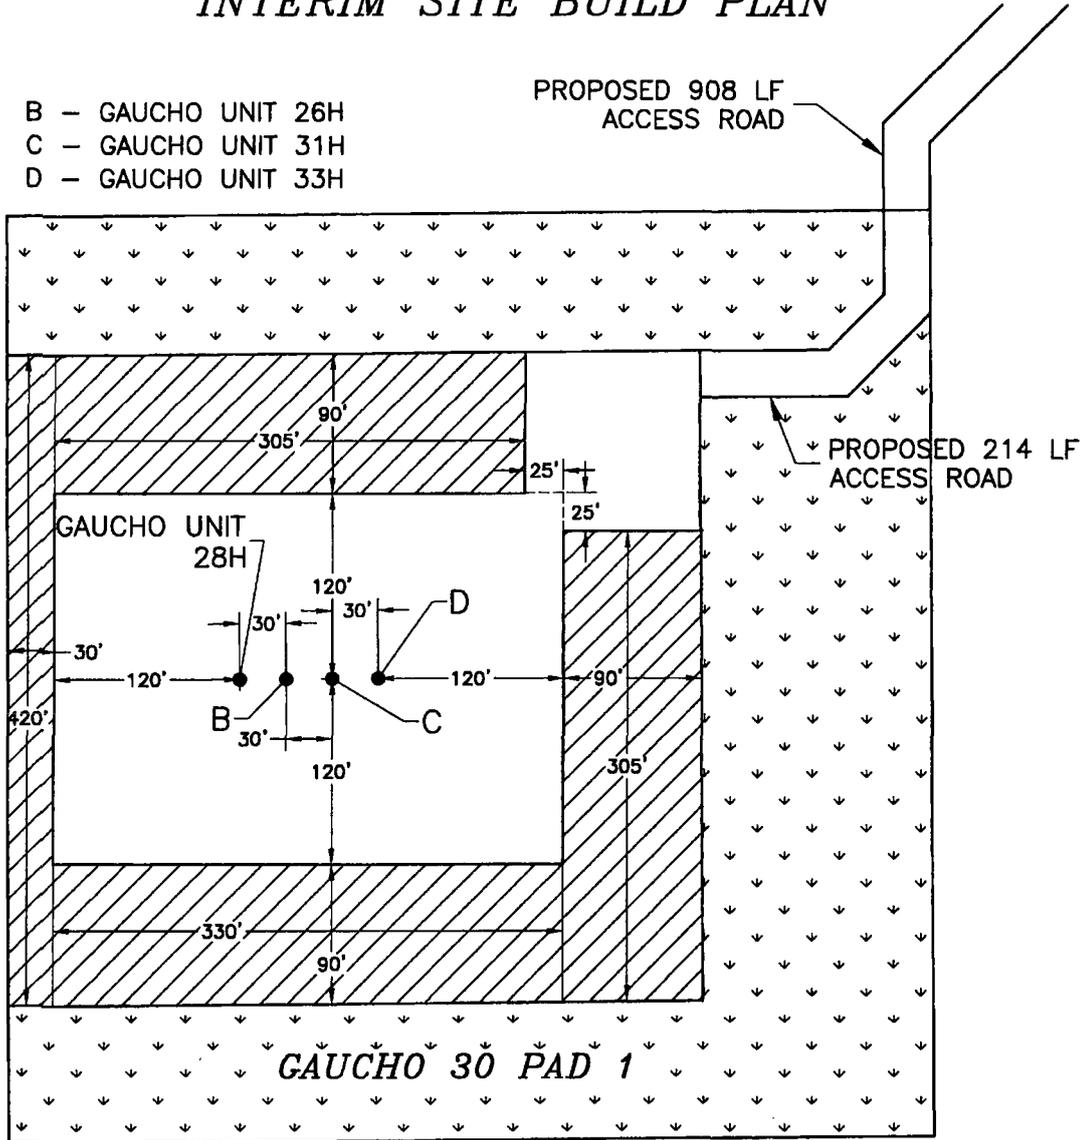

DENOTES INTERIM PAD RECLAMATION AREA



DENOTES GRADING SITE RECLAMATION AREA



**DEVON ENERGY PRODUCTION COMPANY, L.P.
GAUCHO UNIT 28H
LOCATED 375 FT. FROM THE SOUTH LINE
AND 640 FT. FROM THE EAST LINE OF
SECTION 30, TOWNSHIP 22 SOUTH,
RANGE 34 EAST, N.M.P.M.
LEA COUNTY, STATE OF NEW MEXICO**

2.232± ACRES INTERIM PAD RECLAMATION AREA
3.781± ACRES GRADING SITE RECLAMATION AREA
2.253± ACRES NON-RECLAIMED AREA


8.266± ACRES GAUCHO 30 PAD 1

FEBRUARY 28, 2018

SURVEY NO. 3535C

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 CARLSBAD, NEW MEXICO

Devon Energy - Well Pad Rig Location Layout Safety Equipment Location

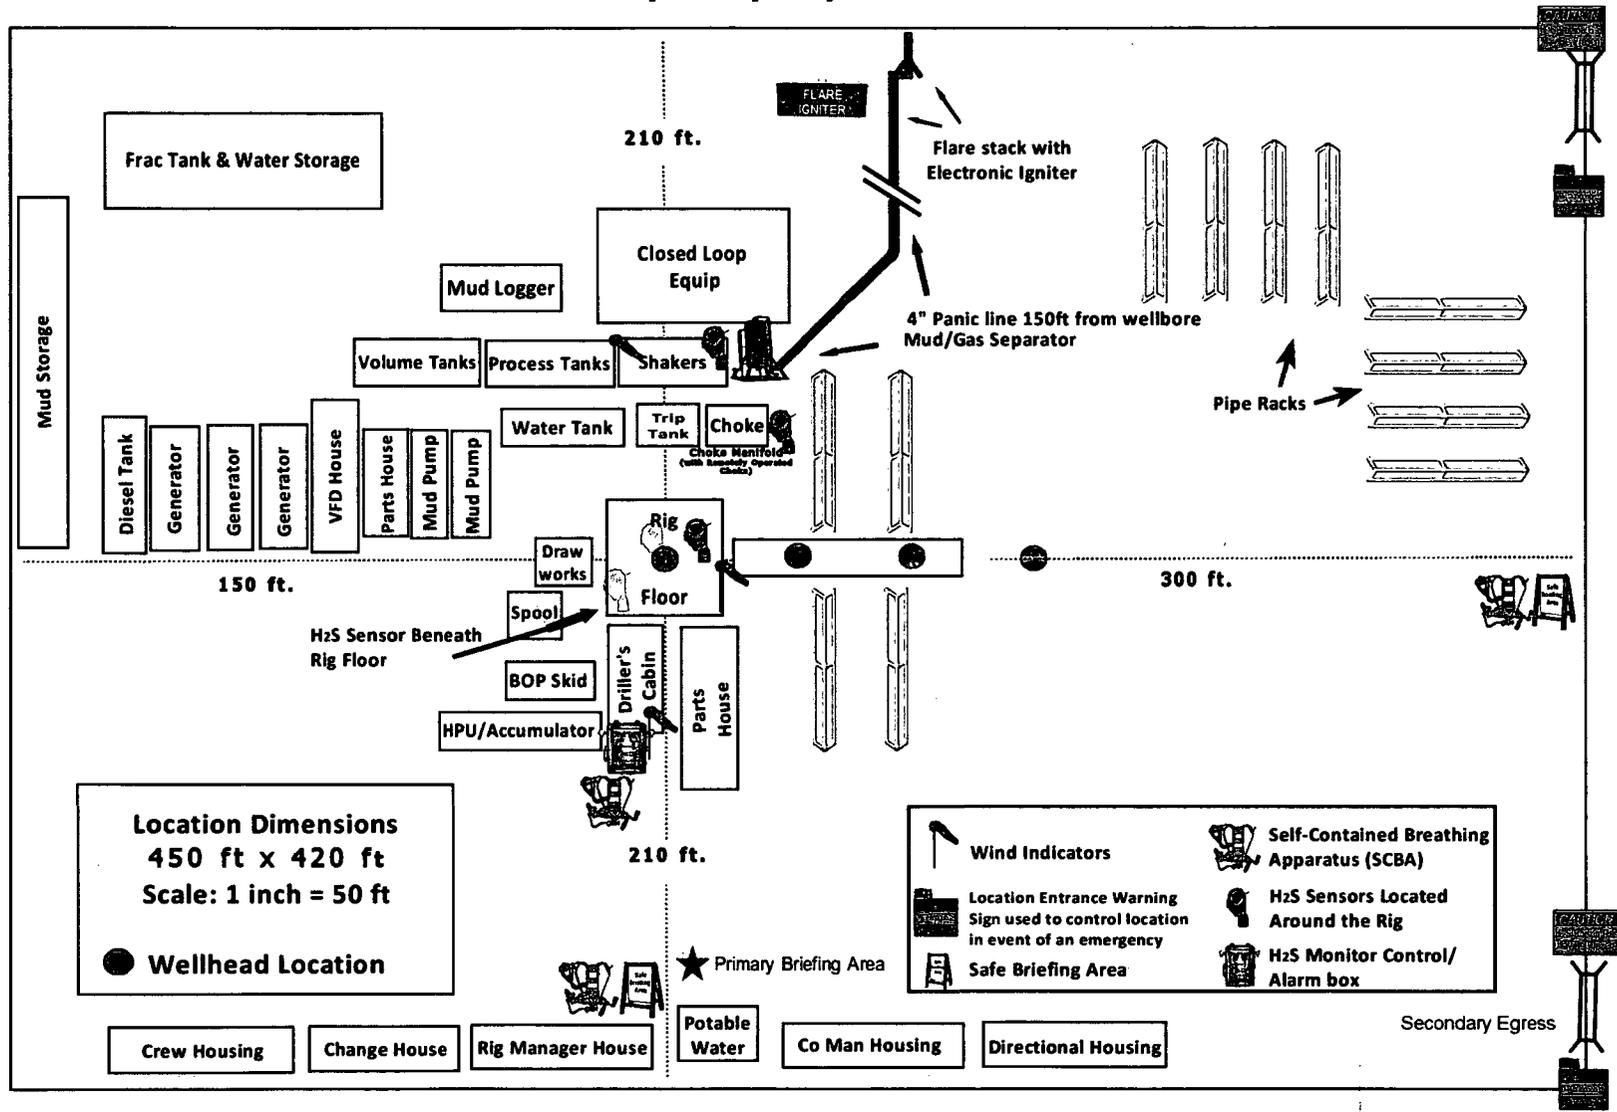

Location Dimensions
450 ft x 420 ft
Scale: 1 inch = 50 ft

● Wellhead Location


- | | | | |
|--|--|--|---|
| | Wind Indicators | | Self-Contained Breathing Apparatus (SCBA) |
| | Location Entrance Warning Sign used to control location in event of an emergency | | H2S Sensors Located Around the Rig |
| | Safe Briefing Area | | H2S Monitor Control/Alarm box |

Crew Housing Change House Rig Manager House Potable Water Co Man Housing Directional Housing

Secondary Egress

Gaicho 30 Pad 1 Caliche Map Total Miles= 7.91

Write a description for your map.

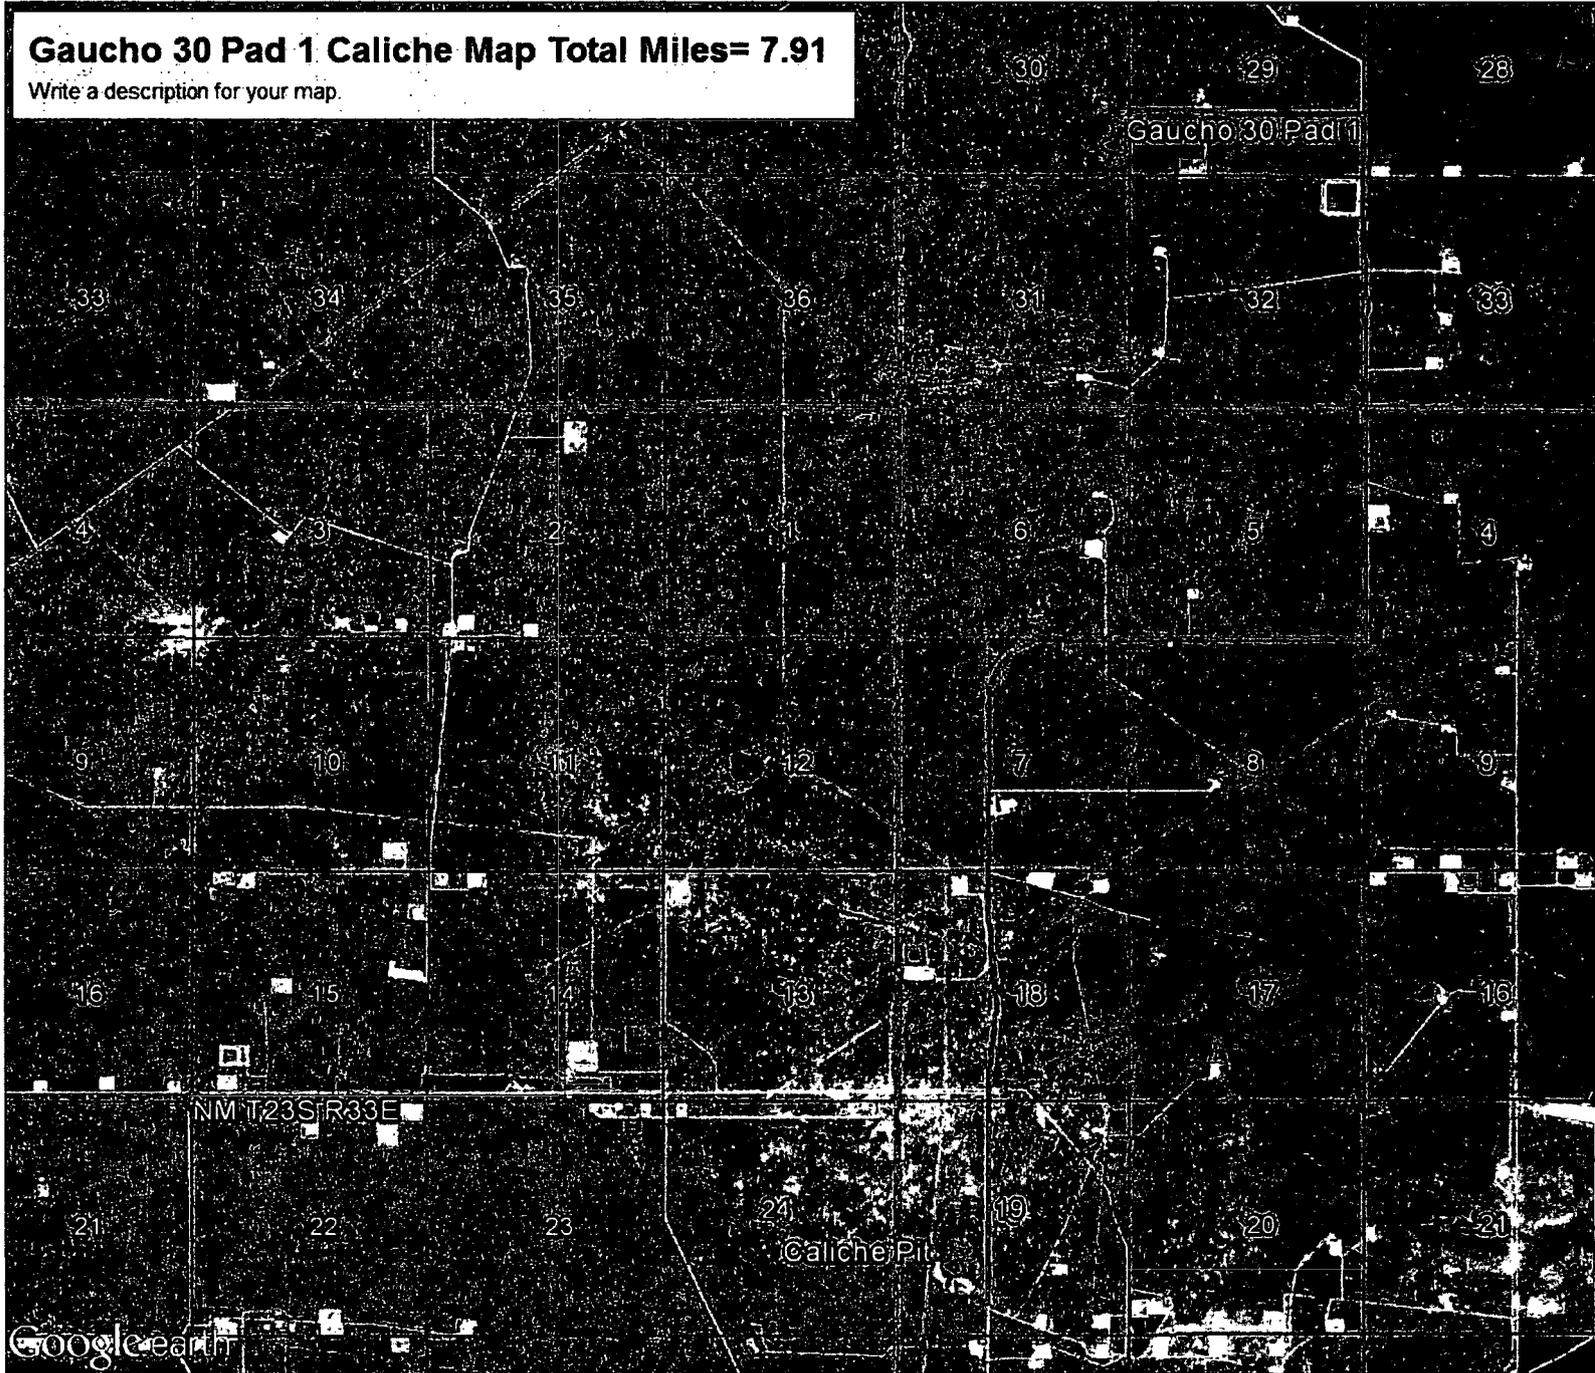

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Assigned injection well API number?

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Injection well name:

Injection well API number:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Information

Federal/Indian APD: FED

BLM Bond number: CO1104

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

