

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-025-45136

5. Indicate Type of Lease
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name
Cobalt 32 State

8. Well Number 707H

9. OGRID Number
7377

10. Pool name or Wildcat
WC-025 G-09 S2433361; Upper WC

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
EOG Resources, Inc.

3. Address of Operator
P.O. Box 2267 Midland, TX 79702

4. Well Location
Unit Letter M : 200 feet from the South line and 688 feet from the West line
Section 32 Township 24S Range 34E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3424' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☒
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐ Change Casing ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

EOG Resources requests an amendment to our approved APD for this well to reflect a change to a 3-string casing design as attached.

HOBBS OCD

SEP 26 2018

RECEIVED

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Stan Wagner TITLE Regulatory Analyst DATE 9/25/2018

Type or print name Stan Wagner E-mail address: PHONE: 432-686-3689

For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Engineer DATE 09/26/18


Conditions of Approval (if any):

**Cobalt 32 State #707H
Lea County, New Mexico**

**200' FSL
688' FWL
Section 32
T-24-S, R-34-E**

**Proposed Wellbore
Revised 9/21/18
API: 30-025-45136**

**KB: 3,449'
GL: 3,424'**

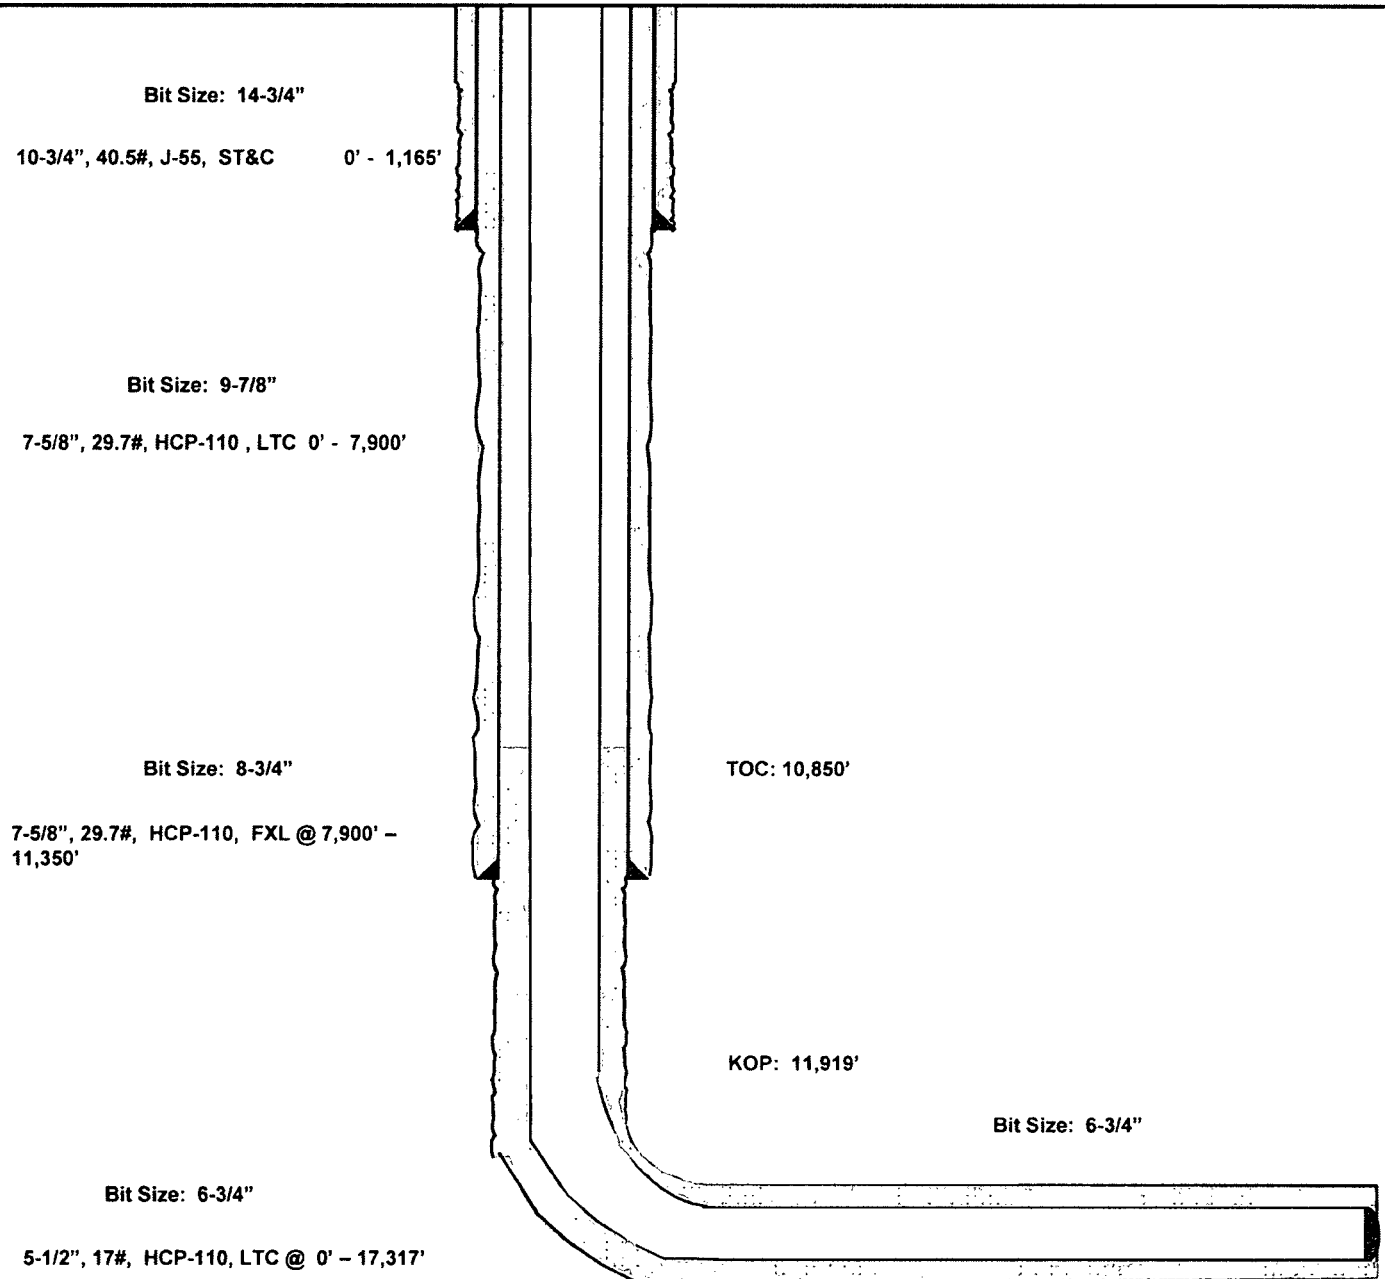

Lateral: 17,317' MD, 12,389' TVD

**BH Location: 100' FNL & 1016' FWL
Section 32
T-24-S, R-34-E**

Revised Permit Information 9/21/18:

Well Name: Cobalt 32 State No. 707H

Location:

SL: 200' FSL & 688' FWL, Section 32, T-24-S, R-34-E, Lea Co., N.M.

BHL: 100' FNL & 1016' FWL, Section 32, T-24-S, R-34-E, Lea Co., N.M.

Casing Program:

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
14.75"	0 – 1,165'	10.75"	40.5#	J55	STC	1.125	1.25	1.60
9.875"	0 – 7,900'	7.625"	29.7#	HCP-110	LTC	1.125	1.25	1.60
8.75"	7,900' – 11,350'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.60
6.75"	11,350' - 17,317'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

Cement Program:

Depth	No. Sacks	Wt. lb/gal	Yld Ft ³ /ft	Slurry Description
1,165'	697	13.5	1.74	Lead: Class 'C' + 4.00% Bentonite + 2.00% CaCl ₂ (TOC @ Surface)
	333	14.8	1.35	Tail: Class 'C' + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate + 2.0% KCl (1.06 lb/sk)
11,350'	600	10.8	3.67	Lead: Class C + 0.40% D013 + 0.20% D046 + 0.10% D065 + 0.20% D167 (TOC @ Surface)
	400	14.8	2.38	Tail: Class H + 94.0 pps D909 + 0.25% D065 + 0.30% D167 + 0.02% D208 + 0.15% D800
17,317'	800	14.8	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 10,850')

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,165'	Fresh - Gel	8.6-8.8	28-34	N/c
1,165' – 11,350'	Brine	8.8-10.0	28-34	N/c
11,350' – 17,317' Lateral	Oil Base	10.0-14.0	58-68	3 - 6