

District I - (575) 393-6161  
1625 N. Frerich Dr., Hobbs, NM 88240  
District II - (575) 748-1283  
811 S. First St., Artesia, NM 88208  
District III - (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87419  
District IV - (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM 87505

**HOBBS OCD**  
**OCT 24 2018**  
**RECEIVED**

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO.	30-025-41886
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name PIXLEY BUX STATE	
8. Well Number	1H
9. OGRID Number	7377
10. Pool name or Wildcat	VACUUM; BONE SPRING, WEST
4. Well Location Unit Letter <u>P</u> : <u>200</u> feet from the <u>SOUTH</u> line and <u>660</u> feet from the <u>EAST</u> line Section <u>26</u> Township <u>18S</u> Range <u>35E</u> NMPM County <u>LEA</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3870' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input checked="" type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

EOG proposes to plug this well using the following procedure, present depth 135':

1. RIH w/WS, fill hole w/ 10.9 yds cmt to surface
2. WOC, top off to surface
3. After filling w/redi mix, cut off locking device and install ground level dry hole marker

Spud Date:

06/26/2014

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

*Kay Maddox*

TITLE Regulatory Analyst

DATE 10/23/2018

Type or print name Kay Maddox

E-mail address: kay\_maddox@eogresources.com

PHONE: 432-686-3658

For State Use Only

APPROVED BY:

*Mark Whittemore*

TITLE P.E.S.

DATE 10/24/2018

Conditions of Approval (if any):


Well Name: Pixley BUX State #1H  
Location: 200' FSL & 660' FEL Sec. 26-18S-35E  
County: Lea, NM  
Lat/Long: 32.7117615,-103.4215775 NAD83  
API #: 30-025-41886  
Spud Date: 6/26/14  
Compl. Date:



**Current Wellbore Diagram:**

KB:  
GL: 3,870'

20" Hole

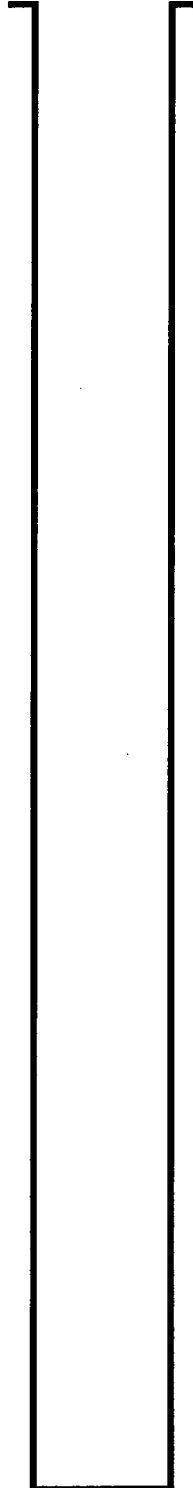

TD @ 135'


Well Name: Pixley BUX State #1H  
Location: 200' FSL & 660' FEL Sec. 26-18S-35E  
County: Lea, NM  
Lat/Long: 32.7117615,-103.4215775 NAD83  
API #: 30-025-41886  
Spud Date: 6/26/14  
Compl. Date:



**Proposed Wellbore Diagram:**

KB:  
GL: 3,870'

20" Hole

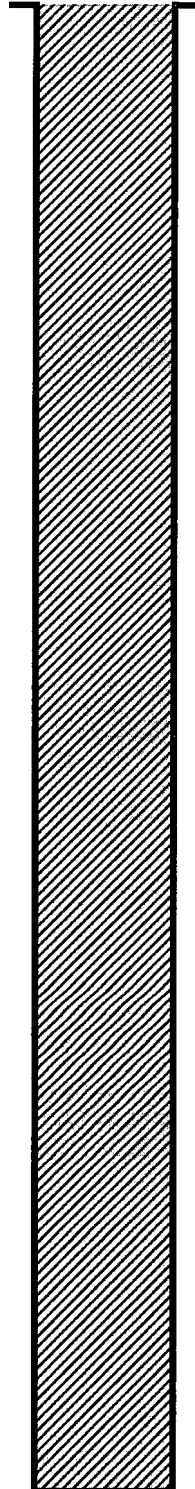

TD @ 135'

## GENERAL CONDITIONS OF APPROVAL:

- 1) Insure all bradenheads have been exposed, identified, and valves are operational prior to rigging up on well.
- 2) Contact the appropriate NMOCD District Office no later than 24 hours prior to moving in and rigging up.
- 3) A copy of the approved C103 intent to P&A should be distributed to the onsite company and plugging representatives. Approved procedures are good for a period of one year from approved date, unless otherwise specified on the C103 intent. Approvals past this date will require the submission and approval of a new C103 intent.
- 4) A company representative is required to be present to witness all operations including setting CIBP's, circulation of mud laden fluids, perforating, squeezing or spotting cement plugs, tags, or any other operations approved on the C103 intent to P&A. Company representative should contact the NMOCD and report all operations.
- 5) Any changes that may be required during plugging operations should be approved by the NMOCD before proceeding.
- 6) A closed loop system is to be used for all plugging operations. Contents of the steel pits to be hauled to a NMOCD permitted disposal facility.
- 7) Mud laden fluids must be placed between all cement plugs mixed at 25 sacks of salt gel per 100 barrels of brine.
- 8) All cement plugs will be 100' or 25 sacks cement, whichever is greater. Class 'C' cement will be used above 7500' and Class 'H' below 7500'.