


Well Name: Boysenberry BVZ State #1H
Location: 200' FNL & 760' FWL Sec. 2-20S-35E
County: Lea, NM
Lat/Long: 32.609022167, -103.434099 NAD83
API #: 30-025-~~42737~~ 42444
Spud Date: 3/30/15
Compl. Date:



Proposed Wellbore Diagram:

KB:
GL: 3,670'

20" Hole

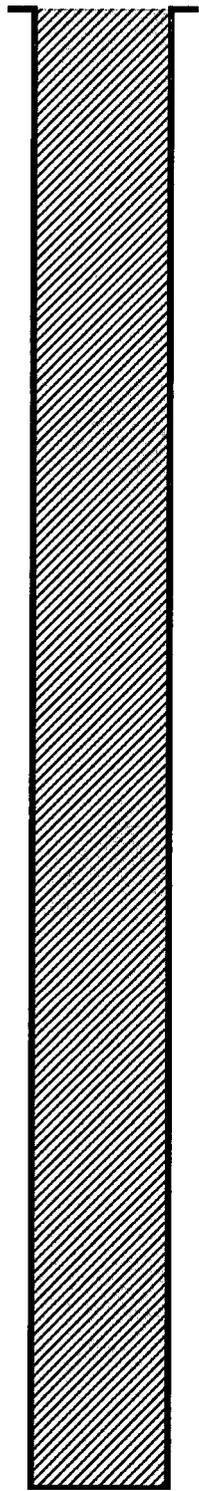

TD @ 60'


Well Name: Boysenberry BVZ State #1H
Location: 200' FNL & 760' FWL Sec. 2-20S-35E
County: Lea, NM
Lat/Long: 32.609022167,-103.434099 NAD83
API #: 30-025-~~42737~~ 42444
Spud Date: 3/30/15
Compl. Date:



Current Wellbore Diagram:

KB:
GL: 3,670'

20" Hole

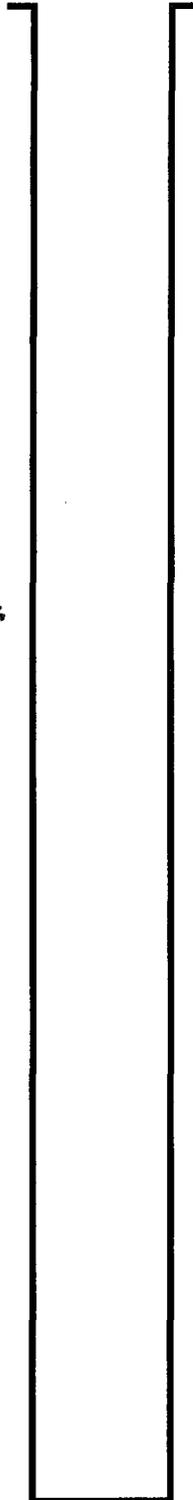

TD @ 60'

GENERAL CONDITIONS OF APPROVAL:

- 1) Insure all bradenheads have been exposed, identified, and valves are operational prior to rigging up on well.
- 2) Contact the appropriate NMOCD District Office no later than 24 hours prior to moving in and rigging up.
- 3) A copy of the approved C103 intent to P&A should be distributed to the onsite company and plugging representatives. Approved procedures are good for a period of one year from approved date, unless otherwise specified on the C103 intent. Approvals past this date will require the submission and approval of a new C103 intent.
- 4) A company representative is required to be present to witness all operations including setting CIBP's, circulation of mud laden fluids, perforating, squeezing or spotting cement plugs, tags, or any other operations approved on the C103 intent to P&A. Company representative should contact the NMOCD and report all operations.
- 5) Any changes that may be required during plugging operations should be approved by the NMOCD before proceeding.
- 6) A closed loop system is to be used for all plugging operations. Contents of the steel pits to be hauled to a NMOCD permitted disposal facility.
- 7) Mud laden fluids must be placed between all cement plugs mixed at 25 sacks of salt gel per 100 barrels of brine.
- 8) All cement plugs will be 100' or 25 sacks cement, whichever is greater. Class 'C' cement will be used above 7500' and Class 'H' below 7500'.