

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
NMLC063798

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
CHARLES LING FED COM 212H

9. API Well No.
30-025-45081-00-X1

10. Field and Pool or Exploratory Area
WOLFCAMP

11. County or Parish, State
LEA COUNTY, NM

SUBMIT IN TRIPLICATE - Other instructions on page 2

HOBBS OCD

NOV 28 2018

RECEIVED

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
MATADOR PRODUCTION COMPANY - Mail: brian@permitswest.com
Contact: BRIAN WOOD

3a. Address
5400 LBJ FREEWAY SUITE 1500
DALLAS, TX 75240

3b. Phone No. (include area code)
Ph: 505-466-8120

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 11 T24S R33E NENW 360FNL 1845FWL
32.238388 N Lat, 103.545685 W Lon

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input type="checkbox"/> Subsequent Report	<input checked="" type="checkbox"/> Alter Casing
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Change Plans
	<input type="checkbox"/> Convert to Injection
	<input type="checkbox"/> Deepen
	<input type="checkbox"/> Hydraulic Fracturing
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Plug and Abandon
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Water Disposal
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Well Integrity
	<input type="checkbox"/> Other

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

Matador requests a change in the Joint type for the following casing specifications. New joint specs are below. Spec sheets for 5.5in and 4.5in casings are attached.

Hole Size: 8.75in; Casing O.D.: 7.0in; MD: 11801-12744; Joint: BTC;

Hole Size: 6.125in; Casing O.D.: 5.5in; MD: 0-11700; Joint: VAM DWC/C-IS MS;

Hole Size: 6.125in; Casing O.D.: 4.5in; MD 11701-17226; Joint: VAM DWC/C-IS HT

All previous COAs still apply.

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #441187 verified by the BLM Well Information System
For MATADOR PRODUCTION COMPANY, sent to the Hobbs
Committed to AFMSS for processing by PRISCILLA PEREZ on 10/25/2018 (19PP0227SE)**

Name (Printed/Typed) BRIAN WOOD Title CONSULTANT

Signature (Electronic Submission) Date 10/25/2018

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By MUSTAFA HAQUE Title PETROLEUM ENGINEER Date 11/05/2018

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Hobbs

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

KA

Technical Specifications

Connection Type:	Size(O.D.):	Weight (Wall):	Grade:
DWC/C-IS MS Casing standard	5-1/2 in	20.00 lb/ft (0.361 in)	VST P110 EC

VST P110 EC	Material
125,000	Grade
135,000	Minimum Yield Strength (psi)
	Minimum Ultimate Strength (psi)

5.500	Pipe Dimensions
4.778	Nominal Pipe Body O.D. (in)
0.361	Nominal Pipe Body I.D.(in)
20.00	Nominal Wall Thickness (in)
19.83	Nominal Weight (lbs/ft)
5.828	Plain End Weight (lbs/ft)
	Nominal Pipe Body Area (sq in)

729,000	Pipe Body Performance Properties
12,090	Minimum Pipe Body Yield Strength (lbs)
14,360	Minimum Collapse Pressure (psi)
13,100	Minimum Internal Yield Pressure (psi)
	Hydrostatic Test Pressure (psi)


6.115	Connection Dimensions
4.778	Connection O.D. (in)
4.653	Connection I.D. (in)
4.13	Connection Drift Diameter (in)
5.828	Make-up Loss (in)
100.0	Critical Area (sq in)
	Joint Efficiency (%)

729,000	Connection Performance Properties
26,040	Joint Strength (lbs)
728,000	Reference String Length (ft) 1.4 Design Factor
729,000	API Joint Strength (lbs)
12,090	Compression Rating (lbs)
14,360	API Collapse Pressure Rating (psi)
104.2	API Internal Pressure Resistance (psi)
	Maximum Uniaxial Bend Rating [degrees/100 ft]

16,100	Approximated Field End Torque Values
18,600	Minimum Final Torque (ft-lbs)
21,100	Maximum Final Torque (ft-lbs)
	Connection Yield Torque (ft-lbs)



VAM USA
 4424 W. Sam Houston Pkwy. Suite 150
 Houston, TX 77041
 Phone: 713-479-3200
 Fax: 713-479-3234
 E-mail: VAMUSAsales@vam-usa.com

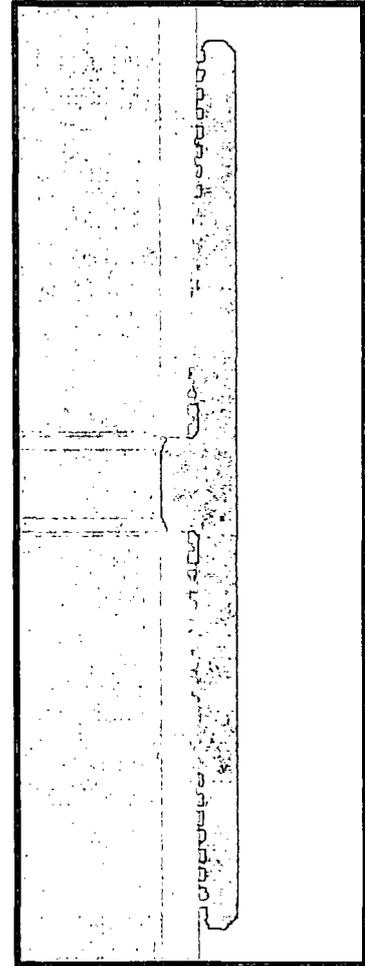


For detailed information on performance properties, refer to DWC Connection Data Notes on following page(s).

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof, and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

DWC Connection Data Notes:

1. DWC connections are available with a seal ring (SR) option.
2. All standard DWC/C connections are interchangeable for a give pipe OD. DWC connections are interchangeable with DWC/C-SR connections of the same OD and wall.
3. Connection performance properties are based on nominal pipe body and connection dimensions.
4. DWC connection internal and external pressure resistance is calculated using the API rating for buttress connections. API Internal pressure resistance is calculated from formulas 31, 32, and 35 in the API Bulletin 5C3.
5. DWC joint strength is the minimum pipe body yield strength multiplied by the connection critical area.
6. API joint strength is for reference only. It is calculated from formulas 42 and 43 in the API Bulletin 5C3.
7. Bending efficiency is equal to the compression efficiency.
8. The torque values listed are recommended. The actual torque required may be affected by field conditions such as temperature, thread compound, speed of make-up, weather conditions, etc.
9. Connection yield torque is not to be exceeded.
10. Reference string length is calculated by dividing the joint strength by both the nominal weight in air and a design factor (DF) of 1.4. These values are offered for reference only and do not include load factors such as bending, buoyancy, temperature, load dynamics, etc.
11. DWC connections will accommodate API standard drift diameters.

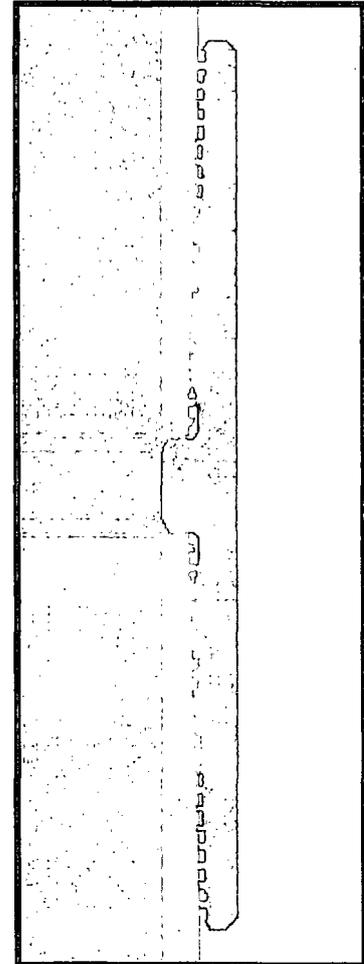

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof, and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

Connection Type:
DWC/C-HT-IS Tubing
STANDARD

Size(O.D.):
4.500in

Weight (Wall):
13.50 lb./ft. (0.290in)

Grade:
VST P110EC

Material

VST P110EC Grade
125,000 Minimum Yield Strength (psi.)
135,000 Minimum Ultimate Strength (psi.)

Pipe Dimensions

4.500 Nominal Pipe Body O.D. (in.)
3.920 Nominal Pipe Body I.D.(in.)
0.290 Nominal Wall Thickness (in.)
13.50 Nominal Weight (lbs./ft.)
13.05 Plain End Weight (lbs./ft.)
3.836 Nominal Pipe Body Area (sq. in.)

Pipe Body Performance Properties

479,000 Minimum Pipe Body Yield Strength (lbs.)
11,600 Minimum Collapse Pressure (psi.)
14,100 Minimum Internal Yield Pressure (psi.)
12,900 Hydrostatic Test Pressure (psi.)

Connection Dimensions

5.000 Connection O.D. (in.)
3.920 Connection I.D. (in.)
3.795 Connection Drift Diameter (in.)
3.94 Make-up Loss (in.)
3.836 Critical Area (sq in.)
100.00 Joint Efficiency (%)

Connection Performance Properties


479,000 Joint Strength (lbs.)
25,340 Reference String Length (ft.) 1.4 Design Factor
482,000 API Joint Strength (lbs.)
479,000 Compression Rating (lbs.)
11,600 Collapse Pressure Rating (psi.)
14,100 API Internal Pressure Resistance (psi.)
127.3 Maximum Uniaxial Bend Rating [degrees/100 ft]

Appoximated Field End Torque Values

8,400 Minimum Final Torque (ft.-lbs.)
9,700 Maximum Final Torque (ft.-lbs.)
12,600 Connection Yield Torque (ft.-lbs.)



VAM USA
4424 W. Sam Houston Pkwy. Suite 150
Houston, TX 77041
Phone: 713-479-3200
Fax: 713-479-3234
E-mail: VAMUSAsales@vam-usa.com

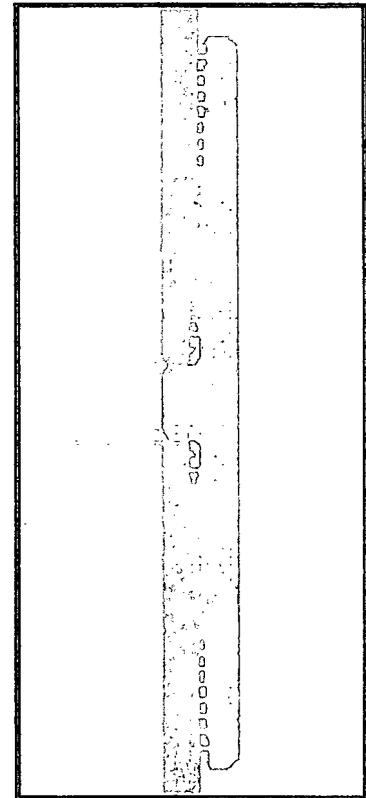

For detailed information on performance properties, refer to DWC Connection Data Notes on following page(s).

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.


All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

DWC Connection Data Notes:

1. DWC connections are available with a seal ring (SR) option.
2. All standard DWC/C connections are interchangeable for a give pipe OD. DWC connections are interchangeable with DWC/C-SR connections of the same OD and wall.
3. Connection performance properties are based on nominal pipe body and connection dimensions.
4. DWC connection internal and external pressure resistance is calculated using the API rating for buttress connections. API Internal pressure resistance is calculated from formulas 31, 32, and 35 in the API Bulletin 5C3.
5. DWC joint strength is the minimum pipe body yield strength multiplied by the connection critical area.
6. API joint strength is for reference only. It is calculated from formulas 42 and 43 in the API Bulletin 5C3.
7. Bending efficiency is equal to the compression efficiency.
8. The torque values listed are recommended. The actual torque required may be affected by field conditions such as temperature, thread compound, speed of make-up, weather conditions, etc.
9. Connection yield torque is not to be exceeded.
10. Reference string length is calculated by dividing the joint strength by both the nominal weight in air and a design factor (DF) of 1.4. These values are offered for reference only and do not include load factors such as bending, buoyancy, temperature, load dynamics, etc.
11. DWC connections will accommodate API standard drift diameters.



VAM USA
4424 W. Sam Houston Pkwy. Suite 150
Houston, TX 77041
Phone: 713-479-3200
Fax: 713-479-3234
E-mail: VAMUSAsales@vam-usa.com

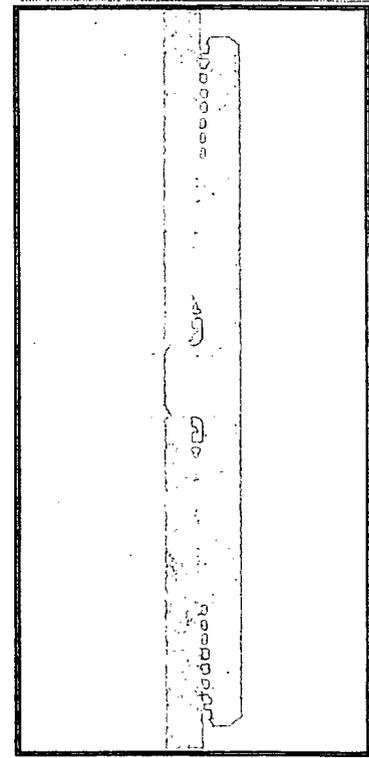

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.