

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-00986
5. Indicate Type of Lease STATE X FEE
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Artesia Metex Unit
8. Well Number 055
9. OGRID Number 269864
10. Pool name or Wildcat Artesia QU-GB-SA
11. Elevation (Show whether DR, RKB, RT, GR, etc.)

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)
1. Type of Well: Oil Well X Gas Well Other
2. Name of Operator State of New Mexico formerly Canyon E&P Company
3. Address of Operator 1625 N. French Drive Hobbs, NM 88240
4. Well Location Unit Letter B : 330 feet from the North line and 1650 feet from the East line
Section 35 Township 18S Range 27E NMPM Eddy County

HOBBS OCD
DEC 05 2018
RECEIVED

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK [] PLUG AND ABANDON []
TEMPORARILY ABANDON [] CHANGE PLANS []
PULL OR ALTER CASING [] MULTIPLE COMPL []
DOWNHOLE COMMINGLE []
OTHER: []
SUBSEQUENT REPORT OF:
REMEDIAL WORK [] ALTERING CASING []
COMMENCE DRILLING OPNS. [] P AND A []
CASING/CEMENT JOB []
OTHER: []

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

SEE ATTACHED

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE TITLE DATE

Type or print name E-mail address: PHONE:

For State Use Only

APPROVED BY: [Signature] TITLE P.E.S. DATE 12/05/2018


Conditions of Approval (if any):

Canyon E&P Company
Artesia Metex Unit #55
30-015-00986
330' FNL & 1650 FEL
UL-B, Sec 35 T18S, R27E


8 5/8" 258# csg set at ~~549'~~^{449'} with 50 sx cement
5 1/2" 14# csg set at 1910' with 35 sx cement.
Open Hole: 1910'-2108'

1. MIRU and POOH with production equipment.
2. Make gauge ring run and set 5 1/2" CIBP at 1810'. Circulate MLF and test casing to 500#.
3. Spot 50 sx cement on top of CIBP.
4. Perforate casing at ~~599'~~^{499'}. Pump sufficient cement to circulate cement to surface inside and outside of 5 1/2" casing.
5. Cut off wellhead 3' below ground level.
6. Verify cement is to surface on all strings of casing.
7. Install upright marker and cut off anchors.

State of New Mexico for Canyon
E&P Company
Artesia Metex Unit #55
API 30-015-00986
WBD Before PA

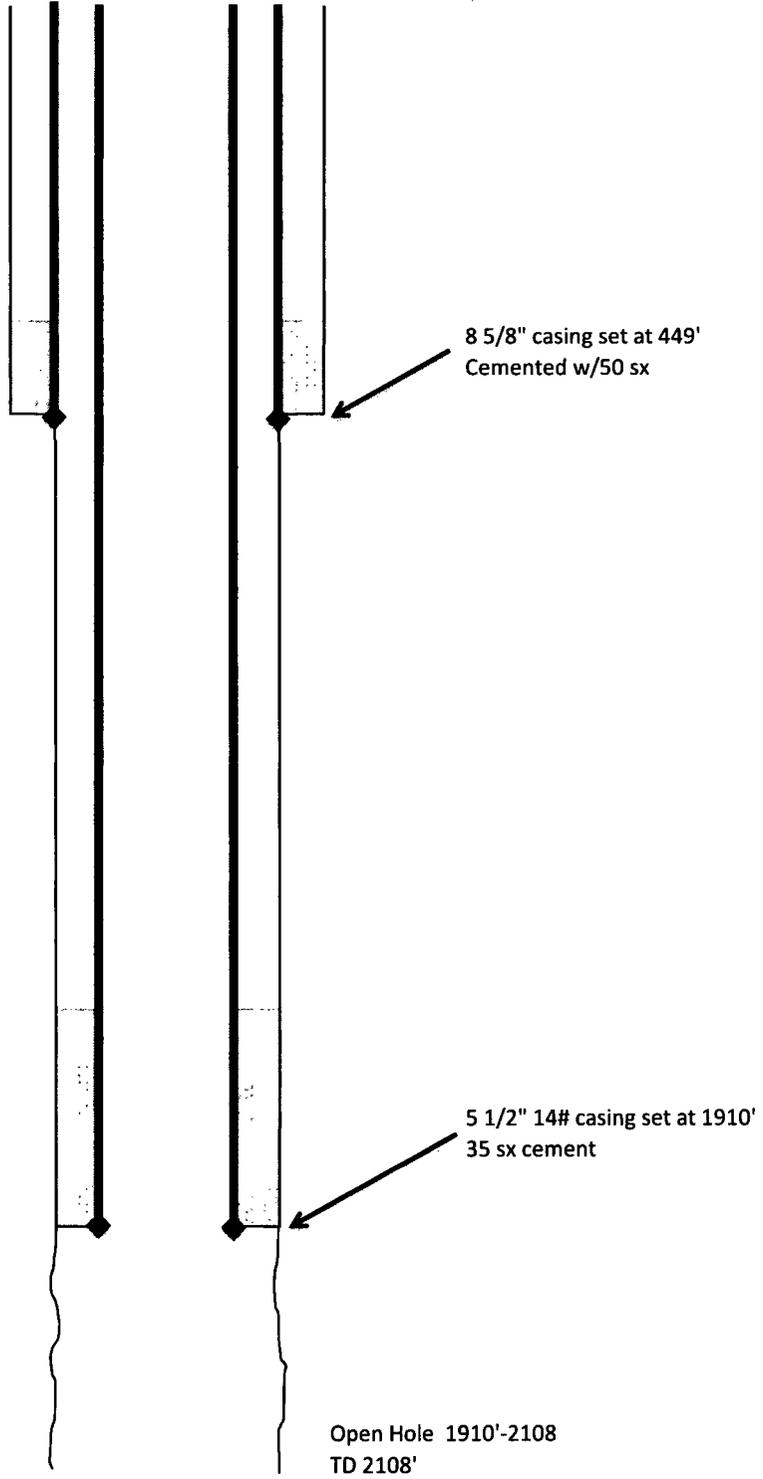

State of New Mexico for Canyon
E&P Company
Artesia Metex Unit #55
API 30-015-00986
WBD After PA

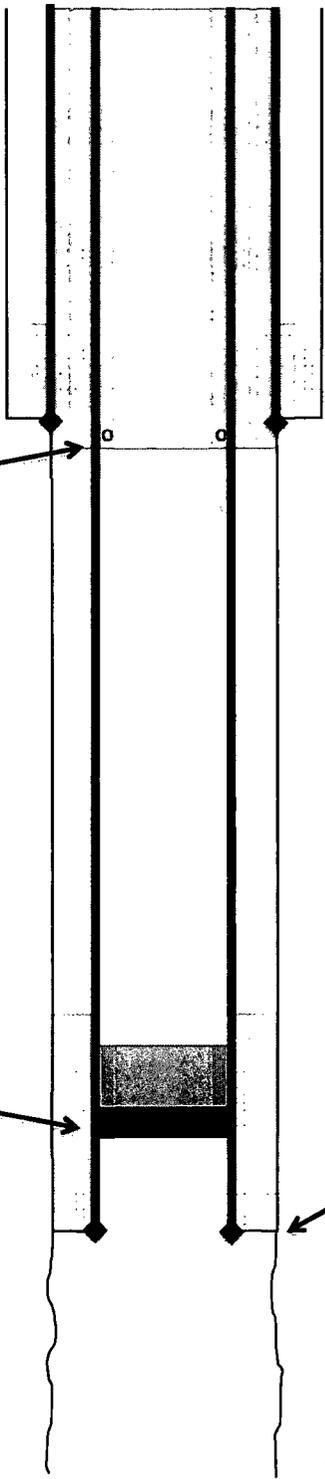

8 5/8" casing set at 449'
Cemented w/50 sx

Perforate 5 1/2" casing at 499' and
circulate cement to surface

Set 5 1/2" CIPB @ 1810'
and spot 50 sx cmt on top

5 1/2" 14# casing set at 1910'
35 sx cement

Open Hole 1910'-2108'
TD 2025'