

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**APPLICATION FOR PERMIT TO DRILL OR REENTER**

**HOBBS OCD**  
**JAN 11 2019**  
**RECEIVED**

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		5. Lease Serial No. NMLC0061936 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. CO GRIZZLY 321 FED 0057H <sup>34</sup>	
2. Name of Operator CHEVRON USA INCORPORATED (4723)		9. API Well No. 30-025-8548	
3a. Address 6301 Deauville Blvd. Midland TX 79706		3b. Phone No. (include area code) (432)687-7866	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SENE / 2640 FNL / 1015 FEL / LAT 32.159539 / LONG -103.657389 At proposed prod. zone NWNE / 100 FNL / 1782 FEL / LAT 32.181025 / LONG -103.659743		10. Field and Pool, or Exploratory COTTON DRAVE (96715) 11. Sec., T. R. M. or Blk. and Survey or Area SEC 3 / T25S / R32E / NMP	
14. Distance in miles and direction from nearest town or post office* 29 miles		12. County or Parish LEA	13. State NM
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 330 feet	16. No of acres in lease 1879.24	17. Spacing Unit dedicated to this well 240	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1435 feet	19. Proposed Depth 10738 feet / 18060 feet	20. BLM/BIA Bond No. in file FED: CA0329	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3494 feet	22. Approximate date work will start* 04/01/2019	23. Estimated duration 150 days	
24. Attachments			

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- |   |   |
|---|---|
| 1. Well plat certified by a registered surveyor.<br>2. A Drilling Plan.<br>3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).<br>5. Operator certification.<br>6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission) Title Permitting Specialist		Name (Printed/Typed) Laura Becerra / Ph: (432)687-7665		Date 05/08/2018	
Approved by (Signature) (Electronic Submission) Title Wildlife Biologist		Name (Printed/Typed) Ty Allen / Ph: (575)234-5978		Date 12/21/2018	
		Office CARLSBAD			

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*GCP Rec 1/11/19*

*KZ 01/11/19*

**APPROVED WITH CONDITIONS**  
Approval Date: 12/21/2018

## INSTRUCTIONS

**GENERAL:** This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

**ITEM I:** If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

**ITEM 4:** Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

**ITEM 14:** Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

**ITEMS 15 AND 18:** If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

**ITEM 22:** Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

**ITEM 24:** If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

## NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

**AUTHORITY:** 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

**PRINCIPAL PURPOSES:** The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

**ROUTINE USE:** Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

**EFFECT OF NOT PROVIDING INFORMATION:** Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

## **Additional Operator Remarks**

### **Location of Well**

1. SHL: SENE / 2640 FNL / 1015 FEL / TWSP: 25S / RANGE: 32E / SECTION: 3 / LAT: 32.159539 / LONG: -103.657389 ( TVD: 10738 feet, MD: 18060 feet )  
PPP: SENE / 2310 FNL / 1782 FEL / TWSP: 25S / RANGE: 32E / SECTION: 3 / LAT: 32.160439 / LONG: -103.659853 ( TVD: 10738 feet, MD: 18060 feet )  
BHL: NUNE / 100 FNL / 1782 FEL / TWSP: 24S / RANGE: 32E / SECTION: 34 / LAT: 32.181025 / LONG: -103.659743 ( TVD: 10738 feet, MD: 18060 feet )

## **BLM Point of Contact**

Name: Priscilla Perez

Title: Legal Instruments Examiner

Phone: 5752345934

Email: pperez@blm.gov

## **Review and Appeal Rights**

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

**Operator Certification**

*I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.*

**NAME:** Laura Becerra

**Signed on:** 05/08/2018

**Title:** Permitting Specialist

**Street Address:** 6301 Deauville Blvd., S2211

**City:** Midland

**State:** TX

**Zip:** 79706

**Phone:** (432)687-7665

**Email address:** LBecerra@Chevron.com

**Field Representative**

**Representative Name:**

**Street Address:**

**City:**

**State:**

**Zip:**

**Phone:**

**Email address:**

APD ID: 10400030012

Submission Date: 05/08/2018

Highlighted data  
reflects the most  
recent changes

Operator Name: CHEVRON USA INCORPORATED

Well Name: CO GRIZZLY 3 27 FED

Well Number: 0057H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

### Section 1 - General

APD ID: 10400030012

Tie to previous NOS?

Submission Date: 05/08/2018

BLM Office: CARLSBAD

User: Laura Becerra

Title: Permitting Specialist

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMLC0061936

Lease Acres: 1879.24

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? NO

Permitting Agent? NO

APD Operator: CHEVRON USA INCORPORATED

Operator letter of designation:

### Operator Info

Operator Organization Name: CHEVRON USA INCORPORATED

Operator Address: 6301 Deauville Blvd.

Zip: 79706

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)687-7866

Operator Internet Address:

### Section 2 - Well Information

Well in Master Development Plan? NO

Mater Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: CO GRIZZLY 3 27 FED

Well Number: 0057H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: COTTON DRAW

Pool Name:

Is the proposed well in an area containing other mineral resources? USEABLE WATER

**Describe other minerals:**

Is the proposed well in a Helium production area? **N**    Use Existing Well Pad? **NO**    New surface disturbance?

Type of Well Pad: **MULTIPLE WELL**    Multiple Well Pad Name: **CO GRIZZLY 3 27 FED**    Number: **0051H 0052H 0055H 0057H 00510H**  
 Well Class: **HORIZONTAL**    Number of Legs: **1**

Well Work Type: **Drill**

Well Type: **OIL WELL**

Describe Well Type:

Well sub-Type: **INFILL**

Describe sub-type:

Distance to town: **29 Miles**    Distance to nearest well: **1435 FT**    Distance to lease line: **330 FT**

Reservoir well spacing assigned acres Measurement: **240 Acres**

Well plat: **CO\_Grizzly\_3\_10\_Fed\_0057H\_C\_102\_Cert\_signed\_20180508074130.pdf**

Well work start Date: **04/01/2019**    Duration: **150 DAYS**

**Section 3 - Well Location Table**

Survey Type: **RECTANGULAR**

Describe Survey Type:

Datum: **NAD83**    Vertical Datum: **NAVD88**

Survey number:

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	2640	FNL	1015	FEL	25S	32E	3	Aliquot SENE	32.159539	-103.657389	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 061936	3494	18060	10738
KOP Leg #1	2640	FNL	1015	FEL	25S	32E	3	Aliquot SENE	32.159539	-103.657389	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 061936	-7244	18060	10738
PPP Leg #1	2310	FNL	1782	FEL	25S	32E	3	Aliquot SENE	32.160439	-103.659853	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 061936	-7244	18060	10738

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
EXIT Leg #1	330	FNL	178 2	FEL	24S	32E	34	Aliquot NWNE 2	32.18039 2	- 103.6597 43	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 061936	- 724 4	180 60	107 38
BHL Leg #1	100	FNL	178 2	FEL	24S	32E	34	Aliquot NWNE 5	32.18102 5	- 103.6597 43	LEA	NEW MEXI CO	NEW MEXI CO	F	NMLC0 061936	- 724 4	180 60	107 38

**APD ID:** 10400030012

**Submission Date:** 05/08/2018

Highlighted data  
reflects the most  
recent changes.

**Operator Name:** CHEVRON USA INCORPORATED

**Well Name:** CO GRIZZLY 3 27 FED

**Well Number:** 0057H

[Show Final Text](#)

**Well Type:** OIL WELL

**Well Work Type:** Drill

**Section 1 - Geologic Formations**

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1	RUSTLER	3494	870	870	DOLOMITE	NONE	No
2	CASTILE	-36	3530	3530	ANHYDRITE	NONE	No
3	LAMAR	-1263	4757	4757	LIMESTONE	NONE	No
4	BELL CANYON	-1336	4830	4830	SANDSTONE	NONE	No
5	CHERRY CANYON	-2226	5720	5720	SANDSTONE	NONE	No
6	BRUSHY CANYON	-3616	7110	7110	SANDSTONE	NONE	No
7	BONE SPRING LIME	-5236	8730	8730	LIMESTONE, SHALE	NONE	No
8	UPPER AVALON SHALE	-5346	8840	8840	LIMESTONE, SHALE	NONE	No
9	BONE SPRING 1ST	-6226	9720	9720	SANDSTONE	NONE	No
10	BONE SPRING 2ND	-6863	10357	10357	LIMESTONE, SANDSTONE	NONE	No
11	BONE SPRING 3RD	-7244	10738	18060	SANDSTONE	USEABLE WATER, NATURAL GAS, OIL	Yes

**Section 2 - Blowout Prevention**

**Pressure Rating (PSI):** 5M

**Rating Depth:** 18060

**Equipment:** Will have a minimum of a 5000 psi rig stack for drill out below surface casing. Batch drilling of the surface, intermediate, and production will take place. A full BOP test will be performed unless approval from BLM is received otherwise.

**Requesting Variance?** YES

**Variance request:** Chevron requests a variance to use a FMC UHS Multibowl wellhead, which will be run through the rig floor on surface casing. BOPE will be nipped up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on file with the BLM office and remains unchanged from previous submittal.

**Testing Procedure:** Stack will be tested as specified in the attached testing requirements upon NU and not to exceed 30

days.

**Choke Diagram Attachment:**

Choke\_Manifold\_Schematic\_20180508081102.pdf

**BOP Diagram Attachment:**

5K\_BOPE\_Schematic\_20180508081117.pdf

**Section 3 - Casing**

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	900	0	900			900	J-55	55	STC	2.84	5.46	DRY	5.94	DRY	4.92
2	INTERMEDIATE	12.25	9.625	NEW	API	N	900	4880	0	4880			3980	L-80	43.5	LTC	4.31	2.19	DRY	3.51	DRY	2.69
3	PRODUCTION	8.5	5.5	NEW	NON API	N	4880	18060	0	18060			13180	P-110	20	OTHER - TXP	2.1	1.11	DRY	2.16	DRY	1.29

**Casing Attachments**

**Casing ID:** 1      **String Type:** SURFACE

**Inspection Document:**

**Spec Document:**

**Tapered String Spec:**

**Casing Design Assumptions and Worksheet(s):**

CO\_Grizzly\_3\_27\_FED\_005\_7H\_9pt\_Plan\_20180508081859.pdf

**Casing Attachments**

Casing ID: 2      String Type:INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

CO\_Grizzly\_3\_27\_FED\_005\_7H\_9pt\_Plan\_20180508082019.pdf

Casing ID: 3      String Type:PRODUCTION

Inspection Document:

Spec Document:

Casing\_Specs\_20180508082107.pdf

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

CO\_Grizzly\_3\_27\_FED\_005\_7H\_9pt\_Plan\_20180508082316.pdf

**Section 4 - Cement**

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	900	757	1.34	14.8	181	50	CLASS C	NONE

INTERMEDIATE	Lead		0	4280	1006	2.43	11.9	435	150	Class C	50/50 Poz Class C
INTERMEDIATE	Tail		4280	4880	290	1.33	14.8	69	85	CLASS C	NONE
PRODUCTION	Lead	1100 0	4380	1100 0	906	2.46	11.9	397	50	CLASS C	NONE

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Lead		1100 0	1706 0	1407	1.34	14.8	336	35	CLASS C	NONE
PRODUCTION	Tail		1706 0	1806 0	105	2.19	15	41	0	CLASS H	ACID SOLUBLE

**Section 5 - Circulating Medium**

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

**Describe what will be on location to control well or mitigate other conditions:** In compliance with Onshore Order # 2, a closed system will be utilized consisting of above ground steel tanks. All wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to an approved sanitary landfill.

**Describe the mud monitoring system utilized:** A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH. Visual mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated -- a pit volume totalizer (PVT), stroke counter, and flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume.

**Circulating Medium Table**

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
4880	1806 0	OIL-BASED MUD	8.3	9.6							
0	900	SPUD MUD	8.3	8.7							
900	4880	OTHER : BRINE	9.5	10.2							

## Section 6 - Test, Logging, Coring

**List of production tests including testing procedures, equipment and safety measures:**

Drill stem tests are not planned. The logging program will be as follows:

TYPE: Mudlogs LOGS: 2 Man Mudlog INTERVAL: Int Csg to TD TIMING: Drillout of Csg VENDOR: TBD

TYPE: LWD LOGS: Mwd Gamma INTERVAL: Int and Prod Hole TIMING: While Drilling VENDOR: TBD

**List of open and cased hole logs run in the well:**

GR,MWD,MUDLOG

**Coring operation description for the well:**

Conventional hole core samples are not planned. A directional survey will be run.

## Section 7 - Pressure

**Anticipated Bottom Hole Pressure:** 5906

**Anticipated Surface Pressure:** 3543.64

**Anticipated Bottom Hole Temperature(F):** 160

**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO

**Describe:**

**Contingency Plans geohazards description:**

**Contingency Plans geohazards attachment:**

**Hydrogen Sulfide drilling operations plan required?** YES

**Hydrogen sulfide drilling operations plan:**

CO\_Grizzly\_3\_27\_FED\_005\_H2S\_Plan\_20180504081854.pdf

## Section 8 - Other Information

**Proposed horizontal/directional/multi-lateral plan submission:**

CO\_Grizzly\_3\_27\_FED\_005\_7H\_Prelim\_1\_Plot\_20180508084141.pdf

CO\_Grizzly\_3\_27\_FED\_005\_7H\_Directional\_Plan\_20180508084218.pdf

**Other proposed operations facets description:**

**Other proposed operations facets attachment:**

**Other Variance attachment:**

# CHOKE MANIFOLD SCHEMATIC


## Minimum Requirements

**OPERATION** : Intermediate Hole Section

**Minimum System Pressure Rating** : 5,000 psi

### Choke Manifold

SIZE	PRESSURE	DESCRIPTION
3"	5,000 psi	Panic Line Valves
2"	5,000 psi	Valves on Choke Lines

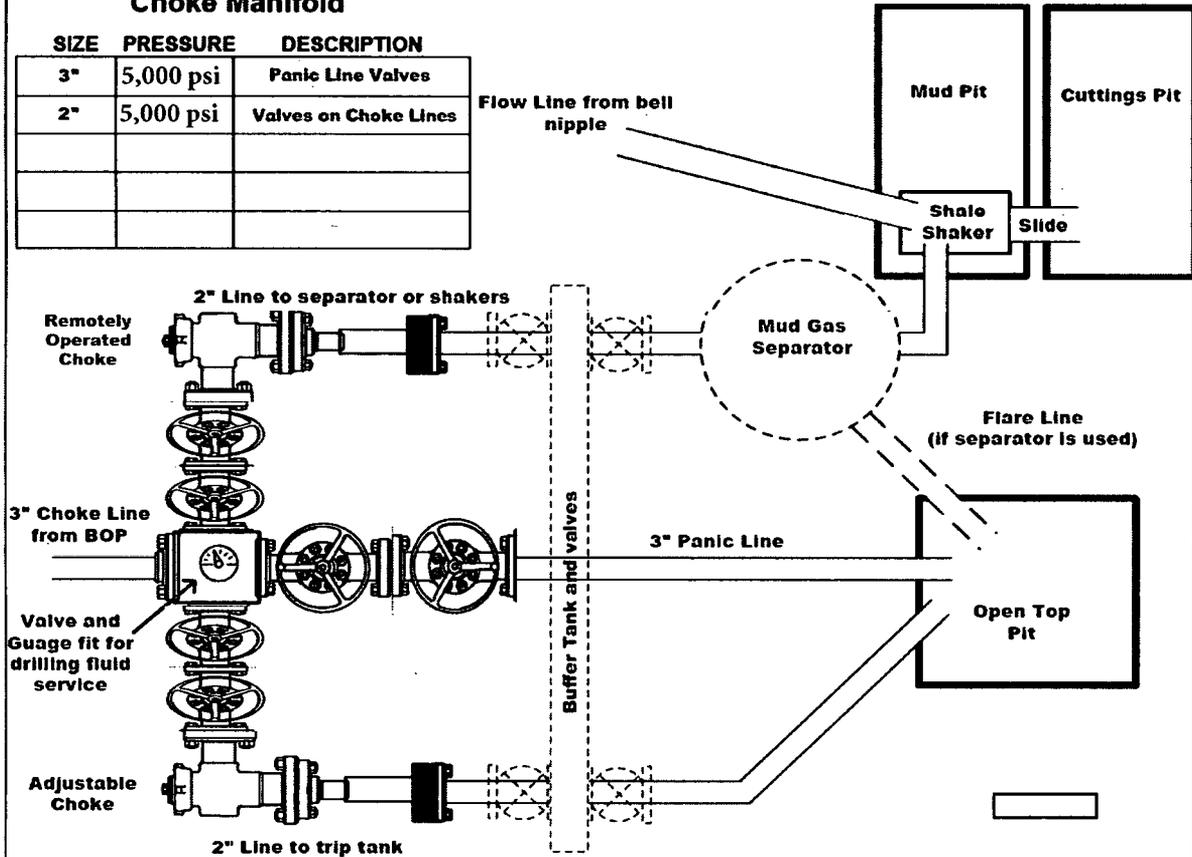

### Installation Checklist

The following item must be verified and checked off prior to pressure testing of BOP equipment.

- The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- Adjustable Chokes may be Remotely Operated but will have backup hand pump for hydraulic actuation in case of loss of rig air pressure or power.
- Flare and Panic lines will terminate a minimum of 150' from the wellhead. These lines will terminate at a location as per approved APD.
- The choke line, kill line, and choke manifold lines will be straight unless turns use tee blocks or are targeted with running tress, and will be anchored to prevent whip and reduce vibration. This excludes the line between mud gas separator and shale shaker.
- All valves (except chokes) on choke line, kill line, and choke manifold will be full opening and will allow straight through flow. This excludes any valves between mud gas separator and shale shakers.
- All manual valves will have hand wheels installed.
- If used, flare system will have effective method for ignition
- All connections will be flanged, welded, or clamped (no threaded connections like hammer unions)
- If buffer tank is used, a valve will be used on all lines at any entry or exit point to or from the buffer tank.

After installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer

**Wellname:** \_\_\_\_\_

**Representative:** \_\_\_\_\_


**Date:** \_\_\_\_\_

# 10M Choke Manifold SCHEMATIC

Minimum Requirements

**OPERATION:** Production Hole Sections

**Minimum System Pressure Rating: 10,000 PSI**

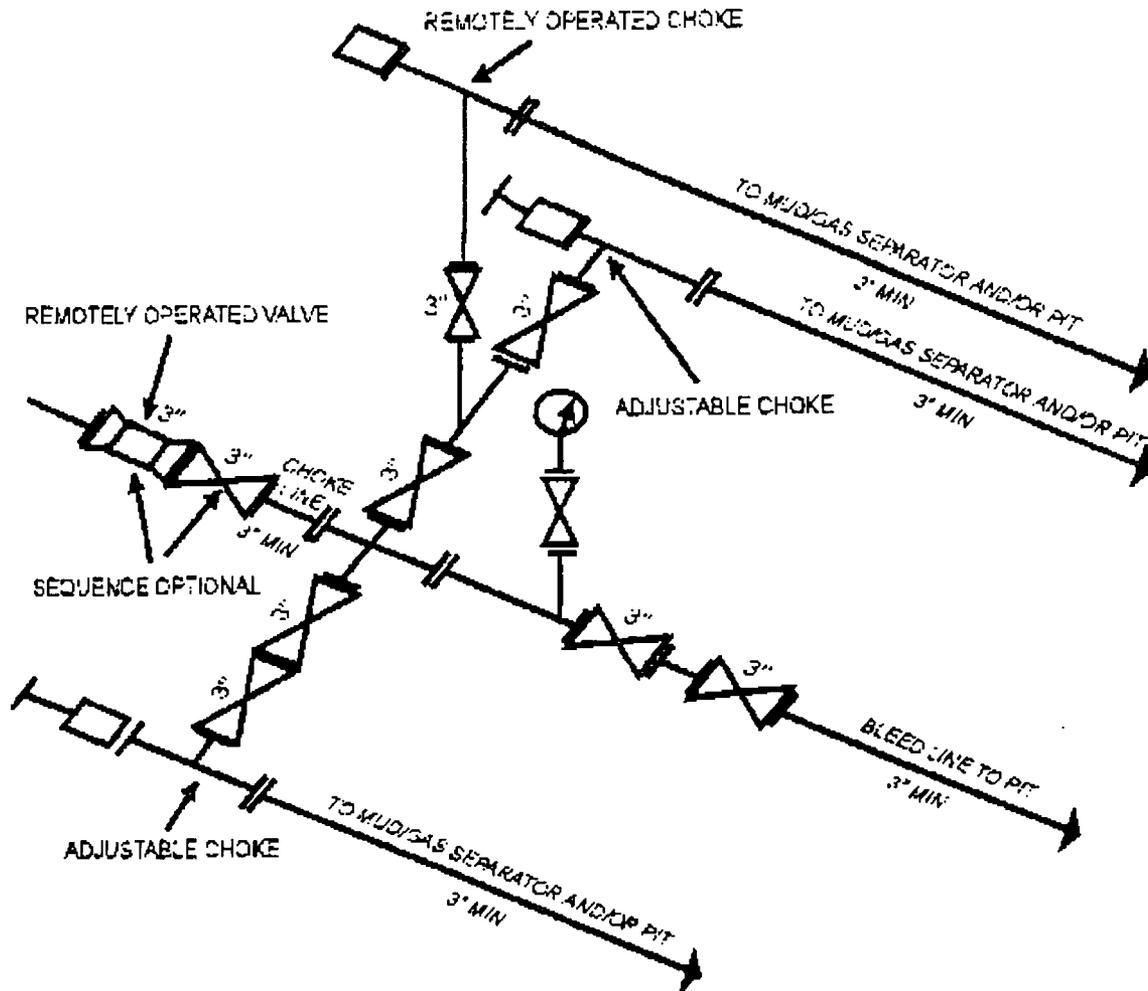

10M AND 15M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY  
[53 FR 4966], Dec. 9, 1988 and 54 FR 39528, Sept. 27, 1989]

# CHOKE MANIFOLD SCHEMATIC


## Minimum Requirements

**OPERATION** : Intermediate & Production Hole Section

**Minimum System Pressure Rating** : 5,000 psi

### Choke Manifold

SIZE	PRESSURE	DESCRIPTION
3"	5,000 psi	Panic Line Valves
2"	5,000 psi	Valves on Choke Lines

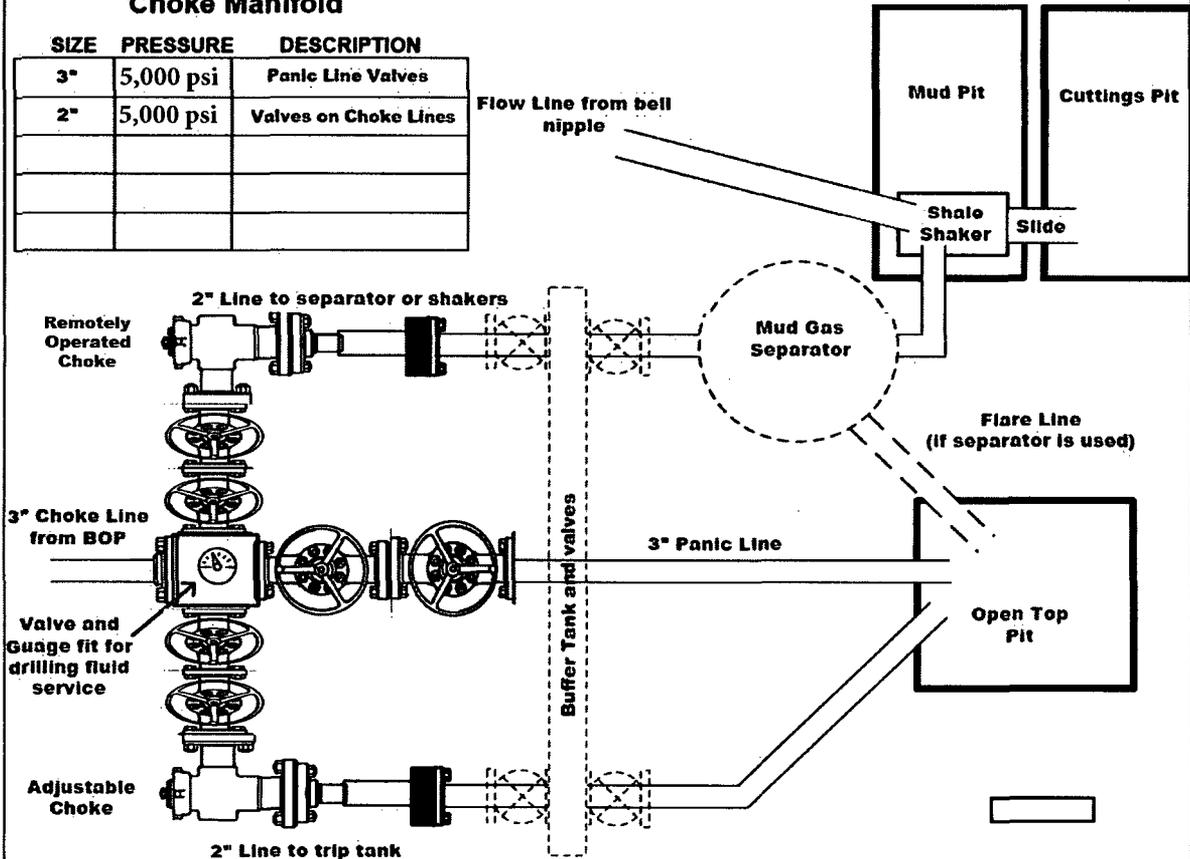

### Installation Checklist

The following items must be verified and checked off prior to pressure testing of BOP equipment.

- The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- Adjustable Chokes may be Remotely Operated but will have backup hand pump for hydraulic actuation in case of loss of rig air pressure or power.
- Flare and Panic lines will terminate a minimum of 150' from the wellhead. These lines will terminate at a location as per approved APD.
- The choke line, kill line, and choke manifold lines will be straight unless turns use tee blocks or are targeted with running tress, and will be anchored to prevent whip and reduce vibration. This excludes the line between mud gas separator and shale shakers.
- All valves (except chokes) on choke line, kill line, and choke manifold will be full opening and will allow straight through flow. This excludes any valves between mud gas separator and shale shakers.
- All manual valves will have hand wheels installed.
- If used, flare system will have effective method for ignition
- All connections will be flanged, welded, or clamped (no threaded connections like hammer unions)
- If buffer tank is used, a valve will be used on all lines at any entry or exit point to or from the buffer tank.

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer

**Wellname:** \_\_\_\_\_

**Representative:** \_\_\_\_\_

**Date:** \_\_\_\_\_

# BLOWOUT PREVENTOR SCHEMATIC

## Minimum Requirements

**OPERATION** : Intermediate Hole Section

**Minimum System Pressure Rating** : 5,000 psi


SIZE	PRESSURE	DESCRIPTION
A	N/A	Bell Nipple
B	13 5/8" 5,000 psi	Annular
C	13 5/8" 5,000 psi	Pipe Ram
D	13 5/8" 5,000 psi	Blind Ram
E	13 5/8" 5,000 psi	Mud Cross
F		
DSA	As required for each hole size	
C-Sec		
B-Sec	13-5/8" 5K x 11" 5K	
A-Sec	13-3/8" SOW x 13-5/8" 5K	

### Kill Line

SIZE	PRESSURE	DESCRIPTION
2"	5,000 psi	Gate Valve
2"	5,000 psi	Gate Valve
2"	5,000 psi	Check Valve

### Choke Line

SIZE	PRESSURE	DESCRIPTION
3"	5,000 psi	Gate Valve
3"	5,000 psi	HCR Valve

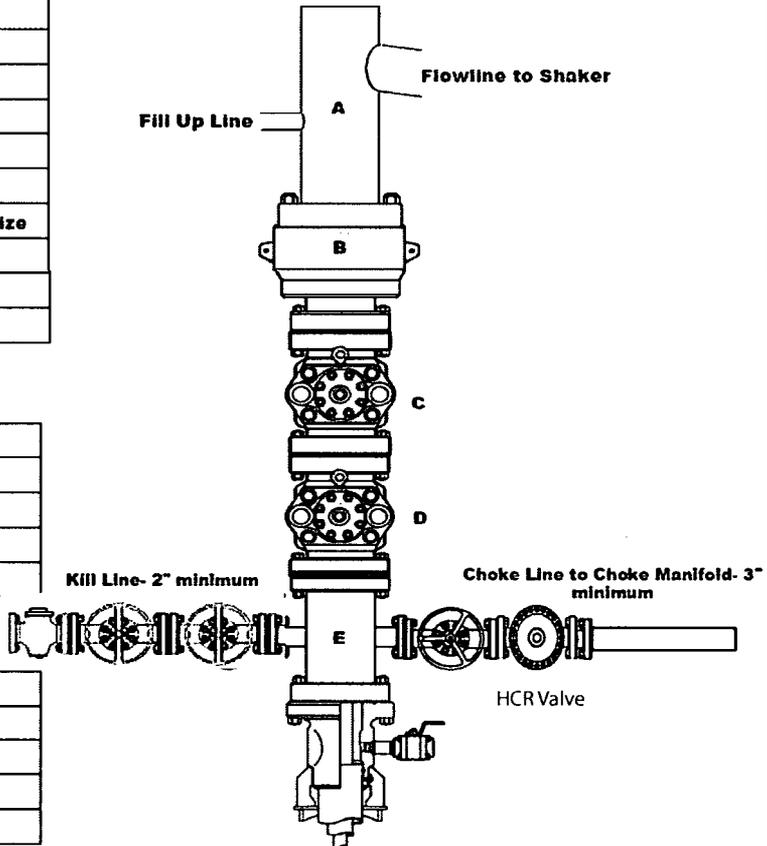

### Installation Checklist

The following item must be verified and checked off prior to pressure testing of BOP equipment.

- The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- All valves on the kill line and choke line will be full opening and will allow straight through flow.
- The kill line and choke line will be straight unless turns use tee blocks or are targeted with running tees, and will be anchored to prevent whip and reduce vibration.
- Manual (hand wheels) or automatic locking devices will be installed on all ram preventers. Hand wheels will also be installed on all manual valves on the choke line and kill line.
- A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will remain open unless accumulator is inoperative.
- Upper kelly cock valve with handle will be available on rig floor along with safety valve and subs to fit all drill string connections in use.

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer

**Wellname:** \_\_\_\_\_

**Representative:** \_\_\_\_\_

**Date:** \_\_\_\_\_

# BLOWOUT PREVENTOR SCHEMATIC

## Minimum Requirements

**OPERATION** : Production Hole Section

**Minimum System Pressure Rating** : 10,000 psi


SIZE	PRESSURE	DESCRIPTION
A	N/A	Bell Nipple
B	13 5/8" 10,000 psi	Annular
C	13 5/8" 10,000 psi	Pipe Ram
D	13 5/8" 10,000 psi	Blind Ram
E	13 5/8" 10,000 psi	Mud Cross
F		
DSA	As required for each hole size	
C-Sec	13-5/8" 10K	
B-Sec	13-5/8" 10K x 13-5/8" 5K	
A-Sec	13-3/8" SOW x 13-5/8" 5K	

### Kill Line

SIZE	PRESSURE	DESCRIPTION
2"	10,000 psi	Gate Valve
2"	10,000 psi	Gate Valve
2"	10,000 psi	Check Valve

### Choke Line

SIZE	PRESSURE	DESCRIPTION
3"	10,000 psi	Gate Valve
3"	10,000 psi	HCR Valve

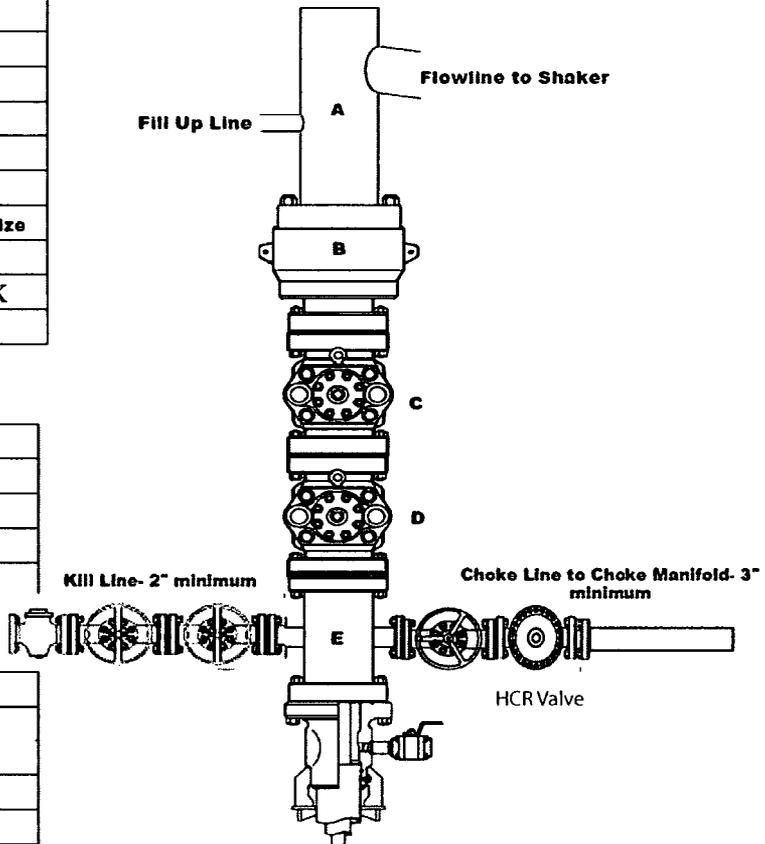

### Installation Checklist

The following item must be verified and checked off prior to pressure testing of BOP equipment.

- The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- All valves on the kill line and choke line will be full opening and will allow straight through flow.
- The kill line and choke line will be straight unless turns use tee blocks or are targeted with running tees, and will be anchored to prevent whip and reduce vibration.
- Manual (hand wheels) or automatic locking devices will be installed on all ram preventers. Hand wheels will also be installed on all manual valves on the choke line and kill line.
- A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will remain open unless accumulator is inoperative.
- Upper kelly cock valve with handle will be available on rig floor along with safety valve and subs to fit all drill string connections in use.

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer

**Wellname:** \_\_\_\_\_

**Representative:** \_\_\_\_\_

**Date:** \_\_\_\_\_

# BOPE Testing

## Minimum Requirements

### Closing Unit and Accumulator Checklist

The following item must be performed, verified, and checked off at least once per well prior to low/high pressure testing of BOP equipment. This must be repeated after 6 months on the same well.

- Precharge pressure for each accumulator bottle must fall within the range below. Bottles may be further charged with nitrogen gas only. Tested precharge pressures must be recorded for each individual bottle and kept on location through the end of the well. Test will be conducted prior to connecting unit to BOP stack.

Check one that applies	Accumulator working pressure rating	Minimum acceptable operating pressure	Desired precharge pressure	Maximum acceptable precharge pressure	Minimum acceptable precharge pressure
<input type="checkbox"/>	1500 psi	1500 psi	750 psi	800 psi	700 psi
<input type="checkbox"/>	2000 psi	2000 psi	1000 psi	1100 psi	900 psi
<input type="checkbox"/>	3000 psi	3000 psi	1000 psi	1100 psi	900 psi

- Accumulator will have sufficient capacity to open the hydraulically-controlled choke line valve (if used), close all rams, close the annular preventer, and retain a minimum of 200 psi above the maximum acceptable precharge pressure (see table above) on the closing manifold without the use of the closing pumps. This test will be performed with test pressure recorded and kept on location through the end of the well.
- Accumulator fluid reservoir will be double the usable fluid volume of the accumulator system capacity. Fluid level will be maintained at manufacturer's recommendations. Usable fluid volume will be recorded. Reservoir capacity will be recorded. Reservoir fluid level will be recorded along with manufacturer's recommendation. All will be kept on location through the end of the well.
- Closing unit system will have two independent power sources (not counting accumulator bottles) to close the preventers.
- Power for the closing unit pumps will be available to the unit at all times so that the pumps will automatically start when the closing valve manifold pressure decreases to the pre-set level. It is recommended to check that air line to accumulator pump is "ON" during each tour change.
- With accumulator bottles isolated, closing unit will be capable of opening the hydraulically-operated choke line valve (if used) plus close the annular preventer on the smallest size drill pipe within 2 minutes and obtain a minimum of 200 psi above maximum acceptable precharge pressure (see table above) on the closing manifold. Test pressure and closing time will be recorded and kept on location through the end of the well.
- Master controls for the BOPE system will be located at the accumulator and will be capable of opening and closing all preventer and the choke line valve (if used)
- Remote controls for the BOPE system will be readily accessible (clear path) to the driller and located on the rig floor (not in the dog house). Remote controls will be capable of closing all preventers.
- Record accumulator tests in drilling reports and IADC sheet

### BOPE Test Checklist

The following item must be checked off prior to beginning test

- BLM will be given at least 4 hour notice prior to beginning BOPE testing
- Valve on casing head below test plug will be open
- Test will be performed using clear water.

The following item must be performed during the BOPE testing and then checked off

- BOPE will be pressure tested when initially installed, whenever any seal subject to test pressure is broken, following related repairs, and at a minimum of 30 days intervals. Test pressure and times will be recorded by a 3<sup>rd</sup> party on a test chart and kept on location through the end of the well.
- Test plug will be used
- Ram type preventer and all related well control equipment will be tested to 250 psi (low) and 5,000 psi (high).
- Annular type preventer will be tested to 250 psi (low) and 3,500 psi (high).
- Valves will be tested from the working pressure side with all down stream valves open. The check valve will be held open to test the kill line valve(s)
- Each pressure test will be held for 10 minutes with no allowable leak off.
- Master controls and remote controls to the closing unit (accumulator) must be function tested as part of the BOP testing
- Record BOP tests and pressures in drilling reports and IADC sheet

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer along with any/all BOP and accumulator test charts and reports from 3<sup>rd</sup> parties.

Wellname: \_\_\_\_\_

Representative: \_\_\_\_\_

Date: \_\_\_\_\_

# BLOWOUT PREVENTOR SCHEMATIC

## Minimum Requirements

**OPERATION** : Intermediate & Production Hole Section

**Minimum System Pressure Rating** : 5,000 psi


SIZE	PRESSURE	DESCRIPTION
A	N/A	Bell Nipple
B	13 5/8" 5,000 psi	Annular
C	13 5/8" 5,000 psi	Pipe Ram
D	13 5/8" 5,000 psi	Blind Ram
E	13 5/8" 5,000 psi	Mud Cross
F		
DSA	As required for each hole size	
C-Sec		
B-Sec	13-5/8" 5K x 11" 5K	
A-Sec	13-3/8" SOW x 13-5/8" 5K	

### Kill Line

SIZE	PRESSURE	DESCRIPTION
2"	5,000 psi	Gate Valve
2"	5,000 psi	Gate Valve
2"	5,000 psi	Check Valve

### Choke Line

SIZE	PRESSURE	DESCRIPTION
3"	5,000 psi	Gate Valve
3"	5,000 psi	HCR Valve

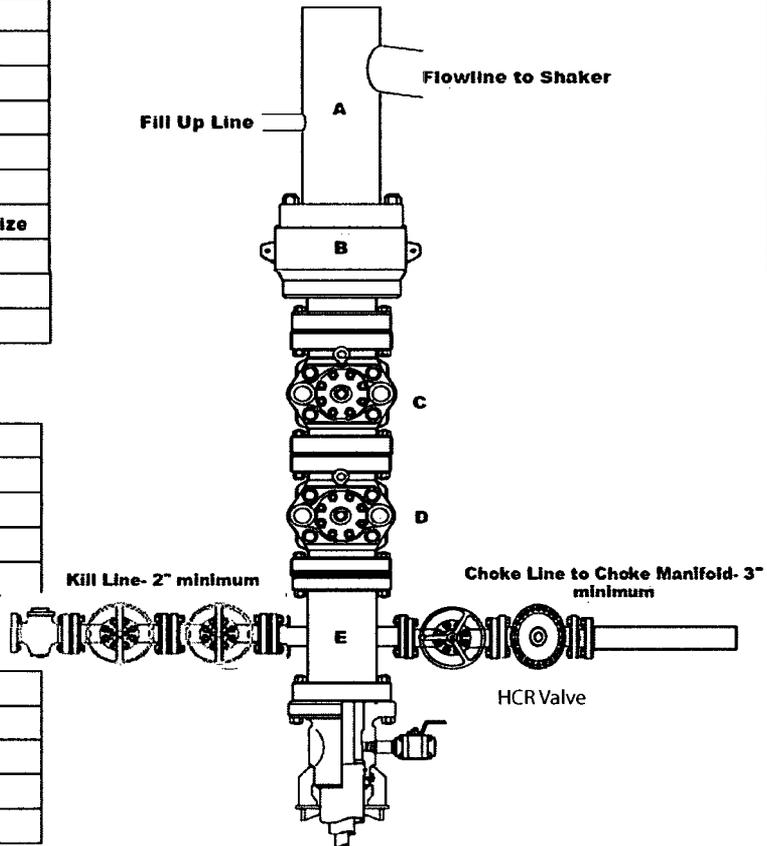

### Installation Checklist

The following item must be verified and checked off prior to pressure testing of BOP equipment.

- The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- All valves on the kill line and choke line will be full opening and will allow straight through flow.
- The kill line and choke line will be straight unless turns use tee blocks or are targeted with running tress, and will be anchored to prevent whip and reduce vibration.
- Manual (hand wheels) or automatic locking devices will be installed on all ram preventers. Hand wheels will also be installed on all manual valves on the choke line and kill line.
- A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will remain open unless accumulator is inoperative.
- Upper kelly cock valve with handle will be available on rig floor along with safety valve and subs to fit all drill string connections in use.

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer

**Wellname:** \_\_\_\_\_

**Representative:** \_\_\_\_\_

**Date:** \_\_\_\_\_

# BOPE Testing

## Minimum Requirements

### Closing Unit and Accumulator Checklist

The following item must be performed, verified, and checked off at least once per well prior to low/high pressure testing of BOP equipment. This must be repeated after 6 months on the same well.

- Precharge pressure for each accumulator bottle must fall within the range below. Bottles may be further charged with nitrogen gas only. Tested precharge pressures must be recorded for each individual bottle and kept on location through the end of the well. Test will be conducted prior to connecting unit to BOP stack.

Check one that applies	Accumulator working pressure rating	Minimum acceptable operating pressure	Desired precharge pressure	Maximum acceptable precharge pressure	Minimum acceptable precharge pressure
<input type="checkbox"/>	1500 psi	1500 psi	750 psi	800 psi	700 psi
<input type="checkbox"/>	2000 psi	2000 psi	1000 psi	1100 psi	900 psi
<input type="checkbox"/>	3000 psi	3000 psi	1000 psi	1100 psi	900 psi

- Accumulator will have sufficient capacity to open the hydraulically-controlled choke line valve (if used), close all rams, close the annular preventer, and retain a minimum of 200 psi above the maximum acceptable precharge pressure (see table above) on the closing manifold without the use of the closing pumps. This test will be performed with test pressure recorded and kept on location through the end of the well
- Accumulator fluid reservoir will be double the usable fluid volume of the accumulator system capacity. Fluid level will be maintained at manufacturer's recommendations. Usable fluid volume will be recorded. Reservoir capacity will be recorded. Reservoir fluid level will be recorded along with manufacturer's recommendation. All will be kept on location through the end of the well.
- Closing unit system will have two independent power sources (not counting accumulator bottles) to close the preventers.
- Power for the closing unit pumps will be available to the unit at all times so that the pumps will automatically start when the closing valve manifold pressure decreases to the pre-set level. It is recommended to check that air line to accumulator pump is "ON" during each tour change.
- With accumulator bottles isolated, closing unit will be capable of opening the hydraulically-operated choke line valve (if used) plus close the annular preventer on the smallest size drill pipe within 2 minutes and obtain a minimum of 200 psi above maximum acceptable precharge pressure (see table above) on the closing manifold. Test pressure and closing time will be recorded and kept on location through the end of the well.
- Master controls for the BOPE system will be located at the accumulator and will be capable of opening and closing all preventer and the choke line valve (if used)
- Remote controls for the BOPE system will be readily accessible (clear path) to the driller and located on the rig floor (not in the dog house). Remote controls will be capable of closing all preventers.
- Record accumulator tests in drilling reports and IADC sheet

### BOPE Test Checklist

The following item must be checked off prior to beginning test

- BLM will be given at least 4 hour notice prior to beginning BOPE testing
- Valve on casing head below test plug will be open
- Test will be performed using clear water.

The following item must be performed during the BOPE testing and then checked off

- BOPE will be pressure tested when initially installed, whenever any seal subject to test pressure is broken, following related repairs, and at a minimum of 30 days intervals. Test pressure and times will be recorded by a 3<sup>rd</sup> party on a test chart and kept on location through the end of the well.
- Test plug will be used
- Ram type preventer and all related well control equipment will be tested to 250 psi (low) and 5,000 psi (high).
- Annular type preventer will be tested to 250 psi (low) and 3,500 psi (high).
- Valves will be tested from the working pressure side with all down stream valves open. The check valve will be held open to test the kill line valve(s)
- Each pressure test will be held for 10 minutes with no allowable leak off.
- Master controls and remote controls to the closing unit (accumulator) must be function tested as part of the BOP testing
- Record BOP tests and pressures in drilling reports and IADC sheet

After installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer along with any/all BOP and accumulator test charts and reports from 3<sup>rd</sup> parties.

Wellname: \_\_\_\_\_

Representative: \_\_\_\_\_

Date: \_\_\_\_\_

January 08 2015

**Size:** 5.500 in.**Wall:** 0.304 in.**Connection:** TenarisXP™ BTC**Weight:** 17.00 lbs/ft**Casing/Tubing:** CAS**Grade:** P110-IC**Coupling Option:** REGULAR API**Min. Wall Thickness:** 87.5 %

## PIPE BODY DATA

GEOMETRY			
Nominal OD	<b>5.500 in.</b>	Nominal Weight	<b>17.00 lbs/ft</b>
Nominal ID	<b>4.892 in.</b>	Wall Thickness	<b>0.304 in.</b>
Plain End Weight	<b>16.89 lbs/ft</b>	Standard Drift Diameter	<b>4.767 in.</b>
		Special Drift Diameter	<b>N/A</b>
PERFORMANCE			
Body Yield Strength	<b>546 x 1000 lbs</b>	Internal Yield	<b>10640 psi</b>
Collapse	<b>8610 psi</b>	SMYS	<b>110000 psi</b>

## TENARISXP™ BTC CONNECTION DATA

GEOMETRY			
Connection OD	<b>6.300 in.</b>	Coupling Length	<b>9.450 in.</b>
Critical Section Area	<b>4.962 sq. in.</b>	Threads per in.	<b>5.00</b>
		Connection ID	<b>4.880 in.</b>
		Make-Up Loss	<b>4.204 in.</b>
PERFORMANCE			
Tension Efficiency	<b>100 %</b>	Joint Yield Strength	<b>546 x 1000 lbs</b>
Structural Compression Efficiency	<b>100 %</b>	Structural Compression Strength	<b>546 x 1000 lbs</b>
External Pressure Capacity	<b>8610 psi</b>	Internal Pressure Capacity <sup>(1)</sup>	<b>10640 psi</b>
		Structural Bending <sup>(2)</sup>	<b>92 °/100 ft</b>

ESTIMATED MAKE-UP TORQUES<sup>(3)</sup>

Minimum	<b>9740 ft-lbs</b>	Target	<b>10820 ft-lbs</b>	Maximum	<b>11900 ft-lbs</b>
---------	--------------------	--------	---------------------	---------	---------------------

## OPERATIONAL LIMIT TORQUES

Operating Torque	<b>11900 ft-lbs</b>	Yield Torque	<b>12900 ft-lbs</b>
------------------	---------------------	--------------	---------------------

## BLANKING DIMENSIONS

## Blanking Dimensions

tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
		870	
		3530	
		4757	
		4830	
		5720	
		7110	
imestone		8730	
		8840	
ng 1		9720	
ng 2		10357	
get TVD		10738	18,060

### DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations to be encountered are as follows:

Formation	Depth
Expected Base of Fresh Water	750
Rustler	870
Bell Canyon	4830
Cherry Canyon	5720
Brushy Canyon	7110
Bone Spring Limestone	8730
Upr. Avalon	8840
Top Bone Spring 1	9720
Top Bone Spring 2	10357
Estimated Target TVD	10738

fresh water and minerals will be reported and protected.

### COMMENT

Minimum of a 5000 psi rig stack (see proposed schematic) for drill out below surface casing. Stack will be verified in the attached testing requirements. Batch drilling of the surface, intermediate, and production will full BOP test will be performed unless approval from BLM is received otherwise.

Requests a variance to use a FMC UHS Multibowl wellhead, which will be run through the rig floor on surface will be nipped up and tested after cementing surface casing. Subsequent tests will be performed as long as they do not exceed 30 days. The field report from FMC and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on the BLM office and remains unchanged from previous submittal.

	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	900'	17-1/2"	13-3/8"	55 #	J55	STC	New
Intermediate	0'	4,880'	12-1/4"	9-5/8"	43.5#	L80	LTC	New
Production	0'	18,060'	8-1/2"	5-1/2"	20.0 #	P-110	TXP BTC	New

using design subject to revision based on geologic conditions encountered.

A "Worst Case" casing design for wells in a particular area is used below to calculate the Casing Safety Factors. If for any reason the casing design for a particular well requires setting casing deeper than the following "worst case" design, then the Casing Safety Factors will be recalculated and sent to the BLM prior to drilling.

Nevron will fill casing at a minimum of every 20 jts (840') while running for intermediate and production casing in order to maintain collapse SF.

Calculations based on the following "Worst Case" casing design:

Surface Casing: 900'  
Intermediate Casing: 4,790' TVD  
Production Casing: 18,060' MD/10,738' TVD (7,810' VS @ 90 deg inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	5.46	2.84	5.94	4.92
Intermediate	2.19	4.31	3.51	2.69
Production	1.11	2.10	2.16	1.29

Min SF is the smallest of a group of safety factors that include the following considerations:

Worst Design	Surf	Int	Prod
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Replace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Fracture at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 11.4 ppg Frac Gradient		X	
Simulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Sealing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
<b>Wellbore Collapse Design</b>			
Well Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Grout Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
<b>Wellbore Tension Design</b>			
10k lb overpull	X	X	X

## GRAM

To	Type	Weight	F. Vis	Filtrate
900'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
1,880'	Brine	9.5 - 10.2	28 - 30	NC - NC
3,060'	Oil Based Mud	8.3 - 9.6	70 - 75	15 - 25

closed system will be utilized consisting of above ground steel tanks. All wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to approved sanitary landfill.

fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations.

mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH.

Surface mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated -- a pit volume totalizer (PVT), stroke counter, and flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume.

Weighting agent and lost circulating material (LCM) will be onsite to mitigate pressure or lost circulation hole conditions dictate.

## LOGGING, AND CORING

The anticipated type and amount of testing, logging, and coring are as follows:

Drill stem tests are not planned.

The logging program will be as follows:

Logs	Interval	Timing	Vendor
Formation mudlog	Int Csg to TD	Drillout of Int Csg	TBD
ND Gamma	Int. and Prod. Hole	While Drilling	TBD

Conventional whole core samples are not planned.

A Directional Survey will be run.

## WELL PRESSURES AND HYDROGEN SULFIDE

No abnormal pressures or temperatures are expected. Estimated BHP is: 5906 psi  
Hydrogen sulfide gas is not anticipated. An H2S Contingency plan is attached with this APD in the event that H2S is encountered

APD ID: 10400030012

Submission Date: 05/08/2018

Highlighted data  
reflects the most  
recent changes

Operator Name: CHEVRON USA INCORPORATED

Well Name: CO GRIZZLY 3 27 FED

Well Number: 0057H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

### Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

Cotton\_Draw\_Grizzly\_Pad\_Aerial\_Detail\_20180504085023.pdf

CO\_Grizzly\_3\_34\_Fed\_0057H\_Road\_Plat\_20180508085250.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? YES

**Existing Road Improvement Description:** The operator will improve or maintain existing roads in a condition the same as or better than before operations begin. The operator will repair pot holes, clear ditches, repair the crown, etc. All existing structures on the entire access route such as cattle guards, other range improvement projects, culverts, etc. will be properly repaired or replaced if they are damaged or have deteriorated beyond practical use. We will prevent and abate fugitive dust as needed, whether created by vehicular traffic, equipment operations, or wind events. BLM written approval will be acquired before application of surfactants, binding agents, or other dust suppression chemicals on roadways.

**Existing Road Improvement Attachment:**

### Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

Cotton\_Draw\_Grizzly\_Pad\_Aerial\_Detail\_20180504090827.pdf

CO\_Grizzly\_3\_34\_Fed\_0057H\_New\_Road\_Plat\_20180508085345.pdf

New road type: LOCAL

Length: 7174.39

Feet

Width (ft.): 25

Max slope (%): 2

Max grade (%): 3

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 25

**New road access erosion control:** Proper erosion control methods will be used on the area to control erosion, runoff and filtration of the surrounding area. See surface use plat.

**New road access plan or profile prepared?** NO

**New road access plan attachment:**

**Access road engineering design?** NO

**Access road engineering design attachment:**

**Access surfacing type:** OTHER

**Access topsoil source:** ONSITE

**Access surfacing type description:** Caliche

**Access onsite topsoil source depth:** 0

**Offsite topsoil source description:**

**Onsite topsoil removal process:** None needed

**Access other construction information:**

**Access miscellaneous information:**

**Number of access turnouts:**

**Access turnout map:**

### Drainage Control

**New road drainage crossing:** OTHER

**Drainage Control comments:** Ditching will be constructed on both sides of the road.

**Road Drainage Control Structures (DCS) description:** Ditching will be constructed on both sides of the road.

**Road Drainage Control Structures (DCS) attachment:**

### Access Additional Attachments

**Additional Attachment(s):**

### Section 3 - Location of Existing Wells

**Existing Wells Map?** YES

**Attach Well map:**

CO\_Grizzly\_3\_27\_FED\_005\_7H\_1mi\_Radius\_20180508085530.pdf

**Existing Wells description:**

### Section 4 - Location of Existing and/or Proposed Production Facilities

**Submit or defer a Proposed Production Facilities plan?** SUBMIT

**Production Facilities description:** See Surface Use Plat

**Production Facilities map:**

- Cotton\_Draw\_Frac\_Pond\_Sec\_9\_Contour\_Detail\_20180504093721.pdf
- Cotton\_Draw\_CTB\_\_CS\_Sec\_3\_Surface\_Use\_Plat\_20180504093449.pdf
- Cotton\_Draw\_Frac\_Pond\_Sec\_9\_SUP\_20180504093647.pdf
- Cotton\_Draw\_Grizzly\_Pad\_EDS\_Line\_20180508085553.pdf
- Cotton\_Draw\_Grizzly\_Pad\_Gas\_Lift\_Line\_20180508085606.pdf
- Cotton\_Draw\_Grizzly\_Pad\_Flowlines\_20180508085708.pdf

### Section 5 - Location and Types of Water Supply

#### Water Source Table

**Water source use type:** INTERMEDIATE/PRODUCTION CASING, STIMULATION, SURFACE CASING

**Water source type:** OTHER

**Describe type:** Frac pond, private water source

**Source latitude:**

**Source longitude:**

**Source datum:**

**Water source permit type:** PRIVATE CONTRACT

**Source land ownership:** FEDERAL

**Water source transport method:** PIPELINE,TRUCKING

**Source transportation land ownership:** FEDERAL

**Water source volume (barrels):** 70000

**Source volume (acre-feet):** 9.022516

**Source volume (gal):** 2940000

#### Water source and transportation map:

- Cotton\_Draw\_Frac\_Pond\_Sec\_9\_Contour\_Detail\_20180504095739.pdf
- Cotton\_Draw\_Frac\_Pond\_Sec\_9\_SUP\_20180504095728.pdf
- Cotton\_Draw\_Grizzly\_Pad\_Temp\_Water\_Line\_20180504095638.pdf

**Water source comments:** A proposed Frac Pond will be in the NE4 of Sec. 9, T25S-R32E and will be utilized for fresh water and recycled water. Fresh water will be obtained from a private water source. A temporary 10" expanding pipe water transfer line will run west and north along the lease road approximately 7,229.42' from the proposed frac pond to the proposed well location in Section 3. Fresh water line will run parallel to road and will stay within 10' of access road. This will cross lease lines and a BLM ROW will be required for the water transfer line.

**New water well?** NO

#### New Water Well Info

**Well latitude:**

**Well Longitude:**

**Well datum:**

**Well target aquifer:**

**Est. depth to top of aquifer(ft):**

**Est thickness of aquifer:**

**Aquifer comments:**

**Aquifer documentation:**

**Well depth (ft):**

**Well casing type:**

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

**Section 6 - Construction Materials**

**Construction Materials description:** Caliche will be used to construct well pad and roads. Material will be purchased from the private land owners (Oliver Kiehne) or the caliche pit located in Sec 27, T26, R33E, Lea County, NM. The proposed source of construction material will be located and purchased by Chevron U.S.A. Inc. Notification shall be given to BLM at (575) 234-5909 at least 3 working days prior to commencing construction of access road and/or well pad.

**Construction Materials source location attachment:**

**Section 7 - Methods for Handling Waste**

**Waste type:** GARBAGE

**Waste content description:** Garbage and trash

**Amount of waste:** 200 pounds

**Waste disposal frequency :** Daily

**Safe containment description:** Waste produced will be collected in a trash container and disposed of properly at a state approved disposal facility. All trash on and around the well site will be collected for disposal.

**Safe containmant attachment:**

**Waste disposal type:** HAUL TO COMMERCIAL FACILITY      **Disposal location ownership:** STATE

**Disposal type description:**

**Disposal location description:** State approved facility

**Reserve Pit**

**Reserve Pit being used?** NO

**Temporary disposal of produced water into reserve pit?**

**Reserve pit length (ft.)**      **Reserve pit width (ft.)**

**Reserve pit depth (ft.)**      **Reserve pit volume (cu. yd.)**

**Is at least 50% of the reserve pit in cut?**

**Reserve pit liner**

**Reserve pit liner specifications and installation description**

**Cuttings Area**

**Cuttings Area being used?** NO

**Are you storing cuttings on location?** NO

**Description of cuttings location**

**Cuttings area length (ft.)**

**Cuttings area width (ft.)**

**Cuttings area depth (ft.)**

**Cuttings area volume (cu. yd.)**

**Is at least 50% of the cuttings area in cut?**

**WCuttings area liner**

**Cuttings area liner specifications and installation description**

**Section 8 - Ancillary Facilities**

**Are you requesting any Ancillary Facilities?:** NO

**Ancillary Facilities attachment:**

**Comments:**

**Section 9 - Well Site Layout**

**Well Site Layout Diagram:**

CO\_Grizzly\_3\_34\_Fed\_0057H\_Well\_Plat\_20180508085942.pdf

CO\_Grizzly\_3\_27\_FED\_005\_7H\_Pad\_Rig\_Layout\_20180508090008.pdf

**Comments:** Exterior well pad dimensions are 380' x 520'. Interior well pad dimensions from point of entry (well head) of the easternmost well are N-120', S-260', E-210', W-310'. The length to the west includes 25' spacing for next well on multi-well pad (five wells). Total disturbance area needed for construction of well pad will be 4.54 acres. Topsoil placement is on the east where interim reclamation is planned to be completed upon completion of well and evaluation of best management practices.

**Section 10 - Plans for Surface Reclamation**

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: CO GRIZZLY 3 27 FED

Multiple Well Pad Number: 0051H 0052H 0055H 0057H 00510H

**Recontouring attachment:**

Cotton\_Draw\_Grizzly\_Surface\_Use\_Plat\_20180504111703.pdf

Cotton\_Draw\_Frac\_Pond\_Sec\_9\_SUP\_20180504102415.pdf

Cotton\_Draw\_Grizzly\_Pad\_IR\_Plat\_20180508090116.pdf

Cotton\_Draw\_CS\_Cut\_\_Fill\_20180508090138.pdf

CO\_GRIZZLY\_3\_27\_Fed\_0057H\_APD\_SUPO\_20180508090150.pdf

**Drainage/Erosion control construction:** Proper erosion control methods will be used on the area to control erosion, runoff and filtration of the surrounding area.

**Drainage/Erosion control reclamation:** Prior to final reclamation procedures, the well pad, road, and surrounding area will be cleared of material, trash, and equipment. After all the disturbed areas have been properly prepared; the areas will be seeded with the proper BLM seed mixture (BLM #2), free of noxious weeds.

<b>Well pad proposed disturbance (acres):</b> 4.54	<b>Well pad interim reclamation (acres):</b> 1.95	<b>Well pad long term disturbance (acres):</b> 2.59
<b>Road proposed disturbance (acres):</b> 2.97	<b>Road interim reclamation (acres):</b> 2.97	<b>Road long term disturbance (acres):</b> 2.97
<b>Powerline proposed disturbance (acres):</b> 2.41	<b>Powerline interim reclamation (acres):</b> 2.41	<b>Powerline long term disturbance (acres):</b> 2.41
<b>Pipeline proposed disturbance (acres):</b> 2.02	<b>Pipeline interim reclamation (acres):</b> 2.02	<b>Pipeline long term disturbance (acres):</b> 2.02
<b>Other proposed disturbance (acres):</b> 13.94	<b>Other interim reclamation (acres):</b> 13.94	<b>Other long term disturbance (acres):</b> 13.94
<b>Total proposed disturbance:</b> 25.88	<b>Total interim reclamation:</b> 23.29	<b>Total long term disturbance:</b> 23.93

**Disturbance Comments:**

**Reconstruction method:** All surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads. All disturbed areas, including roads, pipelines, pads, production facilities, and interim reclaimed areas will be recontoured to the contour existing prior to initial construction or a contour that blends in distinguishably with the surrounding landscape.

**Topsoil redistribution:** Topsoil that was spread over the interim reclamation areas will be stockpiled prior to recontouring. The topsoil will be redistributed evenly over the entire disturbed site to ensure successful revegetation.

**Soil treatment:** Will seed the area the proper BLM mixture free of noxious weeds.

**Existing Vegetation at the well pad:** Mesquite Shrubs and grass

**Existing Vegetation at the well pad attachment:**

**Existing Vegetation Community at the road:** Mesquite Shrubs and grass

**Existing Vegetation Community at the road attachment:**

**Existing Vegetation Community at the pipeline:** Mesquite Shrubs and grass

**Existing Vegetation Community at the pipeline attachment:**

**Existing Vegetation Community at other disturbances: Mesquite Shrubs and grass**

**Existing Vegetation Community at other disturbances attachment:**

**Non native seed used? NO**

**Non native seed description:**

**Seedling transplant description:**

**Will seedlings be transplanted for this project? NO**

**Seedling transplant description attachment:**

**Will seed be harvested for use in site reclamation? NO**

**Seed harvest description:**

**Seed harvest description attachment:**

**Seed Management**

**Seed Table**

**Seed type:**

**Seed source:**

**Seed name:**

**Source name:**

**Source address:**

**Source phone:**

**Seed cultivar:**

**Seed use location:**

**PLS pounds per acre:**

**Proposed seeding season:**

**Seed Summary**

**Total pounds/Acre:**

**Seed Type**

**Pounds/Acre**

**Seed reclamation attachment:**

**Operator Contact/Responsible Official Contact Info**

**First Name:**

**Last Name:**

**Phone:**

**Email:**

**Seedbed prep:**

**Seed BMP:**

**Seed method:**

**Existing invasive species?** NO

**Existing invasive species treatment description:**

**Existing invasive species treatment attachment:**

**Weed treatment plan description:** None needed

**Weed treatment plan attachment:**

**Monitoring plan description:** None needed

**Monitoring plan attachment:**

**Success standards:** N/A

**Pit closure description:** N/A

**Pit closure attachment:**

## **Section 11 - Surface Ownership**

**Disturbance type:** WELL PAD

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Operator Name:** CHEVRON USA INCORPORATED

**Well Name:** CO GRIZZLY 3 27 FED

**Well Number:** 0057H

**Disturbance type:** NEW ACCESS ROAD

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Disturbance type:** EXISTING ACCESS ROAD

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Operator Name:** CHEVRON USA INCORPORATED

**Well Name:** CO GRIZZLY 3 27 FED

**Well Number:** 0057H

**Disturbance type:** PIPELINE

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Disturbance type:** OTHER

**Describe:** Proposed frac pond, gas lift line, flowline

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Section 12 - Other Information**

Right of Way needed? YES

Use APD as ROW? YES

ROW Type(s): 281001 ROW - ROADS,288100 ROW – O&G Pipeline,289001 ROW- O&G Well Pad,FLPMA (Powerline),Other

**ROW Applications**

**SUPO Additional Information:** Power lines: A powerline, approximately 6,985.42, will be installed from the existing powerline running along the Orla Road in Section 10 and will be routed along the lease road to the proposed well site. This will cross lease lines and a ROW will be applied for through the BLM. All construction activity will be confined to the approved ROW. Power line will run parallel to the road and will stay within approved ROW. Exclosure fencing will be installed around open cellar to prevent livestock or large wildlife from being trapped after installation. Fencing will remain in place while no activity is present and until backfilling takes place. Erosion / Drainage: Drainage control system shall be constructed on the entire length of road by the use of any of the following: ditches, side hill out-sloping and in-sloping, lead-off ditches, culvert installation, or low water crossings.

Use a previously conducted onsite? YES

Previous Onsite information: On-site performed by BLM NRS: Paul Murphy 3/22/2018

**Other SUPO Attachment**

CO\_GRIZZLY\_3\_27\_Fed\_0057H\_APD\_SUPO\_20180508090444.pdf

**Section 1 - General**

**Would you like to address long-term produced water disposal? NO**

**Section 2 - Lined Pits**

**Would you like to utilize Lined Pit PWD options? NO**

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Lined pit PWD on or off channel:**

**Lined pit PWD discharge volume (bbl/day):**

**Lined pit specifications:**

**Pit liner description:**

**Pit liner manufacturers information:**

**Precipitated solids disposal:**

**Describe precipitated solids disposal:**

**Precipitated solids disposal permit:**

**Lined pit precipitated solids disposal schedule:**

**Lined pit precipitated solids disposal schedule attachment:**

**Lined pit reclamation description:**

**Lined pit reclamation attachment:**

**Leak detection system description:**

**Leak detection system attachment:**

**Lined pit Monitor description:**

**Lined pit Monitor attachment:**

**Lined pit: do you have a reclamation bond for the pit?**

**Is the reclamation bond a rider under the BLM bond?**

**Lined pit bond number:**

**Lined pit bond amount:**

**Additional bond information attachment:**

### **Section 3 - Unlined Pits**

**Would you like to utilize Unlined Pit PWD options? NO**

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Unlined pit PWD on or off channel:**

**Unlined pit PWD discharge volume (bbl/day):**

**Unlined pit specifications:**

**Precipitated solids disposal:**

**Describe precipitated solids disposal:**

**Precipitated solids disposal permit:**

**Unlined pit precipitated solids disposal schedule:**

**Unlined pit precipitated solids disposal schedule attachment:**

**Unlined pit reclamation description:**

**Unlined pit reclamation attachment:**

**Unlined pit Monitor description:**

**Unlined pit Monitor attachment:**

**Do you propose to put the produced water to beneficial use?**

**Beneficial use user confirmation:**

**Estimated depth of the shallowest aquifer (feet):**

**Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?**

**TDS lab results:**

**Geologic and hydrologic evidence:**

**State authorization:**

**Unlined Produced Water Pit Estimated percolation:**

**Unlined pit: do you have a reclamation bond for the pit?**

**Is the reclamation bond a rider under the BLM bond?**

**Unlined pit bond number:**

**Unlined pit bond amount:**

**Additional bond information attachment:**

### **Section 4 - Injection**

**Would you like to utilize Injection PWD options? NO**

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Injection PWD discharge volume (bbl/day):**

**Injection well mineral owner:**

**Injection well number:**

**Injection well name:**

**Assigned injection well API number?**

**Injection well API number:**

**Injection well new surface disturbance (acres):**

**Minerals protection information:**

**Mineral protection attachment:**

**Underground Injection Control (UIC) Permit?**

**UIC Permit attachment:**

### **Section 5 - Surface Discharge**

**Would you like to utilize Surface Discharge PWD options? NO**

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Surface discharge PWD discharge volume (bbl/day):**

**Surface Discharge NPDES Permit?**

**Surface Discharge NPDES Permit attachment:**

**Surface Discharge site facilities information:**

**Surface discharge site facilities map:**

### **Section 6 - Other**

**Would you like to utilize Other PWD options? NO**

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Other PWD discharge volume (bbl/day):**

**Other PWD type description:**

**Other PWD type attachment:**

**Have other regulatory requirements been met?**

**Other regulatory requirements attachment:**

**Bond Information**

**Federal/Indian APD: FED**

**BLM Bond number: CA0329**

**BIA Bond number:**

**Do you have a reclamation bond? NO**

**Is the reclamation bond a rider under the BLM bond?**

**Is the reclamation bond BLM or Forest Service?**

**BLM reclamation bond number:**

**Forest Service reclamation bond number:**

**Forest Service reclamation bond attachment:**

**Reclamation bond number:**

**Reclamation bond amount:**

**Reclamation bond rider amount:**

**Additional reclamation bond information attachment:**