

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised August 1, 2011

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-28267
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. 19552
7. Lease Name or Unit Agreement Name North Hobbs (G/SA) Unit
8. Well Number: 342
9. OGRID Number: 157984
10. Pool name or Wildcat Hobbs (G/SA)
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3631.6' (GL)

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other: Injector

2. Name of Operator
Occidental Permian Ltd.

3. Address of Operator
P.O. Box 4294, Houston, TX, 77210

4. Well Location
 Unit Letter O : 125 feet from the South line and 2750 feet from the West line
 Section 33 Township 18S Range 38E NMPM Lea County

Hobbs OGD
 JAN 25 2019
 RECEIVED

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- MIRU PU,
- RIH with open ended tbg, tag capped CIBP @ 3940', Cap it with 25 sxs of cement.
WOC & Tag @ 3900' or higher
- Circulate 12# Plugged mud,
- Pressure test casing to 500 psi
- Spot ~~100~~ ft of cmt at 2800' 2 5 5X
WOC and Tag @ 2700' or higher (Yates plug)
- Spot ~~100~~ ft of cmt at 1615' 2 5 5X
WOC and Tag @ 1515' or higher (Rustler / Csg shoe plug)
- Spot 300 ft of cmt at 300' and circulate to surface.
Top-off as necessary (Surface plug)
- Cut off wellhead and install dry hole marker (verify cement to surface all string) with labeling
- Clean up location, remove anchors

During this procedure we plan to use the closed-loop system with a steel tank and haul contents to the required disposal per ODC Rule 19.15.17

See Attached
 Conditions of Approval

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Production Engineer DATE 1/24/2019

Type or print name Carlos Restrepo E-mail address carlos_restrepo@oxy.com PHONE: 713-838-5772

For State Use Only

APPROVED BY: Kerry Fortner TITLE Compliance Officer A DATE 2-12-19
 Conditions of Approval (if any) 0

NHU 33-342

API# 30-025-28267

TWN 18-S; RNG 38-E
Prod- TA

Surface Plug

Spot 300' of cmt @ 300'
Top-off as necessary

Rustler / Csg Shoe Plug

Spot 100' of cmt @ 1615'
WOC and Tag @ 1515' or higher

Yates Plug

Spot 100' of cmt @ 2800'
WOC and Tag @ 2700' or higher


San Andres Plug

Spot 25 sx on top of Capped CIBP
WOC and Tag @ 3900' or higher

Perfs 4068' to 4256'

8 5/8" 24# @ 1565'
cmt'd w/650 sxs
TOC @ Surface (Circ.)

5 1/2" 14# @ 4380'
cmt'd w/725 sxs
TOC @ 100' (CBL.)

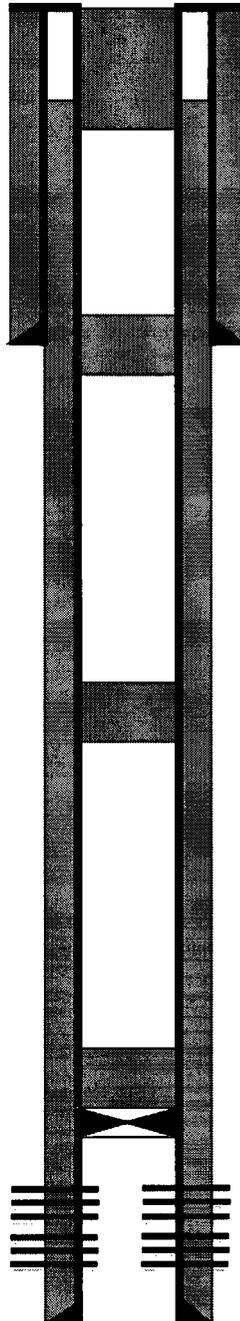


TD @ 4380
PBD @ 3940

NHU 33-342

API# 30-025-28267

TWN 18-S; RNG 38-E
Prod- TA

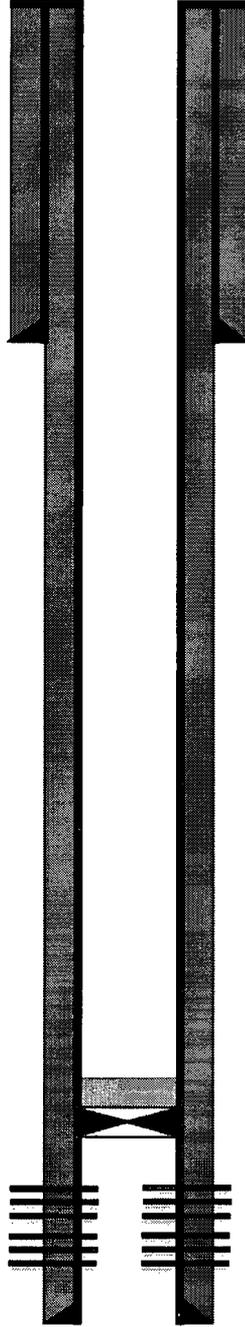

8 5/8" 24# @ 1565'
cmt'd w/650 sxs
TOC @ Surface (Circ.)

CIBP set @ 3975'
Capped w/ 4 sx of cmt. PBT @ 3940'

Perfs 4068' to 4256'

5 1/2" 14# @ 4380'
cmt'd w/725 sxs
TOC @ 100' (CBL.)

TD @ 4380
PBD @ 3940