

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

HOBBS OCD
MAR 11 2019

SUBMIT IN TRIPLICATE - Other instructions on page 2

RECEIVED

5. Lease Serial No. NMNM136226
6. If Indian, Allottee or Tribe Name
7. If Unit or CA/Agreement, Name and/or No.
8. Well Name and No. LESLIE FED COM 21H
9. API Well No. 30-025-44543-00-X1
10. Field and Pool or Exploratory Area DOGIE DRAW-DELAWARE
11. County or Parish, State LEA COUNTY, NM

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other	
2. Name of Operator MATADOR PRODUCTION COMPANYE-Mail: cade.labolt@matadorresources.com Contact: CADE LABOLT	
3a. Address 5400 LBJ FREEWAY SUITE 1500 DALLAS, TX 75240	3b. Phone No. (include area code) Ph: 972-629-2158
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 17 T25S R35E SWSW 295FSL 1102FWL 32.123955 N Lat, 103.394310 W Lon	

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input checked="" type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

BLM Bond No.:NMB0001079
Surety Bond: RLB0015172

Carlsbad Field Office
OCD Hobbs

Matador Request a change in the joint type for the following casing specifications. New Joint specs are below. Spec sheet is attached for the 5.5in casing is attached.

Hole Size: 8.75in; Casing O.D.: 5.5in; MD: 0-13952?; Joint: VAM DWC/C-IS HT Plus

All previous COA will be followed.

14. I hereby certify that the foregoing is true and correct.	
Electronic Submission #452967 verified by the BLM Well Information System For MATADOR PRODUCTION COMPANY, sent to the Hobbs Committed to AFMSS for processing by PRISCILLA PEREZ on 02/06/2019 (19PP0941SE)	
Name (Printed/Typed) BLAKE HERMES	Title DRILLING ENGINEER
Signature (Electronic Submission)	Date 02/04/2019

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <u>NDUNGU KAMAU</u>	Title PETROLEUM ENGINEER	Date 02/21/2019
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office Hobbs

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Ka

Revisions to Operator-Submitted EC Data for Sundry Notice #452967

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	CSG-ALTER NOI	CSG-ALTER NOI
Lease:	NMNM136226	NMNM136226
Agreement:		
Operator:	MATADOR PRODUCTION COMPANY 5400 LBJ FREEWAY SUITE 1500 DALLAS, TX 75240 Ph: 575-627-2465	MATADOR PRODUCTION COMPANY 5400 LBJ FREEWAY SUITE 1500 DALLAS, TX 75240 Ph: 972.371.5200
Admin Contact:	CADE LABOLT ASSOCIATE LANDMAN E-Mail: cade.labolt@matadorresources.com Ph: 972-629-2158	CADE LABOLT ASSOCIATE LANDMAN E-Mail: cade.labolt@matadorresources.com Ph: 972-629-2158
Tech Contact:	BLAKE HERMES DRILLING ENGINEER E-Mail: bhermes@matadorresources.com Ph: 972-371-5485	BLAKE HERMES DRILLING ENGINEER E-Mail: bhermes@matadorresources.com Ph: 972-371-5485
Location:		
State:	NM	NM
County:	LEA	LEA
Field/Pool:	DOGIE-DRAW DELAWARE	DOGIE DRAW-DELAWARE
Well/Facility:	LESLIE FED COM 021H Sec 17 T25S R35E Mer NMP SWSW 295FSL 1102FWL	LESLIE FED COM 21H Sec 17 T25S R35E SWSW 295FSL 1102FWL 32.123955 N Lat, 103.394310 W Lon

Connection Type:
DWC/C-HT-IS PLUS Casing
STANDARD

Size(O.D.):
5.500in

Weight (Wall):
20.00 lb./ft. (0.361in)

Grade:
P110RY

Material

P110RY Grade
110,000 Minimum Yield Strength (psi.)
125,000 Minimum Ultimate Strength (psi.)

Pipe Dimensions

5.500 Nominal Pipe Body O.D. (in.)
4.778 Nominal Pipe Body I.D.(in.)
0.361 Nominal Wall Thickness (in.)
20.00 Nominal Weight (lbs./ft.)
19.83 Plain End Weight (lbs./ft.)
5.828 Nominal Pipe Body Area (sq. in.)

Pipe Body Performance Properties

641,000 Minimum Pipe Body Yield Strength (lbs.)
11,100 Minimum Collapse Pressure (psi.)
12,640 Minimum Internal Yield Pressure (psi.)
11,600 Hydrostatic Test Pressure (psi.)

Connection Dimensions

6.300 Connection O.D. (in.)
4.778 Connection I.D. (in.)
4.653 Connection Drift Diameter (in.)
4.13 Make-up Loss (in.)
5.828 Critical Area (sq in.)
100.00 Joint Efficiency (%)

Connection Performance Properties


641,000 Joint Strength (lbs.)
22,890 Reference String Length (ft.) 1.4 Design Factor
667,000 API Joint Strength (lbs.)
641,000 Compression Rating (lbs.)
11,100 API Collapse Pressure Rating (psi.)
12,640 API Internal Pressure Resistance (psi.)
91.7 Maximum Uniaxial Bend Rating [degrees/100 ft]

Approximated Field End Torque Values

15,900 Minimum Final Torque (ft.-lbs.)
18,200 Maximum Final Torque (ft.-lbs.)
24,700 Connection Yield Torque (ft.-lbs.)



VAM USA
4424 W. Sam Houston Pkwy. Suite 150
Houston, TX 77041
Phone: 713-479-3200
Fax: 713-479-3234
E-mail: VAMUSAsales@vam-usa.com

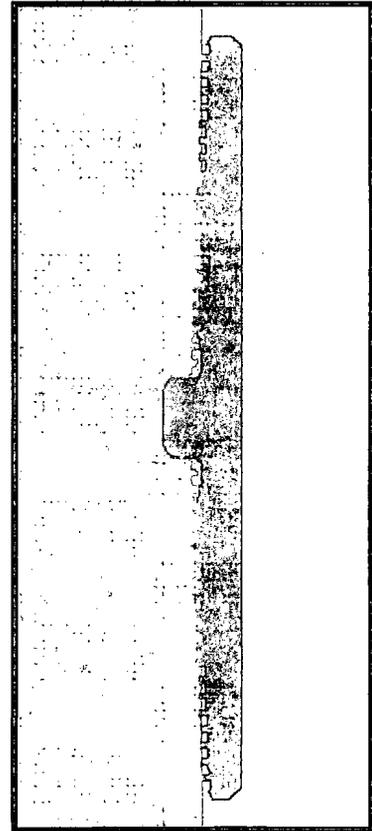

For detailed information on performance properties, refer to DWC Connection Data Notes on following page(s).

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.


All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

DWC Connection Data Notes:

1. DWC connections are available with a seal ring (SR) option.
2. All standard DWC/C connections are interchangeable for a give pipe OD. DWC connections are interchangeable with DWC/C-SR connections of the same OD and wall.
3. Connection performance properties are based on nominal pipe body and connection dimensions.
4. DWC connection internal and external pressure resistance is calculated using the API rating for buttress connections. API Internal pressure resistance is calculated from formulas 31, 32, and 35 in the API Bulletin 5C3.
5. DWC joint strength is the minimum pipe body yield strength multiplied by the connection critical area.
6. API joint strength is for reference only. It is calculated from formulas 42 and 43 in the API Bulletin 5C3.
7. Bending efficiency is equal to the compression efficiency.
8. The torque values listed are recommended. The actual torque required may be affected by field conditions such as temperature, thread compound, speed of make-up, weather conditions, etc.
9. Connection yield torque is not to be exceeded.
10. Reference string length is calculated by dividing the joint strength by both the nominal weight in air and a design factor (DF) of 1.4. These values are offered for reference only and do not include load factors such as bending, buoyancy, temperature, load dynamics, etc.
11. DWC connections will accommodate API standard drift diameters.



VAM USA
 4424 W. Sam Houston Pkwy. Suite 150
 Houston, TX 77041
 Phone: 713-479-3200
 Fax: 713-479-3234
 E-mail: VAMUSAsales@vam-usa.com

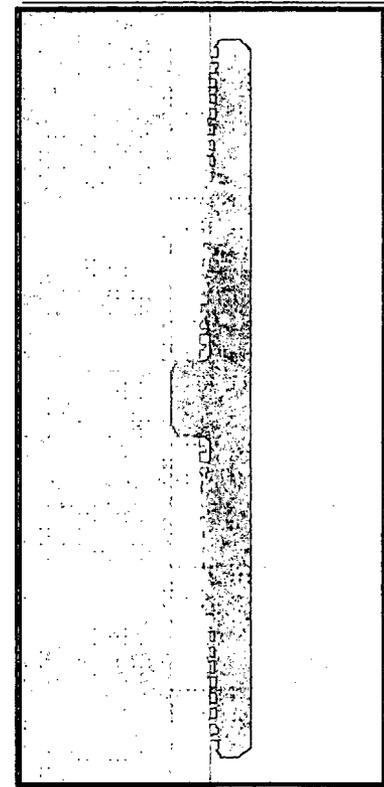

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.