
	UNITED STATES EPARTMENT OF THE INTERI	OR .		APPROVED NO. 1004-0137
B	UREAU OF LAND MANAGEMEN	arisban	5. Lease Serial No.	January 31, 2018
SUNDRY Do not use th	NOTICES AND REPORTS C is form for proposals to drill or II. Use form 3160-3 (APD) for s	to re-enter	LOL . 1 HACCOTE	or Tribe Name
			SBDDS	
SUBMIT IN	TRIPLICATE - Other Instruction	ns on page 2	7. If Unit or CA/Agr	eement, Name and/or No.
. Type of Well S Oil Well Gas Well Ot	her	rs on page 2 HOBES Y R LINK purces.com	Well Name and No CHEVRON 12 F	0. ED 05
MATADOR PRODUCTION C	Contact: TAMM OMPANYE-Mail: tlink@matadorreso	YRLINK	9. API Well No. 30-025-30682-	-00-S1
a. Address 5400 LBJ FREEWAY SUITE DALLAS, TX 75240	1500 3b. Ph Ph: 5	one No. (include area corc) 575-627-2465		r Exploratory Area E SPRING, NORTH
Location of Well (Footage, Sec., 7	., R., M., or Survey Description)		11. County or Parish	, State
Sec 12 T18S R32E SWNE 16	50FNL 1650FEL		LEA COUNTY	, NM
12. CHECK THE A	PPROPRIATE BOX(ES) TO IN	DICATE NATURE OI	F NOTICE, REPORT, OR OT	HER DATA
TYPE OF SUBMISSION		TYPE OF	ACTION	
□ Notice of Intent	🗖 Acidiže	Deepen	Production (Start/Resume)	U Water Shut-Off
_	□ Alter Casing	Hydraulic Fracturing	Reclamation	🖸 Well Integrity
Subsequent Report	Casing Repair	New Construction	🛛 Recomplete	Other
Final Abandonment Notice		Plug and Abandon	Temporarily Abandon	
	Convert to Injection	Plug Back	□ Water Disposal	
	pandonment Notices must be filed only a	multiple completion or recor fter all requirements, includi	ng reclamation, have been completed	and the operator has
determined that the site is ready for f BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo	andonment Notices must be filed only a inal inspection. 2 ne Spring perfs and recomplete i ill rods and tubing. ve top of upper most perf zone. I	fter all requirements, includi into Bone Spring Lime.	ng reclamation, have been completed	and the operator has
determined that the site is ready for for BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu	andonment Notices must be filed only a inal inspection. 2 ne Spring perfs and recomplete i ill rods and tubing. ve top of upper most perf zone. I op of CIBP. 50'-7,905'.	fter all requirements, includi into Bone Spring Lime.	ng reclamation, have been completed	and the operator has
determined that the site is ready for for BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo Spot 35' Class H cement on to Perf Bone Spring Lime: +/-7,7 Acidize Perfs and swab.	andonment Notices must be filed only a inal inspection. 2 ne Spring perfs and recomplete i ill rods and tubing. ve top of upper most perf zone. F op of CIBP. 50'-7,905'. +/-150k lbs sand.	fter all requirements, includi into Bone Spring Lime.	ng reclamation, have been completed	and the operator has
determined that the site is ready for f BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo Spot 35' Class H cement on to Perf Bone Spring Lime: +/-7,7 Acidize Perfs and swab. If good shows, frac perfs with See Attached Figure #3 (curre	andonment Notices must be filed only a inal inspection.	fter all requirements, includi into Bone Spring Lime. Pressure test.	ng reclamation, have been completed	and the operator has
determined that the site is ready for for BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo Spot 35' Class H cement on to Perf Bone Spring Lime: +/-7,7 Acidize Perfs and swab. If good shows, frac perfs with See Attached Figure #3 (currer 1. I hereby certify that the foregoing is	andonment Notices must be filed only a inal inspection.	fter all requirements, includi into Bone Spring Lime. Pressure test. verified by the BLM Well	ng reclamation, have been completed	and the operator has
determined that the site is ready for for BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo Spot 35' Class H cement on to Perf Bone Spring Lime: +/-7,7 Acidize Perfs and swab. If good shows, frac perfs with See Attached Figure #3 (currer 4. 1 hereby certify that the foregoing is	andonment Notices must be filed only a inal inspection.	tter all requirements, includi into Bone Spring Lime. Pressure test. Pressure test. Sprifted by the BLM Well TION COMPANY, sent to Sp PRISCILLA PEREZ on	ng reclamation, have been completed	and the operator has
determined that the site is ready for f BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo Spot 35' Class H cement on to Perf Bone Spring Lime: +/-7,7 Acidize Perfs and swab. If good shows, frac perfs with See Attached Figure #3 (currer 4. I hereby certify that the foregoing is Corr	andonment Notices must be filed only a inal inspection.	tter all requirements, includi into Bone Spring Lime. Pressure test. Pressure test. Sprifted by the BLM Well TION COMPANY, sent to Sp PRISCILLA PEREZ on	ng reclamation, have been completed Information System o the Hobbs 03/15/2019 (19PP1310SE) CTION ANALYST	and the operator has
determined that the site is ready for f BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo Spot 35' Class H cement on to Perf Bone Spring Lime: +/-7,7 Acidize Perfs and swab. If good shows, frac perfs with See Attached Figure #3 (currer . I hereby certify that the foregoing is Corr Name (Printed/Typed) TAMMY R	andonment Notices must be filed only a inal inspection.	rter all requirements, includi into Bone Spring Lime. Pressure test. Pressure test. Pressure test. Pressure test. Date 03/12/20	ng reclamation, have been completed Information System o the Hobbs 03/15/2019 (19PP1310SE) CTION ANALYST 19	and the operator has
determined that the site is ready for ff BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo Spot 35' Class H cement on to Perf Bone Spring Lime: +/-7,7 Acidize Perfs and swab. If good shows, frac perfs with See Attached Figure #3 (currer 4. I hereby certify that the foregoing is Name (Printed/Typed) TAMMY R	andonment Notices must be filed only a inal inspection. P P P P P P P P P P P P P	tter all requirements, includi into Bone Spring Lime. Pressure test. Pressure test. Discompany, sent to py PRISCILLA PEREZ on Title PRODU Date 03/12/20 DERAL OR STATE C	ng reclamation, have been completed Information System o the Hobbs 03/15/2019 (19PP1310SE) CTION ANALYST 19	and the operator has
determined that the site is ready for ff BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo Spot 35' Class H cement on to Perf Bone Spring Lime: +/-7,7 Acidize Perfs and swab. If good shows, frac perfs with See Attached Figure #3 (currer A. I hereby certify that the foregoing is Corr Name (Printed/Typed) TAMMY R Signature (Electronic S Signature (Electronic S	andonment Notices must be filed only a inal inspection. P ne Spring perfs and recomplete i ill rods and tubing. ve top of upper most perf zone. F op of CIBP. 50'-7,905'. +/-150k lbs sand. ent WBD) true and correct. Electronic Submission #457748 v For MATADOR PRODUC mitted to AFMSS for processing to LINK Submission) THIS SPACE FOR FEE d. Approval of this notice does not warn itable title to those rights in the subject 1	ter all requirements, includi into Bone Spring Lime. Pressure test. Pressure test. Differ Dompany, sent t by PRISCILLA PEREZ on Title PRODU Date 03/12/20 DERAL OR STATE C 	Information System o the Hobbs 03/15/2019 (19PP1310SE) CTION ANALYST 19 DFFICE USE	MAR 1 9 201
determined that the site is ready for fi BLM Bonde No. NMB0001079 Surety Bond No. RLB0015172 Plug back existing Second Bo MIRU, install & test BOP's. Pu Set CIBP at 8,100', +/-15' abo Spot 35' Class H cement on to Perf Bone Spring Lime: +/-7,7 Acidize Perfs and swab. If good shows, frac perfs with See Attached Figure #3 (currer 8. I hereby certify that the foregoing is Corr Name (Printed/Typed) TAMMY R Signature (Electronic S Signature (Electronic S Signature of approval, if any, are attached ify that the applicant holds legal or equic ch would entitle the applicant to condu	andonment Notices must be filed only a inal inspection. P ne Spring perfs and recomplete i ill rods and tubing. ve top of upper most perf zone. F op of CIBP. 50'-7,905'. +/-150k lbs sand. ent WBD) true and correct. Electronic Submission #457748 v For MATADOR PRODUC mitted to AFMSS for processing to LINK Submission) THIS SPACE FOR FEE d. Approval of this notice does not warn itable title to those rights in the subject 1	Into Bone Spring Lime. Pressure test. Pressure test. Pressure test. Date 03/12/20 Date 03/12/20 DERAL OR STATE C Title ACCE ant or Jo case Ca Office	Information System o the Hobbs 03/15/2019 (19PP1310SE) CTION ANALYST 19 DFFICE USE pted for Record nathon Shepard risbad Field Office	MAR 1 9 201

Additional data for EC transaction #457748 that would not fit on the form


32. Additional remarks, continued

.

See Attached Figure #4 (Proposed WBD)

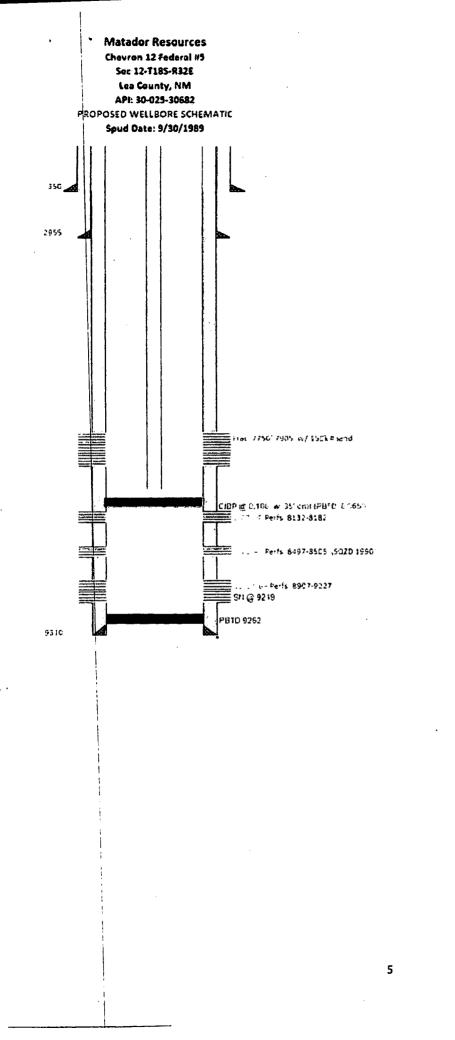

	Casing information		
	rtale 5.2e	Casing Sizi	
Surface	17 1/2	:3 3/5	
ntermediate	12 1/4	£ 5/8	
Freduction	7 7/8	5 1/2	
	OV Teal		
	Mäsker It Flöst Collar		
L	r bet Coner	·	
	5	Cementing Record	
	₽ of Sx	TOC	
Surface ntermediate	375 1450	Cife to surface Cire to surface	
Production	1600	500'	
item	Depth.	2 3/8" +55 #	
יסיונים:	0.2071.	399	
534	9219	1	
-AC	E055	1	
92	9743	:	
¢976	9263		
Perfs	8132-9227		
		•	

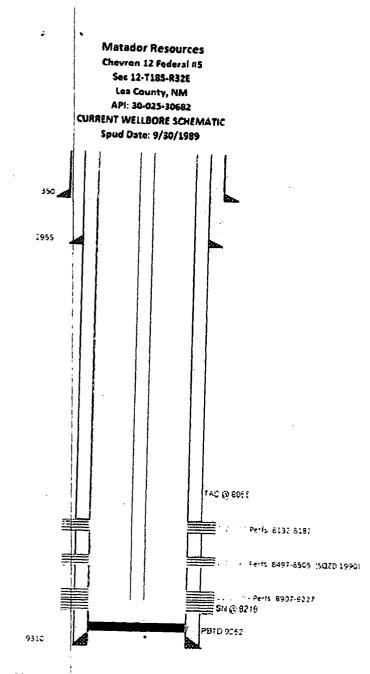

1	Cas	ing information
	Hale 5 te	CatingSite
Sulface	17 1/2	133'E
interrised are	12 1/4	85/3
Preduction	37/B	5 1/2
	DY Tcol	n an
1 1	Marier J	
	Float Co tar	
l r		tenting Record
	a of Se	TOC
Suilare	375	Lite to suffere
ntermediate		re to surface
Froduction		500
	Tubing - 2 3/	8" +55
Lem	Depth	8
10.1.5		299
28) 740	9219	:
at	BCSS	:
FBID	9243	;
	9:62	
Peris	8131-9717	
1 1		

Figure #4 Proposed WBD Chevron 12-5

4