

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
NMNM15684

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on page 032019

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.
STONEWALL 28 FED COM 314H

2. Name of Operator
EOG RESOURCES INCORPORATED
Contact: EMILY FOLLIS
E-Mail: emily_follis@eogresources.com

9. API Well No.
30-025-44875-00-X1

3a. Address
PO BOX 2267
MIDLAND, TX 79702

3b. Phone No. (include area code)
Ph: 432-636-3600

10. Field and Pool or Exploratory Area
WC025G09S243336I-UP WOLFCAMP

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 28 T24S R34E NENE 200FNL 660FEL
32.195240 N Lat, 103.468506 W Lon

11. County or Parish, State
LEA COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original APD
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

**Carlsbad Field Office
OCD Hobbs**

REVISED:
EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes:
Well number change from 714H to 314H
Target formation change from Wolfcamp to First Bone Spring Sand
BHL change from Sec. 33 T-24-S R-34-E 230? FSL 660? FEL to Sec. 33 T-24-S R-34-E 100? FSL 330? FEL
Change in casing and cement program to reflect shallower target

See attached supporting documents

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

All Previous COAs Still Apply, Except For the Following:

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #467847 verified by the BLM Well Information System
For EOG RESOURCES INCORPORATED, sent to the Hobbs
Committed to AFMSS for processing by PRISCILLA PEREZ on 06/05/2019 (19PP2101SE)

Name (Printed/Typed) BEN HOCHER Title ENGINEERING ASSOCIATE

Signature (Electronic Submission) Date 06/05/2019

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By JEROMY PORTER Title PETROLEUM ENGINEER Date 06/25/2019

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Hobbs

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

[Handwritten Signature]

Revisions to Operator-Submitted EC Data for Sundry Notice #467847

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	APDCH NOI	APDCH NOI
Lease:	NMNM15684	NMNM15684
Agreement:		
Operator:	EOG RESOURCES INC PO BOX 2267 MIDLAND, TX 79702 Ph: 432-636-3600	EOG RESOURCES INCORPORATED PO BOX 2267 MIDLAND, TX 79702 Ph: 432.686.3689
Admin Contact:	EMILY FOLLIS SR REGULATORY ADMINISTRATOR E-Mail: emily_follis@eogresources.com Ph: 432-636-3600	EMILY FOLLIS SR REGULATORY ADMINISTRATOR E-Mail: emily_follis@eogresources.com Ph: 432-636-3600
Tech Contact:	BEN HOCHER ENGINEERING ASSOCIATE E-Mail: Ben_Hocher@eogresources.com Ph: 432-686-3623	BEN HOCHER ENGINEERING ASSOCIATE E-Mail: ben_hocher@eogresources.com Ph: 432-686-3623
Location:		
State:	NM	NM
County:	LEA COUNTY	LEA
Field/Pool:	98092 WC025 G09 S243336I	WC025G09S243336I-UP WOLFCAMP
Well/Facility:	STONEWALL 28 FEDERAL COM 714H Sec 28 T24S R34E 200FNL 660FEL	STONEWALL 28 FED COM 314H Sec 28 T24S R34E NENE 200FNL 660FEL 32.195240 N Lat, 103.468506 W Lon

Revised Permit Information 6/3/2019:

Well Name: Stonewall 28 Fed Com #314H

Location:

SHL: 200' FNL & 660' FEL, Section 28, T-24-S, R-34-E, Lea Co., N.M.

BHL: 100' FSL & 330' FEL, Section 33, T-24-S, R-34-E, Lea Co., N.M.

Casing Program:

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
17.5"	0' - 1,150'	13.375"	54.5#	J-55	STC	1.125	1.25	1.60
12.25"	0' - 4,000'	9.625"	40#	J-55	LTC	1.125	1.25	1.60
12.25"	4,000' - 5,100'	9.625"	40#	HCL-80	LTC	1.125	1.25	1.60
8.75"	0' - 20,459'	5.5"	20#	HCP-110	LTC	1.125	1.25	1.60

Variance is requested to waive the centralizer requirements for the 9-5/8" FJ casing in the 12-1/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 12-1/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" FJ casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" hole interval to maximize cement bond and zonal isolation.

Cementing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft ³ /sk	Slurry Description
1,150'	690	13.5	1.73	Lead: Class C + 4.0% Bentonite + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	160	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 950')
5,100'	520	9.0	3.5	Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)
	350	14.4	1.20	Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 4,100')
20,459'	530	11.0	3.21	Lead: Class C + 3% CaCl ₂ + 3% Microbond (TOC @ 4,600')
	2,820	14.4	1.2	Tail: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 9,778')

Additive	Purpose
Bentonite Gel	Lightweight/Lost circulation prevention
Calcium Chloride	Accelerator
Cello-flake	Lost circulation prevention
Sodium Metasilicate	Accelerator
MagOx	Expansive agent
Sodium Chloride	Accelerator
FL-62	Fluid loss control
Halad-344	Fluid loss control
Halad-9	Fluid loss control
HR-601	Retarder
Microbond	Expansive Agent

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,150'	Fresh - Gel	8.6-8.8	28-34	N/c
1,150' – 5,100'	Brine	8.6-8.8	28-34	N/c
5,100' – 20,459'	Oil Base	8.8-9.0	58-68	N/c - 6


The highest mud weight needed to balance formation is expected to be 11.5 ppg. In order to maintain hole stability, mud weights up to 14.0 ppg may be utilized.

200' FNL
660' FEL
Section 28
T-24-S, R-34-E

Proposed Wellbore
Revised 6/3/2019

KB: 3,517'
GL: 3,492'

API: 30-025-44875

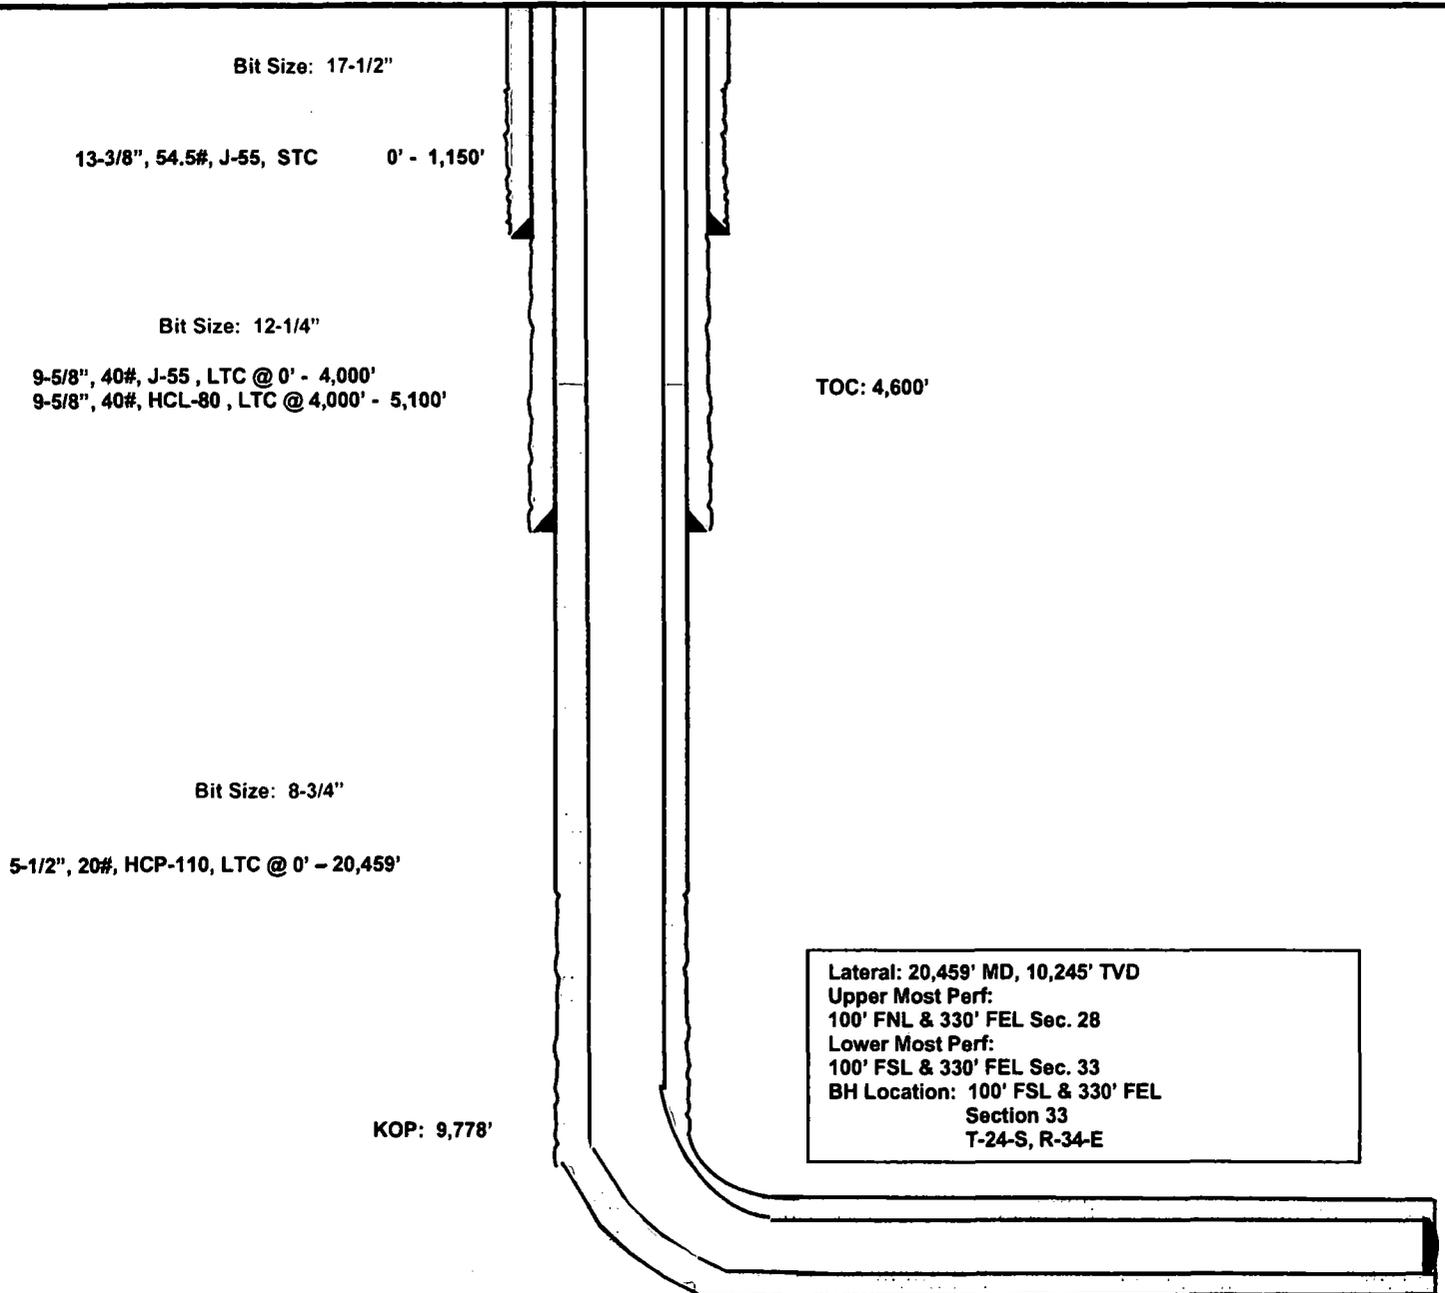



EOG Resources - Midland

Lea County, NM (NAD 83 NME)

Stonewall 28 Fed Com

#314H

OH

Plan: Plan #0.1

Standard Planning Report

04 June, 2019



Planning Report

Database: EDM 5000.14
 Company: EOG Resources - Midland
 Project: Lea County, NM (NAD 83 NME)
 Site: Stonewall 28 Fed Com
 Well: #314H
 Wellbore: OH
 Design: Plan #0.1

Local Co-ordinate Reference: Well #314H
 TVD Reference: KB =25 @ 3517.0usft
 MD Reference: KB =25 @ 3517.0usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Project	Lea County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Stonewall 28 Fed Com				
Site Position:		Northing:	435,811.00 usft	Latitude:	32° 11' 42.907 N
From:	Map	Easting:	804,872.00 usft	Longitude:	103° 28' 53.013 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.45 °

Well	#314H					
Well Position	+N-S	28.0 usft	Northing:	435,839.00 usft	Latitude:	32° 11' 42.869 N
	+E-W	3,986.0 usft	Easting:	808,858.00 usft	Longitude:	103° 28' 6.627 W
Position Uncertainty		0.0 usft	Wellhead Elevation:		Ground Level:	3,492.0 usft

Wellbore	OH					
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength	
	IGRF2015	6/4/2019	(°)	(°)	(nT)	
			6.69	60.03	47,754.79225229	

Design	Plan #0.1				
Audit Notes:					
Version:	Phase:	PLAN	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD)	+N-S	+E-W	Direction	
	(usft)	(usft)	(usft)	(°)	
	0.0	0.0	0.0	177.61	

Plan Survey Tool Program	Date	6/4/2019			
Depth From	Depth To	Survey (Wellbore)	Tool Name	Remarks	
(usft)	(usft)				
1	0.0	20,458.5 Plan #0.1 (OH)	MWD		
			OWSG MWD - Standard		

Plan Sections										
Measured			Vertical			Dogleg	Build	Turn		
Depth	Inclination	Azimuth	Depth	+N-S	+E-W	Rate	Rate	Rate	TFO	Target
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)	(°)	
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,259.0	3.18	65.27	1,258.9	1.8	4.0	2.00	2.00	0.00	65.27	
7,651.0	3.18	65.27	7,641.1	150.2	326.0	0.00	0.00	0.00	0.00	
7,810.0	0.00	0.00	7,800.0	152.0	330.0	2.00	-2.00	0.00	180.00	
9,777.5	0.00	0.00	9,767.5	152.0	330.0	0.00	0.00	0.00	0.00	[SW 28 FC #314H]KC
10,527.5	90.00	179.46	10,245.0	-325.4	334.5	12.00	12.00	23.93	179.46	
20,458.5	90.00	179.46	10,245.0	-10,256.0	428.0	0.00	0.00	0.00	0.00	[SW 28 FC #314H]PB



Planning Report

Database: EDM 5000.14
 Company: EOG Resources - Midland
 Project: Lea County, NM (NAD 83 NME)
 Site: Stonewall 28 Fed Com
 Well: #314H
 Wellbore: OH
 Design: Plan #0.1

Local Co-ordinate Reference: Well #314H
 TVD Reference: KB =25 @ 3517.0usft
 MD Reference: KB =25 @ 3517.0usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Buld Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	2.00	65.27	1,200.0	0.7	1.6	-0.7	2.00	2.00	0.00
1,259.0	3.18	65.27	1,258.9	1.8	4.0	-1.7	2.00	2.00	0.00
1,300.0	3.18	65.27	1,299.9	2.8	6.1	-2.5	0.00	0.00	0.00
1,400.0	3.18	65.27	1,399.7	5.1	11.1	-4.6	0.00	0.00	0.00
1,500.0	3.18	65.27	1,499.5	7.4	16.1	-6.8	0.00	0.00	0.00
1,600.0	3.18	65.27	1,599.4	9.8	21.2	-8.9	0.00	0.00	0.00
1,700.0	3.18	65.27	1,699.2	12.1	26.2	-11.0	0.00	0.00	0.00
1,800.0	3.18	65.27	1,799.1	14.4	31.3	-13.1	0.00	0.00	0.00
1,900.0	3.18	65.27	1,898.9	16.7	36.3	-15.2	0.00	0.00	0.00
2,000.0	3.18	65.27	1,998.8	19.0	41.3	-17.3	0.00	0.00	0.00
2,100.0	3.18	65.27	2,098.6	21.4	46.4	-19.4	0.00	0.00	0.00
2,200.0	3.18	65.27	2,198.5	23.7	51.4	-21.5	0.00	0.00	0.00
2,300.0	3.18	65.27	2,298.3	26.0	56.4	-23.6	0.00	0.00	0.00
2,400.0	3.18	65.27	2,398.2	28.3	61.5	-25.7	0.00	0.00	0.00
2,500.0	3.18	65.27	2,498.0	30.6	66.5	-27.8	0.00	0.00	0.00
2,600.0	3.18	65.27	2,597.9	33.0	71.6	-29.9	0.00	0.00	0.00
2,700.0	3.18	65.27	2,697.7	35.3	76.6	-32.1	0.00	0.00	0.00
2,800.0	3.18	65.27	2,797.5	37.6	81.6	-34.2	0.00	0.00	0.00
2,900.0	3.18	65.27	2,897.4	39.9	86.7	-36.3	0.00	0.00	0.00
3,000.0	3.18	65.27	2,997.2	42.2	91.7	-38.4	0.00	0.00	0.00
3,100.0	3.18	65.27	3,097.1	44.6	96.7	-40.5	0.00	0.00	0.00
3,200.0	3.18	65.27	3,196.9	46.9	101.8	-42.6	0.00	0.00	0.00
3,300.0	3.18	65.27	3,296.8	49.2	106.8	-44.7	0.00	0.00	0.00
3,400.0	3.18	65.27	3,396.6	51.5	111.9	-46.8	0.00	0.00	0.00
3,500.0	3.18	65.27	3,496.5	53.8	116.9	-48.9	0.00	0.00	0.00
3,600.0	3.18	65.27	3,596.3	56.2	121.9	-51.0	0.00	0.00	0.00
3,700.0	3.18	65.27	3,696.2	58.5	127.0	-53.1	0.00	0.00	0.00
3,800.0	3.18	65.27	3,796.0	60.8	132.0	-55.2	0.00	0.00	0.00
3,900.0	3.18	65.27	3,895.9	63.1	137.0	-57.4	0.00	0.00	0.00
4,000.0	3.18	65.27	3,995.7	65.4	142.1	-59.5	0.00	0.00	0.00
4,100.0	3.18	65.27	4,095.5	67.8	147.1	-61.6	0.00	0.00	0.00
4,200.0	3.18	65.27	4,195.4	70.1	152.2	-63.7	0.00	0.00	0.00
4,300.0	3.18	65.27	4,295.2	72.4	157.2	-65.8	0.00	0.00	0.00
4,400.0	3.18	65.27	4,395.1	74.7	162.2	-67.9	0.00	0.00	0.00
4,500.0	3.18	65.27	4,494.9	77.0	167.3	-70.0	0.00	0.00	0.00
4,600.0	3.18	65.27	4,594.8	79.4	172.3	-72.1	0.00	0.00	0.00
4,700.0	3.18	65.27	4,694.6	81.7	177.3	-74.2	0.00	0.00	0.00
4,800.0	3.18	65.27	4,794.5	84.0	182.4	-76.3	0.00	0.00	0.00
4,900.0	3.18	65.27	4,894.3	86.3	187.4	-78.4	0.00	0.00	0.00
5,000.0	3.18	65.27	4,994.2	88.6	192.5	-80.5	0.00	0.00	0.00
5,100.0	3.18	65.27	5,094.0	91.0	197.5	-82.7	0.00	0.00	0.00
5,200.0	3.18	65.27	5,193.9	93.3	202.5	-84.8	0.00	0.00	0.00



Planning Report

Database: EDM 5000.14
 Company: EOG Resources - Midland
 Project: Lea County, NM (NAD 83 NME)
 Site: Stonewall 28 Fed Com
 Well: #314H
 Wellbore: OH
 Design: Plan #0.1

Local Co-ordinate Reference: Well #314H
 TVD Reference: KB =25 @ 3517.0usft
 MD Reference: KB =25 @ 3517.0usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,300.0	3.18	65.27	5,293.7	95.6	207.6	-86.9	0.00	0.00	0.00
5,400.0	3.18	65.27	5,393.5	97.9	212.6	-89.0	0.00	0.00	0.00
5,500.0	3.18	65.27	5,493.4	100.2	217.6	-91.1	0.00	0.00	0.00
5,600.0	3.18	65.27	5,593.2	102.6	222.7	-93.2	0.00	0.00	0.00
5,700.0	3.18	65.27	5,693.1	104.9	227.7	-95.3	0.00	0.00	0.00
5,800.0	3.18	65.27	5,792.9	107.2	232.8	-97.4	0.00	0.00	0.00
5,900.0	3.18	65.27	5,892.8	109.5	237.8	-99.5	0.00	0.00	0.00
6,000.0	3.18	65.27	5,992.6	111.8	242.8	-101.6	0.00	0.00	0.00
6,100.0	3.18	65.27	6,092.5	114.2	247.9	-103.7	0.00	0.00	0.00
6,200.0	3.18	65.27	6,192.3	116.5	252.9	-105.8	0.00	0.00	0.00
6,300.0	3.18	65.27	6,292.2	118.8	257.9	-108.0	0.00	0.00	0.00
6,400.0	3.18	65.27	6,392.0	121.1	263.0	-110.1	0.00	0.00	0.00
6,500.0	3.18	65.27	6,491.9	123.4	268.0	-112.2	0.00	0.00	0.00
6,600.0	3.18	65.27	6,591.7	125.8	273.1	-114.3	0.00	0.00	0.00
6,700.0	3.18	65.27	6,691.5	128.1	278.1	-116.4	0.00	0.00	0.00
6,800.0	3.18	65.27	6,791.4	130.4	283.1	-118.5	0.00	0.00	0.00
6,900.0	3.18	65.27	6,891.2	132.7	288.2	-120.6	0.00	0.00	0.00
7,000.0	3.18	65.27	6,991.1	135.0	293.2	-122.7	0.00	0.00	0.00
7,100.0	3.18	65.27	7,090.9	137.4	298.2	-124.8	0.00	0.00	0.00
7,200.0	3.18	65.27	7,190.8	139.7	303.3	-126.9	0.00	0.00	0.00
7,300.0	3.18	65.27	7,290.6	142.0	308.3	-129.0	0.00	0.00	0.00
7,400.0	3.18	65.27	7,390.5	144.3	313.3	-131.1	0.00	0.00	0.00
7,500.0	3.18	65.27	7,490.3	146.7	318.4	-133.2	0.00	0.00	0.00
7,600.0	3.18	65.27	7,590.2	149.0	323.4	-135.4	0.00	0.00	0.00
7,651.0	3.18	65.27	7,641.1	150.2	326.0	-136.4	0.00	0.00	0.00
7,700.0	2.20	65.27	7,690.0	151.1	328.1	-137.3	2.00	-2.00	0.00
7,800.0	0.20	65.27	7,790.0	152.0	330.0	-138.1	2.00	-2.00	0.00
7,810.0	0.00	0.00	7,800.0	152.0	330.0	-138.1	2.00	-2.00	0.00
7,900.0	0.00	0.00	7,890.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,000.0	0.00	0.00	7,990.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,100.0	0.00	0.00	8,090.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,200.0	0.00	0.00	8,190.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,300.0	0.00	0.00	8,290.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,400.0	0.00	0.00	8,390.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,500.0	0.00	0.00	8,490.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,600.0	0.00	0.00	8,590.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,700.0	0.00	0.00	8,690.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,800.0	0.00	0.00	8,790.0	152.0	330.0	-138.1	0.00	0.00	0.00
8,900.0	0.00	0.00	8,890.0	152.0	330.0	-138.1	0.00	0.00	0.00
9,000.0	0.00	0.00	8,990.0	152.0	330.0	-138.1	0.00	0.00	0.00
9,100.0	0.00	0.00	9,090.0	152.0	330.0	-138.1	0.00	0.00	0.00
9,200.0	0.00	0.00	9,190.0	152.0	330.0	-138.1	0.00	0.00	0.00
9,300.0	0.00	0.00	9,290.0	152.0	330.0	-138.1	0.00	0.00	0.00
9,400.0	0.00	0.00	9,390.0	152.0	330.0	-138.1	0.00	0.00	0.00
9,500.0	0.00	0.00	9,490.0	152.0	330.0	-138.1	0.00	0.00	0.00
9,600.0	0.00	0.00	9,590.0	152.0	330.0	-138.1	0.00	0.00	0.00
9,700.0	0.00	0.00	9,690.0	152.0	330.0	-138.1	0.00	0.00	0.00
9,777.5	0.00	0.00	9,767.5	152.0	330.0	-138.1	0.00	0.00	0.00
9,800.0	2.70	179.46	9,790.0	151.5	330.0	-137.6	12.00	12.00	0.00
9,825.0	5.70	179.46	9,814.9	149.6	330.0	-135.7	12.00	12.00	0.00
9,850.0	8.70	179.46	9,839.7	146.5	330.1	-132.6	12.00	12.00	0.00
9,875.0	11.70	179.46	9,864.3	142.1	330.1	-128.2	12.00	12.00	0.00
9,900.0	14.70	179.46	9,888.7	136.4	330.1	-122.5	12.00	12.00	0.00
9,925.0	17.70	179.46	9,912.7	129.4	330.2	-115.5	12.00	12.00	0.00



Planning Report

Database: EDM 5000.14
 Company: EOG Resources - Midland
 Project: Lea County, NM (NAD 83 NME)
 Site: Stonewall 28 Fed Com
 Well: #314H
 Wellbore: OH
 Design: Plan #0.1

Local Co-ordinate Reference: Well #314H
 TVD Reference: KB =25 @ 3517.0usft
 MD Reference: KB =25 @ 3517.0usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
9,950.0	20.70	179.46	9,936.3	121.2	330.3	-107.3	12.00	12.00	0.00	
9,975.0	23.70	179.46	9,959.4	111.7	330.4	-97.9	12.00	12.00	0.00	
10,000.0	26.70	179.46	9,982.0	101.1	330.5	-87.2	12.00	12.00	0.00	
10,025.0	29.70	179.46	10,004.1	89.3	330.6	-75.4	12.00	12.00	0.00	
10,050.0	32.70	179.46	10,025.4	76.3	330.7	-62.5	12.00	12.00	0.00	
10,075.0	35.70	179.46	10,046.1	62.3	330.8	-48.4	12.00	12.00	0.00	
10,100.0	38.70	179.46	10,066.0	47.2	331.0	-33.3	12.00	12.00	0.00	
10,125.0	41.70	179.46	10,085.1	31.0	331.1	-17.2	12.00	12.00	0.00	
10,150.0	44.70	179.46	10,103.3	13.9	331.3	-0.1	12.00	12.00	0.00	
10,175.0	47.70	179.46	10,120.6	-4.1	331.5	17.9	12.00	12.00	0.00	
10,200.0	50.70	179.46	10,137.0	-23.0	331.6	36.8	12.00	12.00	0.00	
10,225.0	53.70	179.46	10,152.3	-42.8	331.8	56.6	12.00	12.00	0.00	
10,250.0	56.70	179.46	10,166.6	-63.3	332.0	77.1	12.00	12.00	0.00	
10,275.0	59.70	179.46	10,179.7	-84.6	332.2	98.3	12.00	12.00	0.00	
10,300.0	62.70	179.46	10,191.8	-106.5	332.4	120.2	12.00	12.00	0.00	
10,325.0	65.70	179.46	10,202.7	-129.0	332.6	142.7	12.00	12.00	0.00	
10,350.0	68.70	179.46	10,212.3	-152.0	332.9	165.8	12.00	12.00	0.00	
10,375.0	71.70	179.46	10,220.8	-175.5	333.1	189.3	12.00	12.00	0.00	
10,400.0	74.70	179.46	10,228.0	-199.5	333.3	213.2	12.00	12.00	0.00	
10,425.0	77.70	179.46	10,234.0	-223.7	333.5	237.4	12.00	12.00	0.00	
10,450.0	80.70	179.46	10,238.7	-248.3	333.8	262.0	12.00	12.00	0.00	
10,475.0	83.70	179.46	10,242.1	-273.1	334.0	286.7	12.00	12.00	0.00	
10,500.0	86.70	179.46	10,244.2	-298.0	334.2	311.6	12.00	12.00	0.00	
10,527.5	90.00	179.46	10,245.0	-325.4	334.5	339.1	12.00	12.00	0.00	
10,600.0	90.00	179.46	10,245.0	-397.9	335.2	411.6	0.00	0.00	0.00	
10,700.0	90.00	179.46	10,245.0	-497.9	336.1	511.5	0.00	0.00	0.00	
10,800.0	90.00	179.46	10,245.0	-597.9	337.1	611.5	0.00	0.00	0.00	
10,900.0	90.00	179.46	10,245.0	-697.9	338.0	711.4	0.00	0.00	0.00	
11,000.0	90.00	179.46	10,245.0	-797.9	338.9	811.4	0.00	0.00	0.00	
11,100.0	90.00	179.46	10,245.0	-897.9	339.9	911.3	0.00	0.00	0.00	
11,200.0	90.00	179.46	10,245.0	-997.9	340.8	1,011.3	0.00	0.00	0.00	
11,300.0	90.00	179.46	10,245.0	-1,097.9	341.8	1,111.2	0.00	0.00	0.00	
11,400.0	90.00	179.46	10,245.0	-1,197.9	342.7	1,211.2	0.00	0.00	0.00	
11,500.0	90.00	179.46	10,245.0	-1,297.9	343.7	1,311.1	0.00	0.00	0.00	
11,600.0	90.00	179.46	10,245.0	-1,397.9	344.6	1,411.0	0.00	0.00	0.00	
11,700.0	90.00	179.46	10,245.0	-1,497.9	345.5	1,511.0	0.00	0.00	0.00	
11,800.0	90.00	179.46	10,245.0	-1,597.9	346.5	1,610.9	0.00	0.00	0.00	
11,900.0	90.00	179.46	10,245.0	-1,697.9	347.4	1,710.9	0.00	0.00	0.00	
12,000.0	90.00	179.46	10,245.0	-1,797.9	348.4	1,810.8	0.00	0.00	0.00	
12,100.0	90.00	179.46	10,245.0	-1,897.9	349.3	1,910.8	0.00	0.00	0.00	
12,200.0	90.00	179.46	10,245.0	-1,997.9	350.2	2,010.7	0.00	0.00	0.00	
12,300.0	90.00	179.46	10,245.0	-2,097.9	351.2	2,110.7	0.00	0.00	0.00	
12,400.0	90.00	179.46	10,245.0	-2,197.9	352.1	2,210.6	0.00	0.00	0.00	
12,500.0	90.00	179.46	10,245.0	-2,297.9	353.1	2,310.6	0.00	0.00	0.00	
12,600.0	90.00	179.46	10,245.0	-2,397.9	354.0	2,410.5	0.00	0.00	0.00	
12,700.0	90.00	179.46	10,245.0	-2,497.8	355.0	2,510.5	0.00	0.00	0.00	
12,800.0	90.00	179.46	10,245.0	-2,597.8	355.9	2,610.4	0.00	0.00	0.00	
12,900.0	90.00	179.46	10,245.0	-2,697.8	356.8	2,710.4	0.00	0.00	0.00	
13,000.0	90.00	179.46	10,245.0	-2,797.8	357.8	2,810.3	0.00	0.00	0.00	
13,100.0	90.00	179.46	10,245.0	-2,897.8	358.7	2,910.3	0.00	0.00	0.00	
13,200.0	90.00	179.46	10,245.0	-2,997.8	359.7	3,010.2	0.00	0.00	0.00	
13,300.0	90.00	179.46	10,245.0	-3,097.8	360.6	3,110.2	0.00	0.00	0.00	
13,400.0	90.00	179.46	10,245.0	-3,197.8	361.5	3,210.1	0.00	0.00	0.00	
13,500.0	90.00	179.46	10,245.0	-3,297.8	362.5	3,310.1	0.00	0.00	0.00	



Planning Report

Database: EDM 5000.14
 Company: EOG Resources - Midland
 Project: Lea County, NM (NAD 83 NME)
 Site: Stonewall 28 Fed Com
 Well: #314H
 Wellbore: OH
 Design: Plan #0.1

Local Co-ordinate Reference: Well #314H
 TVD Reference: KB =25 @ 3517.0usft
 MD Reference: KB =25 @ 3517.0usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,600.0	90.00	179.46	10,245.0	-3,397.8	363.4	3,410.0	0.00	0.00	0.00
13,700.0	90.00	179.46	10,245.0	-3,497.8	364.4	3,510.0	0.00	0.00	0.00
13,800.0	90.00	179.46	10,245.0	-3,597.8	365.3	3,609.9	0.00	0.00	0.00
13,900.0	90.00	179.46	10,245.0	-3,697.8	366.2	3,709.8	0.00	0.00	0.00
14,000.0	90.00	179.46	10,245.0	-3,797.8	367.2	3,809.8	0.00	0.00	0.00
14,100.0	90.00	179.46	10,245.0	-3,897.8	368.1	3,909.7	0.00	0.00	0.00
14,200.0	90.00	179.46	10,245.0	-3,997.8	369.1	4,009.7	0.00	0.00	0.00
14,300.0	90.00	179.46	10,245.0	-4,097.8	370.0	4,109.6	0.00	0.00	0.00
14,400.0	90.00	179.46	10,245.0	-4,197.8	371.0	4,209.6	0.00	0.00	0.00
14,500.0	90.00	179.46	10,245.0	-4,297.8	371.9	4,309.5	0.00	0.00	0.00
14,600.0	90.00	179.46	10,245.0	-4,397.8	372.8	4,409.5	0.00	0.00	0.00
14,700.0	90.00	179.46	10,245.0	-4,497.8	373.8	4,509.4	0.00	0.00	0.00
14,800.0	90.00	179.46	10,245.0	-4,597.8	374.7	4,609.4	0.00	0.00	0.00
14,900.0	90.00	179.46	10,245.0	-4,697.7	375.7	4,709.3	0.00	0.00	0.00
15,000.0	90.00	179.46	10,245.0	-4,797.7	376.6	4,809.3	0.00	0.00	0.00
15,100.0	90.00	179.46	10,245.0	-4,897.7	377.5	4,909.2	0.00	0.00	0.00
15,200.0	90.00	179.46	10,245.0	-4,997.7	378.5	5,009.2	0.00	0.00	0.00
15,300.0	90.00	179.46	10,245.0	-5,097.7	379.4	5,109.1	0.00	0.00	0.00
15,400.0	90.00	179.46	10,245.0	-5,197.7	380.4	5,209.1	0.00	0.00	0.00
15,500.0	90.00	179.46	10,245.0	-5,297.7	381.3	5,309.0	0.00	0.00	0.00
15,600.0	90.00	179.46	10,245.0	-5,397.7	382.3	5,409.0	0.00	0.00	0.00
15,700.0	90.00	179.46	10,245.0	-5,497.7	383.2	5,508.9	0.00	0.00	0.00
15,800.0	90.00	179.46	10,245.0	-5,597.7	384.1	5,608.9	0.00	0.00	0.00
15,900.0	90.00	179.46	10,245.0	-5,697.7	385.1	5,708.8	0.00	0.00	0.00
16,000.0	90.00	179.46	10,245.0	-5,797.7	386.0	5,808.8	0.00	0.00	0.00
16,100.0	90.00	179.46	10,245.0	-5,897.7	387.0	5,908.7	0.00	0.00	0.00
16,200.0	90.00	179.46	10,245.0	-5,997.7	387.9	6,008.6	0.00	0.00	0.00
16,300.0	90.00	179.46	10,245.0	-6,097.7	388.8	6,108.6	0.00	0.00	0.00
16,400.0	90.00	179.46	10,245.0	-6,197.7	389.8	6,208.5	0.00	0.00	0.00
16,500.0	90.00	179.46	10,245.0	-6,297.7	390.7	6,308.5	0.00	0.00	0.00
16,600.0	90.00	179.46	10,245.0	-6,397.7	391.7	6,408.4	0.00	0.00	0.00
16,700.0	90.00	179.46	10,245.0	-6,497.7	392.6	6,508.4	0.00	0.00	0.00
16,800.0	90.00	179.46	10,245.0	-6,597.7	393.6	6,608.3	0.00	0.00	0.00
16,900.0	90.00	179.46	10,245.0	-6,697.7	394.5	6,708.3	0.00	0.00	0.00
17,000.0	90.00	179.46	10,245.0	-6,797.7	395.4	6,808.2	0.00	0.00	0.00
17,100.0	90.00	179.46	10,245.0	-6,897.7	396.4	6,908.2	0.00	0.00	0.00
17,200.0	90.00	179.46	10,245.0	-6,997.6	397.3	7,008.1	0.00	0.00	0.00
17,300.0	90.00	179.46	10,245.0	-7,097.6	398.3	7,108.1	0.00	0.00	0.00
17,400.0	90.00	179.46	10,245.0	-7,197.6	399.2	7,208.0	0.00	0.00	0.00
17,500.0	90.00	179.46	10,245.0	-7,297.6	400.1	7,308.0	0.00	0.00	0.00
17,600.0	90.00	179.46	10,245.0	-7,397.6	401.1	7,407.9	0.00	0.00	0.00
17,700.0	90.00	179.46	10,245.0	-7,497.6	402.0	7,507.9	0.00	0.00	0.00
17,800.0	90.00	179.46	10,245.0	-7,597.6	403.0	7,607.8	0.00	0.00	0.00
17,900.0	90.00	179.46	10,245.0	-7,697.6	403.9	7,707.8	0.00	0.00	0.00
18,000.0	90.00	179.46	10,245.0	-7,797.6	404.9	7,807.7	0.00	0.00	0.00
18,100.0	90.00	179.46	10,245.0	-7,897.6	405.8	7,907.7	0.00	0.00	0.00
18,200.0	90.00	179.46	10,245.0	-7,997.6	406.7	8,007.6	0.00	0.00	0.00
18,300.0	90.00	179.46	10,245.0	-8,097.6	407.7	8,107.6	0.00	0.00	0.00
18,400.0	90.00	179.46	10,245.0	-8,197.6	408.6	8,207.5	0.00	0.00	0.00
18,500.0	90.00	179.46	10,245.0	-8,297.6	409.6	8,307.4	0.00	0.00	0.00
18,600.0	90.00	179.46	10,245.0	-8,397.6	410.5	8,407.4	0.00	0.00	0.00
18,700.0	90.00	179.46	10,245.0	-8,497.6	411.4	8,507.3	0.00	0.00	0.00
18,800.0	90.00	179.46	10,245.0	-8,597.6	412.4	8,607.3	0.00	0.00	0.00
18,900.0	90.00	179.46	10,245.0	-8,697.6	413.3	8,707.2	0.00	0.00	0.00



Planning Report

Database: EDM 5000.14
 Company: EOG Resources - Midland
 Project: Lea County, NM (NAD 83 NME)
 Site: Stonewall 28 Fed Com
 Well: #314H
 Wellbore: OH
 Design: Plan #0.1

Local Co-ordinate Reference: Well #314H
 TVD Reference: KB =25 @ 3517.0usft
 MD Reference: KB =25 @ 3517.0usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
19,000.0	90.00	179.46	10,245.0	-8,797.6	414.3	8,807.2	0.00	0.00	0.00	
19,100.0	90.00	179.46	10,245.0	-8,897.6	415.2	8,907.1	0.00	0.00	0.00	
19,200.0	90.00	179.46	10,245.0	-8,997.6	416.2	9,007.1	0.00	0.00	0.00	
19,300.0	90.00	179.46	10,245.0	-9,097.6	417.1	9,107.0	0.00	0.00	0.00	
19,400.0	90.00	179.46	10,245.0	-9,197.5	418.0	9,207.0	0.00	0.00	0.00	
19,500.0	90.00	179.46	10,245.0	-9,297.5	419.0	9,306.9	0.00	0.00	0.00	
19,600.0	90.00	179.46	10,245.0	-9,397.5	419.9	9,406.9	0.00	0.00	0.00	
19,700.0	90.00	179.46	10,245.0	-9,497.5	420.9	9,506.8	0.00	0.00	0.00	
19,800.0	90.00	179.46	10,245.0	-9,597.5	421.8	9,606.8	0.00	0.00	0.00	
19,900.0	90.00	179.46	10,245.0	-9,697.5	422.7	9,706.7	0.00	0.00	0.00	
20,000.0	90.00	179.46	10,245.0	-9,797.5	423.7	9,806.7	0.00	0.00	0.00	
20,100.0	90.00	179.46	10,245.0	-9,897.5	424.6	9,906.6	0.00	0.00	0.00	
20,200.0	90.00	179.46	10,245.0	-9,997.5	425.6	10,006.6	0.00	0.00	0.00	
20,300.0	90.00	179.46	10,245.0	-10,097.5	426.5	10,106.5	0.00	0.00	0.00	
20,400.0	90.00	179.46	10,245.0	-10,197.5	427.4	10,206.5	0.00	0.00	0.00	
20,458.5	90.00	179.46	10,245.0	-10,256.0	428.0	10,264.9	0.00	0.00	0.00	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
[SW 28 FC #314H]KOP - hit/miss target - Shape - Point	0.00	0.00	9,767.5	152.0	330.0	435,991.00	809,188.00	32° 11' 44.347 N	103° 28' 2.772 W	
[SW 28 FC #314H]UMP - plan misses target center by 163.5usft at 10175.9usft MD (10121.3 TVD, -4.8 N, 331.5 E) - Point	0.00	0.00	10,245.0	102.0	330.0	435,941.00	809,188.00	32° 11' 43.852 N	103° 28' 2.777 W	
[SW 28 FC #314H]PBHL - plan hits target center - Point	0.00	0.00	10,245.0	-10,256.0	428.0	425,583.00	809,286.00	32° 10' 1.352 N	103° 28' 2.607 W	





Lea County, NM (NAD 83 NME)
 Stonewall 28 Fed Com #314H
 Plan #0.1

PROJECT DETAILS: Lea County, NM (NAD 83 NME)

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Eastern Zone
 System Datum: Mean Sea Level

WELL DETAILS: #314H

KB #25 @ 3517.0wft 3492.0
 Northing 435839.00 Easting 808859.00 Latitude 32° 11' 42.809 N Longitude 103° 28' 6.627 W



To convert a Magnetic Direction to a Grid Direction, Add 0.23°
 To convert a Magnetic Direction to a True Direction, Add 0.69° East
 To convert a True Direction to a Grid Direction, Subtract 0.46°

SECTION DETAILS






Sec	MD	Inc	Azi	TVD	+N-S	+E-W	Dlog	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	1100.0	0.00	0.00	1100.0	0.0	0.0	0.00	0.00	0.0	
3	1259.0	3.18	65.27	1258.9	1.8	4.0	2.00	65.27	-1.7	
4	7651.0	3.18	65.27	7641.1	150.2	326.0	0.00	0.00	-136.4	
5	7810.0	0.00	0.00	7800.0	152.0	330.0	2.00	180.00	-136.1	
6	9777.5	0.00	0.00	9767.5	152.0	330.0	0.00	0.00	-136.1	[SW 28 FC #314H]KOP
7	10527.5	90.00	179.46	10245.0	-325.4	334.5	12.00	179.46	339.1	
8	20458.5	90.00	179.46	10245.0	-10256.0	428.0	0.00	10264.9		[SW 28 FC #314H]PBHL

CASING DETAILS

No casing data is available

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N-S	+E-W	Northing	Easting
[SW 28 FC #314H]KOP	9767.5	152.0	330.0	435841.00	809185.00
[SW 28 FC #314H]PBHL	10245.0	-10256.0	428.0	435863.00	808284.00
[SW 28 FC #314H]JUMP	10245.0	102.0	230.0	435841.00	809185.00

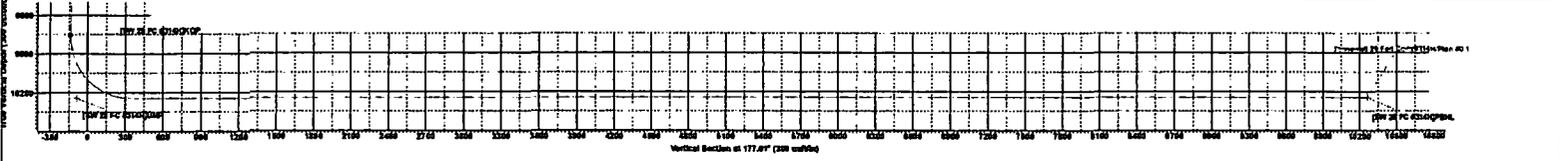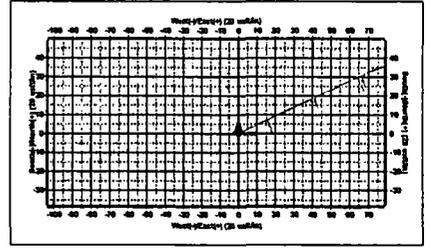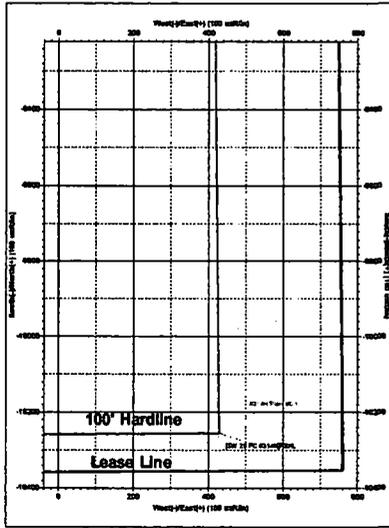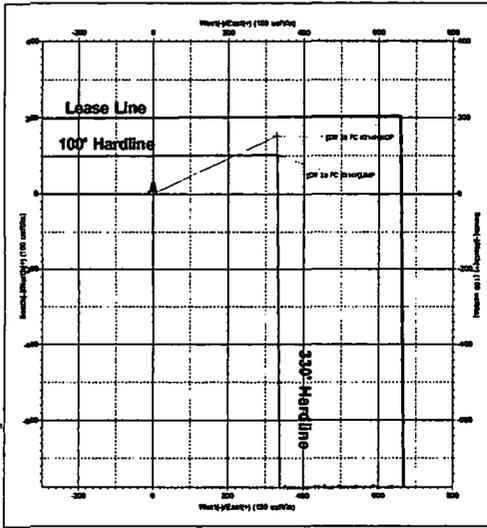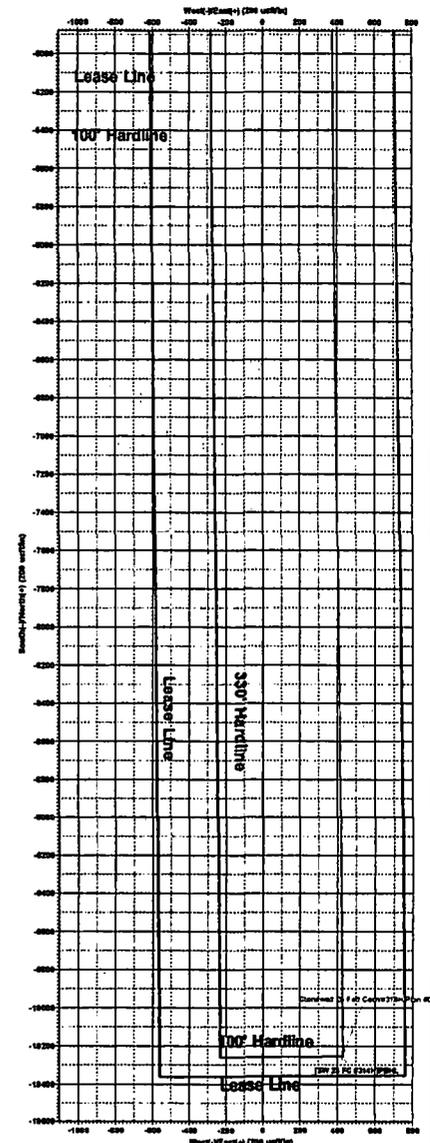

**PECOS DISTRICT
DRILLING CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	EOG RESOURCES INC
LEASE NO.:	NMNM019452
WELL NAME & NO.:	STONEWALL 28 FED COM 314H
SURFACE HOLE FOOTAGE:	200' FNL & 660' FEL
BOTTOM HOLE FOOTAGE	100' FSL & 330' FEL
LOCATION:	Section 28, T. 24 S., R 34 E., NMPM
COUNTY:	LEA County, New Mexico

All Previous COAs Still Apply, Except for the Following:

A. CASING

1. The 13-3/8 inch surface casing shall be set at approximately **1,150** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

B. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

C. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

JJP06252019

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Chaves and Roosevelt Counties
Call the Roswell Field Office, 2909 West Second St., Roswell NM 88201.
During office hours call (575) 627-0272.
After office hours call (575)

Eddy County
Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

Lea County
Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the

plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.