

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised August 1, 2011

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

HOBBES OCD
RECEIVED
AUG 07 2019

WELL API NO. 30-025-10510
5. Indicate Type of Lease STATE X FEE
6. State Oil & Gas Lease No. B-934
7. Lease Name or Unit Agreement Name NEW MEXICO "M" STATE
8. Well Number 020
9. OGRID Number 008359
10. Pool name or Wildcat LANGLEY MATTIX 7-R, QN., GYBR.

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG A WELL OR TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)
 1. Type of Well: Oil Well Gas Well Other INJECTION

2. Name of Operator
GP II ENERGY, INC.

3. Address of Operator
P.O. BOX 50682, MIDLAND, TEXAS 79710

4. Well Location
 Unit Letter F : 1980 feet from the SOUTH line and 1980 feet from the WEST line
 Section 29 Township 22S Range 37E NMPM EDDY County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
 3,379' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) ATTEMPT TO CUT X PULL 2-7/8" CSG. @ +/-2,000'.
- 2) PERF. 4-1/2" CSG. X ATTEMPT TO SQZ. 25 SXS. CMT. @ 2,685'-2,565' (T/YATES, B/SALT); WOC X TAG CMT.
- 3) PERF. 4-1/2" CSG. X ATTEMPT TO SQZ. 60 SXS. CMT. @ 1,210'-1,070' (T/SALT/ANHY.); WOC X TAG CMT.
- 4) PERF. 4-1/2" CSG. X CIRC. TO SURF., FILLING ALL ANNULI, 40 SXS. CMT. @ 100'-3'.
- 5) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; VERIFY CMT. TO SURF. ON ALL ANNULI; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER. *4" dia 4' above ground marker*

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.



See Attached

I hereby certify that the information above is true and complete to the best of my knowledge and belief. **Conditions of Approval**

SIGNATURE *David A. Eyler* TITLE: AGENT DATE: 08/05/19


Type or print name: DAVID A. EYLER E-mail address: DEYLER@MILAGRO-RES.COM PHONE: 432.687.3033
For State Use Only

APPROVED BY: *Kerry Jute* TITLE *Compliance Officer A* DATE *8-8-19*
 Conditions of Approval (if any)

GP II State M # 20
Lea CO NM
30-025-10510-00-00
Drilled 1960

12 1/4" hole
9 5/8" casing set @ 1155'
CMT to surface

T/ANHY. - 1,125'
B/SALT - 2,625'
T/YATES -

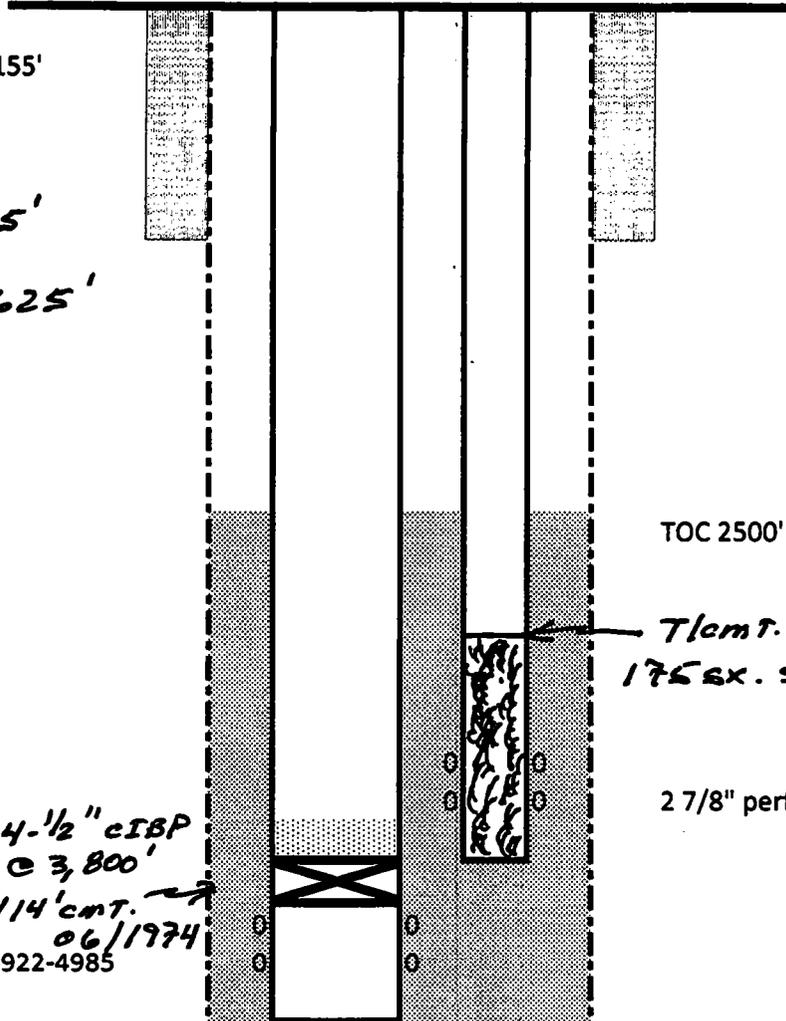

TOC 2500'

*T/CMT. INSIDE 2-7/8" AFTER
175 EX. SQE. - 3,122' (06/1974)*


2 7/8" perf 3522-3650

8 3/4" hole
4.5" casing @ 6846' *4-1/2" cISP*
2 7/8" casing @ 3717' *@ 3,800'*
est TOC 2500' *w/14' cmt. -*
06/1974
4.5" perf 3922-4985

GP II State M # 20
 Lea CO NM
 30-025-10510-00-00
 Drilled 1960

12 1/4" hole
 9 5/8" casing set @ 1155'
 CMT to surface

T/ANHY. - 1,125'
 B/SALT - 2,625'
 T/YATES -

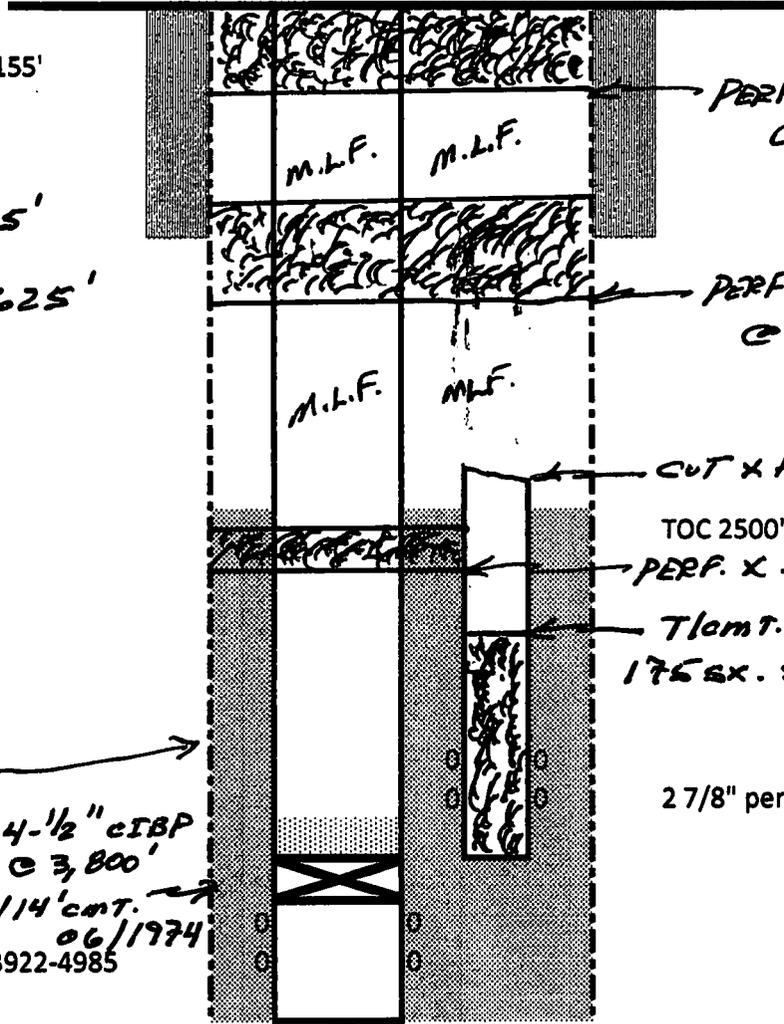

PERF. X CIRC. 40 SX5.
 @ 100'-5'

PERF. X SQZ. 60 SX5.
 @ 1,210' - 1,070' TAG

CUT X PULL 2-7/8" @ 1-3,000'

TOC 2500'

PERF. X SQZ. 25 SX5 @ 2,685' - 2,56

T/CMT. INSIDE 2-7/8" AFTER
 175 SX. SQZ. - 3,122' (06/1974)

2 7/8" perf 3522-3650

8 3/4" hole
 4.5" casing @ 6846'
 2 7/8" casing @ 3717'
 est TOC 2500'
 4.5" perf 3922-4985

4-1/2" CIBP @ 3,800'
 w/14' cmt. 06/1974

JAE 08105119

GENERAL CONDITIONS OF APPROVAL:

- 1) Insure all bradenheads have been exposed, identified, and valves are operational prior to rigging up on well.
- 2) Contact the appropriate NMOCD District Office no later than 24 hours prior to moving in and rigging up.
- 3) A copy of the approved C103 intent to P&A should be distributed to the onsite company and plugging representatives. Approved procedures are good for a period of one year from approved date, unless otherwise specified on the C103 intent. Approvals past this date will require the submission and approval of a new C103 intent.
- 4) A company representative is required to be present to witness all operations including setting CIBP's, circulation of mud laden fluids, perforating, squeezing or spotting cement plugs, tags, or any other operations approved on the C103 intent to P&A. Company representative should contact the NMOCD and report all operations.
- 5) Any changes that may be required during plugging operations should be approved by the NMOCD before proceeding.
- 6) A closed loop system is to be used for all plugging operations. Contents of the steel pits to be hauled to a NMOCD permitted disposal facility.
- 7) Mud laden fluids must be placed between all cement plugs mixed at 25 sacks of salt gel per 100 barrels of brine.
- 8) All cement plugs will be 100' or 25 sacks cement, whichever is greater. Class 'C' cement will be used above 7500' and Class 'H' below 7500'. Plugs should be no more than 3000' apart
- 9) Site remediation due within one year of well plugging completion.