

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-30227	
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>	
6. State Oil & Gas Lease No. B-9312	
7. Lease Name or Unit Agreement Name WEST DOLLARHIDE QUEEN SAND UNIT	
8. Well Number	118
9. OGRID Number	309777
10. Pool name or Wildcat DOLLARHIDE QUEEN (018810)	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

HOBBS OCD

2. Name of Operator
RAM ENERGY LLC

JAN 22 2020

3. Address of Operator
2100 S. UTICA AVE., SUITE 175, TULSA, OK 74114

RECEIVED

4. Well Location

Unit Letter B 40 feet from the NORTH line and 1540 feet from the EAST line
Section 05 Township 25S Range 38E NMPM LEA County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3165' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. NOTIFY NMOCD 24 HRS. BEFORE MIRU.
2. MIRU. ND WH, NU BOPE.
3. SET CIBP@3550'. SPOT 65SX OF CLASS "C" CEMENT FROM 3550'-3000'.
4. CIRCULATE 9.5 PPG MLF AND TEST CASING.
5. SPOT 35SX OF CLASS "C" CEMENT FROM 2725'-2405'. WOC&TAG. (YATES/B.SALT)
6. SPOT 25SX OF CLASS "C" CEMENT FROM 1255'-1100'. WOC&TAG. (T.SALT)
7. SPOT 60SX OF CLASS "C" CEMENT FROM 494'-SURFACE. VERIFY CEMENT TO SURFACE. (FW/SHOE/SURFACE).
8. CUTOFF WELLHEAD, ANCHORS 3' BELOW SURFACE AND INSTALL DRYHOLE MARKER. TURN OVER FOR RECLAMATION.

CLOSED LOOP CONTAINMENT SYSTEM WILL BE USED FOR FLUIDS.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE MP TITLE OPERATIONS MANAGER DATE 11/25/19

Type or print name MATTHEW PATTERSON E-mail address: MPATTERSON@RAMENERGY.NET PHONE: (918)947-6301
For State Use Only

APPROVED BY: Kerry Foster TITLE CO DATE 1-22-20
Conditions of Approval (if any):

WELLBORE DIAGRAM
WEST DOLLARHIDE QUEEN SAND UNIT #118
CURRENT

Created: 11/25/19 By: LEE R.
Updated: _____ By: _____
Lease: WEST DOLLARHIDE QUEEN SAND UNIT
Field: QUEEN
Surf. Loc.: 40' FNL & 1540' FEL
Bot. Loc.: _____
County: LEA St.: NM
Status: _____

Well #: 118
API: 30-025-30227
Unit Ltr.: B Sec. 5
TSHP/Rng: 24S-T38E
Pool Code: _____ OGRID: 309777
Directions: _____


Surface Casing

Size: 8-5/8"
Wt., Grd.: 24#
Depth: 444'
Sxs Cmt: 250
Circulate: YES
TOC: SURFACE
Hole Size: 12-1/4"

FORMATION TOPS	
T. Salt	1205'
B. Salt	2510'

Intermediate Casing

Size: 5-1/2"
Wt., Grd.: 15.5#/17#
Depth: 3948'
Sxs Cmt: 1055
Circulate: YES
TOC: SURFACE
Hole Size: 7-7/8"

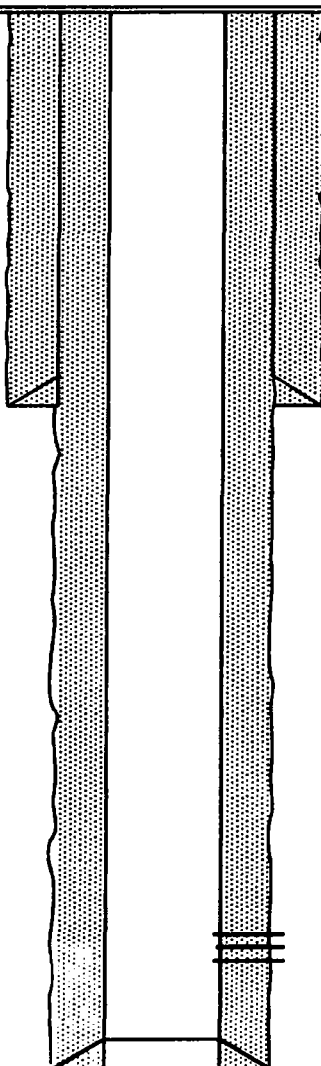

Queen: 3631'-3733'(OA)

WELLBORE DIAGRAM
WEST DOLLARHIDE QUEEN SAND UNIT #118
PROPOSED

Created: 11/25/19 By: LEE R.
Updated: By:
Lease: WEST DOLLARHIDE QUEEN SAND UNIT
Field: QUEEN
Surf. Loc.: 40' FNL & 1540' FEL
Bot. Loc.:
County: LEA St.: NM
Status:

Well #: 118
API: 30-025-30227
Unit Ltr.: B Sec. 5
TSHP/Rng: 24S-T38E
Pool Code: OGRID: 309777
Directions:


Surface Casing

Size: 8-5/8"
Wt., Grd.: 24#
Depth: 444'
Sxs Cmt: 250
Circulate: YES
TOC: SURFACE
Hole Size: 12-1/4"

FORMATION TOPS	
T. Salt	1205'
B. Salt	2510'

Intermediate Casing

Size: 6-1/2"
Wt., Grd.: 15.5#/17#
Depth: 3946'
Sxs Cmt: 1055
Circulate: YES
TOC: SURFACE
Hole Size: 7-7/8"

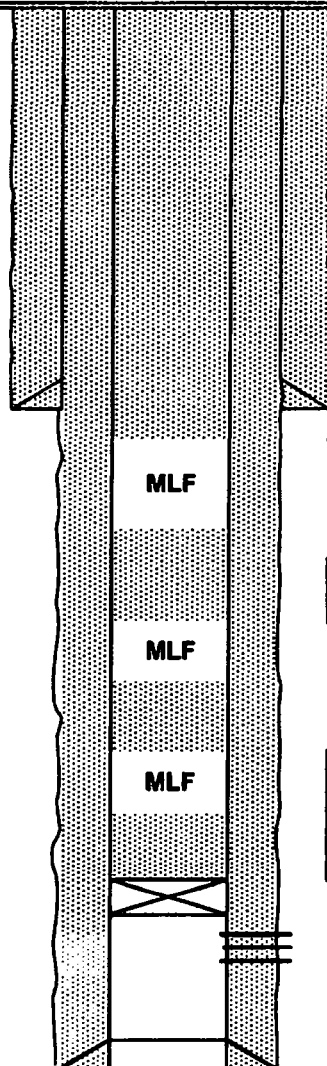

**SPOT 60SX OF CMT FROM 494'-SURFACE.
VERIFY. (FW/SHOE/SURFACE)**

**SPOT 25SX OF CMT FROM 1250'-1100'.
WOC&TAG. (T.SALT)**

**SPOT 35SX OF CMT FROM 2725'-2405'.
WOC&TAG. (YATES/B.SALT)
SET CIBP@3550' AND SPOT 25SX ON TOP
FROM 3550'-3300'.(PERFS)**

Queen: 3631'-3733'(OA)