

HOBBS OCD

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

MAR 10 2020

APPLICATION FOR PERMIT TO DRILL OR REENTER

RECEIVED

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		5. Lease Serial No. NMNM023768 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. NORTH RIDGE 8040 FEDERAL COM 1H (327302)	
2. Name of Operator BTA OIL PRODUCERS LLC (260297)		9. API-Well No. 30-025-46957	
3a. Address 104 S. Pecos Midland TX 79701		3b. Phone No. (include area code) (432)682-3753	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENW / 300 FNL / 1620 FWL / LAT 32.354597 / LONG -103.444139 At proposed prod. zone SWNW / 2600 FNL / 700 FWL / LAT 32.333765 / LONG -103.447157		10. Field and Pool, or Exploratory ANTELOPE RIDGE / BONE SPRING, NM 97293 11. Sec., T. R. M. or Blk. and Survey or Area SEC 35 / T22S / R34E / NMP	
14. Distance in miles and direction from nearest town or post office* 17 miles		12. County or Parish LEA	13. State NM
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 300 feet	16. No of acres in lease 160	17. Spacing Unit dedicated to this well 240	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1409 feet	19. Proposed Depth 10420 feet / 18102 feet	20. BLM/BIA Bond No. in file FED: NMB001711	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3410 feet	22. Approximate date work will start* 10/16/2019	23. Estimated duration 30 days	
24. Attachments			

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)		Name (Printed/Typed) Sammy Hajar / Ph: (432)682-3753		Date 05/17/2019	
Title Regulatory Analyst					
Approved by (Signature) (Electronic Submission)		Name (Printed/Typed) Cody Layton / Ph: (575)234-5959		Date 03/04/2020	
Title Assistant Field Manager Lands & Minerals					
Office CARLSBAD					

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GCP Rec 09/10/2020

KZ 09/11/2020

Double Sided

APPROVED WITH CONDITIONS



Application for Permit to Drill

APD Package Report

Date Printed: 03/05/2020 07:47 AM

APD ID: 10400041928	Well Status: AAPD
APD Received Date: 05/17/2019 09:26 AM	Well Name: NORTH RIDGE 8040 FEDERAL
Operator: BTA OIL PRODUCERS LLC	Well Number: 1H

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
 - Well Plat: 1 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
 - Blowout Prevention Choke Diagram Attachment: 2 file(s)
 - Blowout Prevention BOP Diagram Attachment: 1 file(s)
 - Casing Design Assumptions and Worksheet(s): 3 file(s)
 - Hydrogen sulfide drilling operations plan: 3 file(s)
 - Proposed horizontal/directional/multi-lateral plan submission: 3 file(s)
 - Other Variances: 2 file(s)
- SUPO Report
- SUPO Attachments
 - Existing Road Map: 1 file(s)
 - New Road Map: 1 file(s)
 - Attach Well map: 1 file(s)
 - Production Facilities map: 1 file(s)
 - Water source and transportation map: 1 file(s)
 - Well Site Layout Diagram: 5 file(s)
- PWD Report
- PWD Attachments
 - None
- Bond Report
- Bond Attachments
 - None

CONFIDENTIAL

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Sammy Hajar

Signed on: 05/16/2019

Title: Regulatory Analyst

Street Address: 104 S. Pecos

City: Midland

State: TX

Zip: 79701

Phone: (432)682-3753

Email address: shajar@btaoil.com

Field Representative

Representative Name:

Street Address: 104 South Pecos

City: Midland

State: TX

Zip: 79701

Phone: (432)682-3753

Email address: neaton@btaoil.com

APD ID: 10400041928

Submission Date: 05/17/2019

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Well Type: OIL WELL

Well Work Type: Drill

Show Final Text

Section 1 - General

APD ID: 10400041928

Tie to previous NOS?

Submission Date: 05/17/2019

BLM Office: CARLSBAD

User: Sammy Hajar

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM023768

Lease Acres: 160

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: BTA OIL PRODUCERS LLC

Operator letter of designation:

Operator Info

Operator Organization Name: BTA OIL PRODUCERS LLC

Operator Address: 104 S. Pecos

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)682-3753

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: ANTELOPE RIDGE Pool Name: BONE SPRING,
NORTH

Is the proposed well in an area containing other mineral resources? NONE

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Is the proposed well in an area containing other mineral resources? NONE

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: Number: 1, 2, 5, & 6

Well Class: HORIZONTAL

NORTH RIDGE FEDERAL COM

Number of Legs:

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 17 Miles

Distance to nearest well: 1409 FT

Distance to lease line: 300 FT

Reservoir well spacing assigned acres Measurement: 240 Acres

Well plat: North_Ridge_8040_1H_C102_20190516145651.pdf

Well work start Date: 10/16/2019

Duration: 30 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NGVD29

Survey number:

Reference Datum:

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	300	FNL	1620	FWL	22S	34E	35	Aliquot NENW	32.354597	-103.444139	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 023768	3410	0	0	
KOP Leg #1	100	FNL	700	FWL	22S	34E	35	Aliquot NWNW	32.355146	-103.447116	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 023768	-6437	9909	9847	
PPP Leg #1-1	1297	FSL	700	FWL	23S	34E	35	Aliquot SWSW	32.344486	-103.447136	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 026396	-7010	14200	10420	

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP Leg #1-2	259 7	FSL	700	FW L	23S	34E	35	Aliquot NWS W	32.34805 9	- 103.4471 29	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 136220	- 701 0	129 00	104 20	
PPP Leg #1-3	100	FNL	700	FW L	22S	34E	35	Aliquot NWN W	32.35514 6	- 103.4471 16	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 023768	- 671 8	102 03	101 28	
EXIT Leg #1	254 0	FNL	700	FW L	23S	34E	2	Aliquot SWN W	32.33393	- 103.4471 57	LEA	NEW MEXI CO	NEW MEXI CO	S	STATE	- 701 0	178 22	104 20	
BHL Leg #1	260 0	FNL	700	FW L	23S	34E	2	Aliquot SWN W	32.33376 5	- 103.4471 57	LEA	NEW MEXI CO	NEW MEXI CO	S	STATE	- 701 0	181 02	104 20	

Operator Name: BIA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Pressure Rating (PSI): 5M

Rating Depth: 11000

Equipment: The blowout preventer equipment (BOP) shown in Exhibit A will consist of a (5M system) double ram type (5,000 psi WP) preventer and a bag-type (Hydril) preventer (5000 psi WP). Both units will be hydraulically operated and the ram type preventer will be equipped with blind rams on top and 5" drill pipe rams on bottom. The BOP's will be installed on the 13-3/8" surface casing and utilized continuously until total depth is reached. A 2" kill line and 3" choke line will be incorporated in the drilling spool below the ram-type BOP. A remote kill line will be used for the 5M system as per onshore order #2. Other accessory BOP equipment will include a Kelly cock, floor safety valve, choke lines, and choke manifold having a 5,000 psi WP rating. The 5M annular will be tested as per BLM drilling Operations Order No. 2.

Requesting Variance? NO

Variance request: n/a

Testing Procedure: Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily driller's log. All BOP's and associated equipment will be tested as per BLM drilling Operations Order No. 2.

Choke Diagram Attachment:

Choke_Hose___Test_Chart_and_Specs_20181129153440.pdf

5M_choke_mannifold_20190211164346.pdf

BOP Diagram Attachment:

5M_BOP_diagram_20190211164555.pdf

Section 3 - Casing

Table with 22 columns: Casing ID, String Type, Hole Size, Csg Size, Condition, Standard, Tapered String, Top Set MD, Bottom Set MD, Top Set TVD, Bottom Set TVD, Top Set MSL, Bottom Set MSL, Calculated casing length MD, Grade, Weight, Joint Type, Collapse SF, Burst SF, Joint SF Type, Joint SF, Body SF Type, Body SF. It contains 3 rows of casing data.

Casing Attachments

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

North_Ridge_1H_Casing_assumption_20190516160216.JPG

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

North_Ridge_1H_Casing_assumption_20190516160210.JPG

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

North_Ridge_1H_Casing_assumption_20190516160204.JPG

Section 4 - Cement

Operator Name: BIA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	865	695	1.73	13.5	1202.35	100	Class C	2% CaCl2
SURFACE	Tail		865	1200	340	1.35	14.8	459	100	Class C	2% CaCl2
INTERMEDIATE	Lead		0	5040	1485	2.46	12.8	3653.1	100	Class C	0.5% CaCl2
INTERMEDIATE	Tail		5040	5595	200	1.34	14.8	268	25	Class C	1% CaCl2
PRODUCTION	Lead		4595	9910	515	3.9	10.5	2008.5	60	25% Poz 75% Class C	0.4% Fluid Loss
PRODUCTION	Tail		9910	18102	2070	1.25	14.4	2587.5	25	Class H	0.2% LT Retarder

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1200	OTHER : FW Spud	8.3	8.4							
1200	5595	OTHER : Saturated Brine	10	10.2							
5595	10420	OTHER : Cut Brine	8.7	9.3							

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Drill Stem Tests will be based on geological sample shows.

List of open and cased hole logs run in the well:

CBL,GR,MUDLOG

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5093

Anticipated Surface Pressure: 2800.6

Anticipated Bottom Hole Temperature(F): 164

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

H2S_Plan_20181129153648.pdf

H2S_Equipment_Schematic_20181129153733.pdf

BTA_Oil_Producers_LLC___EMERGENCY_CALL_LIST_20190205154800.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

North_Ridge__01H_directional_plan_20190516160536.pdf

North_Ridge__01H_Wall_plot_20190516160537.pdf

North_Ridge_1H_Gas_Capture_Plan_20190516160548.pdf

Other proposed operations facets description:

A variance is requested for a Multi Bowl Wellhead. See the attached schematic and running procedure. *All strings will be kept 1/3 full while running.

Other proposed operations facets attachment:

Other Variance attachment:



Casing_Head_Running_Procedure_20181129153916.pdf

WH_SCHEMATIC_13.375_9.625_5.5_20190514121902.pdf



Rig 94

ASSET 24455


QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1592	
PURCHASER: ContiTech Oil & Marine Corp.			P.O. N°: 4500461753		
CONTITECH ORDER N°: 539225	HOSE TYPE: 3" ID		Choke & Kill Hose		
HOSE SERIAL N°: 	NOMINAL / ACTUAL LENGTH: 7,62 m / 7,86 m				
W.P. 68,9 MPa	10000 psi	T.P. 103,4 MPa	15000 psi	Duration: 60	min.
Pressure test with water at ambient temperature					
See attachment. (1 page)					
→ 10 Min.					
↑ 50 MPa					
COUPLINGS Type	Serial N°	Quality	Heat N°		
3" coupling with 4 1/16" 10K API Swivel Flange end Hub	2574	5533	AISI 4130	A1582N H8672	
			AISI 4130	58855	
			AISI 4130	A1199N A1423N	
Not Designed For Well Testing			API Spec 16 C		
Fire Rated			Temperature rate:"B"		
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
Date: 04. September 2014.	Inspector	Quality Control 			

1/

File Name: 000720_68543_68545-547.GEV.....000236_68543_68545-547.GEV
 File Message: 68543_68545_58547
 Device Type: GX10
 Serial No.: SSP606399
 Data Count: 1046
 Print Group: Press-Temp
 Print Range: 2014/09/04 01:53:54.000 - 2014/09/04 04:39:39.000
 Comment:


Sampling Int.: 1.000 sec
 Start Time: 2014/09/04 01:53:54.000
 Stop Time: 2014/09/04 04:39:39.000

Data No	Cursor A	Cursor B	Difference
3432	2014/09/04 02:57:05.000	2014/09/04 03:21:08.000	21.0000000
Absolute Time	Value A	Value B	Value B-A
1892.92	10.91.57	23.14	-12.29
23.24			-0.10

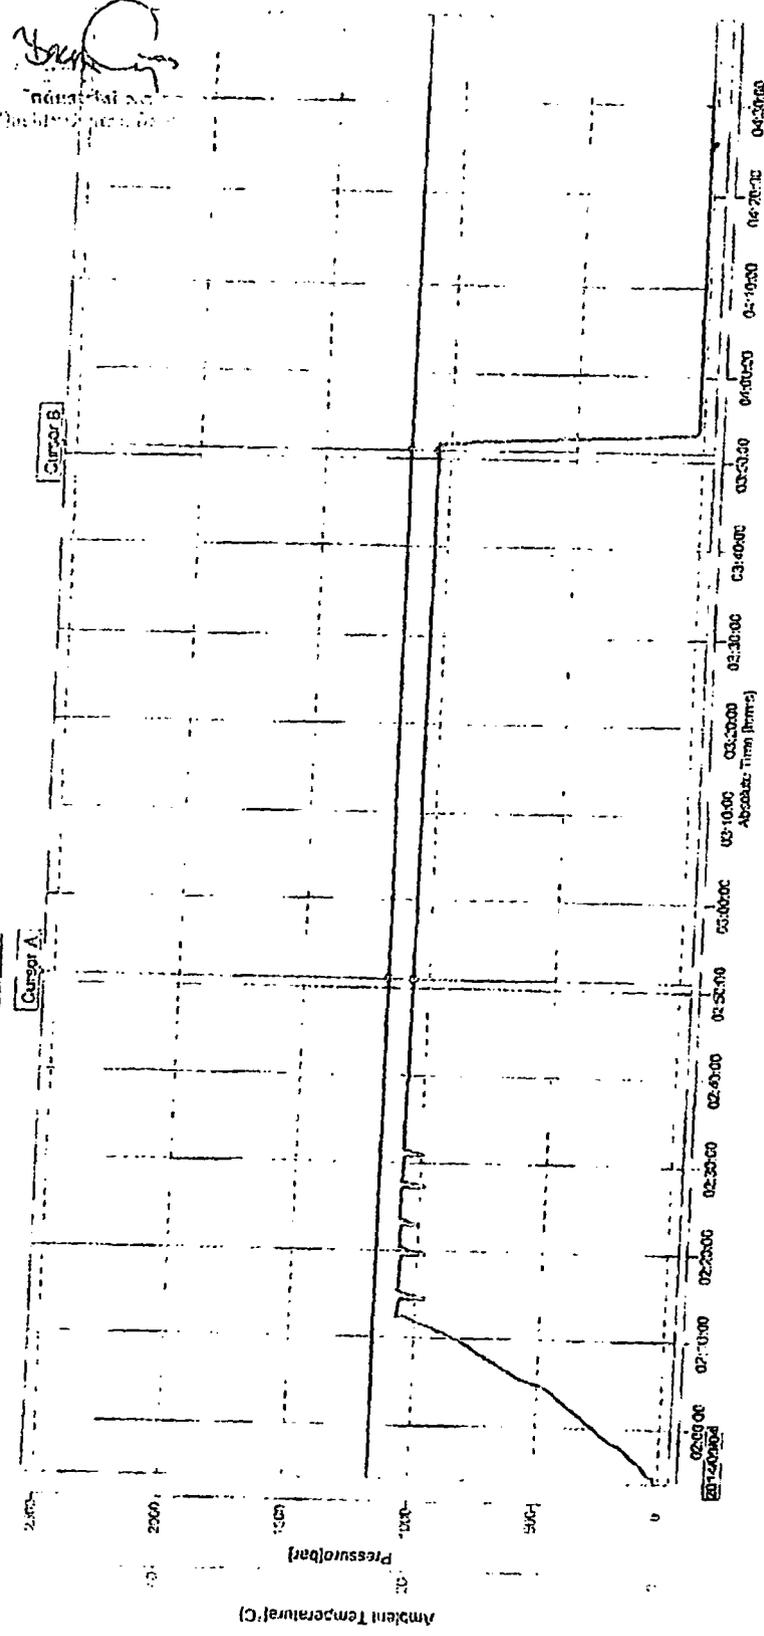

[Handwritten Signature]
 Name: Tai ...
 Position: ...

Image

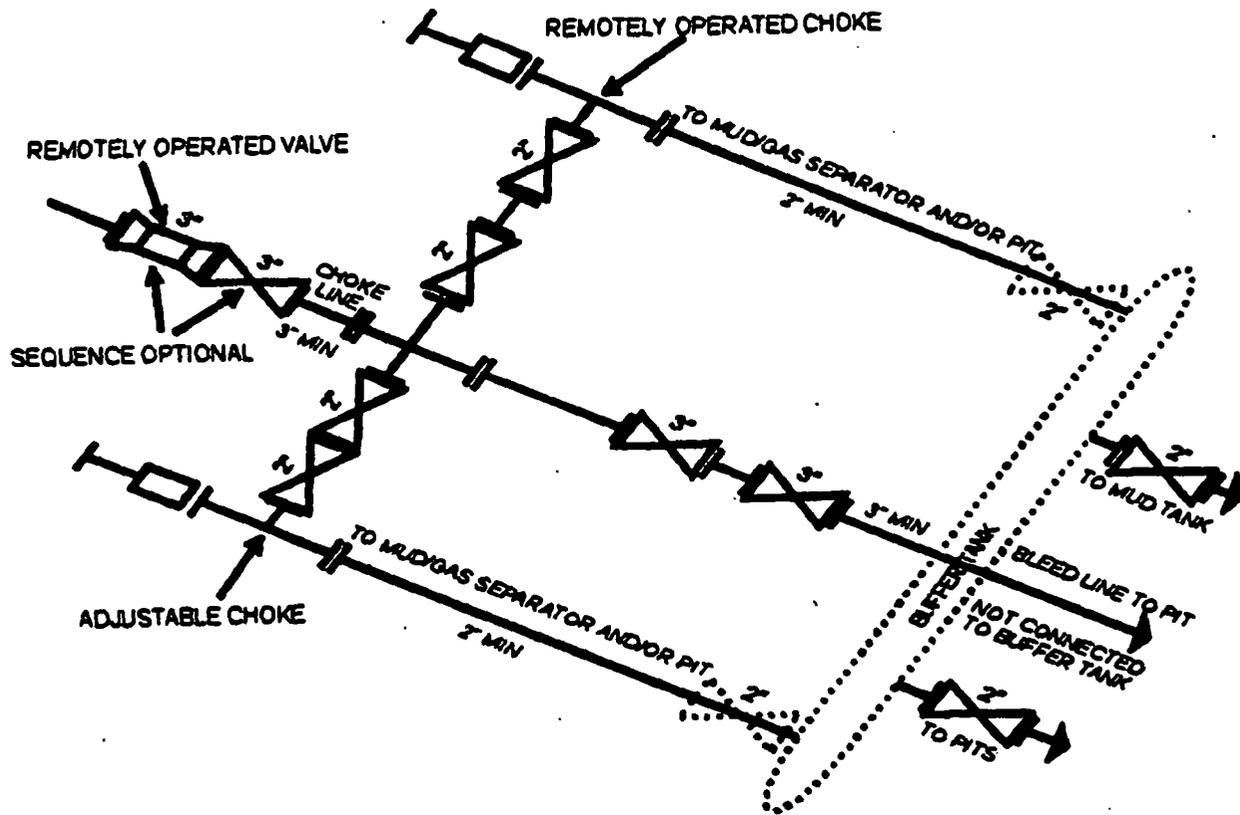


5M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

Although not required for any of the choke manifold systems, buffer tanks are sometimes installed downstream of the choke assemblies for the purpose of manifolding the bleed lines together. When buffer tanks are employed, valves shall be installed upstream to isolate a failure or malfunction without interrupting flow control. Though not shown on 2M, 3M, 10M, OR 15M drawings, it would also be applicable to those situations.

[54 FR 39528, Sept. 27, 1989]

13-5/8" 5,000 PSI BOP

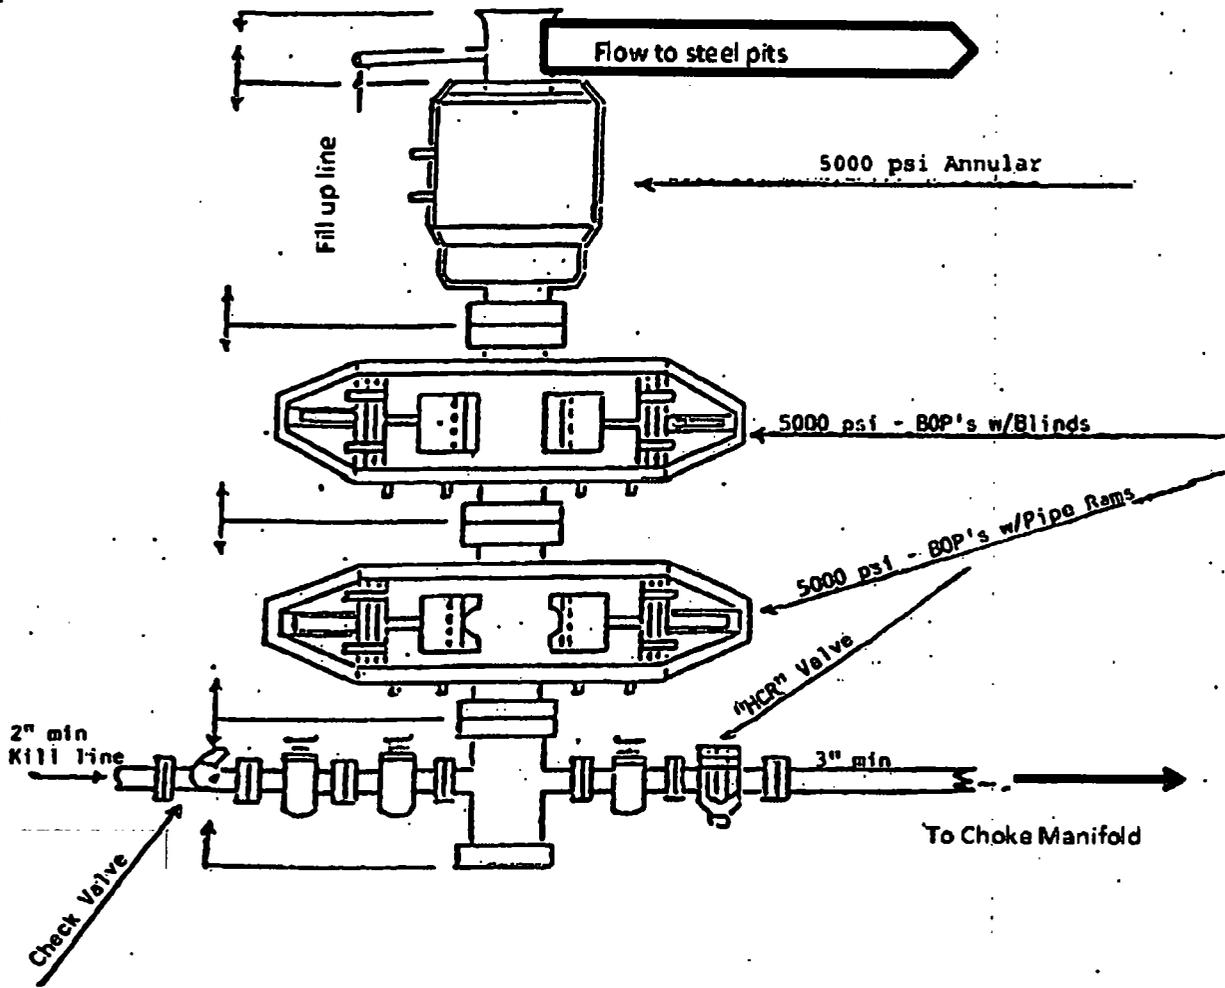

BTA OIL PRODUCERS LLC



HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.
- b. Protective equipment for essential personnel:
 - Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H₂S detection and monitoring equipment:

- 2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.


W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED***
- 2. HARD HATS REQUIRED***
- 3. SMOKING IN DESIGNATED AREAS ONLY***
- 4. BE WIND CONSCIOUS AT ALL TIMES***
- 5. CK WITH BTA OIL PRODUCERS LLC FOREMAN AT MAIN OFFICE***

BTA OIL PRODUCERS LLC

1-432-682-3753

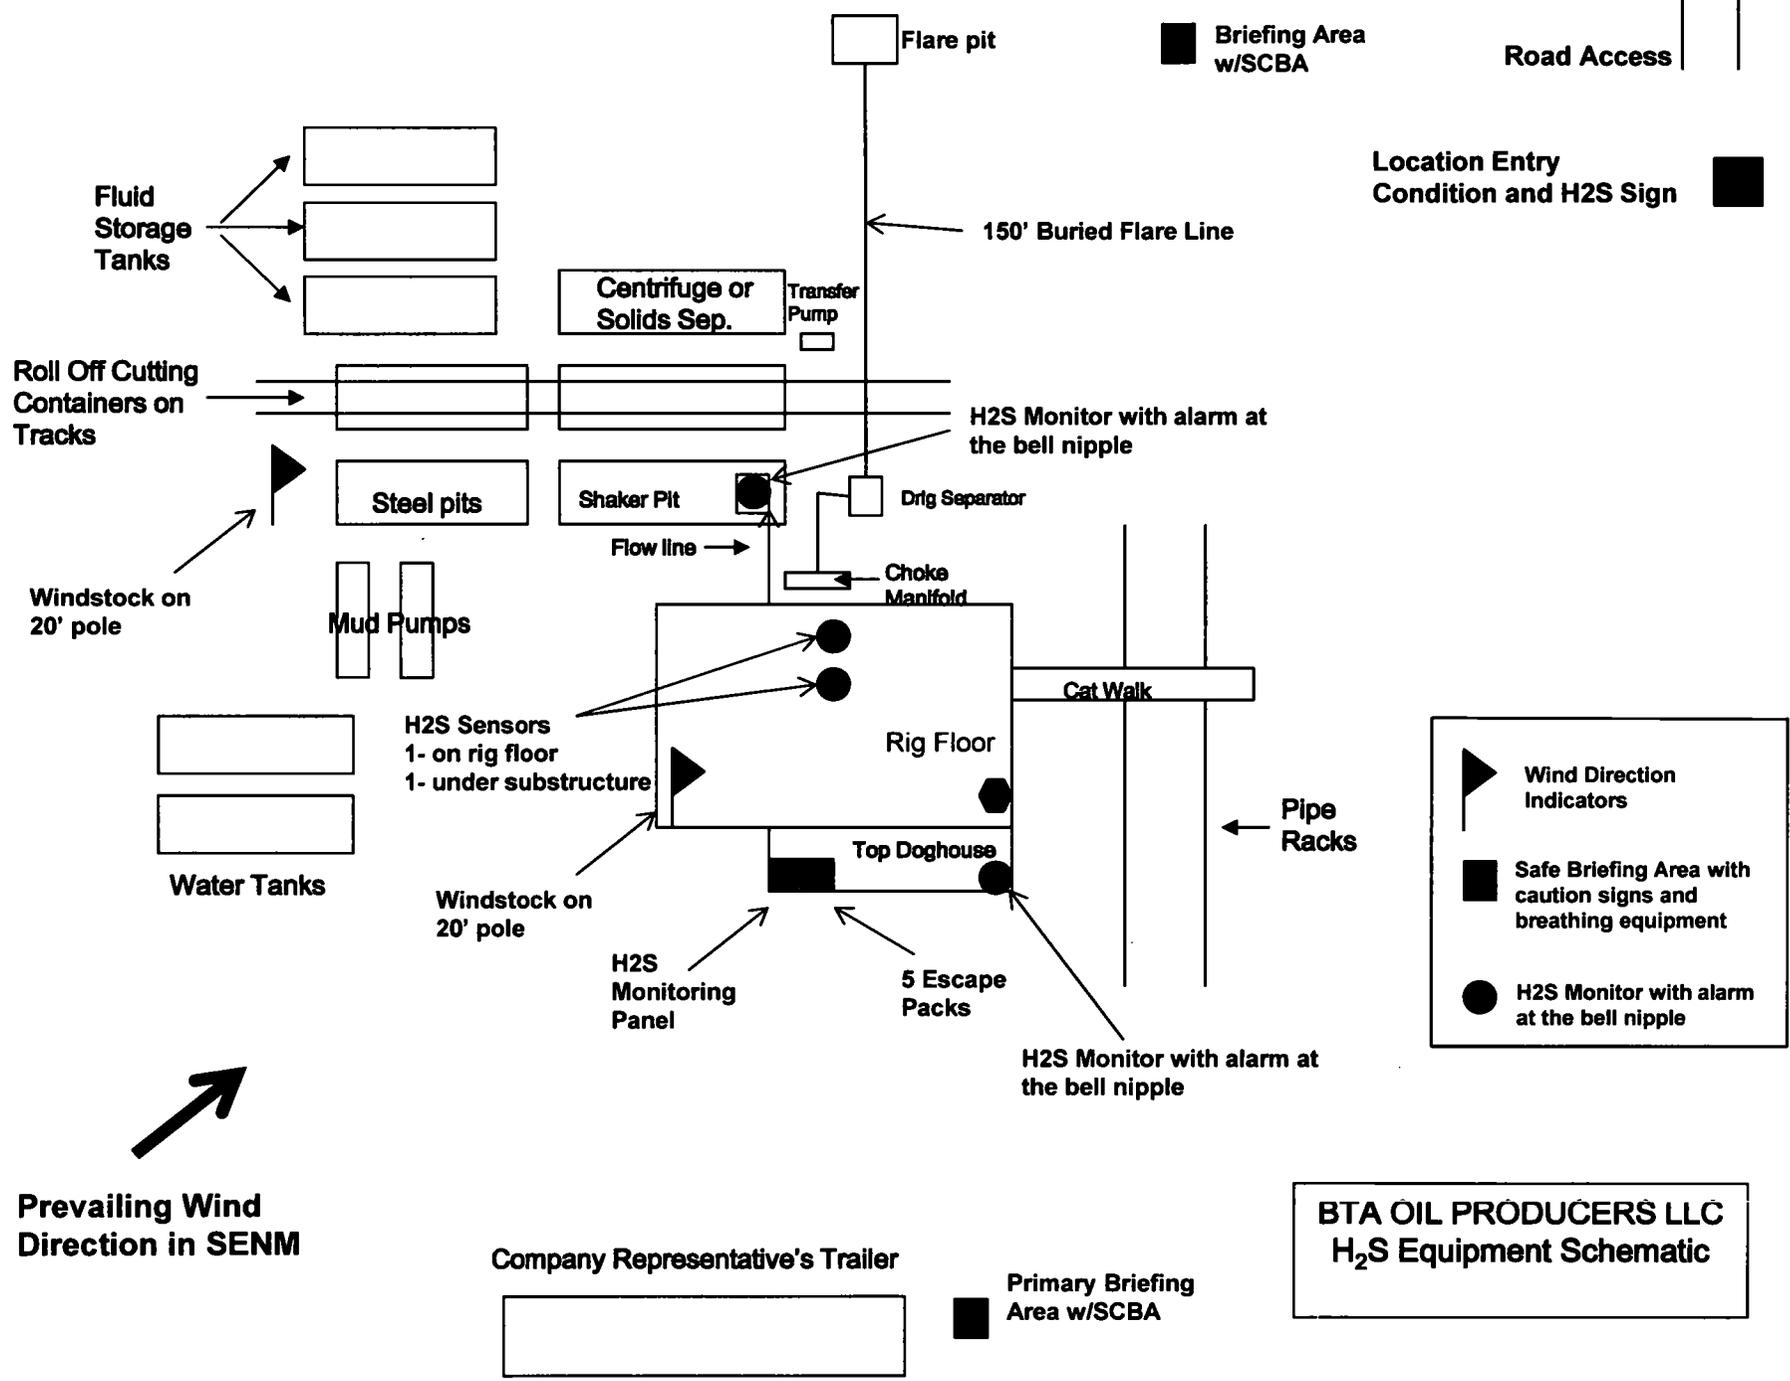

■ Briefing Area w/SCBA

||| Road Access

■ Location Entry Condition and H2S Sign

Flare pit

150' Buried Flare Line

Centrifuge or Solids Sep.

Transfer Pump

Fluid Storage Tanks

Roll Off Cutting Containers on Tracks

H2S Monitor with alarm at the bell nipple

Steel pits

Shaker Pit

Drig Separator

Windstock on 20' pole

Flow line

Choke Manifold

Mud Pumps

Cat Walk

Water Tanks

H2S Sensors
1- on rig floor
1- under substructure

Rig Floor

Pipe Racks

▲ Wind Direction Indicators

■ Safe Briefing Area with caution signs and breathing equipment

● H2S Monitor with alarm at the bell nipple

Windstock on 20' pole

Top Doghouse

H2S Monitoring Panel

5 Escape Packs

H2S Monitor with alarm at the bell nipple

Prevailing Wind Direction in SENM

Company Representative's Trailer

■ Primary Briefing Area w/SCBA

BTA OIL PRODUCERS LLC
H₂S Equipment Schematic



EMERGENCY CALL LIST

	<u>OFFICE</u>	<u>MOBILE</u>
BTA Oil Producers LLC OFFICE	432-682-3753	
BEN GRIMES, Operations	432-682-3753	432-559-4309
NICK EATON, Drilling	432-682-3753	432-260-7841
TRACE WOHLFAHRT, Completions	432-682-3753	

EMERGENCY RESPONSE NUMBERS

	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

BTA Oil Producers, LLC

Lea County, NM (NAD 83)

North Ridge

North Ridge #01H

Wellbore #1

Plan: Design #1

Standard Planning Report - Geographic

15 May, 2019

Microsoft
Planning Report - Geographic

Database: Old	Local Co-ordinate Reference: Well North Ridge #01H
Company: BTA Oil Producers, LLC	TVD Reference: WELL @ 3413.0usft (Original Well Elev)
Project: Lea County, NM (NAD 83)	MD Reference: WELL @ 3413.0usft (Original Well Elev)
Site: North Ridge	North Reference: Grid
Well: North Ridge #01H	Survey Calculation Method: Minimum Curvature
Wellbore: Wellbore #1	
Design: Design #1	

Project	Lea County, NM (NAD 83), Lea County, NM		
Map System:	US State Plane 1983	System Datum:	Ground Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		Using geodetic scale factor

Site	North Ridge				
Site Position:	Northing:	493,872.00 usft	Latitude:	32° 21' 16.544 N	
From: Map	Easting:	815,680.00 usft	Longitude:	103° 26' 41.649 W	
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.48 °

Well	North Ridge #01H					
Well Position	+N/-S	0.0 usft	Northing:	493,872.00 usft	Latitude:	32° 21' 16.544 N
	+E/-W	0.0 usft	Easting:	815,680.00 usft	Longitude:	103° 26' 41.649 W
Position Uncertainty	0.0 usft		Wellhead Elevation:		Ground Level:	3,413.0 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
	IGRF200510	12/31/2009	(°)	(°)	(nT)
			7.70	60.39	48,886.08954630

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(usft)	(usft)	(usft)	(°)
	0.0	0.0	0.0	184.78

Plan Survey Tool Program	Date	4/22/2019		
Depth From	Depth To	Survey (Wellbore)	Tool Name	Remarks
(usft)	(usft)			
1	0.0	18,101.5 Design #1 (Wellbore #1)		

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(usft)	(usft)	Rate	Rate	Rate	(°)	
(usft)			(usft)			(°/100usft)	(°/100usft)	(°/100usft)		
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,051.9	0.00	0.00	5,051.9	0.0	0.0	0.00	0.00	0.00	0.00	
5,551.9	10.00	292.23	5,549.3	16.5	-40.3	2.00	2.00	0.00	292.23	
9,312.2	10.00	292.23	9,252.5	263.5	-644.7	0.00	0.00	0.00	0.00	
9,812.2	0.00	0.00	9,750.0	280.0	-685.0	2.00	-2.00	0.00	180.00	
9,909.2	0.00	0.00	9,847.0	280.0	-685.0	0.00	0.00	0.00	0.00	
10,809.2	90.00	179.63	10,420.0	-292.9	-681.3	10.00	10.00	0.00	179.63	
18,101.5	90.00	179.63	10,420.0	-7,585.0	-634.0	0.00	0.00	0.00	0.00	North Ridge #1H BHL

Microsoft
Planning Report - Geographic

Database: Old
Company: BTA Oil Producers, LLC
Project: Lea County, NM (NAD 83)
Site: North Ridge
Well: North Ridge #01H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well North Ridge #01H
TVD Reference: WELL @ 3413.0usft (Original Well Elev)
MD Reference: WELL @ 3413.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
100.0	0.00	0.00	100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
200.0	0.00	0.00	200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
300.0	0.00	0.00	300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
400.0	0.00	0.00	400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
500.0	0.00	0.00	500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
600.0	0.00	0.00	600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
700.0	0.00	0.00	700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
800.0	0.00	0.00	800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
900.0	0.00	0.00	900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,000.0	0.00	0.00	1,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,100.0	0.00	0.00	1,100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,200.0	0.00	0.00	1,200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,300.0	0.00	0.00	1,300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,400.0	0.00	0.00	1,400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,500.0	0.00	0.00	1,500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,600.0	0.00	0.00	1,600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,700.0	0.00	0.00	1,700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,800.0	0.00	0.00	1,800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,900.0	0.00	0.00	1,900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,000.0	0.00	0.00	2,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,100.0	0.00	0.00	2,100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,200.0	0.00	0.00	2,200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,300.0	0.00	0.00	2,300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,400.0	0.00	0.00	2,400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,500.0	0.00	0.00	2,500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,600.0	0.00	0.00	2,600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,700.0	0.00	0.00	2,700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,800.0	0.00	0.00	2,800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,900.0	0.00	0.00	2,900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,000.0	0.00	0.00	3,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,100.0	0.00	0.00	3,100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,200.0	0.00	0.00	3,200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,300.0	0.00	0.00	3,300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,400.0	0.00	0.00	3,400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,500.0	0.00	0.00	3,500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,600.0	0.00	0.00	3,600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,700.0	0.00	0.00	3,700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,800.0	0.00	0.00	3,800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,900.0	0.00	0.00	3,900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,000.0	0.00	0.00	4,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,100.0	0.00	0.00	4,100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,200.0	0.00	0.00	4,200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,300.0	0.00	0.00	4,300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,400.0	0.00	0.00	4,400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,500.0	0.00	0.00	4,500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,600.0	0.00	0.00	4,600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,700.0	0.00	0.00	4,700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,800.0	0.00	0.00	4,800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,900.0	0.00	0.00	4,900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
5,000.0	0.00	0.00	5,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
5,051.9	0.00	0.00	5,051.9	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
5,100.0	0.96	292.23	5,100.0	0.2	-0.4	493,872.15	815,679.62	32° 21' 16.545 N	103° 26' 41.653 W
5,200.0	2.96	292.23	5,199.9	1.4	-3.5	493,873.45	815,676.45	32° 21' 16.558 N	103° 26' 41.690 W
5,300.0	4.96	292.23	5,299.7	4.1	-9.9	493,876.06	815,670.06	32° 21' 16.585 N	103° 26' 41.765 W

Microsoft

Planning Report - Geographic

Database: Old
Company: BTA Oil Producers, LLC
Project: Lea County, NM (NAD 83)
Site: North Ridge
Well: North Ridge #01H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well North Ridge #01H
TVD Reference: WELL @ 3413.0usft (Original Well Elev)
MD Reference: WELL @ 3413.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
5,400.0	6.96	292.23	5,399.1	8.0	-19.6	493,879.99	815,660.44	32° 21' 16.625 N	103° 26' 41.876 W
5,500.0	8.96	292.23	5,498.2	13.2	-32.4	493,885.23	815,647.62	32° 21' 16.677 N	103° 26' 42.025 W
5,551.9	10.00	292.23	5,549.3	16.5	-40.3	493,888.47	815,639.71	32° 21' 16.710 N	103° 26' 42.117 W
5,600.0	10.00	292.23	5,596.7	19.6	-48.0	493,891.63	815,631.98	32° 21' 16.742 N	103° 26' 42.207 W
5,700.0	10.00	292.23	5,695.2	26.2	-64.1	493,898.20	815,615.90	32° 21' 16.808 N	103° 26' 42.394 W
5,800.0	10.00	292.23	5,793.7	32.8	-80.2	493,904.77	815,599.83	32° 21' 16.875 N	103° 26' 42.580 W
5,900.0	10.00	292.23	5,892.2	39.3	-96.2	493,911.34	815,583.76	32° 21' 16.941 N	103° 26' 42.767 W
6,000.0	10.00	292.23	5,990.7	45.9	-112.3	493,917.91	815,567.68	32° 21' 17.007 N	103° 26' 42.954 W
6,100.0	10.00	292.23	6,089.1	52.5	-128.4	493,924.48	815,551.61	32° 21' 17.074 N	103° 26' 43.141 W
6,200.0	10.00	292.23	6,187.6	59.1	-144.5	493,931.05	815,535.53	32° 21' 17.140 N	103° 26' 43.327 W
6,300.0	10.00	292.23	6,286.1	65.6	-160.5	493,937.62	815,519.46	32° 21' 17.206 N	103° 26' 43.514 W
6,400.0	10.00	292.23	6,384.6	72.2	-176.6	493,944.19	815,503.39	32° 21' 17.273 N	103° 26' 43.701 W
6,500.0	10.00	292.23	6,483.1	78.8	-192.7	493,950.76	815,487.31	32° 21' 17.339 N	103° 26' 43.888 W
6,600.0	10.00	292.23	6,581.5	85.3	-208.8	493,957.33	815,471.24	32° 21' 17.405 N	103° 26' 44.074 W
6,700.0	10.00	292.23	6,680.0	91.9	-224.8	493,963.90	815,455.17	32° 21' 17.472 N	103° 26' 44.261 W
6,800.0	10.00	292.23	6,778.5	98.5	-240.9	493,970.47	815,439.09	32° 21' 17.538 N	103° 26' 44.448 W
6,900.0	10.00	292.23	6,877.0	105.0	-257.0	493,977.04	815,423.02	32° 21' 17.604 N	103° 26' 44.635 W
7,000.0	10.00	292.23	6,975.5	111.6	-273.1	493,983.61	815,406.94	32° 21' 17.671 N	103° 26' 44.821 W
7,100.0	10.00	292.23	7,073.9	118.2	-289.1	493,990.18	815,390.87	32° 21' 17.737 N	103° 26' 45.008 W
7,200.0	10.00	292.23	7,172.4	124.8	-305.2	493,996.75	815,374.80	32° 21' 17.803 N	103° 26' 45.195 W
7,300.0	10.00	292.23	7,270.9	131.3	-321.3	494,003.32	815,358.72	32° 21' 17.870 N	103° 26' 45.382 W
7,400.0	10.00	292.23	7,369.4	137.9	-337.3	494,009.90	815,342.65	32° 21' 17.936 N	103° 26' 45.568 W
7,500.0	10.00	292.23	7,467.9	144.5	-353.4	494,016.47	815,326.58	32° 21' 18.002 N	103° 26' 45.755 W
7,600.0	10.00	292.23	7,566.3	151.0	-369.5	494,023.04	815,310.50	32° 21' 18.069 N	103° 26' 45.942 W
7,700.0	10.00	292.23	7,664.8	157.6	-385.6	494,029.61	815,294.43	32° 21' 18.135 N	103° 26' 46.128 W
7,800.0	10.00	292.23	7,763.3	164.2	-401.6	494,036.18	815,278.35	32° 21' 18.201 N	103° 26' 46.315 W
7,900.0	10.00	292.23	7,861.8	170.7	-417.7	494,042.75	815,262.28	32° 21' 18.268 N	103° 26' 46.502 W
8,000.0	10.00	292.23	7,960.3	177.3	-433.8	494,049.32	815,246.21	32° 21' 18.334 N	103° 26' 46.689 W
8,100.0	10.00	292.23	8,058.8	183.9	-449.9	494,055.89	815,230.13	32° 21' 18.400 N	103° 26' 46.875 W
8,200.0	10.00	292.23	8,157.2	190.5	-465.9	494,062.46	815,214.06	32° 21' 18.467 N	103° 26' 47.062 W
8,300.0	10.00	292.23	8,255.7	197.0	-482.0	494,069.03	815,197.99	32° 21' 18.533 N	103° 26' 47.249 W
8,400.0	10.00	292.23	8,354.2	203.6	-498.1	494,075.60	815,181.91	32° 21' 18.599 N	103° 26' 47.436 W
8,500.0	10.00	292.23	8,452.7	210.2	-514.2	494,082.17	815,165.84	32° 21' 18.666 N	103° 26' 47.622 W
8,600.0	10.00	292.23	8,551.2	216.7	-530.2	494,088.74	815,149.76	32° 21' 18.732 N	103° 26' 47.809 W
8,700.0	10.00	292.23	8,649.6	223.3	-546.3	494,095.31	815,133.69	32° 21' 18.798 N	103° 26' 47.996 W
8,800.0	10.00	292.23	8,748.1	229.9	-562.4	494,101.88	815,117.62	32° 21' 18.865 N	103° 26' 48.183 W
8,900.0	10.00	292.23	8,846.6	236.4	-578.5	494,108.45	815,101.54	32° 21' 18.931 N	103° 26' 48.369 W
9,000.0	10.00	292.23	8,945.1	243.0	-594.5	494,115.02	815,085.47	32° 21' 18.997 N	103° 26' 48.556 W
9,100.0	10.00	292.23	9,043.6	249.6	-610.6	494,121.59	815,069.40	32° 21' 19.064 N	103° 26' 48.743 W
9,200.0	10.00	292.23	9,142.0	256.2	-626.7	494,128.16	815,053.32	32° 21' 19.130 N	103° 26' 48.930 W
9,300.0	10.00	292.23	9,240.5	262.7	-642.8	494,134.73	815,037.25	32° 21' 19.196 N	103° 26' 49.116 W
9,312.2	10.00	292.23	9,252.5	263.5	-644.7	494,135.53	815,035.29	32° 21' 19.204 N	103° 26' 49.139 W
9,400.0	8.24	292.23	9,339.2	268.8	-657.6	494,140.80	815,022.40	32° 21' 19.257 N	103° 26' 49.289 W
9,500.0	6.24	292.23	9,438.4	273.6	-669.3	494,145.57	815,010.73	32° 21' 19.306 N	103° 26' 49.424 W
9,600.0	4.24	292.23	9,538.0	277.0	-677.7	494,149.03	815,002.27	32° 21' 19.341 N	103° 26' 49.523 W
9,700.0	2.24	292.23	9,637.8	279.2	-683.0	494,151.17	814,997.03	32° 21' 19.362 N	103° 26' 49.583 W
9,800.0	0.24	292.23	9,737.8	280.0	-685.0	494,151.99	814,995.03	32° 21' 19.370 N	103° 26' 49.607 W
9,812.2	0.00	0.00	9,750.0	280.0	-685.0	494,152.00	814,995.00	32° 21' 19.371 N	103° 26' 49.607 W
9,900.0	0.00	0.00	9,837.8	280.0	-685.0	494,152.00	814,995.00	32° 21' 19.371 N	103° 26' 49.607 W
9,909.2	0.00	0.00	9,847.0	280.0	-685.0	494,152.00	814,995.00	32° 21' 19.371 N	103° 26' 49.607 W
10,000.0	9.08	179.63	9,937.4	272.8	-685.0	494,144.83	814,995.05	32° 21' 19.300 N	103° 26' 49.607 W
10,100.0	19.08	179.63	10,034.3	248.5	-684.8	494,120.54	814,995.21	32° 21' 19.059 N	103° 26' 49.608 W
10,200.0	29.08	179.63	10,125.5	207.8	-684.5	494,079.79	814,995.47	32° 21' 18.656 N	103° 26' 49.609 W
10,300.0	39.08	179.63	10,208.2	151.8	-684.2	494,023.84	814,995.83	32° 21' 18.102 N	103° 26' 49.610 W
10,400.0	49.08	179.63	10,280.0	82.4	-683.7	493,954.37	814,996.28	32° 21' 17.415 N	103° 26' 49.611 W

Microsoft
Planning Report - Geographic

Database: Old
 Company: BTA Oil Producers, LLC
 Project: Lea County, NM (NAD 83)
 Site: North Ridge
 Well: North Ridge #01H
 Wellbore: Wellbore #1
 Design: Design #1

Local Co-ordinate Reference: Well North Ridge #01H
 TVD Reference: WELL @ 3413.0usft (Original Well Elev)
 MD Reference: WELL @ 3413.0usft (Original Well Elev)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
10,500.0	59.08	179.63	10,338.6	1.5	-683.2	493,873.49	814,996.81	32° 21' 16.615 N	103° 26' 49.613 W	
10,600.0	69.08	179.63	10,382.2	-88.3	-682.6	493,783.67	814,997.39	32° 21' 15.726 N	103° 26' 49.615 W	
10,700.0	79.08	179.63	10,409.6	-184.4	-682.0	493,687.63	814,998.01	32° 21' 14.776 N	103° 26' 49.617 W	
10,800.0	89.08	179.63	10,419.9	-283.7	-681.3	493,588.30	814,998.66	32° 21' 13.793 N	103° 26' 49.619 W	
10,809.2	90.00	179.63	10,420.0	-292.9	-681.3	493,579.06	814,998.72	32° 21' 13.701 N	103° 26' 49.619 W	
10,900.0	90.00	179.63	10,420.0	-383.7	-680.7	493,488.30	814,999.30	32° 21' 12.803 N	103° 26' 49.621 W	
11,000.0	90.00	179.63	10,420.0	-483.7	-680.0	493,388.30	814,999.95	32° 21' 11.814 N	103° 26' 49.623 W	
11,100.0	90.00	179.63	10,420.0	-583.7	-679.4	493,288.30	815,000.60	32° 21' 10.824 N	103° 26' 49.625 W	
11,200.0	90.00	179.63	10,420.0	-683.7	-678.8	493,188.31	815,001.25	32° 21' 9.835 N	103° 26' 49.627 W	
11,300.0	90.00	179.63	10,420.0	-783.7	-678.1	493,088.31	815,001.90	32° 21' 8.845 N	103° 26' 49.629 W	
11,400.0	90.00	179.63	10,420.0	-883.7	-677.5	492,988.31	815,002.55	32° 21' 7.856 N	103° 26' 49.631 W	
11,500.0	90.00	179.63	10,420.0	-983.7	-676.8	492,888.31	815,003.20	32° 21' 6.866 N	103° 26' 49.634 W	
11,600.0	90.00	179.63	10,420.0	-1,083.7	-676.2	492,788.32	815,003.84	32° 21' 5.877 N	103° 26' 49.636 W	
11,700.0	90.00	179.63	10,420.0	-1,183.7	-675.5	492,688.32	815,004.49	32° 21' 4.887 N	103° 26' 49.638 W	
11,800.0	90.00	179.63	10,420.0	-1,283.7	-674.9	492,588.32	815,005.14	32° 21' 3.898 N	103° 26' 49.640 W	
11,900.0	90.00	179.63	10,420.0	-1,383.7	-674.2	492,488.32	815,005.79	32° 21' 2.908 N	103° 26' 49.642 W	
12,000.0	90.00	179.63	10,420.0	-1,483.7	-673.6	492,388.33	815,006.44	32° 21' 1.919 N	103° 26' 49.644 W	
12,100.0	90.00	179.63	10,420.0	-1,583.7	-672.9	492,288.33	815,007.09	32° 21' 0.929 N	103° 26' 49.646 W	
12,200.0	90.00	179.63	10,420.0	-1,683.7	-672.3	492,188.33	815,007.73	32° 20' 59.940 N	103° 26' 49.648 W	
12,300.0	90.00	179.63	10,420.0	-1,783.7	-671.6	492,088.33	815,008.38	32° 20' 58.950 N	103° 26' 49.650 W	
12,400.0	90.00	179.63	10,420.0	-1,883.7	-671.0	491,988.34	815,009.03	32° 20' 57.961 N	103° 26' 49.652 W	
12,500.0	90.00	179.63	10,420.0	-1,983.7	-670.3	491,888.34	815,009.68	32° 20' 56.971 N	103° 26' 49.654 W	
12,600.0	90.00	179.63	10,420.0	-2,083.7	-669.7	491,788.34	815,010.33	32° 20' 55.982 N	103° 26' 49.657 W	
12,700.0	90.00	179.63	10,420.0	-2,183.7	-669.0	491,688.34	815,010.98	32° 20' 54.992 N	103° 26' 49.659 W	
12,800.0	90.00	179.63	10,420.0	-2,283.7	-668.4	491,588.35	815,011.62	32° 20' 54.003 N	103° 26' 49.661 W	
12,900.0	90.00	179.63	10,420.0	-2,383.7	-667.7	491,488.35	815,012.27	32° 20' 53.013 N	103° 26' 49.663 W	
13,000.0	90.00	179.63	10,420.0	-2,483.7	-667.1	491,388.35	815,012.92	32° 20' 52.024 N	103° 26' 49.665 W	
13,100.0	90.00	179.63	10,420.0	-2,583.7	-666.4	491,288.35	815,013.57	32° 20' 51.034 N	103° 26' 49.667 W	
13,200.0	90.00	179.63	10,420.0	-2,683.7	-665.8	491,188.36	815,014.22	32° 20' 50.045 N	103° 26' 49.669 W	
13,300.0	90.00	179.63	10,420.0	-2,783.7	-665.1	491,088.36	815,014.87	32° 20' 49.055 N	103° 26' 49.671 W	
13,400.0	90.00	179.63	10,420.0	-2,883.7	-664.5	490,988.36	815,015.51	32° 20' 48.066 N	103° 26' 49.673 W	
13,500.0	90.00	179.63	10,420.0	-2,983.7	-663.8	490,888.36	815,016.16	32° 20' 47.076 N	103° 26' 49.675 W	
13,600.0	90.00	179.63	10,420.0	-3,083.6	-663.2	490,788.37	815,016.81	32° 20' 46.087 N	103° 26' 49.677 W	
13,700.0	90.00	179.63	10,420.0	-3,183.6	-662.5	490,688.37	815,017.46	32° 20' 45.097 N	103° 26' 49.680 W	
13,800.0	90.00	179.63	10,420.0	-3,283.6	-661.9	490,588.37	815,018.11	32° 20' 44.108 N	103° 26' 49.682 W	
13,900.0	90.00	179.63	10,420.0	-3,383.6	-661.2	490,488.38	815,018.76	32° 20' 43.118 N	103° 26' 49.684 W	
14,000.0	90.00	179.63	10,420.0	-3,483.6	-660.6	490,388.38	815,019.40	32° 20' 42.129 N	103° 26' 49.686 W	
14,100.0	90.00	179.63	10,420.0	-3,583.6	-659.9	490,288.38	815,020.05	32° 20' 41.139 N	103° 26' 49.688 W	
14,200.0	90.00	179.63	10,420.0	-3,683.6	-659.3	490,188.38	815,020.70	32° 20' 40.150 N	103° 26' 49.690 W	
14,300.0	90.00	179.63	10,420.0	-3,783.6	-658.7	490,088.39	815,021.35	32° 20' 39.160 N	103° 26' 49.692 W	
14,400.0	90.00	179.63	10,420.0	-3,883.6	-658.0	489,988.39	815,022.00	32° 20' 38.171 N	103° 26' 49.694 W	
14,500.0	90.00	179.63	10,420.0	-3,983.6	-657.4	489,888.39	815,022.65	32° 20' 37.181 N	103° 26' 49.696 W	
14,600.0	90.00	179.63	10,420.0	-4,083.6	-656.7	489,788.39	815,023.30	32° 20' 36.192 N	103° 26' 49.698 W	
14,700.0	90.00	179.63	10,420.0	-4,183.6	-656.1	489,688.40	815,023.94	32° 20' 35.202 N	103° 26' 49.700 W	
14,800.0	90.00	179.63	10,420.0	-4,283.6	-655.4	489,588.40	815,024.59	32° 20' 34.213 N	103° 26' 49.702 W	
14,900.0	90.00	179.63	10,420.0	-4,383.6	-654.8	489,488.40	815,025.24	32° 20' 33.223 N	103° 26' 49.705 W	
15,000.0	90.00	179.63	10,420.0	-4,483.6	-654.1	489,388.40	815,025.89	32° 20' 32.234 N	103° 26' 49.707 W	
15,100.0	90.00	179.63	10,420.0	-4,583.6	-653.5	489,288.41	815,026.54	32° 20' 31.244 N	103° 26' 49.709 W	
15,200.0	90.00	179.63	10,420.0	-4,683.6	-652.8	489,188.41	815,027.19	32° 20' 30.255 N	103° 26' 49.711 W	
15,300.0	90.00	179.63	10,420.0	-4,783.6	-652.2	489,088.41	815,027.83	32° 20' 29.265 N	103° 26' 49.713 W	
15,400.0	90.00	179.63	10,420.0	-4,883.6	-651.5	488,988.41	815,028.48	32° 20' 28.276 N	103° 26' 49.715 W	
15,500.0	90.00	179.63	10,420.0	-4,983.6	-650.9	488,888.42	815,029.13	32° 20' 27.286 N	103° 26' 49.717 W	
15,600.0	90.00	179.63	10,420.0	-5,083.6	-650.2	488,788.42	815,029.78	32° 20' 26.297 N	103° 26' 49.719 W	
15,700.0	90.00	179.63	10,420.0	-5,183.6	-649.6	488,688.42	815,030.43	32° 20' 25.307 N	103° 26' 49.721 W	
15,800.0	90.00	179.63	10,420.0	-5,283.6	-648.9	488,588.42	815,031.08	32° 20' 24.318 N	103° 26' 49.723 W	

Microsoft
Planning Report - Geographic

Database: Old
Company: BTA Oil Producers, LLC
Project: Lea County, NM (NAD 83)
Site: North Ridge
Well: North Ridge #01H
Wellbore: Wellbore #1
Design: Design #1


Local Co-ordinate Reference: Well North Ridge #01H
TVD Reference: WELL @ 3413.0usft (Original Well Elev)
MD Reference: WELL @ 3413.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
15,900.0	90.00	179.63	10,420.0	-5,383.6	-648.3	488,488.43	815,031.72	32° 20' 23.328 N	103° 26' 49.725 W
16,000.0	90.00	179.63	10,420.0	-5,483.6	-647.6	488,388.43	815,032.37	32° 20' 22.339 N	103° 26' 49.728 W
16,100.0	90.00	179.63	10,420.0	-5,583.6	-647.0	488,288.43	815,033.02	32° 20' 21.349 N	103° 26' 49.730 W
16,200.0	90.00	179.63	10,420.0	-5,683.6	-646.3	488,188.43	815,033.67	32° 20' 20.360 N	103° 26' 49.732 W
16,300.0	90.00	179.63	10,420.0	-5,783.6	-645.7	488,088.44	815,034.32	32° 20' 19.370 N	103° 26' 49.734 W
16,400.0	90.00	179.63	10,420.0	-5,883.6	-645.0	487,988.44	815,034.97	32° 20' 18.381 N	103° 26' 49.736 W
16,500.0	90.00	179.63	10,420.0	-5,983.6	-644.4	487,888.44	815,035.61	32° 20' 17.391 N	103° 26' 49.738 W
16,600.0	90.00	179.63	10,420.0	-6,083.6	-643.7	487,788.44	815,036.26	32° 20' 16.402 N	103° 26' 49.740 W
16,700.0	90.00	179.63	10,420.0	-6,183.6	-643.1	487,688.45	815,036.91	32° 20' 15.412 N	103° 26' 49.742 W
16,800.0	90.00	179.63	10,420.0	-6,283.6	-642.4	487,588.45	815,037.56	32° 20' 14.423 N	103° 26' 49.744 W
16,900.0	90.00	179.63	10,420.0	-6,383.6	-641.8	487,488.45	815,038.21	32° 20' 13.433 N	103° 26' 49.746 W
17,000.0	90.00	179.63	10,420.0	-6,483.6	-641.1	487,388.45	815,038.86	32° 20' 12.444 N	103° 26' 49.748 W
17,100.0	90.00	179.63	10,420.0	-6,583.6	-640.5	487,288.46	815,039.50	32° 20' 11.454 N	103° 26' 49.750 W
17,200.0	90.00	179.63	10,420.0	-6,683.6	-639.8	487,188.46	815,040.15	32° 20' 10.465 N	103° 26' 49.753 W
17,300.0	90.00	179.63	10,420.0	-6,783.6	-639.2	487,088.46	815,040.80	32° 20' 9.475 N	103° 26' 49.755 W
17,400.0	90.00	179.63	10,420.0	-6,883.6	-638.6	486,988.47	815,041.45	32° 20' 8.486 N	103° 26' 49.757 W
17,500.0	90.00	179.63	10,420.0	-6,983.6	-637.9	486,888.47	815,042.10	32° 20' 7.496 N	103° 26' 49.759 W
17,600.0	90.00	179.63	10,420.0	-7,083.6	-637.3	486,788.47	815,042.75	32° 20' 6.507 N	103° 26' 49.761 W
17,700.0	90.00	179.63	10,420.0	-7,183.6	-636.6	486,688.47	815,043.40	32° 20' 5.517 N	103° 26' 49.763 W
17,800.0	90.00	179.63	10,420.0	-7,283.6	-636.0	486,588.48	815,044.04	32° 20' 4.528 N	103° 26' 49.765 W
17,900.0	90.00	179.63	10,420.0	-7,383.6	-635.3	486,488.48	815,044.69	32° 20' 3.538 N	103° 26' 49.767 W
18,000.0	90.00	179.63	10,420.0	-7,483.6	-634.7	486,388.48	815,045.34	32° 20' 2.549 N	103° 26' 49.769 W
18,100.0	90.00	179.63	10,420.0	-7,583.6	-634.0	486,288.48	815,045.99	32° 20' 1.559 N	103° 26' 49.771 W
18,101.5	90.00	179.63	10,420.0	-7,585.0	-634.0	486,287.00	815,046.00	32° 20' 1.545 N	103° 26' 49.771 W

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
North Ridge #1H BHL - hit/miss target - Shape - Point	0.00	0.00	10,420.0	-7,585.0	-634.0	486,287.00	815,046.00	32° 20' 1.545 N	103° 26' 49.771 W




Weatherford[®]

WFT Casing Head (Slip on Weld with O-Ring) Running Procedure

Publication RP-001

October 21, 2010

© 2010 Weatherford International Inc. All rights reserved

 Weatherford 5-2-GL-GL-WES-00052	WFT Casing Head (Slip on Weld with O-Ring) Running Procedure	Approved By:	Reviewed By:	RP-001
				Rev 0
		Date: Oct 21, 2010	Date: Oct 21, 2010	


Install the Casing Head

1. Examine the **WFT Casing Head**. Verify the following:
 - bore is clean and free of debris
 - seal areas, threads and ring grooves are clean and undamaged
 - o-ring is properly installed, clean and undamaged
 - all peripheral equipment is intact and undamaged
2. Measure the pocket depth of the Casing Head and record this dimension.
3. Run the surface casing and cement as required.
4. Determine the required elevation of the Casing Head as required by the Drilling Supervisor.
5. Use the following calculation to determine the correct final cut location of the surface casing.


X = Pocket Depth

Y = Overall Casing Head Height

Y - X = Distance from correct elevation point to surface casing cutoff height.

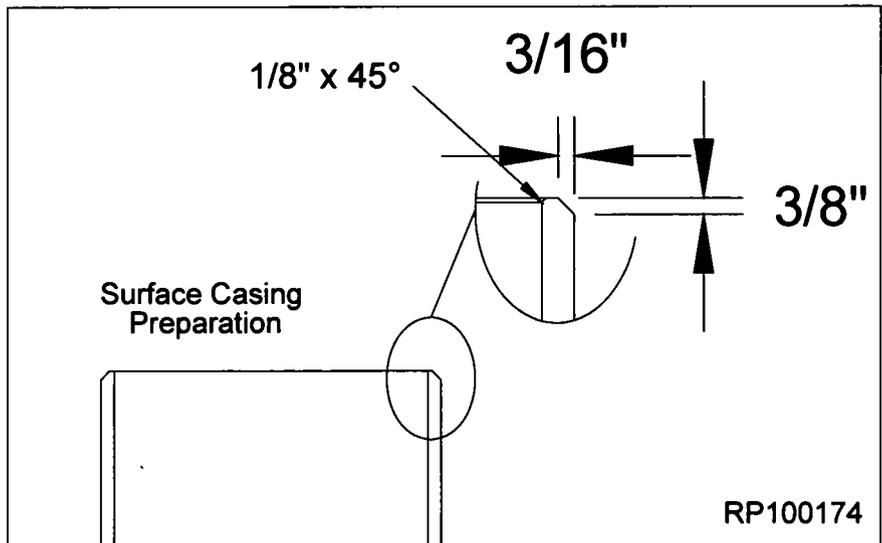

6. Lift the riser assembly high enough to rough cut the surface casing a minimum of 12" above the anticipated final cut location, if applicable.
7. Remove the spent portion of surface casing and the riser assembly and set aside.
8. Determine the correct elevation for the wellhead assembly.
9. Rough cut the surface casing a minimum of 12" above the final cut location.
10. Cut the conductor pipe a comfortable level below the final cut location of the surface casing.

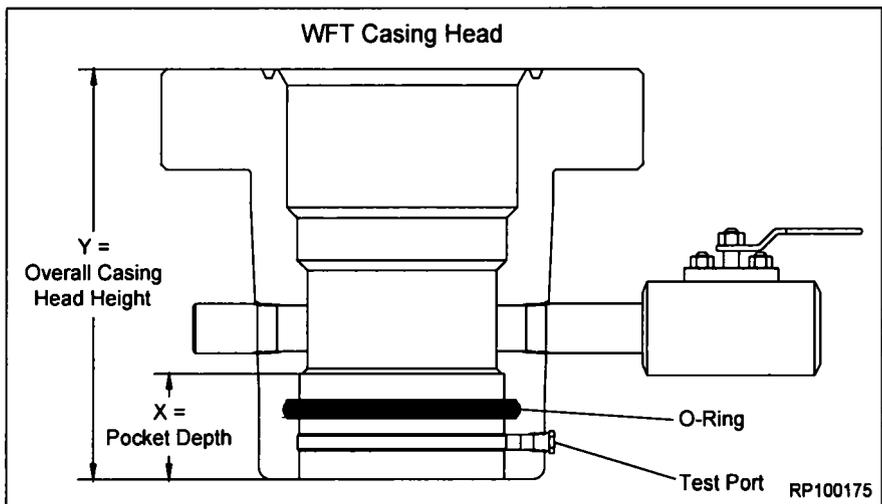

11. Final cut the surface casing at the correct elevation.
- NOTE:** Ensure the cut on the surface casing is level as this will determine the orientation of the remainder of the wellhead equipment.
12. Bevel the surface casing with a $3/16'' \times 3/8''$ bevel and remove any sharp edges from the OD of the casing.
 13. Break a $1/8'' \times 45^\circ$ bevel on the ID of the surface casing.

 5-2-GL-GL-WES-00052	WFT Casing Head (Slip on Weld with O-Ring) Running Procedure	Approved By:	Reviewed By:	RP-001
		<i>BO</i>	<i>Bruce J. Ross</i>	Rev 0
		Date: Oct 21, 2010	Date: Oct 21, 2010	Page 1

Install the Casing Head

14. Wipe the ID of the o-ring of the Casing Head with a light coat of oil or grease.

NOTE: Excessive oil or grease will prevent a positive seal from forming.


15. Lower the Casing Head over the surface casing stub to a positive stop.

16. Remove the fitting from the test port and set aside.

17. Orient the Casing Head as per the Drilling Superintendents instructions ensuring the face of the Casing Head is level and two holed to the drilling rig substructure.

18. Weld and test the surface casing to the Casing Head as per the **RECOMMENDED FIELD WELDING PROCEDURE** located in the back of this manual.

19. Once all welding and testing is completed, replace the fitting into the open port and close the valve on the Casing Head.

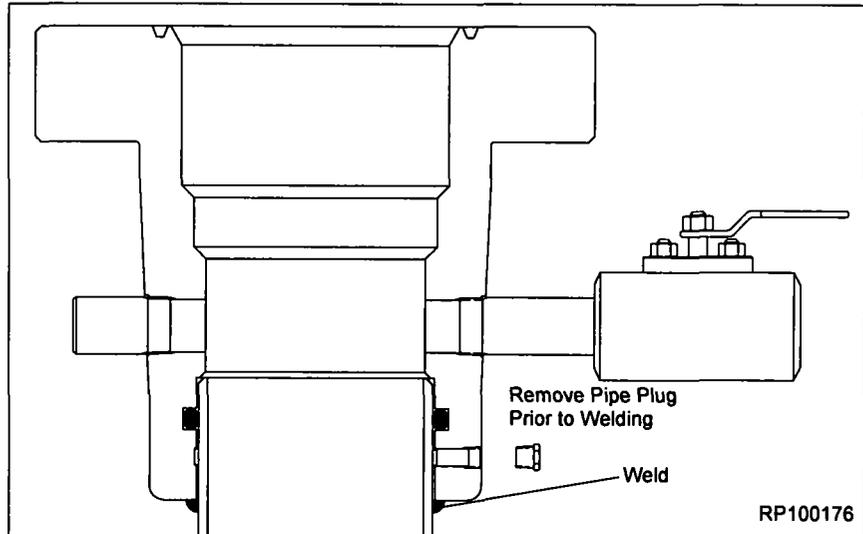

RP-001	Reviewed By:	Approved By:	WFT Casing Head (Slip on Weld with O-Ring) Running Procedure	 Weatherford
Rev 0	<i>Bruce J. Ross</i>	<i>BO</i>		
Page 2	Date: Oct 21, 2010	Date: Oct 21, 2010		

Recommended Procedure for Field Welding Pipe to Well-head Parts for Pressure Seal

1. **Introduction and Scope.** The following recommended procedure has been prepared with particular regard to attaining pressure-tight weld when attaching casing heads, flanges, etc., to casing. Although most of the high strength casing used (such as N-80) is not normally considered field weldable, some success may be obtained by using the following or similar procedures.

Caution: In some wellheads, the seal weld is also a structural weld and can be subjected to high tensile stresses. Consideration must therefore be given by competent authority to the mechanical properties of the weld and its heat affected zone.

a. The steels used in wellhead parts and in casing are high strength steels that are susceptible to cracking when welded. It is imperative that the finished weld and adjacent metal be free from cracks. The heat from welding also affects the mechanical properties. This is especially serious if the weld is subjected to service tension stresses.

b. This procedure is offered only as a recommendation. The responsibility for welding lies with the user and results are largely governed by the welder's skill. Weldability of the several makes and grades of casing varies widely, thus placing added responsibility on the welder. Transporting a qualified welder to the job, rather than using a less-skilled man who may be at hand, will, in most cases, prove economical. The responsible operating representative should ascertain the welder's qualifications and, if necessary, assure himself by instruction or demonstration, that the welder is able to perform the work satisfactorily.

2. **Welding Conditions.** Unfavorable welding conditions must be avoided or minimized in every way possible, as even the most skilled welder cannot successfully weld steels that are susceptible to cracking under adverse working conditions, or when the work is rushed. Work above the welder on the drilling floor should be avoided. The weld should be protected from dripping mud, water, and oil and from wind, rain, or other adverse weather conditions. The drilling mud, water, or other fluids must be lowered in the casing and kept at a low level until the weld has properly cooled. It is the responsibility of the user to provide supervision that will assure favorable working conditions, adequate time, and the necessary cooperation of the rig personnel.

3. **Welding.** The welding should be done by the shielded metal-arc or other approved process.

4. **Filler Metal.** Filler Metals. For root pass, it's recommended to use E6010, E6011 (AC), E6019 or equivalent electrodes. The E7018 or E7018-A1 electrodes may also be used for root pass operations but has the tendency to trap slag in tight grooves. The E6010, E6011 and E6019 offer good penetration and weld deposit ductility with relatively high intrinsic hydrogen content. Since the E7018 and E7018-A1 are less susceptible to hydrogen induced cracking, it is recommended for use as the filler metal for completion of the weld groove after the root pass is completed. The E6010, E6011 (AC), E6019, E7018 and E7018-A1 are classified under one of the following codes AWS A5.1 (latest edition): Mild Steel covered electrodes or the AWS A5.5 (latest edition): Low Alloy Steel Covered Arc-Welding Electrodes. The low hydrogen electrodes, E7018 and E7018-A1, should not be exposed to the atmosphere until ready for use. It's recommended that hydrogen electrodes remain in their sealed containers. When a job arises, the container shall be opened and all unused remaining electrodes to be stored in heat electrode storage ovens. Low hydrogen electrodes exposed to the atmosphere, except water, for more than two hours should be dried 1 to 2 hours at 600°F to 700 °F (316°C to 371 °C) just before use. It's recommended for any low hydrogen electrode containing water on the surface should be scrapped.

5. **Preparation of Base Metal.** The area to be welded should be dry and free of any paint, grease/oil and dirt. All rust and heat-treat surface scale shall be ground to bright metal before welding.

6. **Preheating.** Prior to any heating, the wellhead member shall be inspected for the presence of any o-rings or other polymeric seals. If any o-rings or seals are identified then preheating requires close monitoring as noted in paragraph 6a. Before applying preheat, the fluid should be bailed out of the casing to a point several inches (>6" or 150 mm) below the weld joint/location. Preheat both the casing and wellhead member for a minimum distance of three (3) inches on each side of the weld joint using a suitable preheating torch in accordance with the temperatures shown below in a and b. The preheat temperature should be checked by the use of heat sensitive crayons. Special attention must be given to preheating the thick sections of wellhead parts to be welded, to insure uniform heating and expansion with respect to the relatively thin casing.

a. Wellhead members containing o-rings and other polymeric seals have tight limits on the preheat and interpass temperatures. Those temperatures must be controlled at 200°F to 325°F or 93 °C to 160°C and closely monitored to prevent damage to the o-ring or seals.

b. Wellhead members not containing o-rings and other polymeric seals should be maintained at a preheat and interpass temperature of 400°F to 600°F or 200°C to 300°C.

 5-2-GL-GL-WES-00052	WFT Casing Head (Slip on Weld with O-Ring) Running Procedure	Approved By:	Reviewed By:	RP-001
				Rev 0
		Date: Oct 21, 2010	Date: Oct 21, 2010	Page 3

Recommended Procedure for Field Welding Pipe to Well-head Parts for Pressure Seal (continued)

7. **Welding Technique.** Use a 1/8 or 5/32-inch (3.2 or 4.0 mm) E6010 or E7018 electrode and step weld the first bead (root pass); that, weld approximately 2 to 4 inches (50 to 100 mm) and then move diametrically opposite this point and weld 2 to 4 inches (50 to 100 mm) halfway between the first two welds, move diametrically opposite this weld, and so on until the first pass is completed. This second pass should be made with a 5/32-inch (4.0 mm) low hydrogen electrode of the proper strength and may be continuous. The balance of the welding groove may then be filled with continuous passes without back stepping or lacing, using a 3/16-inch (4.8 mm) low hydrogen electrode. All beads should be stringer beads with good penetration. There should be no undercutting and weld shall be workmanlike in appearance.

a. Test ports should be open when welding is performed to prevent pressure buildup within the test cavity.

b. During welding the temperature of the base metal on either side of the weld should be maintained at 200 to 300°F (93 to 149°C).

c. Care should be taken to insure that the welding cable is properly grounded to the casing, but ground wire should not be welded to the casing or the wellhead. Ground wire should be firmly clamped to the casing, the wellhead, or fixed in position between pipe slips. Bad contact may cause sparking, with resultant hard spots beneath which incipient cracks may develop. The welding cable should not be grounded to the steel derrick, nor to the rotary-table base.

8. **Cleaning.** All slag or flux remaining on any welding bead should be removed before laying the next bead. This also applies to the completed weld.

9. **Defects.** Any cracks or blow holes that appear on any bead should be removed to sound metal by chipping or grinding before depositing the next bead.

10. **Postheating.** Post-heating should be performed at the temperatures shown below and held at that temperature for no less than one hour followed by a slow cooling. The post-heating temperature should be in accordance with the following paragraphs.

a. Wellhead members containing o-rings and other polymeric seals have tight limits on the post-heating temperatures. Those temperatures must be controlled at 250°F to 300°F or 120 °C to 150°C and closely monitored to prevent damage to the o-ring or seals.


b. Wellhead members not containing o-rings and other polymeric seals should be post-heated at a temperature of 400°F to 600°F or 200°C to 300°C.

11. **Cooling.** Rapid cooling must be avoided. To assure slow cooling, welds should be protected from extreme weather conditions (cold, rain, high winds, etc.) by the use of suitable insulating material. (Specially designed insulating blankets are available at many welding supply stores.) Particular attention should be given to maintaining uniform cooling of the thick sections of the wellhead parts and the relatively thin casing, as the relatively thin casing will pull away from the head or hanger if allowed to cool more rapidly. The welds should cool in air to less than 200°F (93°C) (measured with a heat sensitive crayon) prior to permitting the mud to rise in the casing.

12. **Test the Weld.** After cooling, test the weld. The weld must be cool otherwise the test media will crack the weld. The test pressure should be no more than 80% of the casing collapse pressure.

Test Media	
Acceptable Medias	Unacceptable Medias
Water Water Soluable Oil Inert Gas •Nitrogen •Argon Gas	Oxygen Acetylene Hydraulic Oil Motor Oil Brake Fluid

RP-001	Reviewed By:	Approved By:	WFT Casing Head (Slip on Weld with O-Ring) Running Procedure	 Weatherford 5-2-GL-GL-WES-00052
Rev 0	<i>Bruce J. Ross</i>	<i>BO</i>		
Page 4	Date: Oct 21, 2010	Date: Oct 21, 2010		



Weatherford®




Wellhead Field Service Manual

WFT-SB Wellhead System Running Procedure

Publication: SM-11-1

Release Date: December 2014

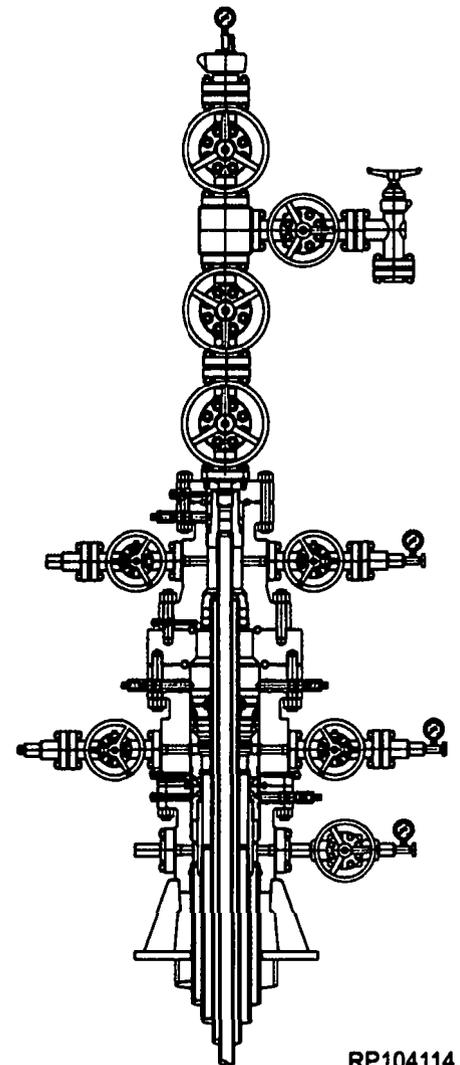

RP104114

©2014 Weatherford International Ltd. All Rights Reserved

 Weatherford 5-3-GL-GL-WES-00XXX	Field Service Manual	Prepared By:	Reviewed By:	Approved By:	SM-11-1
		<i>Marion Robertson</i>	<i>Bruce Ross</i>	<i>Manuel Zaragoza</i>	Rev WIP
		Marion Robertson Dec 2014	Bruce Ross Dec 2014	Manuel Zaragoza Dec 2014	Page 1 of 24

Table of Content


WFT-Split Bowl (SB) Wellhead System

Wellhead System Assembly Drawing	3
Running Procedure	
Casing Head/Spool Assembly Rig-Up and Installation	4
Testing the BOP	5
Running and Retrieving the Long Bowl Protector.....	3
Running the Bowl Protector Prior to Drilling	6
Retrieving the Bowl Protector After Drilling	7
Hanging Off the Intermediate Casing.....	7
Hanging Off the Intermediate Casing- Contingency Completion.....	9
Installation of the Pack-Off Bushing and Energizing the Seals	10
Installation	10
Energizing the Seal	12
Retesting the BOP Stack	14
Running and Retrieving the Short Bowl Protector	15
Running Short Bowl Protector	15
Retrieving the Short Bowl Protector	16
Running the Production Casing	16
Installation of the Slip-Type Casing Hanger Under the BOP Stack	16
Installation of the Slip-Type Casing Hanger Through the BOP Stack.....	17
Hanging Off the Production Casing	18
Installation and Testing the Tubing Spool Assembly	20
Installation	20
Testing the Secondary Seal and Flange Connection	20
Testing the BOP	21
Hanging Off the Production Tubing String.....	22
Installing and Testing of the Production Tree.....	23
Installation	23
Testing	24

 Weatherford 5-3-GL-GL-WES-00XXX	Field Services Manual	Prepared By:	Reviewed By:	Approved By:	SM-13-1
		<i>Marion Robertson</i>	Brad Franks	Manual Zaragoza	Rev WIP
		Marion Robertson	Brad Franks	Manual Zaragoza	Page 2 of 24
		Dec 2014	Dec 2014	Dec 2014	

WFT Split Bowl (SB) Wellhead System

WFT-SB Split Multi-Bowl/ Conventional Wellhead System

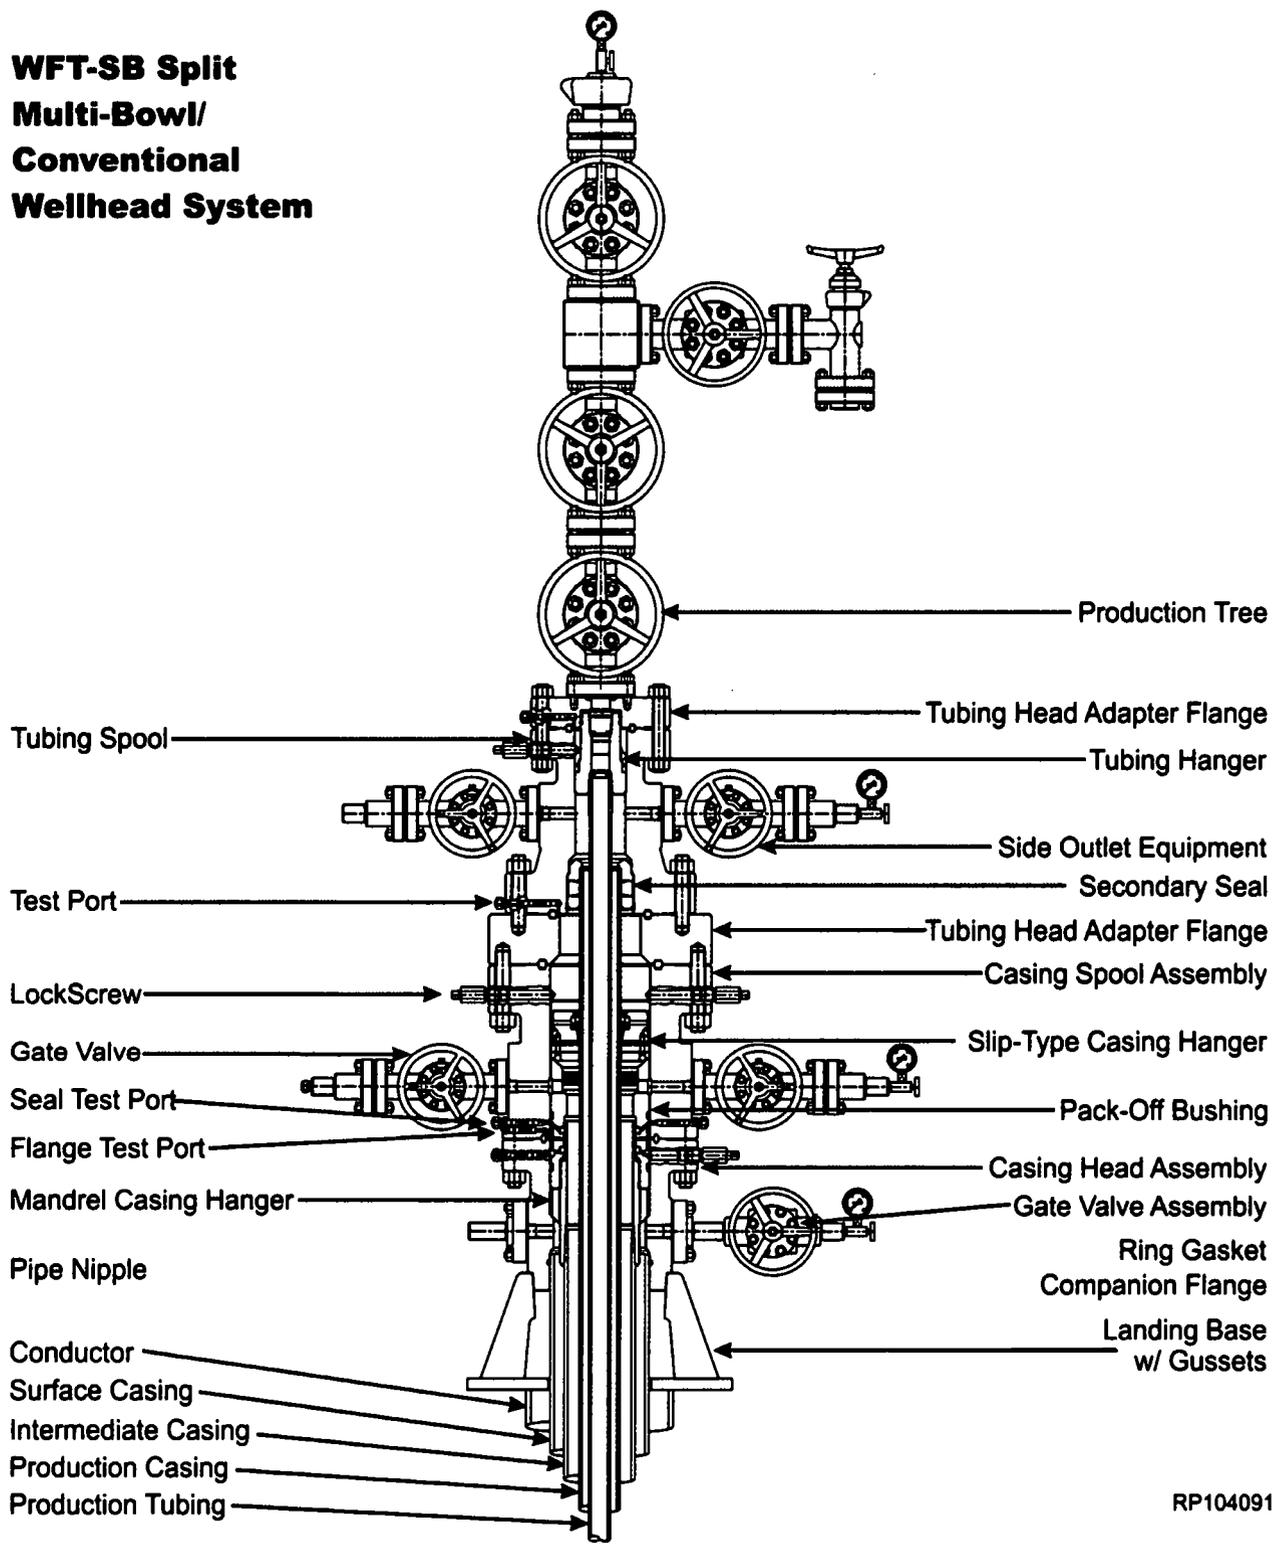

RP104091



Weatherford

5-3-GL-GL-WES-00XXX

Field Service Manual

Prepared By:	Reviewed By:	Approved By:	SM-13-1
<i>Marion Robertson</i>	Brad Franks	Manual Zaragoza	Rev WIP
Marion Robertson	Brad Franks	Manual Zaragoza	Page 3 of 24
December 2014	December 2014	December 2014	



Application for Permit to Drill

APD Package Report

Date Printed: 03/05/2020 07:47 AM

APD ID: 10400041928
APD Received Date: 05/17/2019 09:26 AM
Operator: BTA OIL PRODUCERS LLC

Well Status: AAPD
Well Name: NORTH RIDGE 8040 FEDERAL
Well Number: 1H

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
 - Well Plat: 1 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
 - Blowout Prevention Choke Diagram Attachment: 2 file(s)
 - Blowout Prevention BOP Diagram Attachment: 1 file(s)
 - Casing Design Assumptions and Worksheet(s): 3 file(s)
 - Hydrogen sulfide drilling operations plan: 3 file(s)
 - Proposed horizontal/directional/multi-lateral plan submission: 3 file(s)
 - Other Variances: 2 file(s)
- SUPO Report
- SUPO Attachments
 - Existing Road Map: 1 file(s)
 - New Road Map: 1 file(s)
 - Attach Well map: 1 file(s)
 - Production Facilities map: 1 file(s)
 - Water source and transportation map: 1 file(s)
 - Well Site Layout Diagram: 5 file(s)
- PWD Report
- PWD Attachments
 - None
- Bond Report
- Bond Attachments
 - None

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER**

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		5. Lease Serial No. NMNM023768 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. NORTH RIDGE 8040 FEDERAL COM 1H 9. API-Well No.
2. Name of Operator BTA OIL PRODUCERS LLC		10. Field and Pool, or Exploratory ANTELOPE RIDGE / BONE SPRING, NO
3a. Address 104 S. Pecos Midland TX 79701	3b. Phone No. (include area code) (432)682-3753	11. Sec., T. R. M. or Blk. and Survey or Area SEC 35 / T22S / R34E / NMP
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENW / 300 FNL / 1620 FWL / LAT 32.354597 / LONG -103.444139 At proposed prod. zone SWNW / 2600 FNL / 700 FWL / LAT 32.333765 / LONG -103.447157		12. County or Parish LEA
14. Distance in miles and direction from nearest town or post office* 17 miles		13. State NM
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 300 feet	16. No of acres in lease 160	17. Spacing Unit dedicated to this well 240
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1409 feet	19. Proposed Depth 10420 feet / 18102 feet	20. BLM/BIA Bond No. in file FED: NMB001711
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3410 feet	22. Approximate date work will start* 10/16/2019	23. Estimated duration 30 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission) Title Regulatory Analyst	Name (Printed/Typed) Sammy Hajar / Ph: (432)682-3753	Date 05/17/2019
Approved by (Signature) (Electronic Submission) Title Assistant Field Manager Lands & Minerals	Name (Printed/Typed) Cody Layton / Ph: (575)234-5959 Office CARLSBAD	Date 03/04/2020

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

APPROVED WITH CONDITIONS
Approval Date: 03/04/2020

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

- 1. SHL: NENW / 300 FNL / 1620 FWL / TWSP: 22S / RANGE: 34E / SECTION: 35 / LAT: 32.354597 / LONG: -103.444139 (TVD: 0 feet, MD: 0 feet)
- PPP: NWNW / 100 FNL / 700 FWL / TWSP: 22S / RANGE: 34E / SECTION: 35 / LAT: 32.355146 / LONG: -103.447116 (TVD: 10128 feet, MD: 10203 feet)
- PPP: NWSW / 2597 FSL / 700 FWL / TWSP: 23S / RANGE: 34E / SECTION: 35 / LAT: 32.348059 / LONG: -103.447123 (TVD: 10420 feet, MD: 12900 feet)
- PPP: SWSW / 1297 FSL / 700 FWL / TWSP: 23S / RANGE: 34E / SECTION: 35 / LAT: 32.344486 / LONG: -103.447136 (TVD: 10420 feet, MD: 14200 feet)
- BHL: SWNW / 2600 FNL / 700 FWL / TWSP: 23S / RANGE: 34E / SECTION: 2 / LAT: 32.333765 / LONG: -103.447157 (TVD: 10420 feet, MD: 18102 feet)

BLM Point of Contact

Name: Tenille Ortiz
Title: Legal Instruments Examiner
Phone: 5752342224
Email: tortiz@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL

**PECOS DISTRICT
DRILLING CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	BTA Oil Producers LLC
LEASE NO.:	NMNM023768
WELL NAME & NO.:	North Ridge 8040 Federal Com 1H
SURFACE HOLE FOOTAGE:	300'/N & 1620'/W
BOTTOM HOLE FOOTAGE:	2600'/N & 700'/W
LOCATION:	Section 35, T.22 S., R.34 E., NMPM
COUNTY:	Lea County, New Mexico

COA

H2S	<input type="radio"/> Yes	<input checked="" type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input checked="" type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

Casing Design:

1. The 13-3/8 inch surface casing shall be set at approximately 1775 feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

- completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The 9-5/8 inch intermediate casing shall be set at approximately 5595 feet. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**
 - ❖ In Capitan Reef Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
 - ❖ **Special Capitan Reef requirements.** If lost circulation (50% or greater) occurs below the Base of the Salt, the operator shall do the following:
(Use this for 3 string wells in the Capitan Reef, if 4 string well ensure FW based mud used across the capitan interval)
 - Switch to fresh water mud to protect the Capitan Reef and use fresh water mud until setting the intermediate casing. The appropriate BLM office is to be notified for a PET to witness the switch to fresh water.
 - Daily drilling reports from the Base of the Salt to the setting of the intermediate casing are to be submitted to the BLM CFO engineering staff via e-mail by 0800 hours each morning. Any lost circulation encountered is to be recorded on these drilling reports. The daily drilling report should show mud volume per shift/tour. Failure to submit these reports will result in an Incidence of Non-Compliance being issued for failure to comply with the Conditions of Approval. If not already planned, the operator shall run a caliper survey for the intermediate well bore and submit to the appropriate BLM office.
3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back at least **50 feet** on top of Capitan Reef top. If cement does not circulate see B.1.a, c-d above.

Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi**.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not

hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

OTA01202020

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	BTA Oil Producer LLC
LEASE NO.:	NMNM023768
COUNTY:	Lea County, NM

Wells:

North Ridge 8040 Federal Com 6H

Surface Hole Location: 500' FNL & 1650' FWL, Section 35, T. 22 S., R. 34 E.
Bottom Hole Location: 2600' FNL & 2100' FWL, Section 2, T. 23 S, R. 34 E.

North Ridge 8040 Federal Com 5H

Surface Hole Location: 500' FNL & 1620' FWL, Section 35, T. 22 S., R. 34 E.
Bottom Hole Location: 2600' FNL & 700' FWL, Section 2, T. 23 S., R. 34 E.

North Ridge 8040 Federal Com 1H

Surface Hole Location: 300' FNL & 1620' FWL, Section 35, T. 22 S., R. 34 E.
Bottom Hole Location: 2600' FNL & 700' FWL, Section 2, T. 23 S, R. 34 E.

North Ridge 8040 Federal Com 2H

Surface Hole Location: 300' FNL & 1650' FWL, Section 35, T. 22 S., R. 34 E.
Bottom Hole Location: 2600' FNL & 2100' FWL, Section 2, T. 23 S., R. 34 E.

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Watershed
 - Range
 - Lesser Prairie Chicken
 - VRM IV
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- Interim Reclamation**
- Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural resource (historic or prehistoric site or object) discovered by the holder, or any person working on the holder's behalf, on public or Federal land shall be immediately reported to the Authorized Officer. The holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to the proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

OR

If the entire project is covered under the Permian Basin Programmatic Agreement (cultural resources only):

The proponent has contributed funds commensurate to the undertaking into an account for offsite mitigation. Participation in the PA serves as mitigation for the effects of this project on cultural resources. If any human skeletal remains, funerary objects, sacred objects, or objects of cultural patrimony are discovered at any time during construction, all construction activities shall halt and the BLM will be notified as soon as possible within 24 hours. Work shall not resume until a Notice to Proceed is issued by the BLM. See information below discussing NAGPRA.

If the proposed project is split between a Class III inventory and a Permian Basin Programmatic Agreement contribution, the portion of the project covered under Class III inventory should default to the first paragraph stipulations.

The holder is hereby obligated to comply with procedures established in the Native American Graves Protection and Repatriation Act (NAGPRA) to protect such cultural items as human remains, associated funerary objects, sacred objects, and objects of cultural patrimony discovered inadvertently during the course of project implementation. In the event that any of the cultural items listed above are discovered during the course of project work, the proponent shall immediately halt the disturbance and contact the BLM within 24 hours for instructions. The proponent or initiator of any project shall be held responsible for protecting, evaluating, reporting, excavating, treating, and disposing of these cultural items according to the procedures established by the BLM in consultation with Indian Tribes."

Any paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on the holder's behalf, on public or Federal land shall be immediately reported to the Authorized Officer. The holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to the proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

SPECIAL REQUIREMENT(S)

Watershed:

The entire well pad(s) will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. The compacted berm shall be constructed at a minimum of 12 inches with impermeable mineral material (e.g. caliche). Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed. Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion. Stockpiling of topsoil is required. The topsoil shall be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and not used for berming or erosion control. If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.

TANK BATTERY:

Tank battery locations will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank or 24 hour production, whichever is greater. Automatic shut off, check valves, or similar systems will be installed for tanks to minimize the effects of catastrophic line failures used in production or drilling.

Range:

Cattleguards

Where a permanent cattleguard is approved, an appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s). Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations. A gate shall be constructed on one side of the cattleguard and fastened securely to H-braces.

Fence Requirement

Where entry granted across a fence line, the fence must be braced and tied off on both sides of the passageway prior to cutting. Once the work is completed, the fence will be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Livestock Watering Requirement

Any damage to structures that provide water to livestock throughout the life of the well, caused by operations from the well site, must be immediately corrected by the operator. The operator must notify the BLM office (575-234-5972) and the private surface landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.

Lesser Prairie Chicken:**Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:**

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

Timing Limitation Exceptions:

The Carlsbad Field Office will publish an annual map of where the LPC timing and noise stipulations and conditions of approval (Limitations) will apply for the identified year (between March 1 and June 15) based on the latest survey information. The LPC Timing Area map will identify areas which are Habitat Areas (HA), Isolated Population Area (IPA), and Primary Population Area (PPA). The LPC Timing Area map will also have an area in red crosshatch. The red crosshatch area is the only area where an operator is required to submit a request for exception to the LPC Limitations. If an operator is operating outside the red crosshatch area, the LPC Limitations do not apply for that year and an exception to LPC Limitations is not required.

Ground-level Abandoned Well Marker to avoid raptor perching:

Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

VRM IV:

Low-profile tanks, pumpjacks, and production equipment etc. shall not be greater than eight-feet-high.

Short-term mitigation measures include painting all above-ground structures that are not subject to safety requirements (including meter housing) Shale Green, which is a flat non-reflective paint color listed in the BLM Standard Environmental Color Chart (CC-001: June 2013). Long-term mitigation measures include the removal of wells and associated infrastructure following abandonment (end of cost-effective production). Previously impacted areas will be reclaimed by removing structures and caliche pads, returning disturbed areas to natural grade, and revegetating with an approved BLM seed mixture; thereby eliminating visual impacts.

V. CONSTRUCTION**A. NOTIFICATION**

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.


Turnouts

Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outcropping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

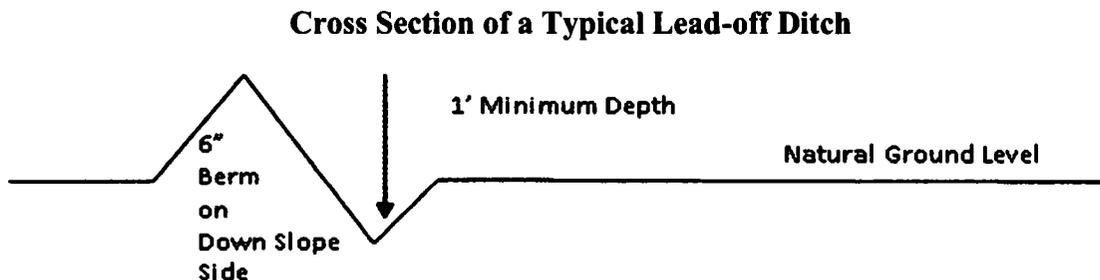

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

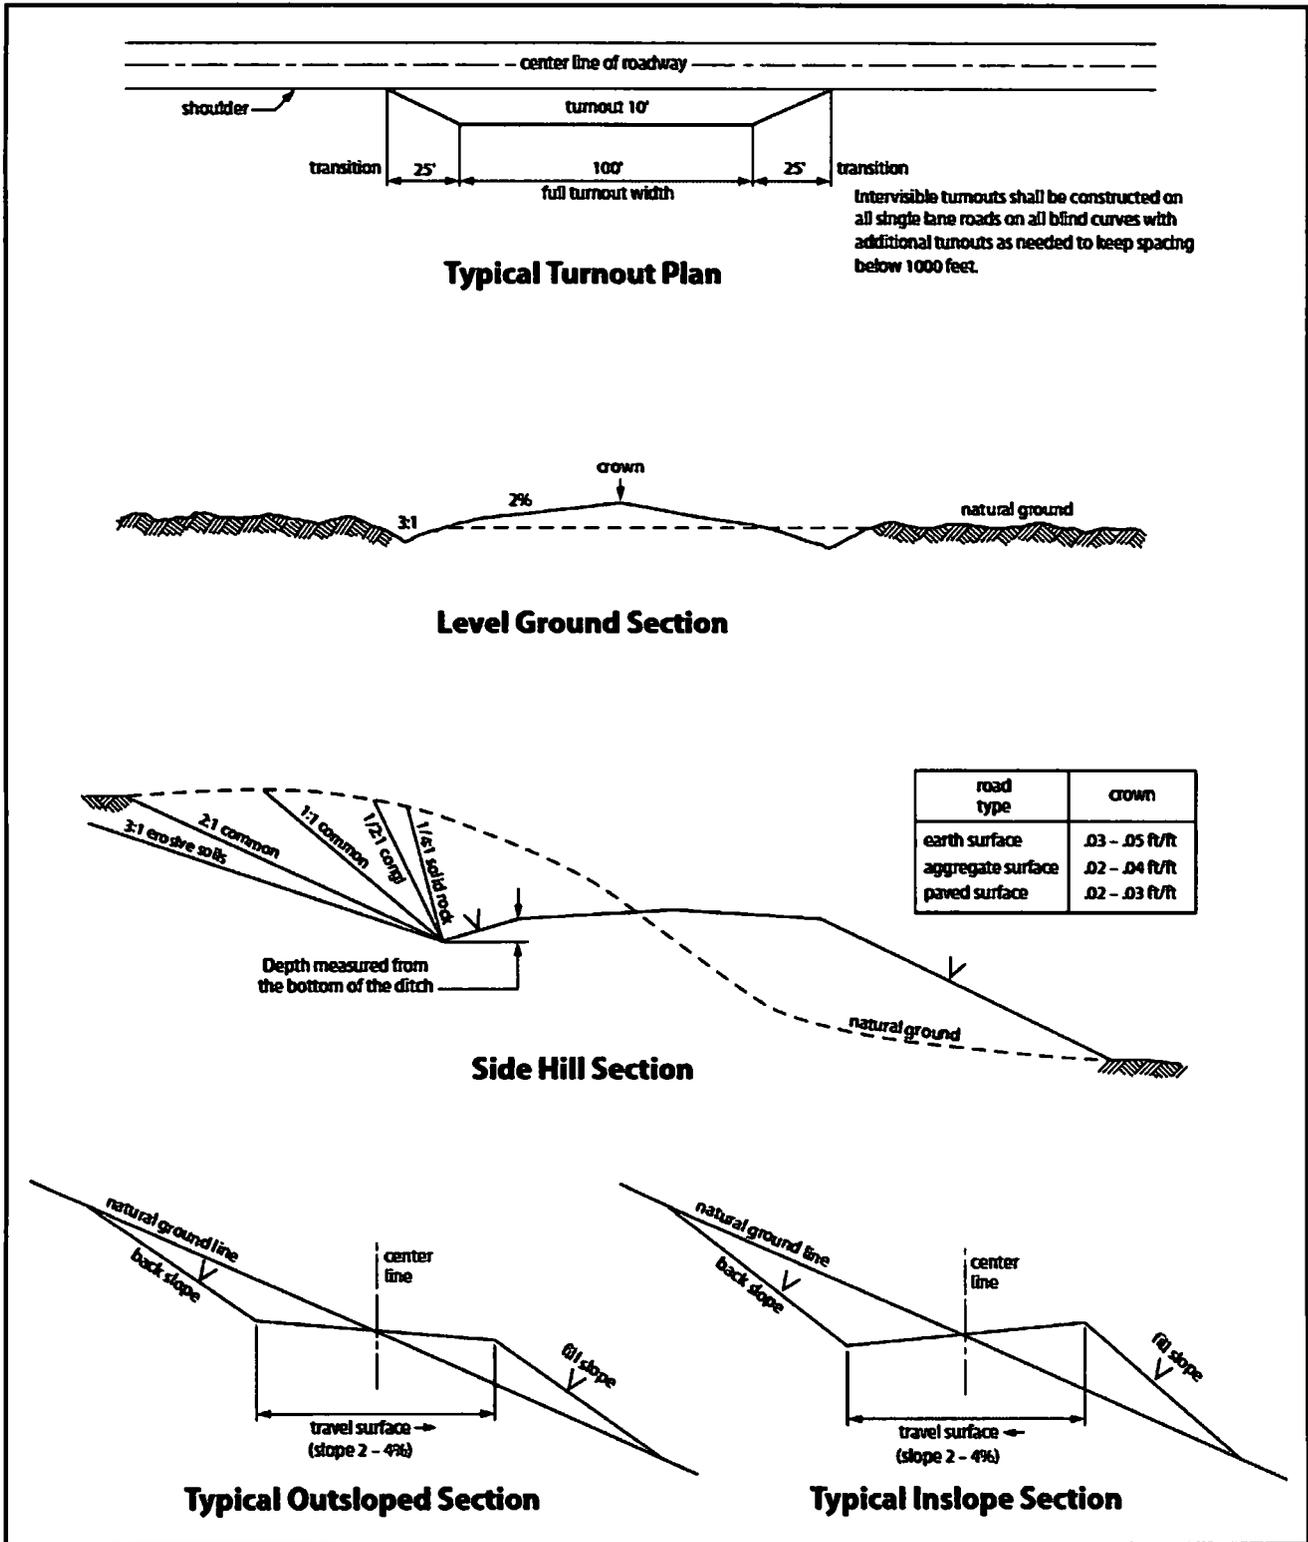


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VI. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, Shale Green from the BLM Standard Environmental Color Chart (CC-001: June 2008).

VRM Facility Requirement

Low-profile tanks not greater than eight-feet-high shall be used.

VII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

VIII. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture for LPC Sand/Shinnery Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Sammy Hajar

Signed on: 05/16/2019

Title: Regulatory Analyst

Street Address: 104 S. Pecos

City: Midland

State: TX

Zip: 79701

Phone: (432)682-3753

Email address: shajar@btaoil.com

Field Representative

Representative Name:

Street Address: 104 South Pecos

City: Midland

State: TX

Zip: 79701

Phone: (432)682-3753

Email address: neaton@btaoil.com

APD ID: 10400041928

Submission Date: 05/17/2019

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - General

APD ID: 10400041928

Tie to previous NOS?

Submission Date: 05/17/2019

BLM Office: CARLSBAD

User: Sammy Hajar

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM023768

Lease Acres: 160

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: BTA OIL PRODUCERS LLC

Operator letter of designation:

Operator Info

Operator Organization Name: BTA OIL PRODUCERS LLC

Operator Address: 104 S. Pecos

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)682-3753

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: ANTELOPE RIDGE Pool Name: BONE SPRING, NORTH

Is the proposed well in an area containing other mineral resources? NONE

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Is the proposed well in an area containing other mineral resources? NONE

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:

Number: 1, 2, 5, & 6

Well Class: HORIZONTAL

NORTH RIDGE FEDERAL COM

Number of Legs:

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 17 Miles

Distance to nearest well: 1409 FT

Distance to lease line: 300 FT

Reservoir well spacing assigned acres Measurement: 240 Acres

Well plat: North_Ridge_8040_1H_C102_20190516145651.pdf

Well work start Date: 10/16/2019

Duration: 30 DAYS

Section 3 - Well Location Table
--

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NGVD29

Survey number:

Reference Datum:

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	300	FNL	1620	FWL	22S	34E	35	Aliquot NENW	32.354597	-103.444139	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 023768	3410	0	0	
KOP Leg #1	100	FNL	700	FWL	22S	34E	35	Aliquot NWNW	32.355146	-103.447116	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 023768	-6437	9909	9847	
PPP Leg #1-1	1297	FSL	700	FWL	23S	34E	35	Aliquot SWSW	32.344486	-103.447136	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 026396	-7010	14200	10420	

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP Leg #1-2	259 7	FSL	700	FW L	23S	34E	35	Aliquot NWS W	32.34805 9	- 103.4471 29	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 136220	- 701 0	129 00	104 20	
PPP Leg #1-3	100	FNL	700	FW L	22S	34E	35	Aliquot NWN W	32.35514 6	- 103.4471 16	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 023768	- 671 8	102 03	101 28	
EXIT Leg #1	254 0	FNL	700	FW L	23S	34E	2	Aliquot SWN W	32.33393	- 103.4471 57	LEA	NEW MEXI CO	NEW MEXI CO	S	STATE	- 701 0	178 22	104 20	
BHL Leg #1	260 0	FNL	700	FW L	23S	34E	2	Aliquot SWN W	32.33376 5	- 103.4471 57	LEA	NEW MEXI CO	NEW MEXI CO	S	STATE	- 701 0	181 02	104 20	

DISTRICT I
1625 N French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Huerfano Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT


API Number	Pool Code	Pool Name Antelope Ridge ; Bone Spring
Property Code	Property Name NORTH RIDGE 8040 FEDERAL COM	
OGRID No. 260297	Operator Name BTA OIL PRODUCERS, LLC	
		Well Number 1H
		Elevation 3410'

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	35	22-S	34-E		300	NORTH	1620	WEST	LEA

Bottom Hole Location If Different From Surface									
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	2	23-S	34-E		2600	NORTH	700	WEST	LEA

Dedicated Acres	Joint or Infill	Consolidation Code	Order No
240			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

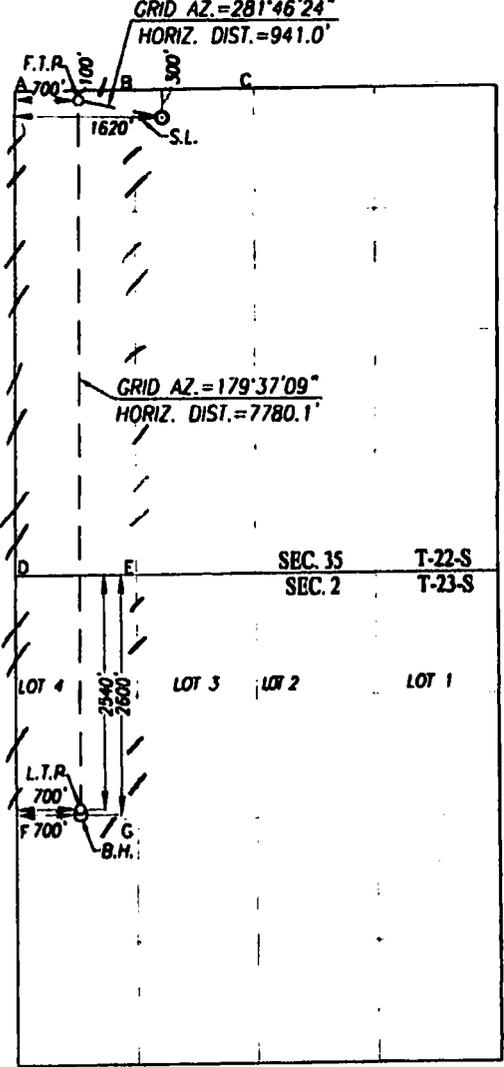

SCALE: 1"=2000'

<p>GEODETIC COORDINATES NAD 83 NME SURFACE LOCATION Y = 493874.6 N X = 815915.8 E LAT. = 32.354597° N LONG. = 103.444139° W</p> <p>FIRST TAKE POINT NAD 83 NME Y = 494066.6 N X = 814994.8 E LAT. = 32.355145° N LONG. = 103.447116° W</p> <p>CORNER COORDINATES TABLE NAD 27 NME</p> <p>A - Y = 494100.2 N, X = 773110.9 E B - Y = 494111.6 N, X = 774429.1 E C - Y = 494123.1 N, X = 775747.3 E D - Y = 488821.5 N, X = 773142.0 E E - Y = 488832.4 N, X = 774462.3 E F - Y = 486176.1 N, X = 773163.4 E G - Y = 486185.2 N, X = 774485.2 E</p> <p>CORNER COORDINATES TABLE NAD 83 NME</p> <p>A - Y = 494160.4 N, X = 814294.3 E B - Y = 494171.9 N, X = 815612.6 E C - Y = 494183.4 N, X = 816930.8 E D - Y = 488881.6 N, X = 814325.5 E E - Y = 488892.5 N, X = 815645.9 E F - Y = 486236.2 N, X = 814347.0 E G - Y = 486245.3 N, X = 815668.8 E</p> <p>LAST TAKE POINT NAD 83 NME Y = 486347.9 N X = 815046.1 E LAT. = 32.333937° N LONG. = 103.447157° W</p> <p>BOTTOM HOLE LOCATION NAD 83 NME Y = 486287.9 N X = 815046.5 E LAT. = 32.333765° N LONG. = 103.447157° W</p>	<p>GEODETIC COORDINATES NAD 27 NME SURFACE LOCATION Y = 493814.3 N X = 774732.3 E LAT. = 32.354473° N LONG. = 103.443661° W</p> <p>FIRST TAKE POINT NAD 27 NME Y = 494006.3 N X = 773811.3 E LAT. = 32.355022° N LONG. = 103.446638° W</p> <p>CORNER COORDINATES TABLE NAD 27 NME</p> <p>A - Y = 494100.2 N, X = 773110.9 E B - Y = 494111.6 N, X = 774429.1 E C - Y = 494123.1 N, X = 775747.3 E D - Y = 488821.5 N, X = 773142.0 E E - Y = 488832.4 N, X = 774462.3 E F - Y = 486176.1 N, X = 773163.4 E G - Y = 486185.2 N, X = 774485.2 E</p> <p>CORNER COORDINATES TABLE NAD 83 NME</p> <p>A - Y = 494160.4 N, X = 814294.3 E B - Y = 494171.9 N, X = 815612.6 E C - Y = 494183.4 N, X = 816930.8 E D - Y = 488881.6 N, X = 814325.5 E E - Y = 488892.5 N, X = 815645.9 E F - Y = 486236.2 N, X = 814347.0 E G - Y = 486245.3 N, X = 815668.8 E</p> <p>LAST TAKE POINT NAD 27 NME Y = 486287.8 N X = 773862.5 E LAT. = 32.333805° N LONG. = 103.446679° W</p> <p>BOTTOM HOLE LOCATION NAD 27 NME Y = 486227.9 N X = 773862.9 E LAT. = 32.333640° N LONG. = 103.446679° W</p>
---	---

OPERATOR CERTIFICATION

I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: *Sammy Hajar* 5/6/19
Date

Sammy Hajar
Printed Name

SHAJAR@BTAOIL.COM
E-mail Address

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

MARCH 6, 2019

Date of Survey

Signature: *Ronald J. Eidson*
Professional Surveyor

RONALD J. EIDSON
NEW MEXICO
3239

Certification Number: 112641
Ronald J. Eidson 3239

L.S.L. Ref.: 19 11 0046 JWSC W.O.: 19 11 0439

APD ID: 10400041928

Submission Date: 05/17/2019

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
458555	QUATERNARY	3410	0	0	ALLUVIUM	NONE	N
458569	RUSTLER	1623	1787	1787	ANHYDRITE	NONE	N
458558	TOP SALT	1302	2108	2108		NONE	N
458560	BASE OF SALT	112	3298	3298		NONE	N
623728	CAPITAN REEF	-765	4175	4175		NONE	N
458559	DELAWARE	-2203	5613	5613		NATURAL GAS, OIL	N
458572	BELL CANYON	-2283	5693	5693		NATURAL GAS, OIL	N
458573	CHERRY CANYON	-2818	6228	6228		NATURAL GAS, OIL	N
458565	BRUSHY CANYON	-3728	7138	7138		NATURAL GAS, OIL	N
458570	BONE SPRING LIME	-5088	8498	8498		NATURAL GAS, OIL	N
458566	FIRST BONE SPRING SAND	-6239	9649	9649		NATURAL GAS, OIL	N
458574	BONE SPRING 2ND	-6718	10128	10128		NATURAL GAS, OIL	N
458568	BONE SPRING 3RD	-7573	10983	10983		NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Pressure Rating (PSI): 5M

Rating Depth: 11000

Equipment: The blowout preventer equipment (BOP) shown in Exhibit A will consist of a (5M system) double ram type (5,000 psi WP) preventer and a bag-type (Hydril) preventer (5000 psi WP). Both units will be hydraulically operated and the ram type preventer will be equipped with blind rams on top and 5" drill pipe rams on bottom. The BOP's will be installed on the 13-3/8" surface casing and utilized continuously until total depth is reached. A 2" kill line and 3" choke line will be incorporated in the drilling spool below the ram-type BOP. A remote kill line will be used for the 5M system as per onshore order #2. Other accessory BOP equipment will include a Kelly cock, floor safety valve, choke lines, and choke manifold having a 5,000 psi WP rating. The 5M annular will be tested as per BLM drilling Operations Order No. 2.

Requesting Variance? NO

Variance request: n/a

Testing Procedure: Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily driller's log. All BOP's and associated equipment will be tested as per BLM drilling Operations Order No. 2.

Choke Diagram Attachment:

Choke_Hose___Test_Chart_and_Specs_20181129153440.pdf

5M_choke_mannifold_20190211164346.pdf

BOP Diagram Attachment:

5M_BOP_diagram_20190211164555.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1200	0	1200			1200	J-55	54.5	ST&C	2.2	5.3	DRY	7.9	DRY	13
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	5595	0	5595			5595	J-55	40	LT&C	1.7	1.4	DRY	2.3	DRY	2.8
3	PRODUCTION	8.75	5.5	NEW	API	N	0	18102	0	10420			18102	P-110	17	BUTT	1.4	1.4	DRY	1.8	DRY	1.8

Casing Attachments

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

North_Ridge_1H_Casing_assumption_20190516160216.JPG

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

North_Ridge_1H_Casing_assumption_20190516160210.JPG

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

North_Ridge_1H_Casing_assumption_20190516160204.JPG

Section 4 - Cement

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	865	695	1.73	13.5	1202.35	100	Class C	2% CaCl2
SURFACE	Tail		865	1200	340	1.35	14.8	459	100	Class C	2% CaCl2
INTERMEDIATE	Lead		0	5040	1485	2.46	12.8	3653.1	100	Class C	0.5% CaCl2
INTERMEDIATE	Tail		5040	5595	200	1.34	14.8	268	25	Class C	1% CaCl2
PRODUCTION	Lead		4595	9910	515	3.9	10.5	2008.5	60	25% Poz 75% Class C	0.4% Fluid Loss
PRODUCTION	Tail		9910	18102	2070	1.25	14.4	2587.5	25	Class H	0.2% LT Retarder

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1200	OTHER : FW Spud	8.3	8.4							
1200	5595	OTHER : Saturated Brine	10	10.2							
5595	10420	OTHER : Cut Brine	8.7	9.3							

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Drill Stem Tests will be based on geological sample shows.

List of open and cased hole logs run in the well:

CBL,GR,MUDLOG

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5093

Anticipated Surface Pressure: 2800.6

Anticipated Bottom Hole Temperature(F): 164

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

H2S_Plan_20181129153648.pdf

H2S_Equipment_Schematic_20181129153733.pdf

BTA_Oil_Producers_LLC___EMERGENCY_CALL_LIST_20190205154800.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

North_Ridge__01H_directional_plan_20190516160536.pdf

North_Ridge__01H_Wall_plot_20190516160537.pdf

North_Ridge_1H_Gas_Capture_Plan_20190516160548.pdf

Other proposed operations facets description:

A variance is requested for a Multi Bowl Wellhead. See the attached schematic and running procedure. *All strings will be kept 1/3 full while running.

Other proposed operations facets attachment:

Other Variance attachment:

Casing_Head_Running_Procedure_20181129153916.pdf

WH_SCHEMATIC_13.375_9.625_5.5_20190514121902.pdf



Rig 94

ASSET 24455


QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1592			
PURCHASER: ContiTech Oil & Marine Corp.			P.O. N°: 4500461753				
CONTITECH ORDER N°: 539225		HOSE TYPE: 3" ID		Choke & Kill Hose			
HOSE SERIAL N°: 		NOMINAL / ACTUAL LENGTH: 7,62 m / 7,66 m					
W.P. 68,9 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.			
Pressure test with water at ambient temperature							
See attachment. (1 page)							
→ 10 Min.							
↑ 50 MPa							
COUPLINGS Type		Serial N°		Quality		Heat N°	
3" coupling with		2574 5533		AISI 4130		A1582N H8672	
4 1/16" 10K API Swivel Flange end				AISI 4130		58855	
Hub				AISI 4130		A1199N A1423N	
Not Designed For Well Testing				API Spec 16 C			
Fire Rated				Temperature rate:"B"			
All metal parts are flawless							
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.							
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.							
Date: 04. September 2014.		Inspector		Quality Control Continental Rubber Industrial Kft. Quality Control Dept. 			

File Name : 000220_68543_68545+547.GEV.....000236_68543_68545+547.GEV
 File Message : 68543_68545_S8547
 Device Type : GX10
 Serial No : S8P606399
 Data Count : 9046
 Print Group : Press:Temp
 Print Range : 2014/09/04 01:53:54.000 - 2014/09/04 04:39:39.000
 Comment :

Sampling Int. : 1.000 sec
 Start Time : 2014/09/04 01:53:54.000
 Stop Time : 2014/09/04 04:39:39.000

Data No	Cursor A	Cursor B	Difference
2014090402351761000	3432	7032	3600
2014090402351761000	2014/09/04 02:35:17.61000	2014/09/04 02:35:17.61000	01 00:00.000
Temp Comment	Value A	Value B	Value B-A
Pressure(bar)	1092.93	1048.57	-44.36
Ambient Temperature(C)	23.24	23.14	-0.10


Yuan G
 Inspector
 Quality Control Dept

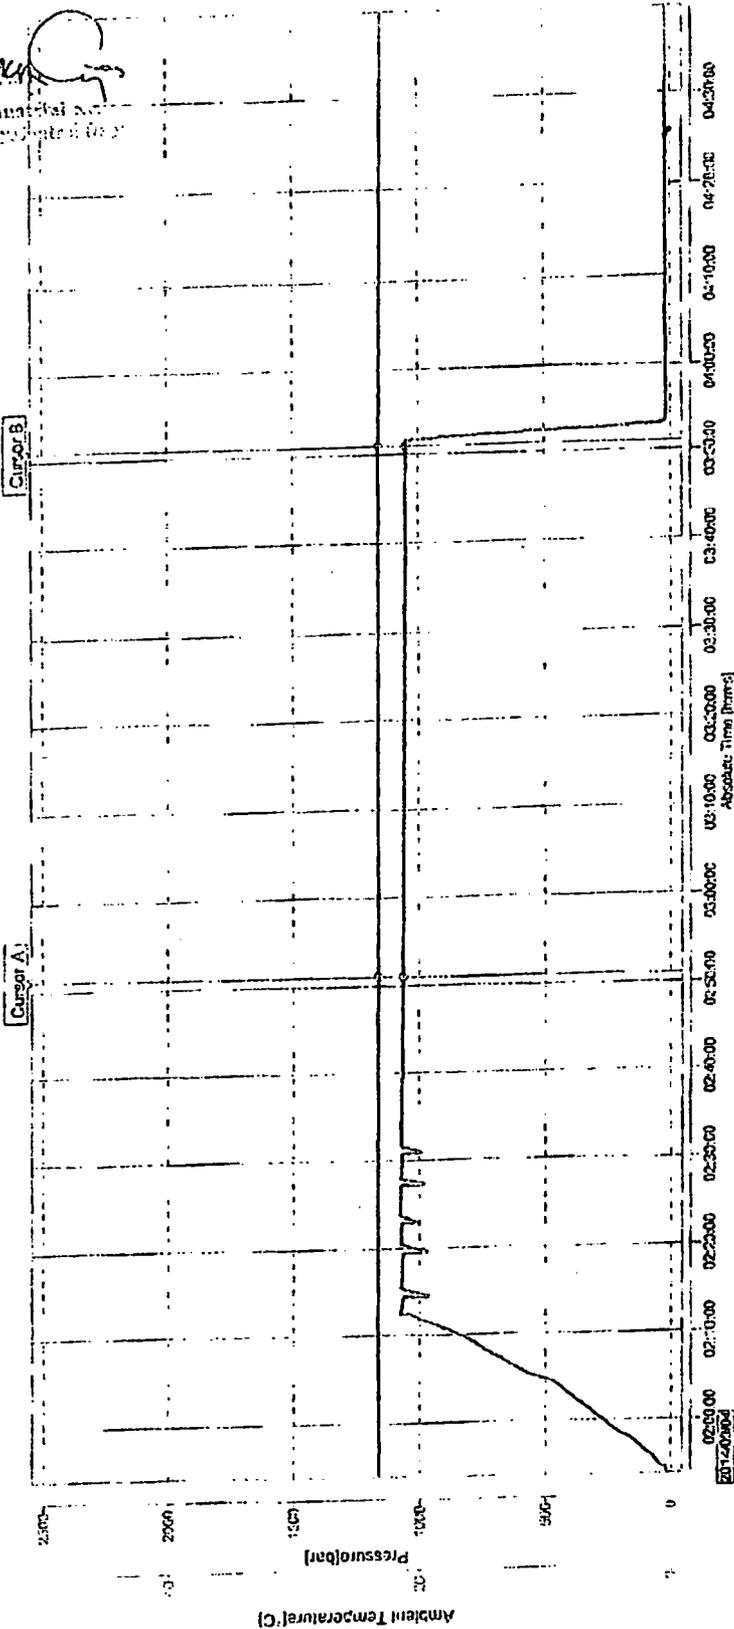

Temperature

Absolute Time (mm:ss)

2014/09/04

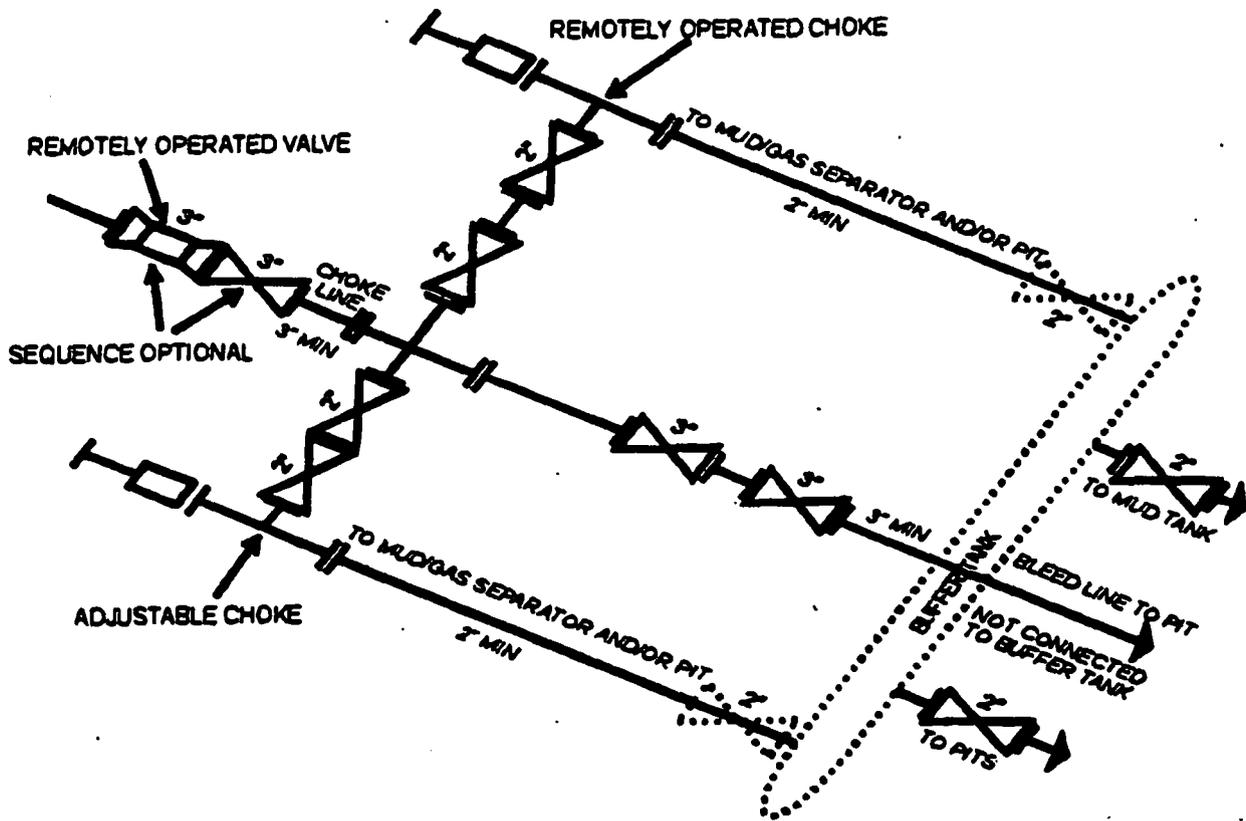


5M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

Although not required for any of the choke manifold systems, buffer tanks are sometimes installed downstream of the choke assemblies for the purpose of manifolding the bleed lines together. When buffer tanks are employed, valves shall be installed upstream to isolate a failure or malfunction without interrupting flow control. Though not shown on 2M, 3M, 10M, OR 15M drawings, it would also be applicable to those situations.

[54 FR 39528, Sept. 27, 1989]

13-5/8" 5,000 PSI BOP

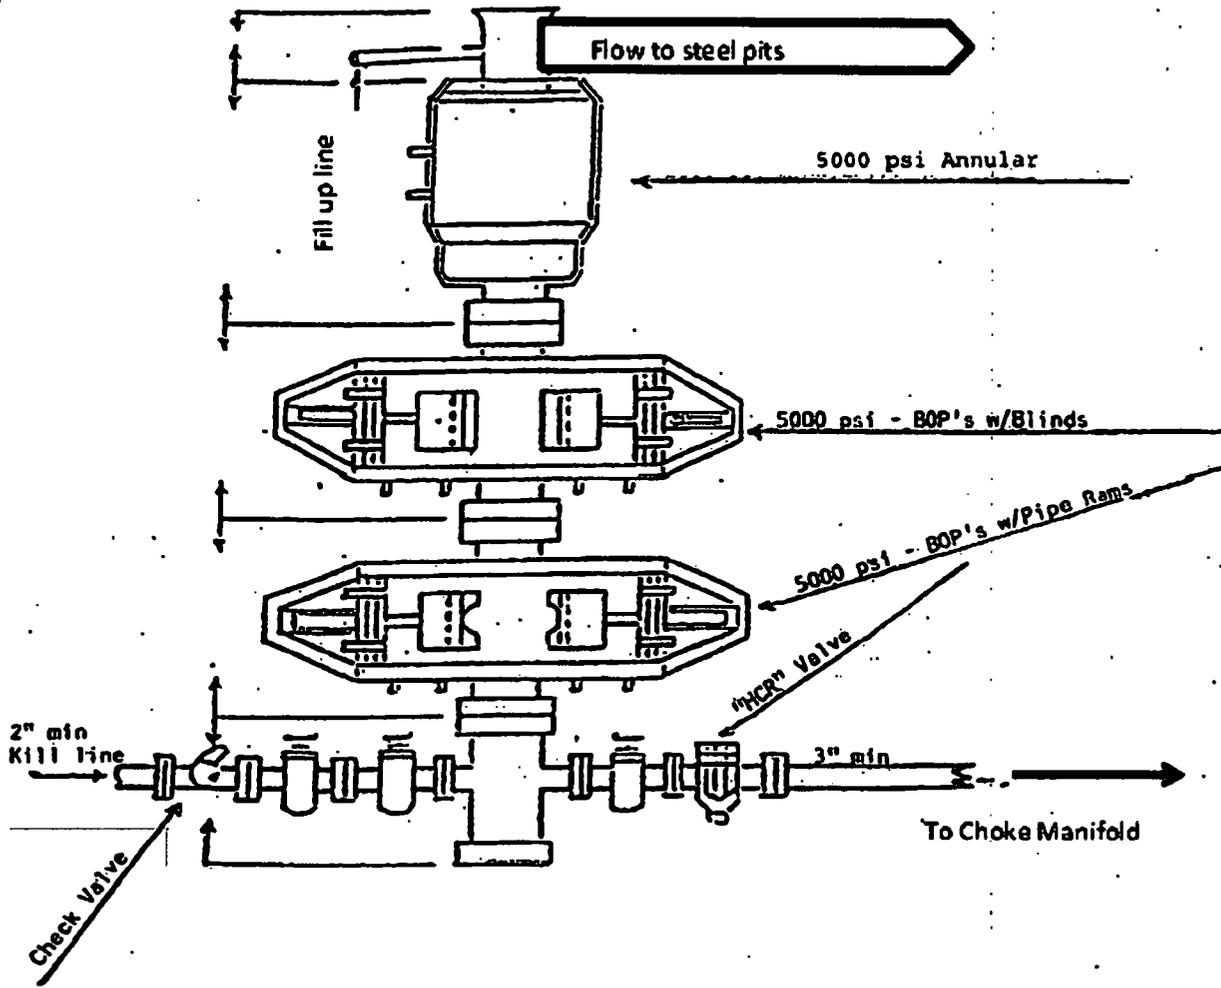

BTA OIL PRODUCERS LLC



HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.
- b. Protective equipment for essential personnel:
 - Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H₂S detection and monitoring equipment:

2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.

- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.


W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED**
- 2. HARD HATS REQUIRED**
- 3. SMOKING IN DESIGNATED AREAS ONLY**
- 4. BE WIND CONSCIOUS AT ALL TIMES**
- 5. CK WITH BTA OIL PRODUCERS LLC FOREMAN AT MAIN OFFICE**

BTA OIL PRODUCERS LLC

1-432-682-3753

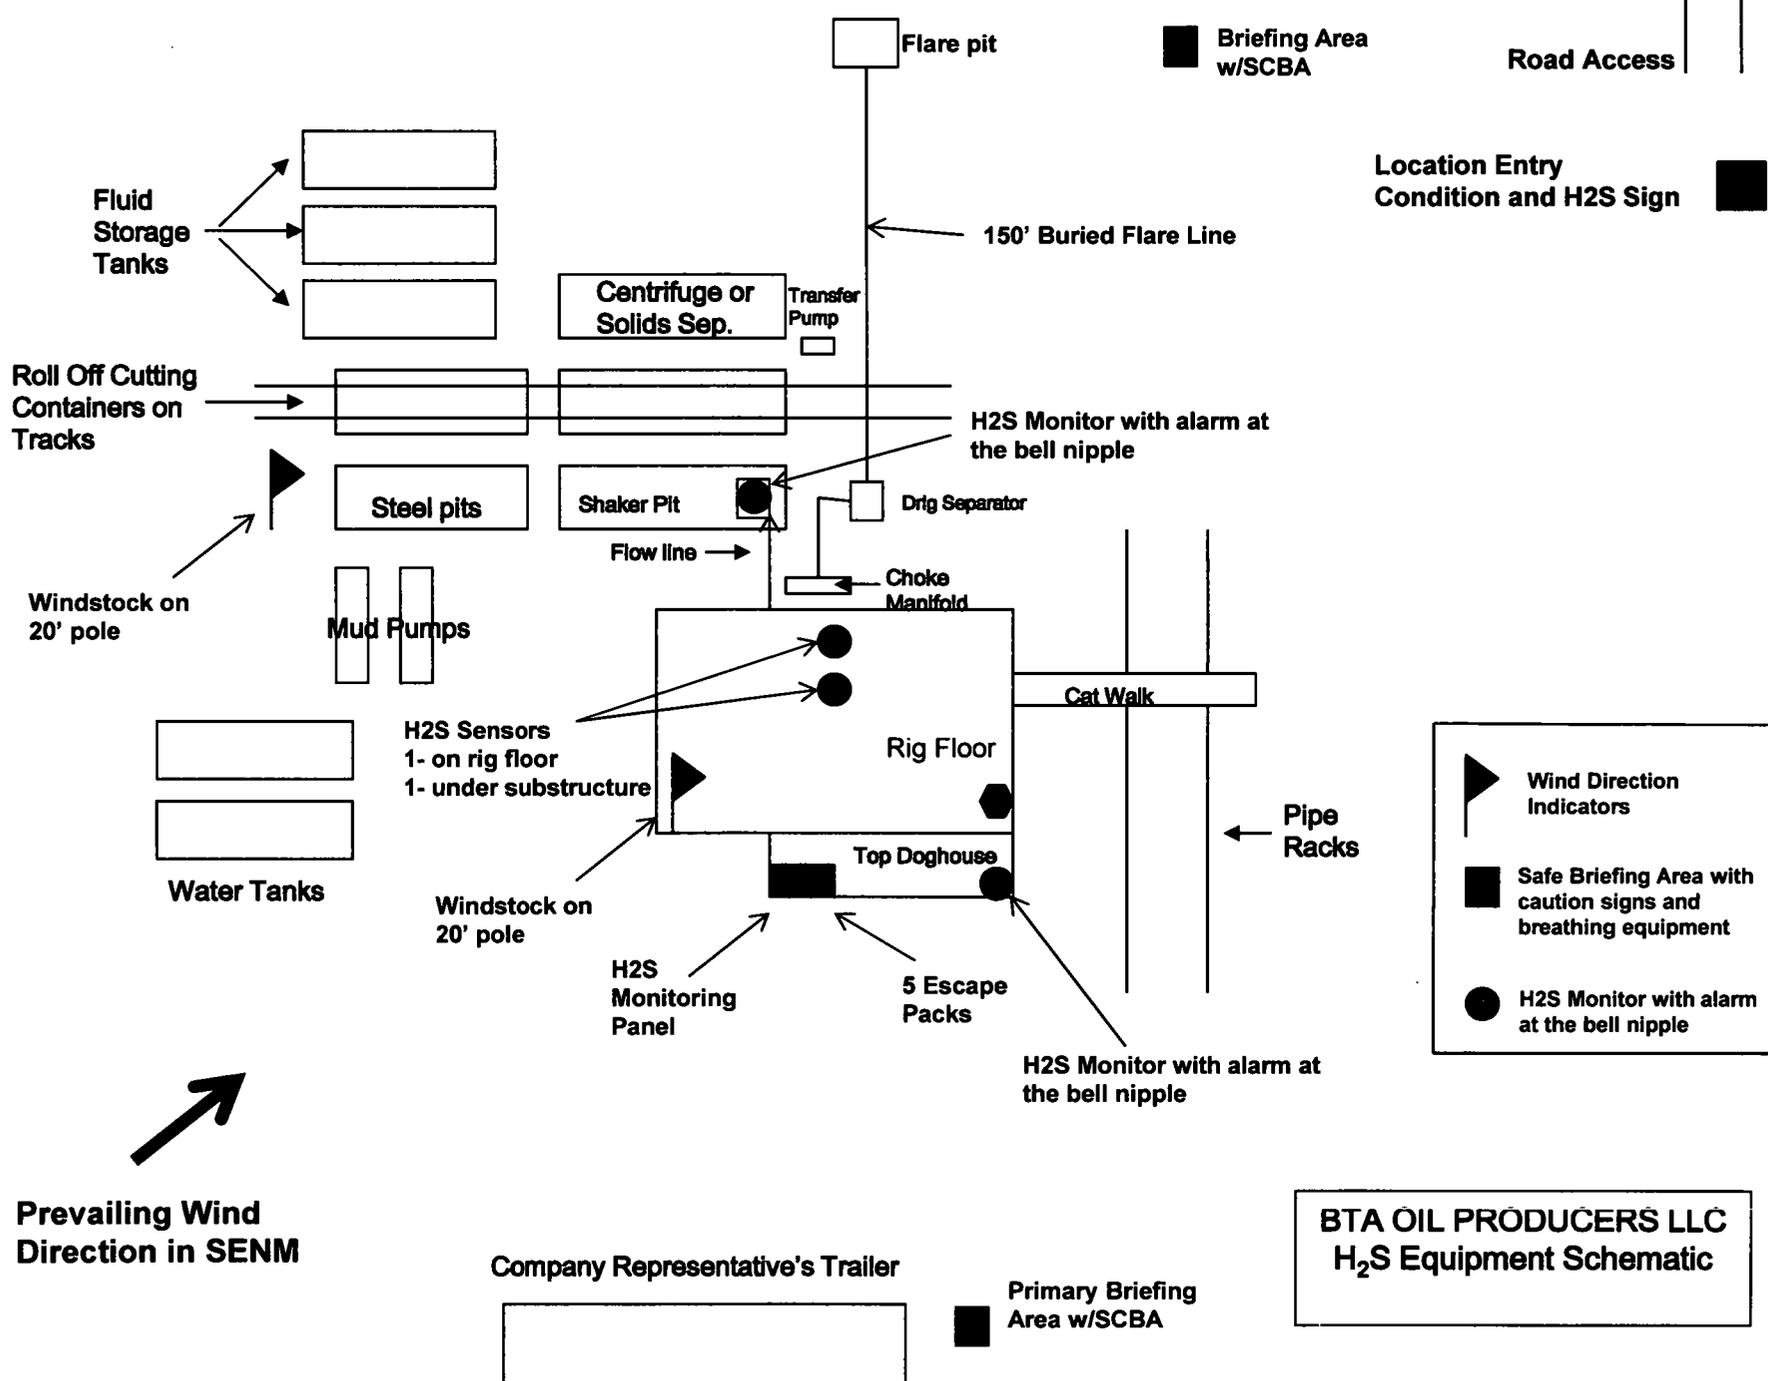

Prevaling Wind Direction in SENM

Company Representative's Trailer

BTA OIL PRODUCERS LLC
H₂S Equipment Schematic

	Wind Direction Indicators
	Safe Briefing Area with caution signs and breathing equipment
	H2S Monitor with alarm at the bell nipple

Primary Briefing Area w/SCBA

Briefing Area w/SCBA

Road Access

Location Entry Condition and H2S Sign

Flare pit

150' Buried Flare Line

Centrifuge or Solids Sep.

Transfer Pump

Fluid Storage Tanks

Roll Off Cutting Containers on Tracks

H2S Monitor with alarm at the bell nipple

Steel pits

Shaker Pit

Drig Separator

Windstock on 20' pole

Flow line

Choke Manifold

Mud Pumps

Cat Walk

Rig Floor

H2S Sensors
1- on rig floor
1- under substructure

Pipe Racks

Water Tanks

Windstock on 20' pole

Top Doghouse

H2S Monitoring Panel

5 Escape Packs

H2S Monitor with alarm at the bell nipple

EMERGENCY CALL LIST

	<u>OFFICE</u>	<u>MOBILE</u>
BTA Oil Producers LLC OFFICE	432-682-3753	
BEN GRIMES, Operations	432-682-3753	432-559-4309
NICK EATON, Drilling	432-682-3753	432-260-7841
TRACE WOHLFAHRT, Completions	432-682-3753	

EMERGENCY RESPONSE NUMBERS

	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

BTA Oil Producers, LLC

Lea County, NM (NAD 83)

North Ridge

North Ridge #01H

Wellbore #1

Plan: Design #1

Standard Planning Report - Geographic

15 May, 2019

Microsoft
Planning Report - Geographic

Database:	Old	Local Co-ordinate Reference:	Well North Ridge #01H
Company:	BTA Oil Producers, LLC	TVD Reference:	WELL @ 3413.0usft (Original Well Elev)
Project:	Lea County, NM (NAD 83)	MD Reference:	WELL @ 3413.0usft (Original Well Elev)
Site:	North Ridge	North Reference:	Grid
Well:	North Ridge #01H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Lea County, NM (NAD 83), Lea County, NM		
Map System:	US State Plane 1983	System Datum:	Ground Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		Using geodetic scale factor

Site	North Ridge				
Site Position:		Northing:	493,872.00 usft	Latitude:	32° 21' 16.544 N
From:	Map	Easting:	815,680.00 usft	Longitude:	103° 26' 41.649 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.48 °

Well	North Ridge #01H					
Well Position	+N/-S	0.0 usft	Northing:	493,872.00 usft	Latitude:	32° 21' 16.544 N
	+E/-W	0.0 usft	Easting:	815,680.00 usft	Longitude:	103° 26' 41.649 W
Position Uncertainty		0.0 usft	Wellhead Elevation:		Ground Level:	3,413.0 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	IGRF200510	12/31/2009	7.70	60.39	48,886.08954630

Design	Design #1				
Audit Notes:					
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction	
	(usft)	(usft)	(usft)	(°)	
	0.0	0.0	0.0	184.78	

Plan Survey Tool Program	Date	4/22/2019			
Depth From	Depth To	Survey (Wellbore)	Tool Name	Remarks	
(usft)	(usft)				
1	0.0	18,101.5 Design #1 (Wellbore #1)			

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(usft)	(usft)	Rate	Rate	Rate	(°)	
(usft)			(usft)			(°/100usft)	(°/100usft)	(°/100usft)		
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,051.9	0.00	0.00	5,051.9	0.0	0.0	0.00	0.00	0.00	0.00	
5,551.9	10.00	292.23	5,549.3	16.5	-40.3	2.00	2.00	0.00	292.23	
9,312.2	10.00	292.23	9,252.5	263.5	-644.7	0.00	0.00	0.00	0.00	
9,812.2	0.00	0.00	9,750.0	280.0	-685.0	2.00	-2.00	0.00	180.00	
9,909.2	0.00	0.00	9,847.0	280.0	-685.0	0.00	0.00	0.00	0.00	
10,809.2	90.00	179.63	10,420.0	-292.9	-681.3	10.00	10.00	0.00	179.63	
18,101.5	90.00	179.63	10,420.0	-7,585.0	-634.0	0.00	0.00	0.00	0.00	North Ridge #1H BHL

Microsoft Planning Report - Geographic

Database: Old
Company: BTA Oil Producers, LLC
Project: Lea County, NM (NAD 83)
Site: North Ridge
Well: North Ridge #01H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well North Ridge #01H
TVD Reference: WELL @ 3413.0usft (Original Well Elev)
MD Reference: WELL @ 3413.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
100.0	0.00	0.00	100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
200.0	0.00	0.00	200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
300.0	0.00	0.00	300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
400.0	0.00	0.00	400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
500.0	0.00	0.00	500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
600.0	0.00	0.00	600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
700.0	0.00	0.00	700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
800.0	0.00	0.00	800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
900.0	0.00	0.00	900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,000.0	0.00	0.00	1,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,100.0	0.00	0.00	1,100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,200.0	0.00	0.00	1,200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,300.0	0.00	0.00	1,300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,400.0	0.00	0.00	1,400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,500.0	0.00	0.00	1,500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,600.0	0.00	0.00	1,600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,700.0	0.00	0.00	1,700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,800.0	0.00	0.00	1,800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
1,900.0	0.00	0.00	1,900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,000.0	0.00	0.00	2,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,100.0	0.00	0.00	2,100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,200.0	0.00	0.00	2,200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,300.0	0.00	0.00	2,300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,400.0	0.00	0.00	2,400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,500.0	0.00	0.00	2,500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,600.0	0.00	0.00	2,600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,700.0	0.00	0.00	2,700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,800.0	0.00	0.00	2,800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
2,900.0	0.00	0.00	2,900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,000.0	0.00	0.00	3,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,100.0	0.00	0.00	3,100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,200.0	0.00	0.00	3,200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,300.0	0.00	0.00	3,300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,400.0	0.00	0.00	3,400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,500.0	0.00	0.00	3,500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,600.0	0.00	0.00	3,600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,700.0	0.00	0.00	3,700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,800.0	0.00	0.00	3,800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
3,900.0	0.00	0.00	3,900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,000.0	0.00	0.00	4,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,100.0	0.00	0.00	4,100.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,200.0	0.00	0.00	4,200.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,300.0	0.00	0.00	4,300.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,400.0	0.00	0.00	4,400.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,500.0	0.00	0.00	4,500.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,600.0	0.00	0.00	4,600.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,700.0	0.00	0.00	4,700.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,800.0	0.00	0.00	4,800.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
4,900.0	0.00	0.00	4,900.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
5,000.0	0.00	0.00	5,000.0	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
5,051.9	0.00	0.00	5,051.9	0.0	0.0	493,872.00	815,680.00	32° 21' 16.544 N	103° 26' 41.649 W
5,100.0	0.96	292.23	5,100.0	0.2	-0.4	493,872.15	815,679.62	32° 21' 16.545 N	103° 26' 41.653 W
5,200.0	2.96	292.23	5,199.9	1.4	-3.5	493,873.45	815,676.45	32° 21' 16.558 N	103° 26' 41.690 W
5,300.0	4.96	292.23	5,299.7	4.1	-9.9	493,876.06	815,670.06	32° 21' 16.585 N	103° 26' 41.765 W

Microsoft

Planning Report - Geographic

Database: Old
Company: BTA Oil Producers, LLC
Project: Lea County, NM (NAD 83)
Site: North Ridge
Well: North Ridge #01H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well North Ridge #01H
TVD Reference: WELL @ 3413.0usft (Original Well Elev)
MD Reference: WELL @ 3413.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
5,400.0	6.96	292.23	5,399.1	8.0	-19.6	493,879.99	815,660.44	32° 21' 16.625 N	103° 26' 41.876 W
5,500.0	8.96	292.23	5,498.2	13.2	-32.4	493,885.23	815,647.62	32° 21' 16.677 N	103° 26' 42.025 W
5,551.9	10.00	292.23	5,549.3	16.5	-40.3	493,888.47	815,639.71	32° 21' 16.710 N	103° 26' 42.117 W
5,600.0	10.00	292.23	5,596.7	19.6	-48.0	493,891.63	815,631.98	32° 21' 16.742 N	103° 26' 42.207 W
5,700.0	10.00	292.23	5,695.2	26.2	-64.1	493,898.20	815,615.90	32° 21' 16.808 N	103° 26' 42.394 W
5,800.0	10.00	292.23	5,793.7	32.8	-80.2	493,904.77	815,599.83	32° 21' 16.875 N	103° 26' 42.580 W
5,900.0	10.00	292.23	5,892.2	39.3	-96.2	493,911.34	815,583.76	32° 21' 16.941 N	103° 26' 42.767 W
6,000.0	10.00	292.23	5,990.7	45.9	-112.3	493,917.91	815,567.68	32° 21' 17.007 N	103° 26' 42.954 W
6,100.0	10.00	292.23	6,089.1	52.5	-128.4	493,924.48	815,551.61	32° 21' 17.074 N	103° 26' 43.141 W
6,200.0	10.00	292.23	6,187.6	59.1	-144.5	493,931.05	815,535.53	32° 21' 17.140 N	103° 26' 43.327 W
6,300.0	10.00	292.23	6,286.1	65.6	-160.5	493,937.62	815,519.46	32° 21' 17.206 N	103° 26' 43.514 W
6,400.0	10.00	292.23	6,384.6	72.2	-176.6	493,944.19	815,503.39	32° 21' 17.273 N	103° 26' 43.701 W
6,500.0	10.00	292.23	6,483.1	78.8	-192.7	493,950.76	815,487.31	32° 21' 17.339 N	103° 26' 43.888 W
6,600.0	10.00	292.23	6,581.5	85.3	-208.8	493,957.33	815,471.24	32° 21' 17.405 N	103° 26' 44.074 W
6,700.0	10.00	292.23	6,680.0	91.9	-224.8	493,963.90	815,455.17	32° 21' 17.472 N	103° 26' 44.261 W
6,800.0	10.00	292.23	6,778.5	98.5	-240.9	493,970.47	815,439.09	32° 21' 17.538 N	103° 26' 44.448 W
6,900.0	10.00	292.23	6,877.0	105.0	-257.0	493,977.04	815,423.02	32° 21' 17.604 N	103° 26' 44.635 W
7,000.0	10.00	292.23	6,975.5	111.6	-273.1	493,983.61	815,406.94	32° 21' 17.671 N	103° 26' 44.821 W
7,100.0	10.00	292.23	7,073.9	118.2	-289.1	493,990.18	815,390.87	32° 21' 17.737 N	103° 26' 45.008 W
7,200.0	10.00	292.23	7,172.4	124.8	-305.2	493,996.75	815,374.80	32° 21' 17.803 N	103° 26' 45.195 W
7,300.0	10.00	292.23	7,270.9	131.3	-321.3	494,003.32	815,358.72	32° 21' 17.870 N	103° 26' 45.382 W
7,400.0	10.00	292.23	7,369.4	137.9	-337.3	494,009.90	815,342.65	32° 21' 17.936 N	103° 26' 45.568 W
7,500.0	10.00	292.23	7,467.9	144.5	-353.4	494,016.47	815,326.58	32° 21' 18.002 N	103° 26' 45.755 W
7,600.0	10.00	292.23	7,566.3	151.0	-369.5	494,023.04	815,310.50	32° 21' 18.069 N	103° 26' 45.942 W
7,700.0	10.00	292.23	7,664.8	157.6	-385.6	494,029.61	815,294.43	32° 21' 18.135 N	103° 26' 46.128 W
7,800.0	10.00	292.23	7,763.3	164.2	-401.6	494,036.18	815,278.35	32° 21' 18.201 N	103° 26' 46.315 W
7,900.0	10.00	292.23	7,861.8	170.7	-417.7	494,042.75	815,262.28	32° 21' 18.268 N	103° 26' 46.502 W
8,000.0	10.00	292.23	7,960.3	177.3	-433.8	494,049.32	815,246.21	32° 21' 18.334 N	103° 26' 46.689 W
8,100.0	10.00	292.23	8,058.8	183.9	-449.9	494,055.89	815,230.13	32° 21' 18.400 N	103° 26' 46.875 W
8,200.0	10.00	292.23	8,157.2	190.5	-465.9	494,062.46	815,214.06	32° 21' 18.467 N	103° 26' 47.062 W
8,300.0	10.00	292.23	8,255.7	197.0	-482.0	494,069.03	815,197.99	32° 21' 18.533 N	103° 26' 47.249 W
8,400.0	10.00	292.23	8,354.2	203.6	-498.1	494,075.60	815,181.91	32° 21' 18.599 N	103° 26' 47.436 W
8,500.0	10.00	292.23	8,452.7	210.2	-514.2	494,082.17	815,165.84	32° 21' 18.666 N	103° 26' 47.622 W
8,600.0	10.00	292.23	8,551.2	216.7	-530.2	494,088.74	815,149.76	32° 21' 18.732 N	103° 26' 47.809 W
8,700.0	10.00	292.23	8,649.6	223.3	-546.3	494,095.31	815,133.69	32° 21' 18.798 N	103° 26' 47.996 W
8,800.0	10.00	292.23	8,748.1	229.9	-562.4	494,101.88	815,117.62	32° 21' 18.865 N	103° 26' 48.183 W
8,900.0	10.00	292.23	8,846.6	236.4	-578.5	494,108.45	815,101.54	32° 21' 18.931 N	103° 26' 48.369 W
9,000.0	10.00	292.23	8,945.1	243.0	-594.5	494,115.02	815,085.47	32° 21' 18.997 N	103° 26' 48.556 W
9,100.0	10.00	292.23	9,043.6	249.6	-610.6	494,121.59	815,069.40	32° 21' 19.064 N	103° 26' 48.743 W
9,200.0	10.00	292.23	9,142.0	256.2	-626.7	494,128.16	815,053.32	32° 21' 19.130 N	103° 26' 48.930 W
9,300.0	10.00	292.23	9,240.5	262.7	-642.8	494,134.73	815,037.25	32° 21' 19.196 N	103° 26' 49.116 W
9,312.2	10.00	292.23	9,252.5	263.5	-644.7	494,135.53	815,035.29	32° 21' 19.204 N	103° 26' 49.139 W
9,400.0	8.24	292.23	9,339.2	268.8	-657.6	494,140.80	815,022.40	32° 21' 19.257 N	103° 26' 49.289 W
9,500.0	6.24	292.23	9,438.4	273.6	-669.3	494,145.57	815,010.73	32° 21' 19.306 N	103° 26' 49.424 W
9,600.0	4.24	292.23	9,538.0	277.0	-677.7	494,149.03	815,002.27	32° 21' 19.341 N	103° 26' 49.523 W
9,700.0	2.24	292.23	9,637.8	279.2	-683.0	494,151.17	814,997.03	32° 21' 19.362 N	103° 26' 49.583 W
9,800.0	0.24	292.23	9,737.8	280.0	-685.0	494,151.99	814,995.03	32° 21' 19.370 N	103° 26' 49.607 W
9,812.2	0.00	0.00	9,750.0	280.0	-685.0	494,152.00	814,995.00	32° 21' 19.371 N	103° 26' 49.607 W
9,900.0	0.00	0.00	9,837.8	280.0	-685.0	494,152.00	814,995.00	32° 21' 19.371 N	103° 26' 49.607 W
9,909.2	0.00	0.00	9,847.0	280.0	-685.0	494,152.00	814,995.00	32° 21' 19.371 N	103° 26' 49.607 W
10,000.0	9.08	179.63	9,937.4	272.8	-685.0	494,144.83	814,995.05	32° 21' 19.300 N	103° 26' 49.607 W
10,100.0	19.08	179.63	10,034.3	248.5	-684.8	494,120.54	814,995.21	32° 21' 19.059 N	103° 26' 49.608 W
10,200.0	29.08	179.63	10,125.5	207.8	-684.5	494,079.79	814,995.47	32° 21' 18.656 N	103° 26' 49.609 W
10,300.0	39.08	179.63	10,208.2	151.8	-684.2	494,023.84	814,995.83	32° 21' 18.102 N	103° 26' 49.610 W
10,400.0	49.08	179.63	10,280.0	82.4	-683.7	493,954.37	814,996.28	32° 21' 17.415 N	103° 26' 49.611 W

Microsoft

Planning Report - Geographic

Database: Old
Company: BTA Oil Producers, LLC
Project: Lea County, NM (NAD 83)
Site: North Ridge
Well: North Ridge #01H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well North Ridge #01H
TVD Reference: WELL @ 3413.0usft (Original Well Elev)
MD Reference: WELL @ 3413.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
10,500.0	59.08	179.63	10,338.6	1.5	-683.2	493,873.49	814,996.81	32° 21' 16.615 N	103° 26' 49.613 W
10,600.0	69.08	179.63	10,382.2	-88.3	-682.6	493,783.67	814,997.39	32° 21' 15.726 N	103° 26' 49.615 W
10,700.0	79.08	179.63	10,409.6	-184.4	-682.0	493,687.63	814,998.01	32° 21' 14.776 N	103° 26' 49.617 W
10,800.0	89.08	179.63	10,419.9	-283.7	-681.3	493,588.30	814,998.66	32° 21' 13.793 N	103° 26' 49.619 W
10,809.2	90.00	179.63	10,420.0	-292.9	-681.3	493,579.06	814,998.72	32° 21' 13.701 N	103° 26' 49.619 W
10,900.0	90.00	179.63	10,420.0	-383.7	-680.7	493,488.30	814,999.30	32° 21' 12.803 N	103° 26' 49.621 W
11,000.0	90.00	179.63	10,420.0	-483.7	-680.0	493,388.30	814,999.95	32° 21' 11.814 N	103° 26' 49.623 W
11,100.0	90.00	179.63	10,420.0	-583.7	-679.4	493,288.30	815,000.60	32° 21' 10.824 N	103° 26' 49.625 W
11,200.0	90.00	179.63	10,420.0	-683.7	-678.8	493,188.31	815,001.25	32° 21' 9.835 N	103° 26' 49.627 W
11,300.0	90.00	179.63	10,420.0	-783.7	-678.1	493,088.31	815,001.90	32° 21' 8.845 N	103° 26' 49.629 W
11,400.0	90.00	179.63	10,420.0	-883.7	-677.5	492,988.31	815,002.55	32° 21' 7.856 N	103° 26' 49.631 W
11,500.0	90.00	179.63	10,420.0	-983.7	-676.8	492,888.31	815,003.20	32° 21' 6.866 N	103° 26' 49.634 W
11,600.0	90.00	179.63	10,420.0	-1,083.7	-676.2	492,788.32	815,003.84	32° 21' 5.877 N	103° 26' 49.636 W
11,700.0	90.00	179.63	10,420.0	-1,183.7	-675.5	492,688.32	815,004.49	32° 21' 4.887 N	103° 26' 49.638 W
11,800.0	90.00	179.63	10,420.0	-1,283.7	-674.9	492,588.32	815,005.14	32° 21' 3.898 N	103° 26' 49.640 W
11,900.0	90.00	179.63	10,420.0	-1,383.7	-674.2	492,488.32	815,005.79	32° 21' 2.908 N	103° 26' 49.642 W
12,000.0	90.00	179.63	10,420.0	-1,483.7	-673.6	492,388.33	815,006.44	32° 21' 1.919 N	103° 26' 49.644 W
12,100.0	90.00	179.63	10,420.0	-1,583.7	-672.9	492,288.33	815,007.09	32° 21' 0.929 N	103° 26' 49.646 W
12,200.0	90.00	179.63	10,420.0	-1,683.7	-672.3	492,188.33	815,007.73	32° 20' 59.940 N	103° 26' 49.648 W
12,300.0	90.00	179.63	10,420.0	-1,783.7	-671.6	492,088.33	815,008.38	32° 20' 58.950 N	103° 26' 49.650 W
12,400.0	90.00	179.63	10,420.0	-1,883.7	-671.0	491,988.34	815,009.03	32° 20' 57.961 N	103° 26' 49.652 W
12,500.0	90.00	179.63	10,420.0	-1,983.7	-670.3	491,888.34	815,009.68	32° 20' 56.971 N	103° 26' 49.654 W
12,600.0	90.00	179.63	10,420.0	-2,083.7	-669.7	491,788.34	815,010.33	32° 20' 55.982 N	103° 26' 49.657 W
12,700.0	90.00	179.63	10,420.0	-2,183.7	-669.0	491,688.34	815,010.98	32° 20' 54.992 N	103° 26' 49.659 W
12,800.0	90.00	179.63	10,420.0	-2,283.7	-668.4	491,588.35	815,011.62	32° 20' 54.003 N	103° 26' 49.661 W
12,900.0	90.00	179.63	10,420.0	-2,383.7	-667.7	491,488.35	815,012.27	32° 20' 53.013 N	103° 26' 49.663 W
13,000.0	90.00	179.63	10,420.0	-2,483.7	-667.1	491,388.35	815,012.92	32° 20' 52.024 N	103° 26' 49.665 W
13,100.0	90.00	179.63	10,420.0	-2,583.7	-666.4	491,288.35	815,013.57	32° 20' 51.034 N	103° 26' 49.667 W
13,200.0	90.00	179.63	10,420.0	-2,683.7	-665.8	491,188.36	815,014.22	32° 20' 50.045 N	103° 26' 49.669 W
13,300.0	90.00	179.63	10,420.0	-2,783.7	-665.1	491,088.36	815,014.87	32° 20' 49.055 N	103° 26' 49.671 W
13,400.0	90.00	179.63	10,420.0	-2,883.7	-664.5	490,988.36	815,015.51	32° 20' 48.066 N	103° 26' 49.673 W
13,500.0	90.00	179.63	10,420.0	-2,983.7	-663.8	490,888.36	815,016.16	32° 20' 47.076 N	103° 26' 49.675 W
13,600.0	90.00	179.63	10,420.0	-3,083.6	-663.2	490,788.37	815,016.81	32° 20' 46.087 N	103° 26' 49.677 W
13,700.0	90.00	179.63	10,420.0	-3,183.6	-662.5	490,688.37	815,017.46	32° 20' 45.097 N	103° 26' 49.680 W
13,800.0	90.00	179.63	10,420.0	-3,283.6	-661.9	490,588.37	815,018.11	32° 20' 44.108 N	103° 26' 49.682 W
13,900.0	90.00	179.63	10,420.0	-3,383.6	-661.2	490,488.38	815,018.76	32° 20' 43.118 N	103° 26' 49.684 W
14,000.0	90.00	179.63	10,420.0	-3,483.6	-660.6	490,388.38	815,019.40	32° 20' 42.129 N	103° 26' 49.686 W
14,100.0	90.00	179.63	10,420.0	-3,583.6	-659.9	490,288.38	815,020.05	32° 20' 41.139 N	103° 26' 49.688 W
14,200.0	90.00	179.63	10,420.0	-3,683.6	-659.3	490,188.38	815,020.70	32° 20' 40.150 N	103° 26' 49.690 W
14,300.0	90.00	179.63	10,420.0	-3,783.6	-658.7	490,088.39	815,021.35	32° 20' 39.160 N	103° 26' 49.692 W
14,400.0	90.00	179.63	10,420.0	-3,883.6	-658.0	489,988.39	815,022.00	32° 20' 38.171 N	103° 26' 49.694 W
14,500.0	90.00	179.63	10,420.0	-3,983.6	-657.4	489,888.39	815,022.65	32° 20' 37.181 N	103° 26' 49.696 W
14,600.0	90.00	179.63	10,420.0	-4,083.6	-656.7	489,788.39	815,023.30	32° 20' 36.192 N	103° 26' 49.698 W
14,700.0	90.00	179.63	10,420.0	-4,183.6	-656.1	489,688.40	815,023.94	32° 20' 35.202 N	103° 26' 49.700 W
14,800.0	90.00	179.63	10,420.0	-4,283.6	-655.4	489,588.40	815,024.59	32° 20' 34.213 N	103° 26' 49.702 W
14,900.0	90.00	179.63	10,420.0	-4,383.6	-654.8	489,488.40	815,025.24	32° 20' 33.223 N	103° 26' 49.705 W
15,000.0	90.00	179.63	10,420.0	-4,483.6	-654.1	489,388.40	815,025.89	32° 20' 32.234 N	103° 26' 49.707 W
15,100.0	90.00	179.63	10,420.0	-4,583.6	-653.5	489,288.41	815,026.54	32° 20' 31.244 N	103° 26' 49.709 W
15,200.0	90.00	179.63	10,420.0	-4,683.6	-652.8	489,188.41	815,027.19	32° 20' 30.255 N	103° 26' 49.711 W
15,300.0	90.00	179.63	10,420.0	-4,783.6	-652.2	489,088.41	815,027.83	32° 20' 29.265 N	103° 26' 49.713 W
15,400.0	90.00	179.63	10,420.0	-4,883.6	-651.5	488,988.41	815,028.48	32° 20' 28.276 N	103° 26' 49.715 W
15,500.0	90.00	179.63	10,420.0	-4,983.6	-650.9	488,888.42	815,029.13	32° 20' 27.286 N	103° 26' 49.717 W
15,600.0	90.00	179.63	10,420.0	-5,083.6	-650.2	488,788.42	815,029.78	32° 20' 26.297 N	103° 26' 49.719 W
15,700.0	90.00	179.63	10,420.0	-5,183.6	-649.6	488,688.42	815,030.43	32° 20' 25.307 N	103° 26' 49.721 W
15,800.0	90.00	179.63	10,420.0	-5,283.6	-648.9	488,588.42	815,031.08	32° 20' 24.318 N	103° 26' 49.723 W

Microsoft

Planning Report - Geographic


Database: Old
Company: BTA Oil Producers, LLC
Project: Lea County, NM (NAD 83)
Site: North Ridge
Well: North Ridge #01H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well North Ridge #01H
TVD Reference: WELL @ 3413.0usft (Original Well Elev)
MD Reference: WELL @ 3413.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
15,900.0	90.00	179.63	10,420.0	-5,383.6	-648.3	488,488.43	815,031.72	32° 20' 23.328 N	103° 26' 49.725 W	
16,000.0	90.00	179.63	10,420.0	-5,483.6	-647.6	488,388.43	815,032.37	32° 20' 22.339 N	103° 26' 49.728 W	
16,100.0	90.00	179.63	10,420.0	-5,583.6	-647.0	488,288.43	815,033.02	32° 20' 21.349 N	103° 26' 49.730 W	
16,200.0	90.00	179.63	10,420.0	-5,683.6	-646.3	488,188.43	815,033.67	32° 20' 20.360 N	103° 26' 49.732 W	
16,300.0	90.00	179.63	10,420.0	-5,783.6	-645.7	488,088.44	815,034.32	32° 20' 19.370 N	103° 26' 49.734 W	
16,400.0	90.00	179.63	10,420.0	-5,883.6	-645.0	487,988.44	815,034.97	32° 20' 18.381 N	103° 26' 49.736 W	
16,500.0	90.00	179.63	10,420.0	-5,983.6	-644.4	487,888.44	815,035.61	32° 20' 17.391 N	103° 26' 49.738 W	
16,600.0	90.00	179.63	10,420.0	-6,083.6	-643.7	487,788.44	815,036.26	32° 20' 16.402 N	103° 26' 49.740 W	
16,700.0	90.00	179.63	10,420.0	-6,183.6	-643.1	487,688.45	815,036.91	32° 20' 15.412 N	103° 26' 49.742 W	
16,800.0	90.00	179.63	10,420.0	-6,283.6	-642.4	487,588.45	815,037.56	32° 20' 14.423 N	103° 26' 49.744 W	
16,900.0	90.00	179.63	10,420.0	-6,383.6	-641.8	487,488.45	815,038.21	32° 20' 13.433 N	103° 26' 49.746 W	
17,000.0	90.00	179.63	10,420.0	-6,483.6	-641.1	487,388.45	815,038.86	32° 20' 12.444 N	103° 26' 49.748 W	
17,100.0	90.00	179.63	10,420.0	-6,583.6	-640.5	487,288.46	815,039.50	32° 20' 11.454 N	103° 26' 49.750 W	
17,200.0	90.00	179.63	10,420.0	-6,683.6	-639.8	487,188.46	815,040.15	32° 20' 10.465 N	103° 26' 49.753 W	
17,300.0	90.00	179.63	10,420.0	-6,783.6	-639.2	487,088.46	815,040.80	32° 20' 9.475 N	103° 26' 49.755 W	
17,400.0	90.00	179.63	10,420.0	-6,883.6	-638.6	486,988.47	815,041.45	32° 20' 8.486 N	103° 26' 49.757 W	
17,500.0	90.00	179.63	10,420.0	-6,983.6	-637.9	486,888.47	815,042.10	32° 20' 7.496 N	103° 26' 49.759 W	
17,600.0	90.00	179.63	10,420.0	-7,083.6	-637.3	486,788.47	815,042.75	32° 20' 6.507 N	103° 26' 49.761 W	
17,700.0	90.00	179.63	10,420.0	-7,183.6	-636.6	486,688.47	815,043.40	32° 20' 5.517 N	103° 26' 49.763 W	
17,800.0	90.00	179.63	10,420.0	-7,283.6	-636.0	486,588.48	815,044.04	32° 20' 4.528 N	103° 26' 49.765 W	
17,900.0	90.00	179.63	10,420.0	-7,383.6	-635.3	486,488.48	815,044.69	32° 20' 3.538 N	103° 26' 49.767 W	
18,000.0	90.00	179.63	10,420.0	-7,483.6	-634.7	486,388.48	815,045.34	32° 20' 2.549 N	103° 26' 49.769 W	
18,100.0	90.00	179.63	10,420.0	-7,583.6	-634.0	486,288.48	815,045.99	32° 20' 1.559 N	103° 26' 49.771 W	
18,101.5	90.00	179.63	10,420.0	-7,585.0	-634.0	486,287.00	815,046.00	32° 20' 1.545 N	103° 26' 49.771 W	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
North Ridge #1H BHL - hit/miss target - Shape - plan hits target center - Point	0.00	0.00	10,420.0	-7,585.0	-634.0	486,287.00	815,046.00	32° 20' 1.545 N	103° 26' 49.771 W	



BTA Oil Producers, LLC



Azimuths to Grid North
 True North: -0.48°
 Magnetic North: 7.23°

Magnetic Field
 Strength: 48886.1nT
 Dip Angle: 60.39°
 Date: 12/31/2009
 Model: IGRF200510

WELL DETAILS: North Ridge #01H					
+N/-S	+E/-W	Northing	Ground Level Easting	3413.0 Latitude	Longitude
0.0	0.0	493872.00	815680.00	32° 21' 16.544 N	103° 26' 41.649 W

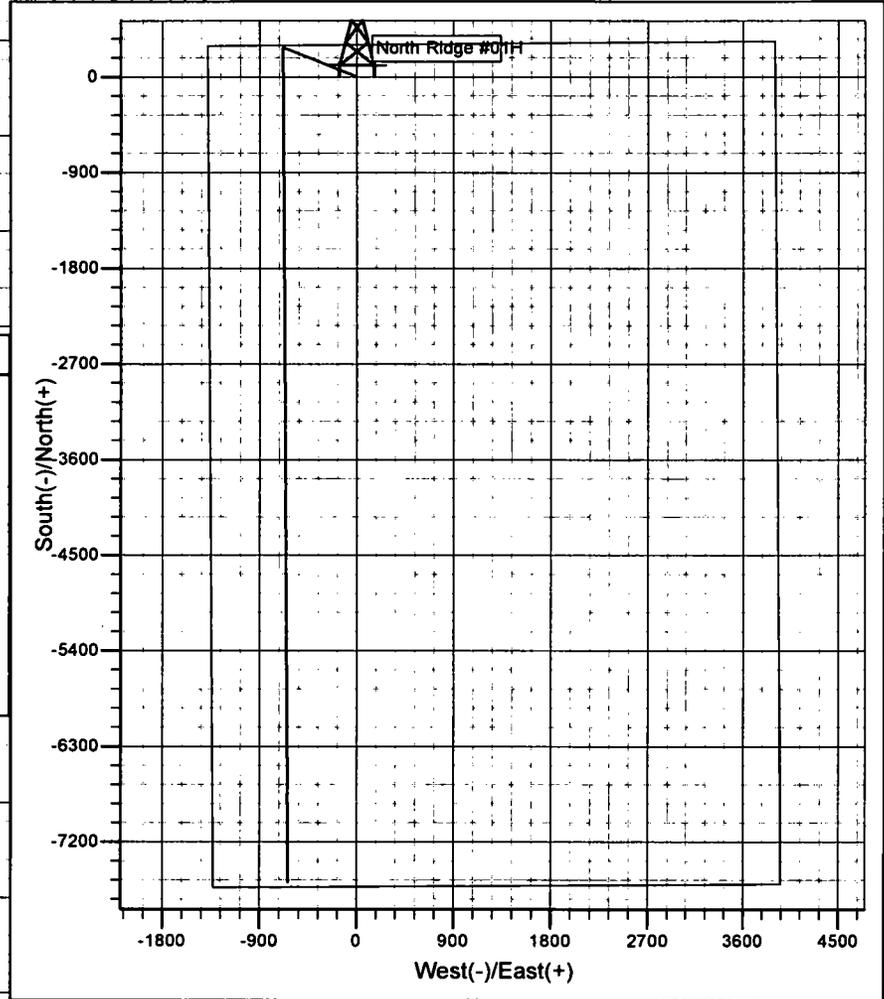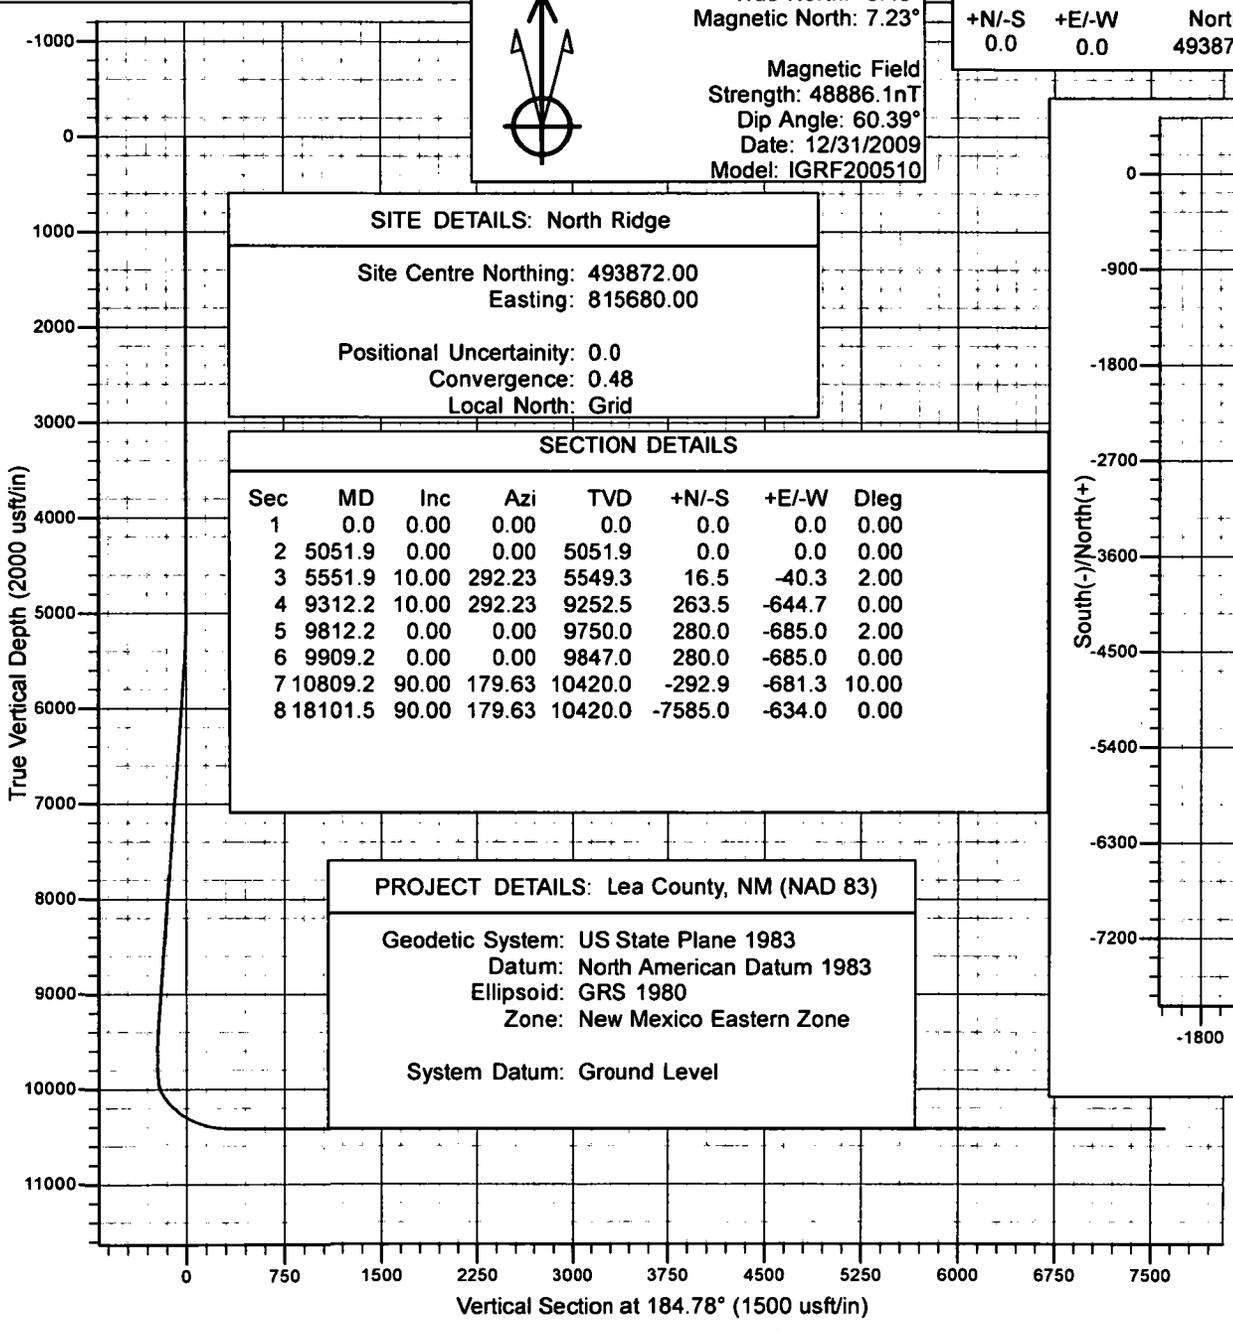

District I
1625 N. French Dr , Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rjo Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Original
to Appropriate
District Office

GAS CAPTURE PLAN

Date: 5/6/2019

Original

Operator & OGRID No.: 260297

Amended - Reason for Amendment: _____

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vented	Comments
NORTH RIDGE 8040		SEC 35 ; 22S ; 34E	300 FNL 1620 FWL	2000	Flared	Battery Connected
FEDERAL COM 1H						To ETP System

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to Gas Transporter and will be connected to Gas Transporter low/high pressure gathering system located in LEA County, New Mexico. It will require 0 ' of pipeline to (ETP) connect the facility to low/high pressure gathering system. Operator provides (periodically) to Gas Transporter a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, Operator and Gas Transporter have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at Gas Transporter Processing Plant located in Sec. _____, Twn. _____, Rng. _____, _____ County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy


After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Gas Transporter system at that time. Based on current information, it is Operator's belief the system can take this gas upon completion of the well(s)

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

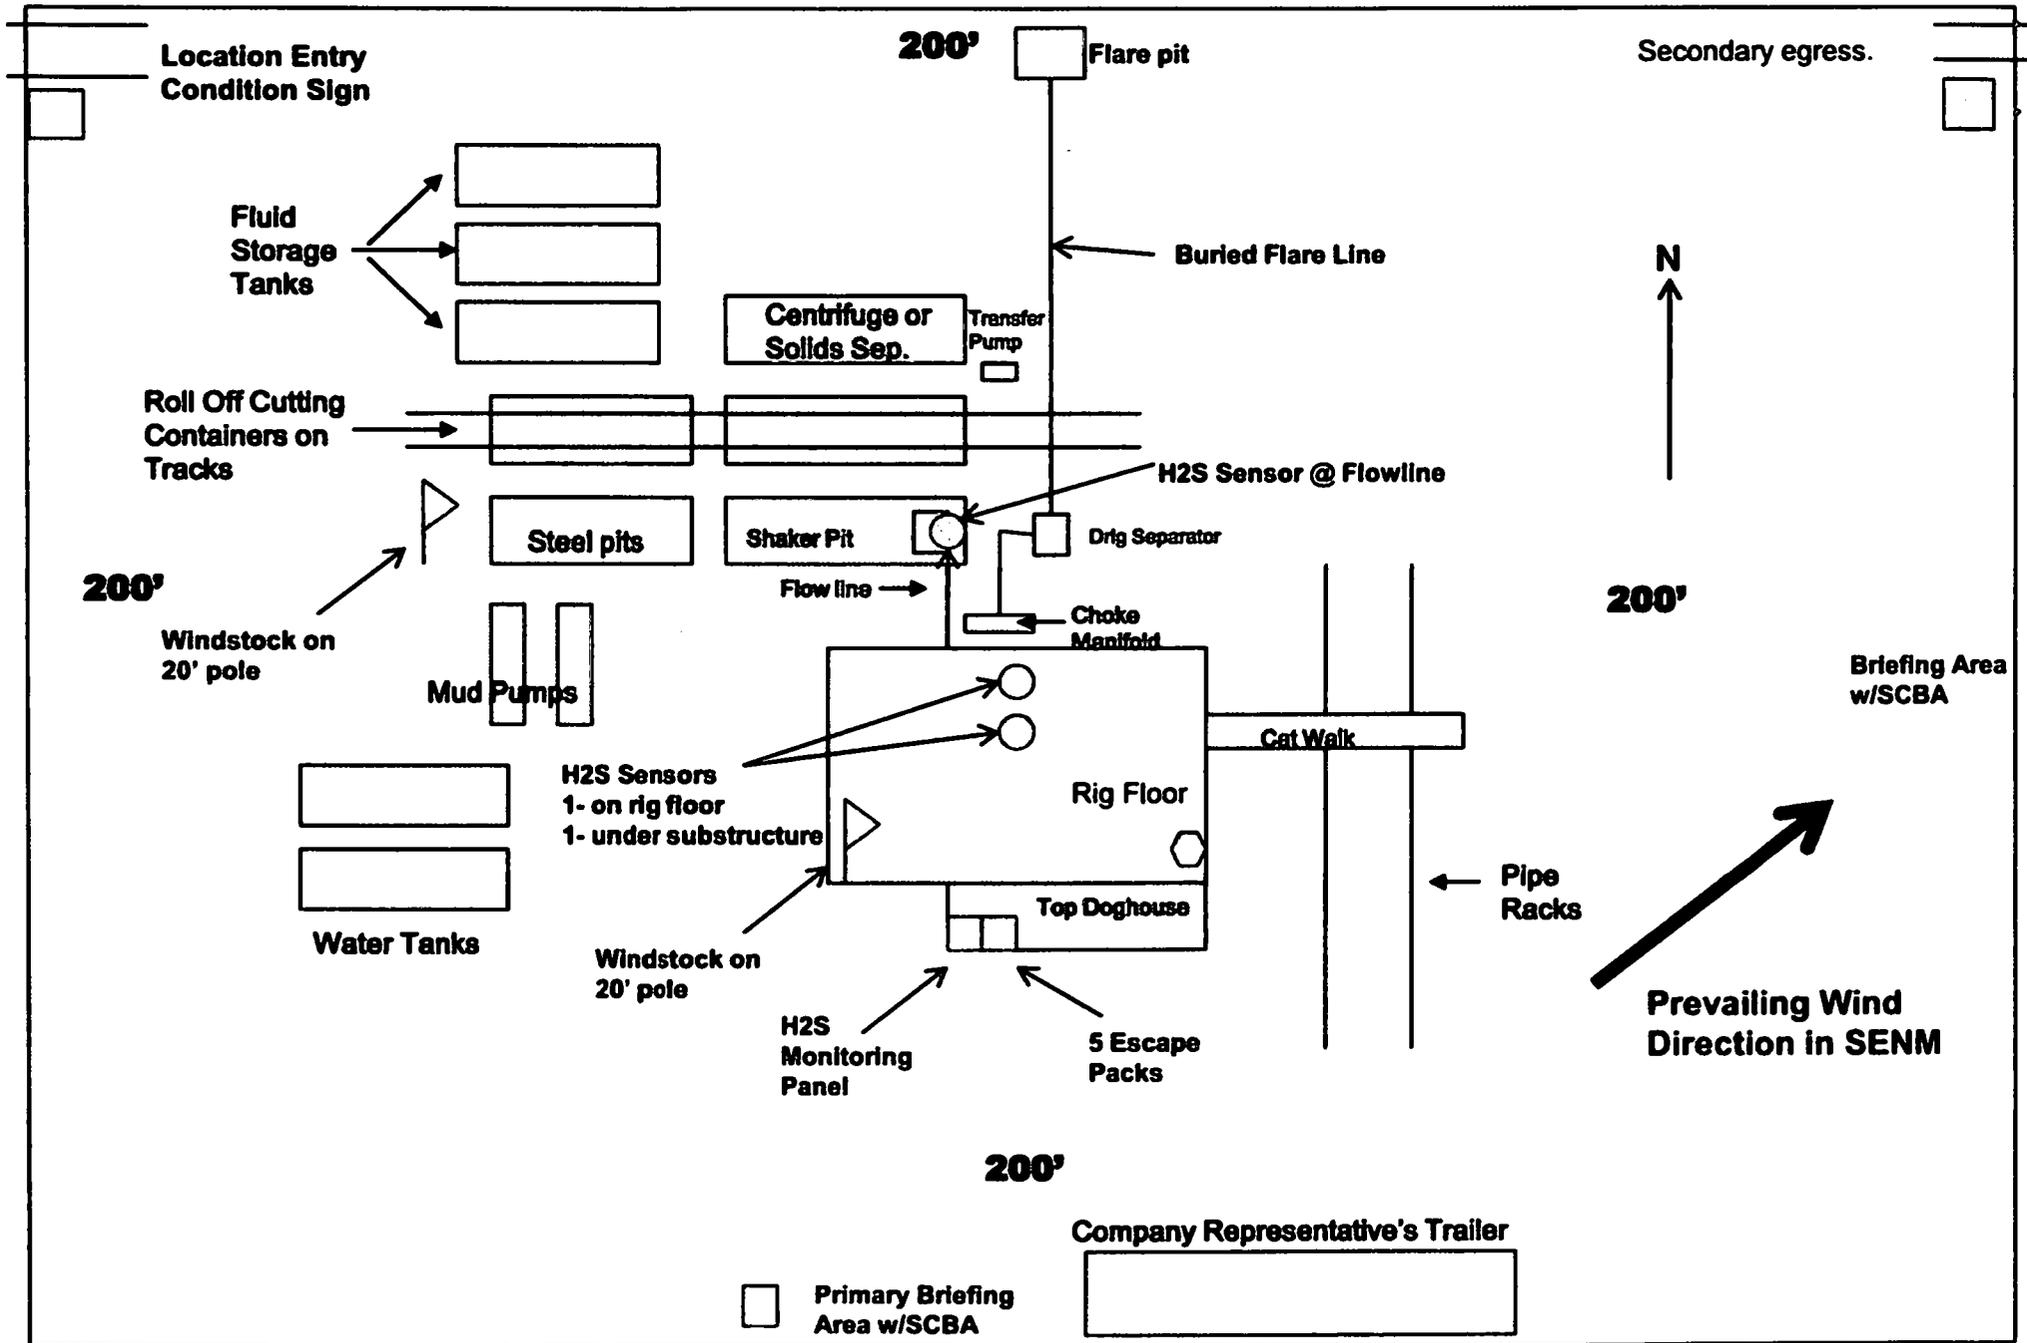

APD ID: 10400041928

Submission Date: 05/17/2019

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:

APD ID: 10400041928

Submission Date: 05/17/2019

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB001711

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

APD ID: 10400041928

Submission Date: 05/17/2019

Operator Name: BTA OIL PRODUCERS LLC

Well Name: NORTH RIDGE 8040 FEDERAL COM

Well Number: 1H

Show Final Text

Well Type: OIL WELL


Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
458555	QUATERNARY	3410	0	0	ALLUVIUM	NONE	N
458569	RUSTLER	1623	1787	1787	ANHYDRITE	NONE	N
458558	TOP SALT	1302	2108	2108		NONE	N
458560	BASE OF SALT	112	3298	3298		NONE	N
623728	CAPITAN REEF	-765	4175	4175		NONE	N
458559	DELAWARE	-2203	5613	5613		NATURAL GAS, OIL	N
458572	BELL CANYON	-2283	5693	5693		NATURAL GAS, OIL	N
458573	CHERRY CANYON	-2818	6228	6228		NATURAL GAS, OIL	N
458565	BRUSHY CANYON	-3728	7138	7138		NATURAL GAS, OIL	N
458570	BONE SPRING LIME	-5088	8498	8498		NATURAL GAS, OIL	N
458566	FIRST BONE SPRING SAND	-6239	9649	9649		NATURAL GAS, OIL	N
458574	BONE SPRING 2ND	-6718	10128	10128		NATURAL GAS, OIL	N
458568	BONE SPRING 3RD	-7573	10983	10983		NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention


BTA Oil Producers, LLC



Azimuths to Grid North
 True North: -0.48°
 Magnetic North: 7.23°

Magnetic Field
 Strength: 48886.1nT
 Dip Angle: 60.39°
 Date: 12/31/2009
 Model: IGRF200510

WELL DETAILS: North Ridge #01H					
+N/-S	+E/-W	Northing	Ground Level Easting	3413.0 Latitude	Longitude
0.0	0.0	493872.00	815680.00	32° 21' 16.544 N	103° 26' 41.649 W

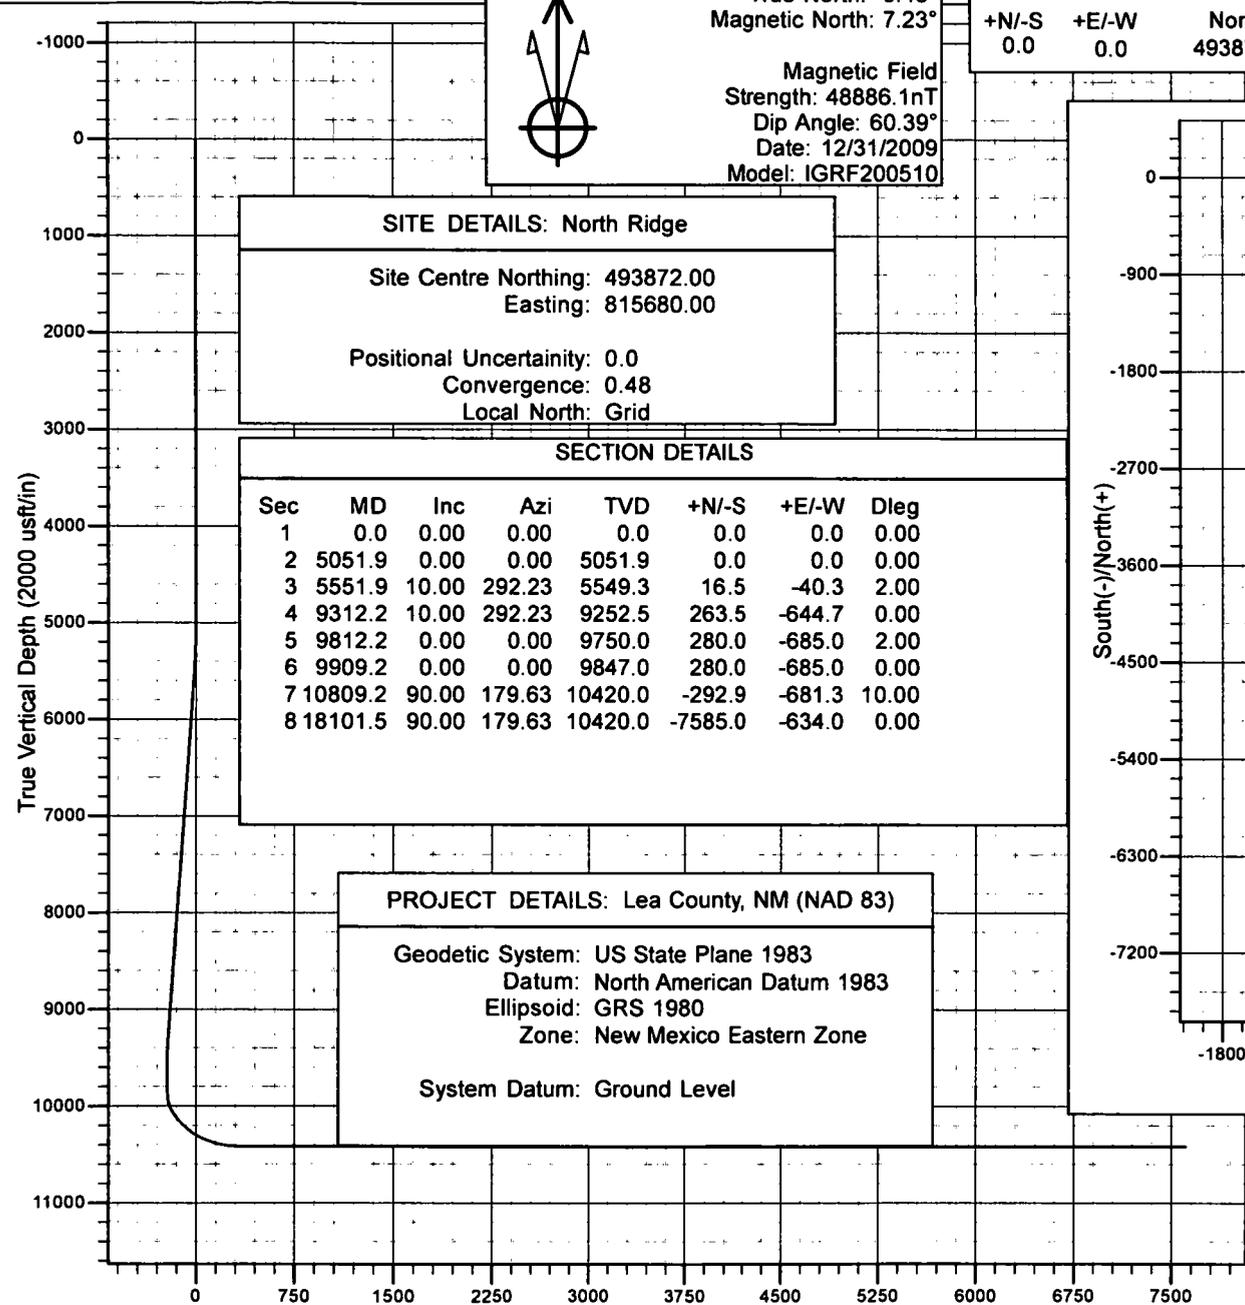

SITE DETAILS: North Ridge	
Site Centre Northing:	493872.00
Easting:	815680.00
Positional Uncertainty:	0.0
Convergence:	0.48
Local North:	Grid

SECTION DETAILS							
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00
2	5051.9	0.00	0.00	5051.9	0.0	0.0	0.00
3	5551.9	10.00	292.23	5549.3	16.5	-40.3	2.00
4	9312.2	10.00	292.23	9252.5	263.5	-644.7	0.00
5	9812.2	0.00	0.00	9750.0	280.0	-685.0	2.00
6	9909.2	0.00	0.00	9847.0	280.0	-685.0	0.00
7	10809.2	90.00	179.63	10420.0	-292.9	-681.3	10.00
8	18101.5	90.00	179.63	10420.0	-7585.0	-634.0	0.00

PROJECT DETAILS: Lea County, NM (NAD 83)	
Geodetic System:	US State Plane 1983
Datum:	North American Datum 1983
Ellipsoid:	GRS 1980
Zone:	New Mexico Eastern Zone
System Datum:	Ground Level

