

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Chickadee Field Office
Operator Copy

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
NMNM132949

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
STOVE PIPE FEDERAL COM 707H

9. API Well No.
30-025-46504-00-X1

10. Field and Pool or Exploratory Area
MESA VERDE

11. County or Parish, State
LEA COUNTY, NM

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
COG OPERATING LLC
Contact: MAYTE X REYES
E-Mail: mreyes1@concho.com

3a. Address
ONE CONCHO CENTER 600 W ILLINOIS AVENUE
MIDLAND, TX 79701-4287
3b. Phone No. (include area code)
Ph: 575-748-6945

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 31 T24S R35E 270FSL 330FWL
32.167469 N Lat, 103.414024 W Lon

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original APD
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

COG Operating respectfully requests approval for the following changes to the originally approved APD.

Slim hole design attached.

besides casing size changes, all previous conditions of approval still apply.

14. I hereby certify that the foregoing is true and correct.
 Electronic Submission #493993 verified by the BLM Well Information System
 For COG OPERATING LLC, sent to the Hobbs
 Committed to AFMSS for processing by PRISCILLA PEREZ on 12/03/2019 (20PP0475SE)

Name (Printed/Typed) MAYTE X REYES Title SENIOR REGULATORY ANALYST
 Signature (Electronic Submission) Date 11/27/2019

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By DYLAN ROSSMANGO Title PETROLEUM ENGINEER Date 12/16/2019
 Office Hobbs

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

COG Operating LLC - Stove Pipe Fed Com 707H
API 30-025-46504

COG, Operating, LLC respectfully requests to change to a slim hole casing design on this well with the changes as shown below to the approved drilling plan. Details are as follows:

Surface Interval

Casing String	TOC	% Excess
Surface	Surface	*64%

*Cement calculated with 64% excess for open hole plus 50 extra sacks of lead.

Csg String #	String Type	Hole Size	Casing Size	Condition	Standard	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Length	Weight	Grade	Connection
1	Surface	14.750"	10.750"	New	API	0'	1200'	0'	1200'	1200'	45.5	L80	BTC

String Type	Lead/Tail	Bottom MD	Quantity (sx)	Yield	Density	Cu Ft	Excess %	Cement Type	Additives
Surf	Lead	740'	455	1.73	13.5	787	64	Class C	4% gel & 1/4# CF
	Tail	1200'	332	1.34	14.8	445	64	Class C	1% CaCl ₂ & 1/4# CF

Intermediate Interval

Casing String	TOC	% Excess
Intermediate	Surface	*52%

*Cement calculated with 52% excess for open hole plus 50 extra sacks of lead.

Csg String #	String Type	Hole Size	Casing Size	Condition	Standard	Top Set MD	Bot Set MD	Top Set TVD	Bot Set TVD	Length	Weight	Grade	Connection
2	Intermediate	9.875"	7.625"	New	API	0'	7500'	0'	7499'	7500'	29.7	L80 EHC	BTC
2	Intermediate	9.875"	7.625"	New	API	7500'	9000'	0'	8999'	1500'	29.7	P110 HC	FJM
2	Intermediate	8.750"	7.625"	New	API	9000'	12075'	0'	12073'	3075'	29.7	P110 HC	FJM

String Type	Lead/Tail	Bottom MD	Quantity (sx)	Yield	Density	Cu Ft	Excess %	Cement Type	Additives
Int	Lead	11065'	910	3.49	10.3	3176	52	NeoCem H	2# kolseal & 3% HGS 4000
	Tail	12075'	165	1.08	16.4	178	52	NeoCem H	0.3% Halad-9, 0.2% CFR-3, & 0.20% HR-601

COG Operating LLC - Stove Pipe Fed Com 707H
API 30-025-46504

Production Interval

Casing String	TOC	% Excess
Production	Surface	*17%

*Cement calculated with 17% excess for open hole.

Csg String #	String Type	Hole Size	Casing Size	Condition	Standard	Top Set MD	Bot Set MD	Top Set TVD	Bot Set TVD	Length	Weight	Grade	Connection
3	Production	*6.875"	5.500"	New	API	0'	7500'	0'	7499'	7500'	23	P110 CY	BTC
3	Production	*6.875"	5.000"	New	API	7500'	12075'	0'	12073'	4575'	18	P110 HC	SFW
3	Production	6.750"	5.000"	New	API	12075'	23405'	0'	12755'	11330'	18	P110 HC	SFW

*Intermediate casing ID

String Type	Lead/Tail	Bottom MD	Quantity (sx)	Yield	Density	Cu Ft	Excess %	Cement Type	Additives
Int	Lead	12075'	745	1.98	12.7	1472	0	NeoCem H	2# kolseal & 3% HGS 4000
	Tail	23405'	1210	1.22	14.5	1480	17	NeoCem H	0.3% Halad-9, 0.2% CFR-3, & 0.20% HR-601



**U. S. Steel Tubular Products
Product Information**

7 5/8 29.70 lb (0.375) L80 HP BTC

7/10/2018

Mechanical Properties		Coupling	Pipe Body	
	Yield Strength			
	Minimum	80	85	ksi
	Maximum	95	95	ksi
	Tensile Strength			
	Minimum	95	95	ksi
Dimensions, Nominal				
	Outside Diameter		7.625	in.
	Wall		0.375	in.
	Inside Diameter		6.875	in.
	Drift			
	Special		6.750	in.
	Nominal Linear Weight, T&C		29.70	lbs/ft
	Weight, Plain End		29.06	lbs/ft
	Pipe Cross Sectional Area		8.541	sq. in.
	Coupling Diameter			
	BTC		8.500	in.
Performance Ratings, Minimum				
	Collapse			
	Plain End		6,220	psi
	BTC		6,220	psi
	Internal Yield Pressure			
	Plain End		7,310	psi
	BTC		7,310	psi
	Yield Strength, Pipe Body		726	1,000 lbs
	Joint Strength			
	BTC		733	1,000 lbs

Legal Notice: All material contained in this publication is for general information only. This material should not therefore, be used or relied upon for any specific application without independent competent professional examination and verification of its accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application. USS Product Data Sheet 2018 rev27 (Feb)

U. S. Steel Tubular Products, Inc. - 460 Wildwood Forest Dr., Suite 300S, Spring, TX 77380
www.USS.COM



U. S. Steel Tubular Products

8/22/2019 1:57:07 PM

7.625" 29.70lbs/ft (0.375" Wall) P110 HC USS-LIBERTY FJM®



MECHANICAL PROPERTIES	Pipe	USS-LIBERTY FJM®	
Minimum Yield Strength	110,000	--	psi
Maximum Yield Strength	140,000	--	psi
Minimum Tensile Strength	125,000	--	psi
DIMENSIONS	Pipe	USS-LIBERTY FJM®	
Outside Diameter	7.625	7.625	in.
Wall Thickness	0.375	--	in.
Inside Diameter	6.875	6.789	in.
Standard Drift	6.750	6.750	in.
Alternate Drift	--	--	in.
Nominal Linear Weight, T&C	29.70	--	lbs/ft
Plain End Weight	29.06	--	lbs/ft
SECTION AREA	Pipe	USS-LIBERTY FJM®	
Critical Area	8.541	5.074	sq. in.
Joint Efficiency	--	59.4	%
PERFORMANCE	Pipe	USS-LIBERTY FJM®	
Minimum Collapse Pressure	6,700	6,700	psi
Minimum Internal Yield Pressure	9,460	9,460	psi
Minimum Pipe Body Yield Strength	940,000	--	lbs
Joint Strength	--	558,000	lbs
Compression Rating	--	558,000	lbs
Reference Length	--	12,810	ft
Maximum Uniaxial Bend Rating	--	39.3	deg/100 ft
MAKE-UP DATA	Pipe	USS-LIBERTY FJM®	
Make-Up Loss	--	3.92	in.
Minimum Make-Up Torque	--	10,800	ft-lbs
Maximum Make-Up Torque	--	15,250	ft-lbs


- Other than proprietary collapse and connection values, performance properties have been calculated using standard equations defined by API 5C3 and do not incorporate any additional design or safety factors. Calculations assume nominal pipe OD, nominal wall thickness and Specified Minimum Yield Strength (SMYS).
- Compressive & Tensile Connection Efficiencies are calculated by dividing the connection critical area by the pipe body area.
- Uniaxial bending rating shown is structural only, and equal to compression efficiency.
- USS-LIBERTY FJM™ connections are optimized for each combination of OD and wall thickness and cannot be interchanged.
- Torques have been calculated assuming a thread compound friction factor of 1.0 and are recommended only. Field make-up torques may require adjustment based on actual field conditions (e.g. make-up speed, temperature, thread compound, etc.).
- Reference length is calculated by joint strength divided by nominal plain end weight with 1.5 safety factor.
- Connection external pressure leak resistance has been verified to 100% API pipe body collapse pressure following the guidelines of API 5C5 Cal III.

Legal Notice

USS-LIBERTY FJM® is a trademark of U. S. Steel Corporation. All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U.S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

U. S. Steel Tubular Products
 460 Wildwood Forest Drive, Suite 300S
 Spring, Texas 77380

1-877-893-9461
 connections@uss.com
 www.usstubar.com

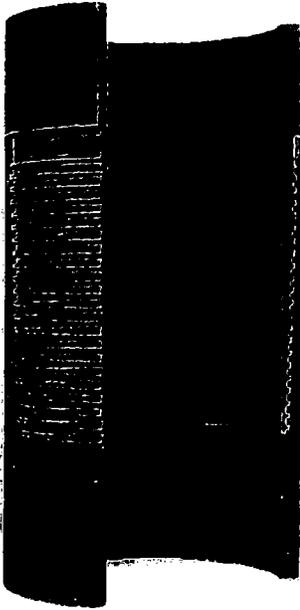

TEC-LOCK FJ

7.625" 29.7 LB/FT (.375" Wall)

P110 HC

Pipe Body Data

Nominal OD:	7.625	in
Nominal Wall:	0.375	in
Nominal Weight:	29.70	lb/ft
Plain End Weight:	29.22	lb/ft
Material Grade:	P110 HC	
Mill/Specification:	BORUSAN MANNESMANN	
Yield Strength:	110,000	psi
Tensile Strength:	125,000	psi
Nominal ID:	6.875	in
API Drift Diameter:	6.750	in
Special Drift Diameter:	NA	in
RBW:	87.5%	
Body Yield:	940,000	lbf
Burst:	9,460	psi
Collapse:	7,050	psi

Connection Data

Standard OD:	7.625	in
Pin Bored ID:	6.875	in
Critical Section Area:	6.299	in ²
Tensile Efficiency:	70.0%	
Compressive Efficiency:	61.9%	
Longitudinal Yield Strength:	658,000	lbf
Compressive Limit:	581,860	lbf
Internal Pressure Rating:	7,570	psi
External Pressure Rating:	7,050	psi
Maximum Bend:	26	°/100ft

Operational Data

Minimum Makeup Torque:	3,600	ft*lbf
Optimum Makeup Torque:	6,500	ft*lbf
Maximum Makeup Torque:	9,400	ft*lbf
Minimum Yield:	14,500	ft*lbf
Makeup Loss:	5.97	in

Notes Preliminary DataSheet

The Connection ratings are structural





U. S. Steel Tubular Products

5 1/2 23.00 lb (0.415) P110RY CC**

USS-CDC HTQ™

PIPE

CONNECTION

MECHANICAL PROPERTIES

Minimum Yield Strength	110,000		psi
Maximum Yield Strength	125,000		psi
Minimum Tensile Strength	125,000		psi

DIMENSIONS

Outside Diameter	5.500	6.300	in.
Wall Thickness	0.415		in.
Inside Diameter	4.670	4.670	in.
Drift - API	4.545	4.545	in.
Nominal Linear Weight, T&C	23.00		lbs/ft
Plain End Weight	22.56		lbs/ft

SECTION AREA

Cross Sectional Area Critical Area	6.630	6.630	sq. in.
Joint Efficiency		100.0	%

PERFORMANCE

Minimum Collapse Pressure	15,310	15,310	psi
External Pressure Leak Resistance		12,250	psi
Minimum Internal Yield Pressure	14,520	14,520	psi
Minimum Pipe Body Yield Strength	729,000		lbs
Joint Strength		759,000	lbs
Compression Rating		455,000	lbs
Reference Length		22,000	ft
Maximum Uniaxial Bend Rating		57.2	deg/100 ft

MAKE-UP DATA

Make-Up Loss	4.63		in.
Minimum Make-Up Torque	15,000		ft-lbs
Maximum Make-Up Torque	21,000		ft-lbs
Connection Yield Torque	27,800		ft-lbs
* Verification of connection shoulder required. Typical shoulder range	5,000 - 7,500		ft-lbs

Notes:

- 1) Other than proprietary collapse and connection values, performance properties have been calculated using standard equations defined by API 5C3 and do not incorporate any additional design or safety factors. Calculations assume nominal pipe OD, nominal wall thickness, and Specified Minimum Yield Strength (SMYS).
- 2) Uniaxial bending rating shown is structural only, and equal to compression efficiency.
- 3) Torques have been calculated assuming a thread compound friction factor of 1.0 and are recommended only. Field make-up torques may require adjustment based on actual field conditions (e.g. make-up speed, temperature, thread compound, etc.).
- 4) Reference length is calculated by joint strength divided by nominal T&C weight with 1.5 safety factor
- 5) Connection external pressure resistance has been verified to 80% API pipe body collapse pressure (API 5C3 Cal III testing protocol)

Legal Notice: USS-CDC HTQ™ (High Torque Casing Drilling Connection) is a trademark of U. S. Steel Corporation. This product is a modified API Buttress threaded and coupled connection designed for drilling with casing applications. All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability, and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.
USS Product Data Sheet 2017 rev26 (Sept)



PIPE CONNECTION

MECHANICAL PROPERTIES

Minimum Yield Strength	110,000	psi
Maximum Yield Strength	125,000	psi
Minimum Tensile Strength	125,000	psi

DIMENSIONS

Outside Diameter	5.000	5.775	in.
Wall Thickness	0.362		in.
Inside Diameter	4.276	4.276	in.
Drift - API	4.151	4.151	in.
Nominal Linear Weight, T&C	18.00		lbs/ft
Plain End Weight	17.95		lbs/ft

SECTION AREA

Cross Sectional Area Critical Area	5.275	5.275	sq. in.
Joint Efficiency		100.0	%

PERFORMANCE

Minimum Collapse Pressure	13,470	13,470	psi
External Pressure Leak Resistance		10,780	psi
Minimum Internal Yield Pressure	13,950	13,950	psi
Minimum Pipe Body Yield Strength	580,000		lbs
Joint Strength		606,000	lbs
Compression Rating		364,000	lbs
Reference Length		22,444	ft
Maximum Uniaxial Bend Rating		63.3	deg/100 ft

MAKE-UP DATA

Make-Up Loss		4.56	in.
Minimum Make-Up Torque		11,500	ft-lbs
Maximum Make-Up Torque		16,000	ft-lbs
Connection Yield Torque		19,600	ft-lbs

Notes:

- Other than proprietary collapse and connection values, performance properties have been calculated using standard equations defined by API 5C3 and do not incorporate any additional design or safety factors. Calculations assume nominal pipe OD, nominal wall thickness, and Specified Minimum Yield Strength (SMYS).
- Uniaxial bending rating shown is structural only, and equal to compression efficiency.
- Torques have been calculated assuming a thread compound friction factor of 1.0 and are recommended only. Field make-up torques may require adjustment based on actual field conditions (e.g. make-up speed, temperature, thread compound, etc.).
- Reference length is calculated by joint strength divided by nominal T&C weight with 1.5 safety factor.
- Connection external pressure resistance has been verified to 80% API pipe body collapse pressure (API 5C3 Cal III testing protocol).

Legal Notice: USS-CDC HTQ™ (High Torque Casing Drilling Connection) is a trademark of U. S. Steel Corporation. This product is a modified API Buttress threaded and coupled connection designed for drilling with casing applications. All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability, and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.
 USS Product Data Sheet 2018 rev27 (Feb)