

District I
1625 N. French, Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-37592
5. Indicate Type Of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> DRY <input type="checkbox"/> OTHER _____	7. Lease Name or Unit Agreement Name W.S. Marshall B. Hobbs Received MAY 2006
b. Type of Completion: NEW WELL <input checked="" type="checkbox"/> WORK OVER <input type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/> DIFF. RESVR. <input type="checkbox"/> OTHER _____	8. Well No. 13
2. Name of Operator Marathon Oil Company	9. Pool name of Wildcat Hare San Andres (24150)
3. Address of Operator P.O. Box 3487 Houston, TX 77253-3487	
4. Well Location Unit Letter <u>N</u> : <u>990</u> Feet From The <u>South</u> Line and <u>1650</u> Feet From The <u>West</u> Line Section <u>27</u> Township <u>21-S</u> Range <u>37-E</u> NMPM. Lea _____ County _____	

10. Date Spudded 03/30/2006	11. Date T.D. Reached 04/05/2006	12. Date Compl. (Ready to Prod.) 04/18/2006	13. Elevations (DF & RKB, RT, GR, etc.) 3413' GR	14. Elev. Casinghead
15. Total Depth 4330'	16. Plug Back T.D. 4279'	17. If Multiple Compl. How Many Zones?	18. Intervals Drilled By All	Rotary Tools Cable Tools
19. Producing Interval(s), of this completion - Top, Bottom, Name 3996' - 4130' San Andres				20. Was Directional Survey Made Yes
21. Type Electric and Other Logs Run Dual Laterolog, Spectral Density, CBL				22. Was Well Cored No

23. CASING RECORD (Report all strings set in well)					
CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
8 5/8"	24#	437'	12 1/4"	280 sks to surface	
5 1/2'	15.5#	4320'	7 7/8"	750 sks lead	
				300 sks tail 190' f/ surf	

24. LINER RECORD					25. TUBING RECORD		
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET	PACKER SET
					2 7/8"	4230'	TAC @ 3886

26. Perforation record (interval, size, and number) 3996-4014, 4026-4042, 4052-4060, 4074-7090, 4094-4111, 4116-4130 0.380 diameter 178 holes	27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. DEPTH INTERVAL AMOUNT AND KIND MATERIAL USED 3996 - 4130 19 bbls MSC acid 3996 - 4130 100 bbls HCL acid
---	---

28. PRODUCTION							
Date First Production 04/19/2006		Production Method (Flowing, gas lift, pumping - Size and type pump) Pumping				Well Status (Prod. or Shut-in) Producing	
Date of Test 04/22/2006	Hours Tested 24	Choke Size N/A	Prod'n For Test Period	Oil - Bbl. 14	Gas - MCF 201	Water - Bbl. 988	Gas - Oil Ratio 14,357
Flow Tubing Press. 85	Casing Pressure 45	Calculated 24-Hour Rate	Oil - Bbl. 14	Gas - MCF 201	Water - Bbl. 988	Oil Gravity - API (Corr.) 32.6	

29. Disposition of Gas (Sold, used for fuel, vented, etc.) Sold	Test Witnessed By Kevin Silco
--	----------------------------------

30. List Attachments Density log, laterolog, CBL, Inclination Survey, Wellbore diagram

31. I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief			
Signature Charles E. Kendrix	Printed Name Charles E. Kendrix	Title Reg. Compliance Rep	Date 05/15/2006
E-mail address cekendrix@marathonoil.com			

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, Items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northeastern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn. "B"
T. Salt	T. Strawn	T. Kirtland-Fruitland	T. Penn. "C"
B. Salt	T. Atoka	T. Pictured Cliffs	T. Penn. "D"
T. Yates 2524	T. Miss	T. Cliff House	T. Leadville
T. 7 Rivers 2786	T. Devonian	T. Menefee	T. Madison
T. Queen 3340	T. Silurian	T. Point Lookout	T. Elbert
T. Grayburg 3652	T. Montoya	T. Mancos	T. McCracken
T. San Andres 3916	T. Simpson	T. Gallup	T. Ignacio Otzte
T. Glorieta	T. McKee	Base Greenhorn	T. Granite
T. Paddock	T. Ellenburger	T. Dakota	T.
T. Blinebry	T. Gr. Wash	T. Morrison	T.
T. Tubb	T. Delaware Sand	T. Todilto	T.
T. Drinkard	T. Bone Springs	T. Entrada	T.
T. Abo	T.	T. Wingate	T.
T. Wolfcamp		T. Chinle	T.
T. Penn	T.	T. Permain	T.
T. Cisco (Bough C)	T.	T. Penn "A"	T.

OIL OR GAS SANDS OR ZONES

No. 1, from _____ to _____

No. 2, from _____ to _____

No. 3, from _____ to _____

No. 4, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from ----- to ----- feet -----
 No. 2, from ----- to ----- feet -----
 No. 3, from ----- to ----- feet -----

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness in Feet	Lithology

From	To	Thickness in Feet	Lithology



W.S. Marshall B No. 13
New Well Completion (San Andres)

Well Spud on 03/30/2006
GL Elevation 3413'

Marathon Oil Company
W.S. Marshall B No. 13
UL"N", Sec 27, T-21-S, R-37-E
16-May-06

Cement on production casing @ 190' f/ surface

Surface Casing
8 5/8" 24# J-55 set @ 437' w/ 280 sks cmt.
Cmt to suface



Tubing Anchor @ 3886'


Seating Nipple @ 4226'
Bottom mud jt @ 4230'

San Andres Perforations
3996' - 4130' 178 shots

PBTD @ 4279'

Production Casing
5 1/2" 17# J-55 Set @ 4320' Cmtd w/ 1050 sks

TD @ 4330'

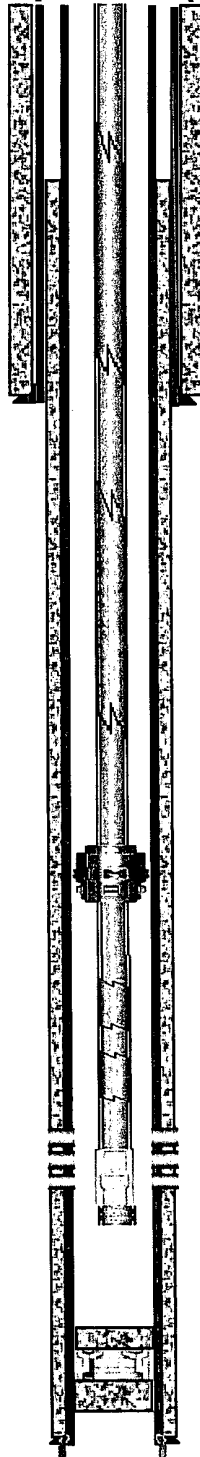

Well Name & Number:	W.S. Marshall B No. 13		Lease	W. S. Marshall	
County or Parish:	Lea	State/Prov.	New Mexico	Country:	USA
Perforations: (MD)	3996' - 4130'		(TVD)	4330'	
Date Completed:	04/18/06				RKB:
Prepared By:	Charles Kendrix		Last Revision Date:	05/16/06	