OCD-HOBBS

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB No. 1004-0136 Expires March 31, 2007

5. Lease Serial No. LC-031670(B)

APPLICATION FOR PERMIT TO DR	ILL OR REENTER		6. If Indian, Allottee	or Tribe Name
1a. Type of Work: X DRILL REENTE	R		7. If Unit or CA Agre	
1b. Type of Well: X Oil Well Gas Well Other	Single Zone X Mult	iple Zone	8. Lease Name and W BURGER B-20	Vell No. 231367
2. Name of Operator	1	2	9 API Well No. 30 - D 25 -	2 70 27
CONOCOPHILLIPS CO. 3a. Address P.O. BOX 2197 WL3 6108 HOUSTON, TX	3b. Phone No. (include area code)	1/2		
77252 WES GIOGITOUS TON, 17	(832)486-2326			G/WARREN; TUBB (
4. Location of Well (Report location clearly and in accordance with	any State requirements.*)	i		Blk, and Survey or Area
At surface990' FNL & 990' FEL	Unit A		A Sec: 20 Twn:20	OS Rng: 38E
At proposed prod. zone	Unit A		10 C	12.
14. Distance in miles and direction from nearest town or post office*			12. County or Parish LEA	13. State NEW MEXIC
15. Distance from porposed* 990 NORTH 990 EAST location to nearest	16. No. of Acres in lease	17. Spacin	ng Unit dedicated to this v	vell
property or lease line, ft. (Also to nearest drig. unit line, if any)	. 40	40	•	
18. Distance from proposed location*	19. Proposed Depth	20. BLM/I	BIA Bond No. on file	
to nearest well, drilling, completed, applied for, on this lease, ft.	7250	ES	0085	
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will sta	ırt*	23. Estimated duration	n
3554 GL	06/15/2006 24. Attachments	Course (Controlled Water	
The following, completed in accordance with the requirements of Onshor			· · · · · · · · · · · · · · · · · · ·	
 Well plat certified by a registered surveyor. A Drilling Plan A Surface Use Plan (if the location is on National Forest System Land SUPO shall be filed with the appropriate Forest Service Office). 	Item 20 above). 5. Operation certif	ication. specific infor	s unless covered by an eximation and/or plans as m	· ·
25. Signature Johnson May Wall	Name (Printed/Typed) DEBORAH MARBER	RY		Date 04/12/2006
Title REGULATORY ANALYST				
Approved by (Signature) /s/ Tony J. Herreil	Name (Printed/Typed) /S/ Ton	y J. He	rreil	Date JUN 0 5 2006
Title FIELD MANAGER			ELD OFFICI	
Application approval does not warrant or certify the the applicant holds to operations thereon. Conditions of approval, if any, are attached.			lease which would entitle	
Title 18 U.S.C Section 1001 and Title 43 U.S.C. Section 1212, make it a States and false, fictitious or fradulent statements or representations as to		willfully to r	nake to any department o	r agency of the United

*(Instructions on page 2)

KZ

Witness Surface Casing

Approval subject to General requirements and General stipulations Attached

DISTRICT I 1625 N. French Dr., Hobbs, NM 88240

State of New Mexico

Energy, Minerals & Natural Resources Department

Form C-102
Revised August 15, 2000
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DIATRICT_II P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505

☐ AMENDED REPORT

DISTRICT IV 2040 South Pacheco, Santa Fe, NM 87505

WELL LOCATION AND ACREAGE DEDICATION PLAT

3D · 025 - 37	Pool Code 6660	BLINEBRY OIL & GAS		
Property Code 31367	·	perty Name GER B-20	Well Number 5	
OGRID No. 217817		Operator Name CONOCOPHILLIPS		

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Α	20	20 S	38 E	1	990	NORTH	990	, EAST	LEA .

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
						·			7
Dedicated Acres	Joint o	r Infill Co	nsolidation (Code Or	der No.				
40									

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	NON-STANDAL	RD UNIT HAS BEEN	ALL ROYED BY THE	D11101011
				OPERATOR CERTIFICATION
			,,066	I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.
		3554. Plane Coordinate X = 859,993.4 Y = 570,508.1 3554.	990'	Signature Mallety
				Deborah Marberry Printed Name
				Regulatory Analyst
				SURVEYOR CERTIFICATION
				I hereby certify that the well location shown on this plat was plotted from field notes of wrveys made by me or under my on and that the same is true and rrect to the best of my belief.
				March 8, 2006 MEXLVA Signature & Seal of
				Professional Surveyor 12185
Coordinate System", Nev	form to the "New Mexico w Mexico East Zone, North Distances shown hereon are			W.O. Num: 2006-0134

District I 1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

State of New Mexico

Energy, Minerals & Natural Resources Department OIL CONSERVATIONDIVISION

1220 South St. Francis Dr.

Form C-102 Revised October 12, 2005 Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

District IV	-				Santa Fe, N	M 87505		·	•
1220 S. St. Francis	Dr., Santa 1	Fe, NM 87505			1			\square AM	ENDED REPORT
		V	VELL LO	OCATIO	N AND ACE	REAGE DEDIC	CATIONPLA	T	
1/	API Numbe	r		'Pool Code		ARREN; TUBB	' Pool Na		
Property C	Code	BURGER	R B-20		Property	Name		5	Well Number
OGRID N 217817	Vo.	CONOCO	OPHILLII	PS CO.	*Operator	Name		3554	'Elevation GL
					¹⁰ Surface	Location (
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Α	20	20S	38E		990	NORTH !	990	EAST	LEA
			. 11 Be	ottom Ho	le Location I	f Different From	m Surface	-	· · · · · · · · · · · · · · · · · · ·
UL or lot no.	Section	Township	Range		Feet from the	North/South line	Feet from the	East/West line	County
" Dedicated Acres	" Joint or	r Infill "C	onsolidation	Code "Or	der No.		<u> </u>		
No allowable widivision.	vill be ass	igned to th	is complet	ion until al	l interests have t	peen consolidated	or a non-standard	i unit has been ap	proved by the

	-				 			Т					 						
1	6 .																į		17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to
								- 1											the best of my knowledge and belief, and that this organization either owns a
1													- 1	\aleph			į		working interest or unleased mineral interest in the land including the
																			proposed bottom hole location or has a right to drill this well at this location
														- 1		۵	aλ	/	pursuant to a contract with an owner of such a mineral or working interest,
													-	•			<u>IU</u>		or to a voluntary pooling agreement or a compulsory pooling order
!				<u> </u>	 					,									heletofore entered by the division.
								**			7					1			W. J. J. Albertalance
-								-		٠							٠	:	Signature Date
.				'		,													
																		• .	DEBORAH MARBERRY
				.				-	:										Printed Name
													- [•					
													- .		,				
					 			\dashv					 \dashv						18GLIDAUENOD GED TIPIG A TRONI
				İ									-						18 SURVEYOR CERTIFICATION
1								- }							:	, .	, î		I hereby certify that the well location shown on this plai
									•							Ċ			was plotted from field notes of actual surveys made by
.								ı	1										me or under my supervision, and that the same is true
						,		• .		. 1								. 7 1	and correct to the best of my belief.
				1							* * *				1.			•	
⊩	<u> </u>	-		4	 			_	·				_						Date of Survey
1			40		 								ŀ						Signature and Seal of Professional Surveyor:
-								1											organizate and soal of Professional Surveyor.
				1.															
			es r				**												
								İ				٠.	1						
																	1		
								Ī						-					Certificate Number
ــــا				1	 						<u> </u>		 		,				

District I 1625 N. French Dr., Hobbs, NM 88240 District.II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Energy, Minerals & Natural Resources Department

OIL CONSERVATIONDIVISION

1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised October 12, 2005

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

☐ AMENDED REPORT

			WELL LO			<u>EAGE DEDIC</u>	<u>CATION PLA</u>	.1			
1,	API Numbe	r	570	Pool Co		'Pool Name SKAGGS; DRUNKARD					
¹Property (Code			'Well Numbe	er						
31367		BURG	ER B-20		,			5			
'OGRID	No.				Operator 1	Name	·		' Elevation		
217817		CONO	COPHILLII	PS CO.	•	į.		355	4 GL		
					¹⁰ Surface	Location					
UL or lot no.	Section	Township	Range	Lot Id		North/South line	Feet from the	East/West l	ine	County	
Α	20	20S	38E		990 ·	NORTH	990	EAST	LEA		
		•	11 Be	ottom H	ole Location I	f Different Fron	n Surface				
UL or lot no.	Section	Township	Range	Lot Id	n Feet from the	North/South line	Feet from the	East/West I	ine	County	
" Dedicated Acres	" Joint or	Infill	 [™] Consolidation	Code "C	order No.		•	·	<u> </u>		
40					•						
No allowable v	vill be ass	igned to	this complet	ion until a	all interests have	oeen consolidated	or a non-standaro	l unit has been	approved by	y the	
division.						·	•				

16		990'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or the a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division:
			Signature Date Date
			DEBORAH MARBERRY Printed Name
			¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by
			me or under my supervision, and that the same is true and correct to the best of my belief.
	· .:	:	Date of Survey Signature and Seal of Professional Surveyor:
	. ,		Certificate Number

District I 1625 N. French Dr., Hobbs, NM 88240 District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Energy, Minerals & Natural Resources Department

OIL CONSERVATIONDIVISION

1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised October 12, 2005

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies


☐ AMENDED REPORT

	WE	LL LOCATION A	<u>AND ACKEAGE DEDICA</u>	HONPLAI	
'API Num	ber	¹ Pool Name			
		56630	SKAGGS; ABO EAS	T	
'Property Code		***	Property Name	\$	'Well Number
31367	BURGER B	-20	•		5
OGRID No.			*Operator Name		' Elevation
217817	CONOCOP	HILLIPS CO.			3554 GL

¹⁰ Surface Location North/South line Feet from the East/West line UL or lot no. Section Township Range Lot Idn Feet from the County NORTH **EAST** LEA 20 · 20S 38E Α ¹¹ Bottom Hole Location If Different From Surface Lot Idn Feet from the North/South line Feet from the East/West line County UL or lot no. Section Township Range " Dedicated Acres " Joint or Infill "Consolidation Code ' Order No. 40

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

16		990'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, on to a woluntary pooling agreement or a compulsory pooling order hereinfore entered by the division. DEBORAH MARBERRY Printed Name
			¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plan
			was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
			Date of Survey Signature and Seal of Professional Surveyor:
			Certificate Number

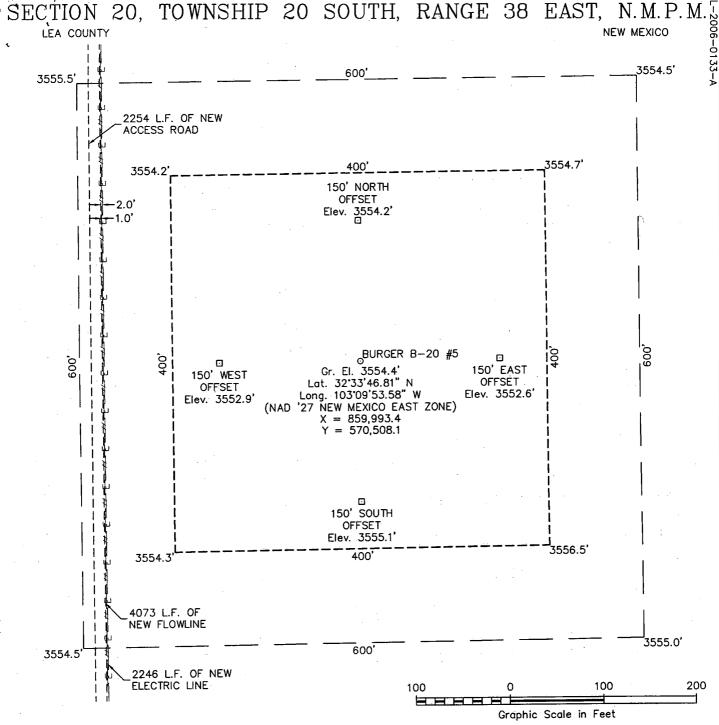

DRIVING DIRECTIONS

FROM THE INTERSECTION OF U.S. HIGHWAY 18 AND U.S. HIGHWAY 176 IN EUNICE, NEW MEXICO GO NORTH ON SAID U.S. HIGHWAY 18 7.3 MILES TO A CATTLE GUARD ON WEST (LEFT) SIDE OF SAID U.S. HIGHWAY 18, THEN GO WEST THROUGH SAID CATTLE GUARD ON LEASE ROAD 2.6 MILES, THEN GO NORTH (RIGHT) FOR 0.4 MILE, THEN GO WEST (LEFT) 0.3 MILE ALONG ANOTHER LEASE ROAD, THEN GO NORTH (RIGHT) 0.4 MILE, THEN GO EAST (RIGHT) 0.3 MILE, THEN GO NORTH 0.1 MILE TO POINT APPROXIMATELY 300 FEET WEST OF THE SEMU #173 WELL LOCATION, THEN CONTINUE NORTH 0.5 MILE, THEN GO EAST (RIGHT) 0.4 MILE, THEN GO NORTH (LEFT) 0.2 MILE TO PROPOSED LOCATION.



110 W. LOUISIANA, STE. 110 MIDLAND TEXAS, 79701 (432) 687-0865 - (432) 687-0868 FAX

CONOCOPHILLIPS

BURGER B-20 #5

Located 990' FNL & 990' FEL, Section 20 Township 20 South, Range 38 East, N.M.P.M. Lea County, New Mexico

	The state of the s					
Drawn By: LVA	Date: March 23, 2006					
Scale: 1"=100'	Field Book: 332 / 23-25					
Revision Date:	Quadrangle: Hobbs SW					
W.O. No: 2006-0133	Dwg. No.: L-2006-0133-A					



ConocoPhillips Company PTRRC

Ronald G. Crouch PTRRC Advisor 4001 Penbrook St., Ste. 345 Odessa TX, 79762 Phone (432) 368-1218 Cell (432) 631-5557

April 6, 2006

Cody Layton Bureau of Land Management 620 East Greene Carlsbad New Mexico 88220

Re:

Burger B 20 #5 Section 20, T20S-R38E

Lea County, New Mexico

Dear Cody:

Settlement has been reached between the surface owner and ConocoPhillips Company for the above mentioned well location and appurtenances. The surface owner is:

Robert McCasland P.O. Box 206 Eunice, NM 88231

If you have any questions, please contact me.

Sincerely,

Ronald Crouch PTRRC Advisor

ConocoPhillips Company

H2S DRILLING OPERATIONS PLAN

ConocoPhillips, Inc. will comply with Onshore Order No. 2 and No. 6 for working in an H2S environment or a potential H2S environment.

I. Hydrogen Sulfide Training

All contractors and subcontractors employed by ConocoPhillips will receive or have received training from a qualified instructor within the last twelve months in the following areas prior to commencing drilling operations on this well.

- 1. The hazards and characteristics of hydrogen sulfide (H2S)
- 2. Safety precautions.
- 3. Operations of safety equipment and life support systems.

In addition, contractor supervisory personnel will be trained or prepared in the following areas:

- 1. The effect of H2S on metal components in the system, especially where high tensile strength tubulars are to be used.
- Corrective action and shutdown procedures when drilling or reworking a well, blowout prevention and well control procedures, if the nature of work performed involves these items.
- 3. The contents and requirements of the contingency plan when such plan is required.

II. H2S EQUIPMENT AND SYSTEMS

1. Safety Equipment

The following minimum safety equipment will be on location:

- A. Wind direction indicators placed near rig floor/mud return lines and at points along the perimeter of the location to allow visibility of at least one indicator from any point on location.
- B. Automatic H2S detection alarm equipment (both audio and visual)
- C. Clearly visible warning signs. Signs will use the words "POISON GAS" and "CAUTION" with a strong color contrast.
- D. Protective breathing equipment will be located in the doghouse and at briefing areas on location.

2. Well Control Systems

A. Blowout Prevention Equipment

Equipment includes but is not limited to:

- 1. Pipe rams to accommodate all pipe sizes
- 2. Blind rams
- 3. Choke manifold
- 4. Closing Unit
- 5. Flare line and means of ignition

B. Communication

The rig contractor will be required to have two-way communication capability. ConocoPhillips will have either land-line, satellite phone, microwave phone, or mobile (cellular) telephone capabilities.


C. Mud Program

The mud program has been designed to minimize the volume of H2S circulated to surface. Proper mud weight, safe drilling practices and the use of H2S scavengers when appropriate will minimize hazards when penetrating H2S bearing zones.


D. Drill Stem Tests

Any planned drill stem test will be cancelled if H2S is detected prior to such test. In the event that H2S is detected during testing, the test will be terminated immediately.

HOP SPECIFICATIONS

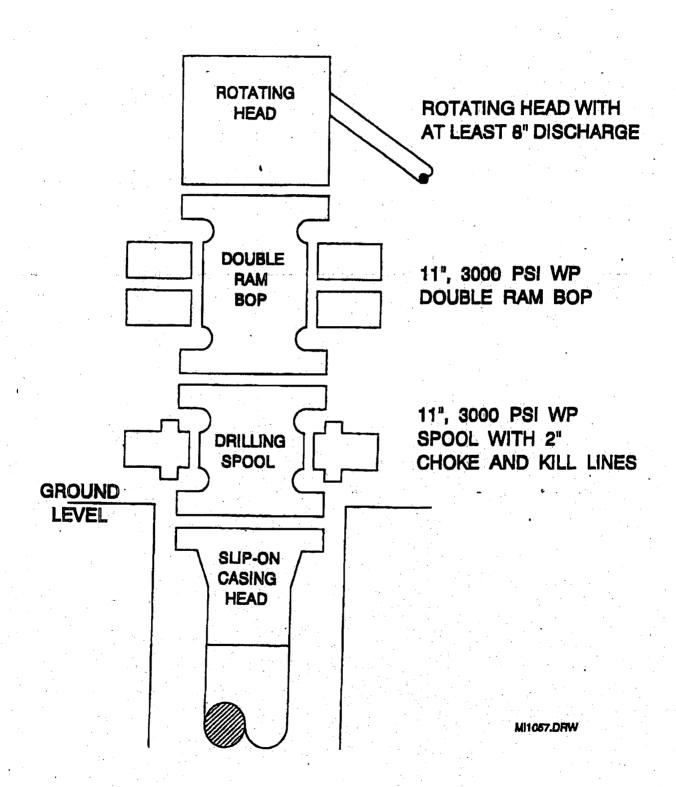

CHOKE MANIFOLD DIAGRAM

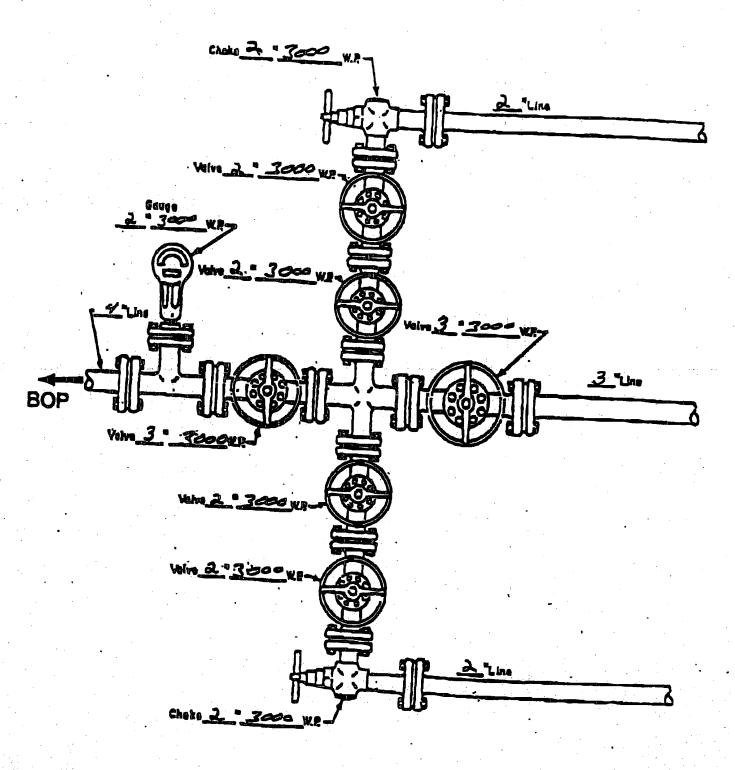

MANIFOLD

区 Menuel

☐ Hydraulie

<u>Hobbs BU Wells</u> <u>Schlumberger Cement Calculations</u>

SURFACE CASING:

Drill Bit Diameter
Casing Outside Diameter
Casing Inside Diam.
Casing Weight
Casing Grade
Shoe Depth
Excess Lead Cement
Excess Tail Cement
Tail Cement Length

5 "	12,2	
5 "	8 62	
7 "	8.09	
4 ppf	2	
5	J-5	
0	155	1000
5 % 0 %	12	
0 %	10	and the
0 '	50	

SHOE

1550 ', 8.625 ",

24 ppf,

J-55 STC

PRODUCTION CASING:

Drill Bit Diameter
Casing Outside Diameter
Casing Inside Diam.
Casing Weight
Casing Grade
Top of Cement
Shoe Depth
Excess Lead Cement
Excess Tail Cement
Tail Cement Length

7,875	"
****5·5	**
41892	!"
. 7.651.17	ppf
J-55	
t in letter	•.
7250	•
225	% %
150	%
1750	•

SHOE 7250', 5.5", 17 ppf, J-55 LTC

出のbos:BULWells には	
Schlumberger Cement Calculations	
Production Casing	

nice agency	Lead Cement, The Market Comment
77	50:50 Poz Class C
7.0	CemNET in first 100 bbls 4 3 4 4 4 1 1 1 1 1 1
	#5% Salt (bwow)
Cement Recipe	#10% Bentonite
	#0.2%:Uniflac
	±0.2% TIC Dispersants and the second
at a second	+ 0.25 lb/sx Celloflake
Cement Quantity	994 SX11334 385 385 385 385 385 385
Cement Yield	(*) 2.54 cuft/sx ((4.4)
Cement Volume	27.3),97/5(4) cufting a second of the second
Cement volume	Dols China Sin Heliophysia artist
Cement Density	pog
Water Required.	14:71 gal/sx iii a a a a a a a a a a a a a a a a a

	·
12.61 (0.16)	Tail Cementa
	TXI/Lightweight
	+2% Antifoamer
Cement Recipe:	+ 0:2% XE114A 等并推翻 第一次
	+ 0/3% Unifiae
100	+02%TICDispersant
Cement Quantity.	\$5.07.2570 sx
Cement Yield	34 cuff/sx *** 34 cuff/sx ************************************
Cement Volume	2 1/76412 cufts all all the miles of the
Cement volumes	74 - \$136.1 bbls
Sement Density	7 13:2 ppg 4 4 4 1 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
Water Required:	6.78 gal/sx

		ells at a see was	
A CARCAGO MASC	illimberger Cement	Calculations 🕒	e - 1110
	Surface Casi	ng .	n said
	Lead Ceme	iti, 🥦 💮	
LEGISLA PROGRAMMENT SERVICE PROGRAMMENTAL PROGRAMMENT AND A SERVICE PR	35 65 Poz Classin	AND LONG COMMENCES OF BUILDING AND AND AND AND AND AND AND AND AND AND	Marie Marie Compatition of the party of

	Line Cement: Free Market
	35:65 Poz GlassiC Cement
	CemNET in first 100 bbls
Gement-Recipe	± 5% Salt (bwow)
Cerneme Kecipe.	+6% Bentonite Gel
AND PERSONS	# 2% Calcium Chloride
	+ 0.25 lb/sx Celloflake
Cement Volume	3.4.7.495 sx
Cement Yield	tit.97 cuft/sx 1 mm.
Slurry Volume	(# 2.975/4 cuff - 344 AS 34 34 34 34 34 34 34 34 34 34 34 34 34
Sidify volume	15 17/3 / bbls
Cement Density	12.8 ppg
Water Required	10'54 gal/sx

	Class C Standard Cement
	± 2% Calcium Chloride
Cement Recipe	+ 5% Sált
and the party of	+3% Bentonite Gel
alternative to the	+ 0.25 lb/sx Gelloflake
Cement Volume	1423320 SX+41 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Cement Yield	a 都與1934 cuft/sx 一种 人名 · · · · · · · · · · · · · · · · · ·
Slurry Volume	* 85 429.0 cuft
	44276 4 bbis
Cement Density	14.8 ppg
Water Required.	6/29 gal/sx

Samumue	ger Cement Calculatio	And the second s
telatini materiali	e Sufficesol	Prod. Cs
OD .	8.625	5 :
ID : Misself to a	8.097	988 4.892
Depth. (p. 1775)	# 15/15/15/50 	7250
Hole Diam	12.25	7.87
% Excess Lead:	125	22!
% Excess Tail	100	150
Lead Yield	- 17 MA 97A	1)34
Tail Yield	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	NW 19419-11/32
Ft of Tail Slurry	500	300 1750
Top of Tail Slurry	1050	5500
Top of Lead Slurry	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	(8)
Mud Wt (ppg) 👫 😘	8.8 200 200	10.0
Mud Type	WBM + N8RX	BRINE

	···· Autorit (#15) Surface	Casing	Linear Control of the
	Ft Cap	XS Factor bids	sx v.
Lead Open Hole Annulus	1050 10 073539	# P 2 25 FF 173	7 44 975.4 495.1
Lead Total (1) (4) (4) (4) (4)		473	7 495.1
Tail Open Hole Annulus 12	500 0.073539	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	6 412.9 808.1
Tail Shoe Track Volume	45 0.063714	<u></u>	
Tall-Total State 180		为数据 1 1 76	4 图 4 4 4 4 2 9 7 0 第 2 6 4 3 2 0 3

	Production	n Casing	ar are	
	Ft 4. Cap.	XS Factor Lux	bbls. c	úft sx≕
Lead Open Hole Annulus	3950 # 0.03087	3.25	489618 - 2	2225,0 876.0
Lead Cased Hole Annulus	1550 0.034316	1 2	53:2 Ara	298.6 117.6
Lead Total		200	44915	2523.7 WHAT P998.6
Tail Open Hole Annulus	1750 0.03087	2.5	1354	758.3 4 565.9
Tail Shoe Track Volume	45 0 023257	1 156	77.110 gas	59 1.44
Tail/Total		100	136,1	4764.2 × 570.3

District I
1625 N. French Dr., Hobbs, NM 88240
District II,
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Form C-144 June 1, 2004

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Pit or Below-Grade Tank Registration or Closure
Is pit or below-grade tank covered by a "general plan"? Yes No

Type of action: Registration of a pit or below-grade tank Closure of a pit or below-grade tank		
Operator: CONOCOPHILLIPS CO. Telephon	ne: (832)486-2326 e-mail address: deborah.m	arberry@conocophillips.com
DO DOW 2107 WH 2 C100 HOLIGTON TW 77072		
Facility or well name: BURGER B-20 \$\frac{1}{5}\$ API#: \frac{30.025-3700}{0.025-3700} Qtr/Qtr \frac{A}{5} Sec \frac{20}{5} T \frac{20S}{6} R \frac{38E}{5}		
County: LEA Latitude Longitude NAD: 1927 1983 Surface Owner Federal State Private Indian		
Pit	Below-gradetank	
Type: Drilling X Production Disposal	Volume:bbl Type of fluid:	
Workover Emergency	Constructionmaterial:	
Lined X Unlined	Double-walled, with leak detection? Yes If not, explain why not.	
Liner type: Synthetic Thickness 12 mil Clay		
Pit Volumebbl		
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet	(20 points)
	(50 feet or more, but less than 100 feet)	(10 points)
	100 feet or more	(0 points)
	Yes	(20 points)
Wellhead protection area: (Less than 200 feet from a private domestic	No	(0 points)
water source, or less than 1000 feet from all other water sources.)		(o points)
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet	(20 points)
	200 feet or more, but less than 1000 feet	(10 points)
irrigation canais, utches, and perenina and epitemeral watercourses.)	1000 feet or more	(0 points)
	Ranking Score (Total Points)	
If this is a pit closure: (1) attach a diagram of the facility showing the pit's	relationship to other equipment and tanks. (2) Indic	ate disposal location: (check the onsite box if
your are burying in place) onsite offsite If offsite, name of facility		
remediationstart date and end date. (4) Groundwater encountered: No Yes If yes, show depth below ground surface ft. and attach sample results. (5)		
Attach soil sample results and a diagram of sample locations and excavations.		
AdditionalComments:		
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-gradetank has been/will be constructed or closed according to NMOCD guidelines, a general permit, or an (attached) alternative OCD-approved plan . Date:		
Your certification and NMOCD approval of this application/closuredoes not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or total laws and/or regulations.		
Approval: Printed Name/Title PETROLEUM ENGINE	R	
Printed Name/Title PETROLEUM ENGINEER	Signature	Date:

ConocoPhillips' General Plan for Pit Construction & Closure in Southeast New Mexico October 2005

In accordance with Rule 19.15.2.50(B)(2), the following information describes the construction and closure of drilling pits on COPC Southeast New Mexico (SENM) locations. This will become COPC's standard procedure on all SENM locations. If pits are constructed or closed out of the norm, a separate permit application will be submitted.

Drill Pit Construction:

General:

- Depth to Ground Water, Wellhead Protection Area & Distance to Nearest Surface Water Body ranking criteria will be site specific and information will be provided on APD or Sundry form C-103.
 - In the case where groundwater is encountered during the construction of a drilling pit, the NMOCD will be contacted and COPC will either try to find an alternative well location or use a closed steel tank system.
- The pit size and design is specific to well depth and location conditions.
- Topsoil will be stockpiled in the construction zone for later use in restoration.
- Pits will not to be located in natural drainages.
- Diversion ditches will be constructed and maintained so that runoff water from outside the location is not allowed to enter the pit.
- Under no circumstance will pits be cut and drained during the drilling operations.
- A well sign will be on location identifying ConocoPhillips as the operator.
- Waste material at construction sites shall be disposed of promptly at an appropriate waste disposal site. No trash shall be disposed of in the drilling pit.
- Immediately after cessation of drilling and completion pits shall have any visible or measurable layer of oil removed from the surface.
- Prior to any pit construction the OCD will be notified at least 48 hours in advance.

Reserve Pit

- Pits will be constructed so as not to leak, break or allow discharge of liquids or produced solids during the drilling operations.
- Pits will be lined with impervious material at least 12 mils thick, which meets long-term standards as referenced in the guidelines. Padding (hay or pad dirt) is used underneath the synthetic liner in rocky areas.
- The pit will have adequate capacity to maintain 2 feet of free board.
- The reserve pit will be fenced on three sides away from the pad during drilling and the fourth side fenced as soon as the rig moves out.

Blow Pit

- Pits will be constructed to allow gravity flow to discharge into lined drill pit.
- The lower half of the pit, which is toward the drain line to the fully lined reserve pit, will be lined.
- Design of pit has been changed to reduce potential for trapped fluid at tail end of pit
- Pit will be fenced on three sides away from the pad during drilling and the fourth side fenced as soon as the rig moves off.
- Corrective actions will be taken to ensure the pit does not contain fluid.
 - This includes pumping out trapped fluid or fluid in low spots.
 - Filling in low spots in the blow pit that are below the elevation of the drain pipe to the lined pit.
 - Removing any high spots in blow pit that could trap rain water.


Pit Monitoring and Maintenance

- COPC will perform an inspection of the location including pit compliance within 72 hours of rig moving
 off.
- COPC will review the OCD pit requirements and the requirements included in this document with all COPC and contract personnel responsible for construction and closure of pits.

Drill Pit Closure:

- Good faith effort is made to close pits within required timeframe on Federal wells (90 days) and State/Fee wells (6 months). If pits will remain open past due dates, an extension will be requested by sundry notice to allow pits to remain open.
- The BLM is notified 24 hours prior to fluid hauling on Federal wells.
- The NMOCD will be notified 48 hours prior to closing of any pit.
- Aeration of pit fluids will be confined within pit area.
- Wells which have not penetrated a salt section and where less than 9.5# brine was used during drilling will be encapsulated below-grade.
 - Encapsulation will be accomplished by mixing earthen materials with the pit contents to stiffen the pit contents, as necessary, folding the edges of the liner over the stiffened mud and cuttings and covering the encapsulated wastes and liner with a minimum of 3 feet of clean soil or like material that is capable of supporting native plant growth.
- Wells which have penetrated a salt section or 9.5# brine or greater was used during drilling may be capped and encapsulated insitu or deep trench buried and capped below-grade.
 - Capping and encapsulation insitu will be accomplished by mixing earthen materials with the pit contents, as necessary to stiffen the pit contents sufficiently to provide physical stability and support for the pit cover, folding the edges of the liner over the stiffened mud and cuttings; capping the pit with either a 1-foot thick clay cap compacted to ASTM standards, or a 20 mil minimum liner and covering the cap with a minimum of 3 feet of clean soil or like material that is capable of supporting native plant growth.
 - Deep trench burial and capping will be accomplished by digging a trench adjacent to the drilling pit; lining the trench with a 12 mil liner; mixing earthen materials with the pit contents, as necessary to stiffen the pit contents sufficiently to provide physical stability and support for the trench cap; capping the trench with either a 1-foot clay cap compacted to ASTM standards, or a 20 mil minimum liner and covering the cap with a minimum of 3 feet of clean soil or like material that is capable of supporting native plant growth.
 - When constructing the cap, the liner or clay cap will overlap the underlying pit or trench area by at least 3 feet in all directions.
- If the depth to groundwater is less that 50 feet or if the well is located less than 200 feet from a domestic fresh water well or spring or less than 1000 feet from any other fresh water well or if the distance to surface water body is less than 200 feet; the well is considered to be in sensitive area. (Keep in mind that these are not the only scenarios of sensitive area.)
 - A special encapsulation or solidification process prior to covering the pit contents will be accomplished by mixing the pit contents with cement or some other solidifying product at approximately a 3 to 1 ratio with samples taken and approved by the OCD prior to closure and then contents buried as described above.
 - OCD must give written approval on any special closure or encapsulation prior to any work being done.
- The reserve pit will then be backfilled, leveled and contoured so as to prevent run-off to surface water.
- The area will be reseeded with the appropriate seed mixture.
- The final grade of reserve pit (after reclamation) will be returned to natural contour of the land such that no pooling will occur.
- A closure report will be submitted on Form C-144 on all drilling pits.
- Note: On Federal wells, a BLM inspector may witness pit closures and may mandate specific modifications to that which is mentioned above. If this happens, OCD will be contacted for concurrence and modifications will be noted in the closure report.

ConocoPhillips

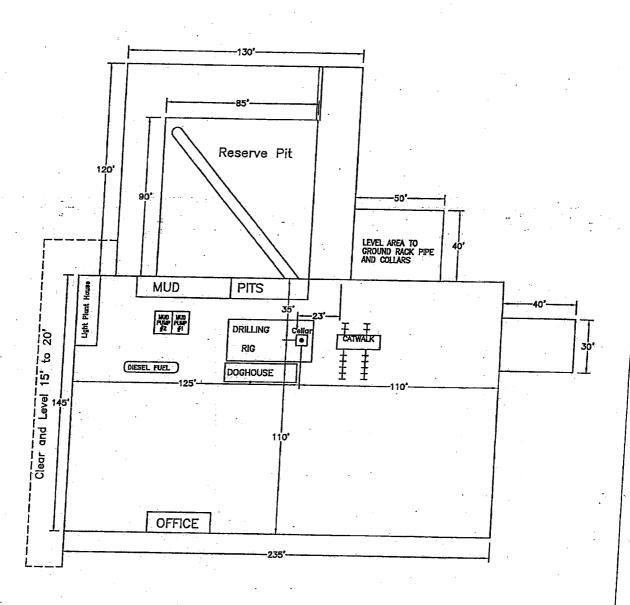

Sent: Tue 6/13/2006 9:20 AM

The sender of this message has requested a read receipt. Click here to send a receipt.

Mull, Donna, EMNRD

From:

Phillips, Dorothy, EMNRD

To:

Mull, Donna, EMNRD

Cc:

Attachments:

Subject:

None of these appear on Jane's list and all have blankets.

RE: Financial Assurance Requirement

From: Mull, Donna, EMNRD

Sent: Tuesday, June 13, 2006 9:06 AM

To: Phillips, Dorothy, EMNRD

Cc: Macquesten, Gail, EMNRD; Sanchez, Daniel J., EMNRD

Subject: Financial Assurance Requirement

Dorothy,

Is the Financial Assurance Requirement for these Operators OK?

Chevron USA Inc (4323) ConocoPhillips Co (217817) Range Operating Ne Mexico Inc (227588)

I have checked the Inactive well list for each operator.

Please let me know. Thanks and have a nice day. Donna