

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
310 Old Santa Fe Trail, Room 206
Santa Fe, New Mexico 87503

WELL API NO.
30-025-09305

5. Indicate Type of Lease

STATE ☐

FEE ☒

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE 'APPLICATION FOR PERMIT'
(FORM C-101) FOR SUCH PROPOSALS.)

7. Lease Name or Unit Agreement Name

Janda, J F NCT H

1. Type of Well:

OIL
WELL ☐

GAS
WELL ☒

OTHER

2. Name of Operator
Pogo Producing Company

8. Well No. 1

3. Address of Operator
PO Box 10340 Midland, Texas 79702

9. Pool name or Wildcat
Jalmat Gas

4. Well Location

Unit Letter I : 1980 Feet From The South Line and 660 Feet From The East Line

Section 11

Township 23S

Range 36E

NMPM

Lea

County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)
3419 GL

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐

PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐

CHANGE PLANS ☐

PULL OR ALTER CASING ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Well Bore: See Attached Wellbore Schematic

1. Spot 25 sx plug from 2894'-2600'. WOC and Tag


2. Circulate hole w/ 9.5# mud.

3. Spot 25 sx plug from 1400 to 1300'. WOC and Tag

4. Perforate casing at 350'.

5. Squeeze perforations w/ 115 sx. Leave hole full of cement.

6. Cut off wellhead and install dry hole marker. THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE H. Boatright TITLE Agent

DATE 7/28/03

TYPE OR PRINT NAME H. Boatright

TELEPHONE NO. 432/570-5382

(This space for State Use)

APPROVED BY

Hayward

OC FIELD REPRESENTATIVE II/STAFF MANAGER

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY


JUL 31 2003

Wellbore Schematic

JANDA, J F NCT H # 001

Wellbore ID #: A700223

Printed: 6/23/2003

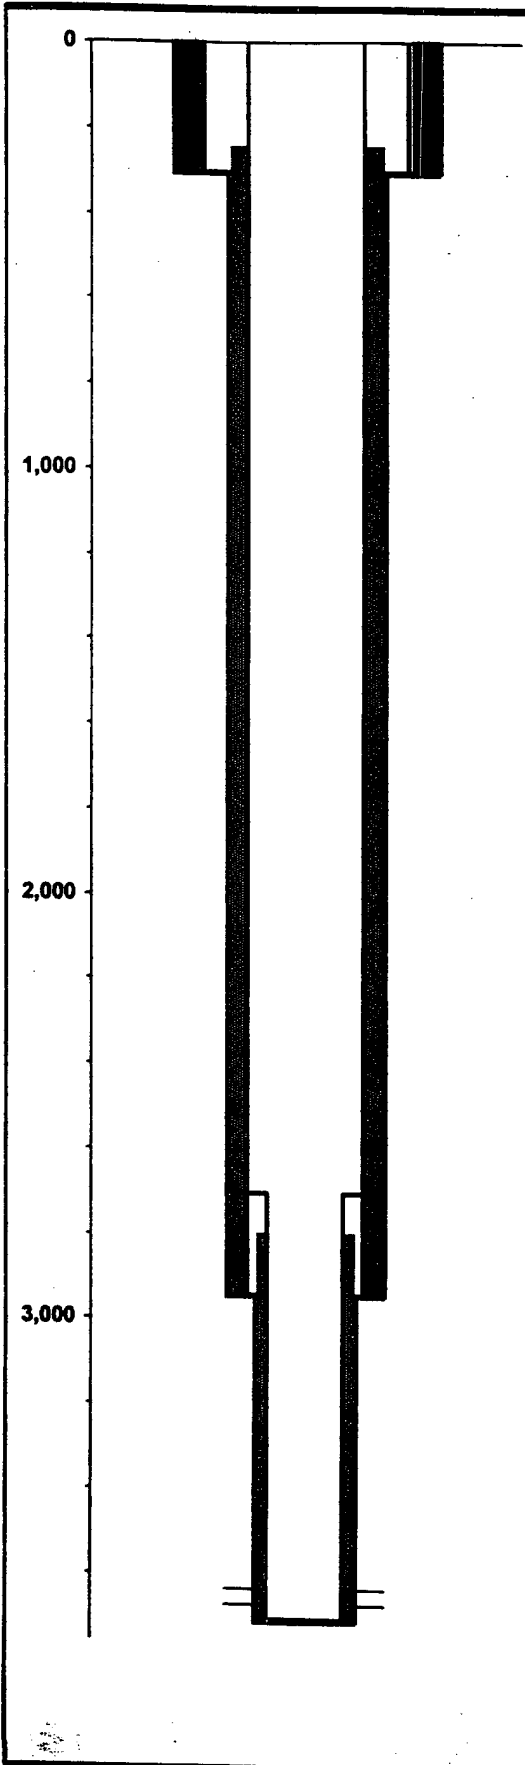

1980' FSL & 660' FEL	GL Elev:	3,419.00
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 11, 23S, 36E	Fill Depth:	
County, State: LEA, NM	PBTD:	3,712.00
Aux ID (API, etc.): 30-025-09305	TD:	3,714.00
KB = 7; DF = ; All Depths Corr To: KB	BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
12.2500	0.00	303.00	10/11/1949
7.3750	303.00	2,945.00	10/18/1949
4.7500	2,945.00	3,500.00	10/26/1949
4.7500	3,500.00	3,714.00	4/14/1961

Surface Casing

Date Ran: 10/12/1949

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	9	9.6250	36.00	H40	296.00	7.00	303.00

Production Casing String 1

Date Ran: 10/21/1949

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	91	5.5000	14.00	H40	2,937.00	7.00	2,944.00

DV TOOL @ 1348'

Production Casing String 2

Date Ran: 4/21/1961

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	32	3.5000	9.20		1,011.00	2,703.00	3,714.00

TX PATTERN SHOE RUN ON TOP INVERTED.

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
225			9.625	12.250	0.00	303.00	Circ
750			5.500	7.380	1,348.00	2,944.00	Est
125			5.500	7.380	250.00	1,348.00	Est

DV STG

#	Class	Weight	I D	O D	Top At	Btm At	TOC Per
100			3.500	4.750	2,800.00	3,714.00	TS

Perforations

Top	Bottom	Status	Opened	Closed	# / Ft	Ttl #	Open Hole?
2,944.00	3,500.00	PA	11/4/1949	4/14/1961			Yes

JALMAT GAS


3,641.00	3,676.00	TA	4/26/1961		4	32	
----------	----------	----	-----------	--	---	----	--

LANGLIE MATTIX - 4 EA 2' SELECTIONS

Wellbore Plugs and Junk

Top	Bottom	Type	Diameter	Solid	Date
3,712.00	3,714.00	Cmt	3.500	Yes	5/1/1961

SHOE




Wellbore Schematic

JANDA, J F NCT H # 001

Wellbore ID #: A700223

Printed: 6/23/2003

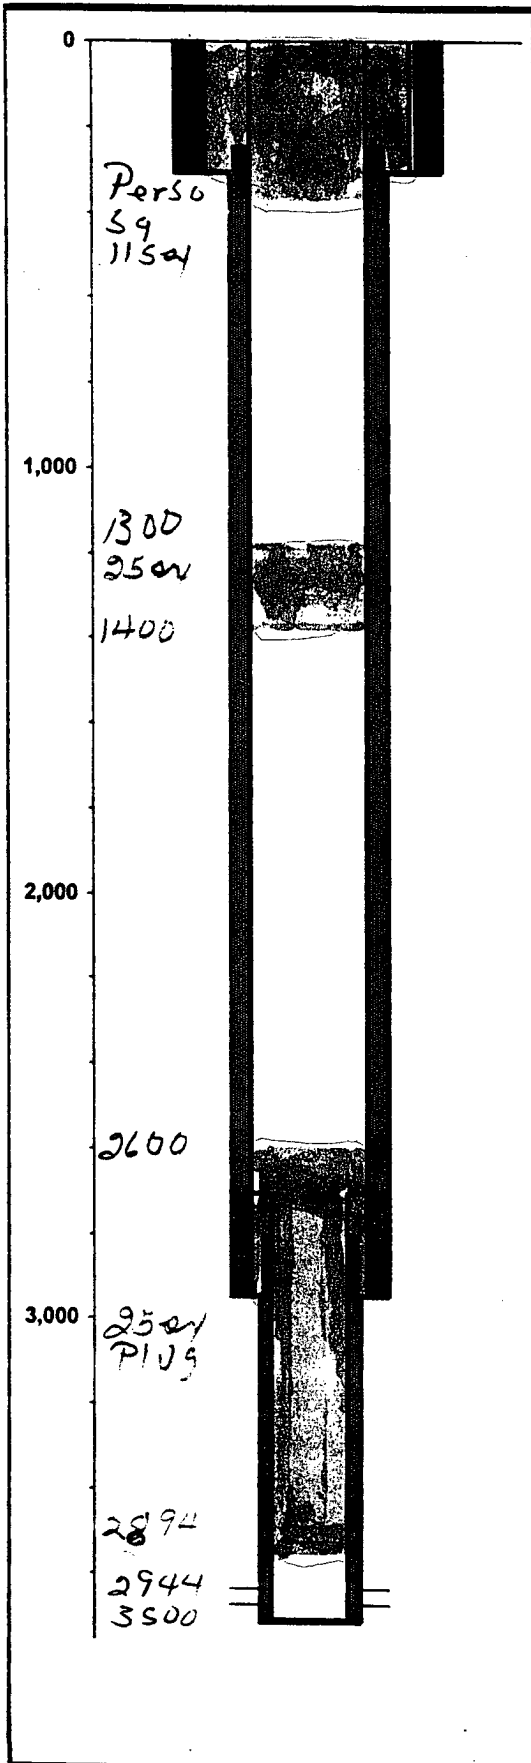

1980' FSL & 660' FEL

GL Elev: 3,419.00

Sec. Blk. Sur(Lbr, Lge, Sur) or (Sec, Twn, Rng): 11, 23S, 36E

Fill Depth:

County, State: LEA, NM

PBTD: 3,712.00

Aux ID (API, etc.): 30-025-09305

TD: 3,714.00

KB = 7; DF = ; All Depths Corr To: KB

BOP:

Hole Size

Diameter	Top At	Btm At	Date Drilled
12.2500	0.00	303.00	10/11/1949
7.3750	303.00	2,945.00	10/18/1949
4.7500	2,945.00	3,500.00	10/26/1949
4.7500	3,500.00	3,714.00	4/14/1961

Surface Casing

Date Ran: 10/12/1949

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	9	9.6250	36.00	H40	296.00	7.00	303.00

Production Casing String 1

Date Ran: 10/21/1949

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	91	5.5000	14.00	H40	2,937.00	7.00	2,944.00

DV TOOL @ 1348'

Production Casing String 2

Date Ran: 4/21/1961

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	32	3.5000	9.20		1,011.00	2,703.00	3,714.00

TX PATTERN SHOE RUN ON TOP INVERTED.

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
225			9.625	12.250	0.00	303.00	Circ
750			5.500	7.380	1,348.00	2,944.00	Est
125			5.500	7.380	250.00	1,348.00	Est
DV STG							
100			3.500	4.750	2,800.00	3,714.00	TS

Perforations

Top	Bottom	Status	Opened	Closed	# / Ft	Ttl #	Open Hole?
2,944.00	3,500.00	PA	11/4/1949	4/14/1961			Yes

JALMAT GAS

3,641.00	3,676.00	TA	4/26/1961		4	32	
----------	----------	----	-----------	--	---	----	--

LANGLIE MATTIX - 4 EA 2' SELECTIONS

Wellbore Plugs and Junk

Top	Bottom	Type	Diameter	Solid	Date
3,712.00	3,714.00	Cmt	3.500	Yes	5/1/1961

SHOE

