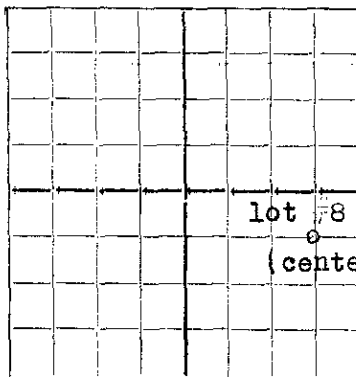



N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

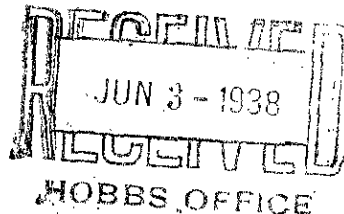

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE.

ORIGINAL

Stanolind Oil & Gas Company

Box F, Hobbs, New Mexico

Company or Operator R.C. Hill "A" Address Box F, Hobbs, New Mexico

Well No. 2 in NE-1/4 of Sec. 6, T. 21-S

Lease 37-E, N. M. P. M., Hardy Field, Lea County.

Well is 3300 feet south of the North line and 660 feet west of the East line of Sec. 6-21-37

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is Elmer C. Hill, Address Eunice, New Mexico

If Government land the permittee is _____, Address _____

The Lessee is _____, Address _____

Drilling commenced April 10 19 38 Drilling was completed May 24 19 38

Name of drilling contractor John G. Menke, Address Tyler, Texas

Elevation above sea level at top of casing 3492 feet.

The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from 3695 to 3785 No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.

No. 2, from _____ to _____ feet.

No. 3, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	40#	8	LW	281	Belled			Shut off surf
9-5/8"	36#	8	SS	1368	Baker			Protect salt
7"	22#	10	SS	3499	Baker			Protect oil p.

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2"	13"	298	200	Halliburton		
12"	9-5/8"	1385	500	"		
8-3/4"	7"	3515	300	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____ This well was neither shot nor acidized

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from Surface feet to 3520 feet, and from _____ feet to _____ feet
 Cable tools were used from 3520 feet to 3785 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing June 1, 38, 19____
 The production of the first 24 hours was 242 barrels of fluid of which 100 % was oil; _____ %
 emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
 If gas well, cu. ft. per 24 hours 480,000 Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Ed Findley _____, Driller H.H. Jones _____, Driller
J.M. Jackson _____, Driller S.H. Poteet _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 1st

day of June, 19 38

[Signature]
 Notary Public

My Commission expires JUN 1 1940

Hobbs, New Mexico June 1, 1938

Place Date
 Name [Signature]

Position Field Supt.

Representing Stanolind Oil & Gas Company
 Company or Operator

Address Box F, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
Surface	184	184	caliche, sand and gravel
184	1321	1137	red beds
1321	1500	179	anhydrite
1500	2610	1110	x salt (2610 base of salt)
2610	2912	302	anhydrite and grey lime
2912	3117	205	anhydrite and brown lime
3117	3462	345	lime
3462	3604	142	grey lime
3604	3630	26	white lime
3630	3660	30	grey lime
3660	3665	5	sandy lime
3665	3689	24	grey lime
3689	3695	6	sandy lime
3695	3700	5	grey lime (oil and gas)
3700	3719	19	sandy lime
3719	3731	12	sand (well flowing by heads)
3731	3740	9	hard grey lime
3740	3744	4	brown lime
3744	3785	41	grey lime ID