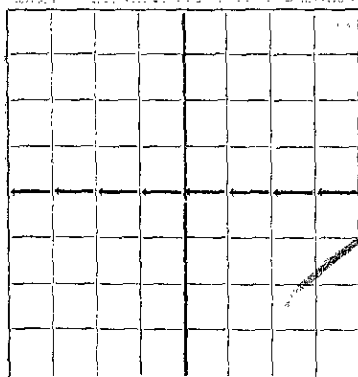
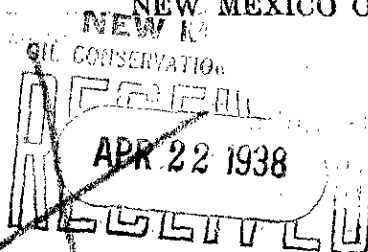


CROSBY, POSTAMADE


N.

NEW MEXICO OIL CONSERVATION COMMISSION

AREA 640 ACRES
LOCATE WELL CORRECTLY

Santa Fe, New Mexico

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

ORIGINAL

Skelly Oil Company

Tulsa, Oklahoma

Company or Operator

Address

E. C. Hill

Well No. 2

in NW NE/4 of Sec. 6

T. 21S

Lease

R. 37E, N. M. P. M., Hardy Area, Lea County.

Well is 660 feet south of the North line and 1980 feet west of the East line of Section 6 -

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is E. C. Hill, Address Eunice, New Mexico.

If Government land the permittee is, Address

The Lessee is, Address

Drilling commenced Feb. 5, 1938. Drilling was completed March 26, 1938

Name of drilling contractor Leo Drilling Company, Address Tulsa, Oklahoma

Elevation above sea level at top of casing 3471' feet.

The information given is to be kept confidential until --- 19---

OIL SANDS OR ZONES

No. 1, from 3665' to 3675' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
10-3/4"	40#	8	Smls	163'7"					
7" OD	24#	10	Smls	3531'11"					
5-1/2" OD	17#	10	Smls	296'			3657'	3780'	To be used a liner.
Tubing									
2"	4.7	10	Smls	3795'11"					

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12"	10 ⁵ / ₄ "	177'	150	Halliburton	(Cement circulated to bottom of Cel.	
8 ¹ / ₂ "	7" OD	3515'	500	Halliburton		
Tubing	2"	3771'	Swung			

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from Top feet to 3515' feet, and from _____ feet to _____ feet

Cable tools were used from 3515' feet to 3780' feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing Mar. 27, _____, 1938

The production of the first 24 hours was 165 barrels of fluid of which 100 % was oil; _____ %

emulsion; _____ % water; and _____ % sediment. Gravity, Be _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

John Yount _____, Driller T.W. Meador _____, Driller

C.B. Yowell _____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 8

day of March, 1938

[Signature]
Notary Public

My Commission expires Dec. 10, 1940

Hobbs, New Mexico Mar. 8, 1938

Place _____ Date _____
Name [Signature]

Position District Superintendent

Representing Skelly Oil Company
Company or Operator

Address Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
Top	38	38	Caliche
38	160	122	Sand & Gravel
160	205	45	Red Bed
205	300	95	Red Bed & Shells
300	500	200	Red Bed & Sand
500	750	250	Red Bed
750	1295	545	Red Bed & Shells
1295	1385	90	Anhydrite
1385	2450	1065	Salt & Anhydrite
2450	2540	90	Salt & Shells
2540	2585	45	Salt & Anhydrite
2585	2719	134	Anhydrite
2719	2745	26	Hard Anhydrite
2745	2857	112	Anhydrite
2857	2920	63	Brown Lime & Anhydrite
2920	2980	60	Brown Lime
2980	3168	188	Lime & Anhydrite
3168	3195	27	Lime & Gypsum
3195	3576	381	Hard Lime
3576	3580	4	Gray Lime
3580	3665	85	Lime
3665	3700	35	Soft Broken Lime
3700	3720	20	Hard Lime
3720	3780	60	Lime - w/ Sandy Streaks