

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

July 20, 1939

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico.
Gentlemen:


You are hereby notified that it is our intention to commence the drilling of a well to be known as

SKELLY OIL COMPANY

E. C. Hill

Well No. 3 In SW/4 NW/4

Company or Operator of Sec. 6, T. 21, R. 37, N. M. P.M., Lease Hardy Field, Lea County.

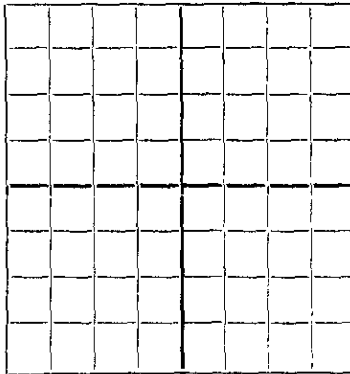

The well is 1870 feet (X) (S.) of the North line and 660 feet (E.) (X) of the West line of Section 6-21s-37e.

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. _____, Assignment No. _____

If patented land the owner is Elmer C. Hill

Address Eunice, New Mexico

If government land the permittee is _____

Address _____

The lessee is _____

Address _____

We propose to drill well with drilling equipment as follows:

Cable tools - from top to total depth...

HOBBS OFFICE

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: _____

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing OD	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
18"	16"	70#	SH	120'	Cemented	160
15"	13"	40#	SH	465'	Landed	
12 1/8"	10-3/4"	40#	SH	775'	Landed	
10 1/4"	8-5/8"	32#	SH	1220'	Landed	
8-1/4"	7"	24#	New	3575'	Cemented	250

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3600 feet.

Additional information: In cementing the 16" OD casing the cement will be circulated back into the bottom of the cellar. At the time the 7" OD Casing is run and cemented the 13", 10-3/4" and 8-5/8" OD casing will be pulled. At the time of cementing the two strings of casing above the cement shall be given sufficient time to thoroughly set before drilling the plug and testing.

Approved _____, 19____

except as follows:

JUL 22 1939

Sincerely yours,

SKELLY OIL COMPANY

Company or Operator

By _____

Position: District Superintendent

Send communication regarding well to

Name: SKELLY OIL COMPANY

Address: Hobbs, New Mexico

OIL CONSERVATION COMMISSION

By Ray Garthright

Title: OIL & GAS INSPECTOR