

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

(Other instructions on reverse side)
OCD-HOBBS
H-06-73

FUKM APPROVED
OMB NO. 1004-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. NM 16-0245247	
b. TYPE OF WELL OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/> SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME	
2. NAME OF OPERATOR McELVAIN OIL & GAS PROPERTIES, INC. (REED FISCHER 303-893-0933)		7. UNIT AGREEMENT NAME	
3. ADDRESS AND TELEPHONE NO. 1050 17TH STREET SUITE 1800 DENVER, CO. 80265		8. FARM OR LEASE NAME, WELL NO. (302325) McELVAIN FEDERAL # 8	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.) At surface 660' FWL & 1905' FSL SECTION 30 T18S-R34E LEA CO. NM At proposed prod. zone SAME		9. API WELL NO. 30-025-38012	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE Approximately 35 miles West of Hobbs New Mexico		10. FIELD AND POOL, OR WILDCAT E-K BONE SPRING	
15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) 660'		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA SECTION 30 T18S-R34E	
16. NO. OF ACRES IN LEASE 1280		12. COUNTY OR PARISH 13. STATE LEA CO. NEW MEXICO	
17. DISTANCE FROM PROPOSED* LOCATION TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 1650'		17. NO. OF ACRES ASSIGNED TO THIS WELL 80	
18. PROPOSED DEPTH 10,500'		20. ROTARY OR CABLE TOOLS ROTARY 16 1/2" IS	
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 3884' GR.		22. APPROX. DATE WORK WILL START* WHEN APPROVED	
23. PROPOSED CASING AND CEMENTING PROGRAM			
SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH
26"	Conductor 20"	NA	40'
17 1/2"	H-40 13 3/8"	48#	400'
12 1/2"	J-55 8 5/8"	32#	3700'
7 7/8"	N-80 5 1/2"	20#	10,500'
Cement to surface with Redi-mix. 440 Sx. circulate cement 1000 Sx. circulate cement 1155 Sx. Estimate TOC 3500' FS			

1. Drill 26" hole to 40'. Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
2. Drill 17 1/2" hole to 400'. Run and set 400' of 13 3/8" 48# H-40 ST&C casing. Cement with 440 Sx. of Class "C" cement + 1/4# Celo-flakes/Sx. + 2% CaCl circulate cement to surface.
3. Drill 11" hole to 3700'. Run and set 3700' of 8 5/8" 32# J-55 ST&C casing. Cement with 800 Sx. of 35/65/ Class "C" POZ, + 5% NaCl, + 5#/Sx LCM, + 6% Bentonite, tail in with 200 Sx. of Class "C" cement + additives, circulate cement to surface.
4. Drill 7 7/8" hole to 10,500'. Run and set 10,500' of 5 1/2" 20# N-80 LT&C casing. Cement with 1155 Sx. of Class "H" 50/50 POZ, + 5% bowc FL-25, + .5% bowc FL-52A, + 2% Bentonite. Estimate top of cement 3500' from surface.

Witness Surface Casing

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present production and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Jaet. Janice TITLE Agent DATE 05/27/06

(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
CONDITIONS OF APPROVAL IF ANY:

APPROVED BY /s/ Tony J. Herrell TITLE FIELD MANAGER DATE JUL 13 2006

*See Instructions On Reverse Side APPROVAL FOR 1 YEAR

DISTRICT I
1325 N. FRENCH DR., ROBBES, NM 88240

DISTRICT II
9301 W. GRAND AVENUE, ARTESIA, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
1220 S. ST. FRANCIS DR., SANTA FE, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-025-38012	Pool Code 21650	Pool Name E-K BONE SPRING
Property Code 302305	Property Name McELVAIN FEDERAL	Well Number 8
OGRID No. 22044	Operator Name McELVAIN OIL & GAS PROPERTIES, INC.	Elevation 3884'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	30	18-S	34-E		1905	SOUTH	660	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
80			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION


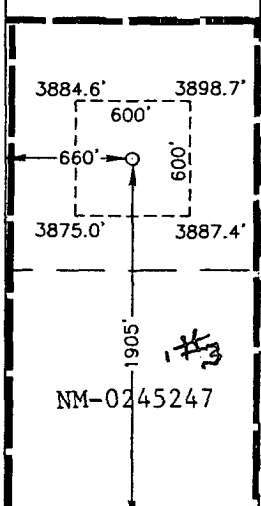
	<p>GEODETIC COORDINATES NAD 27 NME</p> <p>Y=625168.5 N X=723906.1 E</p> <p>LAT.=32°42'59.66" N LONG.=103°36'19.20" W</p>	<p>OPERATOR CERTIFICATION</p> <p>I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p><i>Joe T. Janica</i> Signature Date 05/27/06 Joe T. Janica Agent Printed Name</p> <p>SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>MAY 11, 2006</p> <p>Date Surveyed Signature & Seal of Professional Surveyor <i>Ronald J. Eidson</i> 06.11.0809 Certificate No. GARY. EIDSON 12641 RONALD J. EIDSON 3239</p>
--	--	---


EXHIBIT "A"

SECTION 30, TOWNSHIP 18 SOUTH, RANGE 34 EAST, N.M.P.M.,
LEA COUNTY, NEW MEXICO

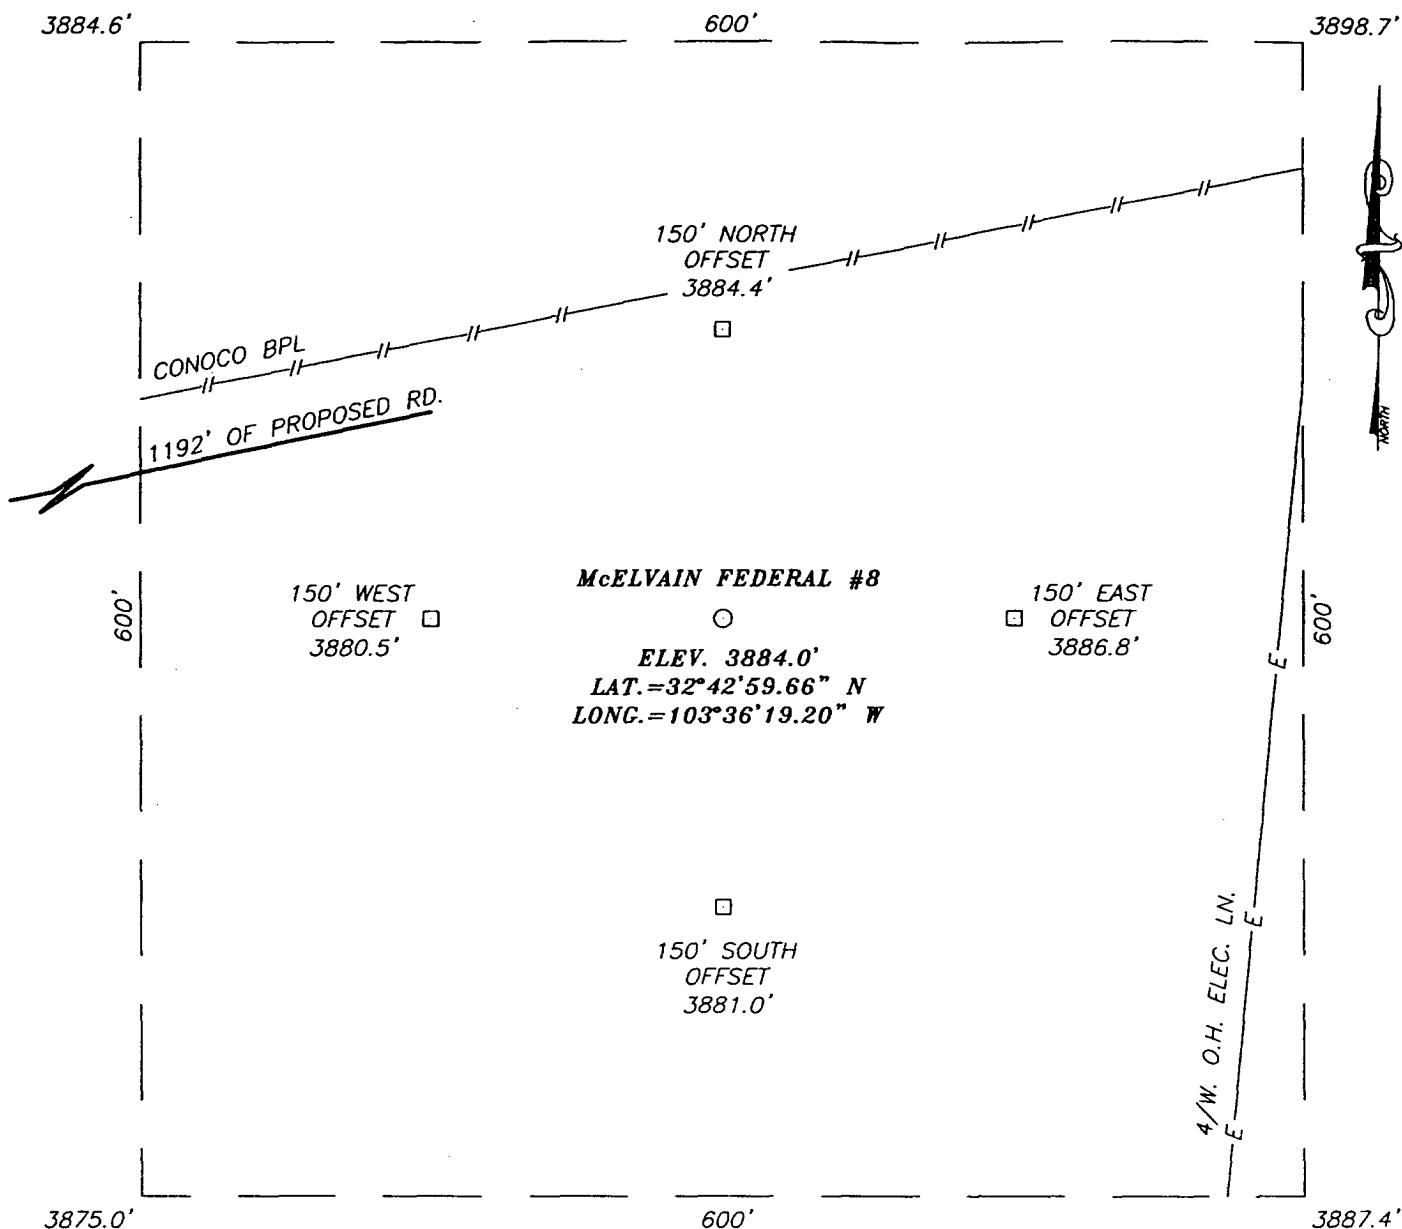

DIRECTIONS TO LOCATION

FROM THE INTERSECTION OF ST. HWY. #529 AND CO. RD. #125 (QUERECHO RD.), GO SOUTHWEST ON MAIN CALICHE ROAD APPROX. 0.1 MILES. TURN LEFT AND GO SOUTH APPROX. 1.0 MILES. VEER LEFT AND GO SOUTHEAST APPROX. 0.6 MILES. VEER LEFT AND GO EAST APPROX. 0.3 MILES. VEER RIGHT AND GO SOUTH APPROX. 0.6 MILES. VEER RIGHT AND GO SOUTHWEST APPROX. 0.2 MILES TO A TWO TRACK ROAD. TURN RIGHT AND GO WEST (ALONG CONOCO PIPELINE) APPROX. 0.4 MILES. THIS LOCATION IS APPROX. 150 FEET SOUTH.




McELVAIN OIL & GAS PROPERTIES, INC.


McELVAIN FEDERAL #8
 LOCATED 1905 FEET FROM THE SOUTH LINE
 AND 660 FEET FROM THE WEST LINE OF SECTION 30,
 TOWNSHIP 18 SOUTH, RANGE 34 EAST, N.M.P.M.,
 LEA COUNTY, NEW MEXICO.

Survey Date: 05/11/06	Sheet 1 of 1 Sheets
W.O. Number: 06.11.0809	Dr By: M.R.
Date: 05/16/06	Rev 1: N/A
Disk: CD#6	06110809
Scale: 1"=100'	


PROVIDING SURVEYING SERVICES
 SINCE 1946
JOHN WEST SURVEYING COMPANY
 412 N. DAL PASO
 HOBBS, N.M. 88240
 (505) 393-3117



SEC. 30 TWP. 18-S RGE. 34-E
SURVEY _____ N.M.P.M. _____
COUNTY LEA STATE NEW MEXICO
DESCRIPTION 1905' FSL & 660' FWL
ELEVATION 3884'
OPERATOR McELVAIN OIL & GAS
PROPERTIES, INC.
LEASE McELVIN FEDERAL

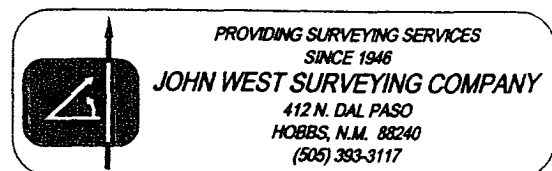

LOCATION VERIFICATION MAP

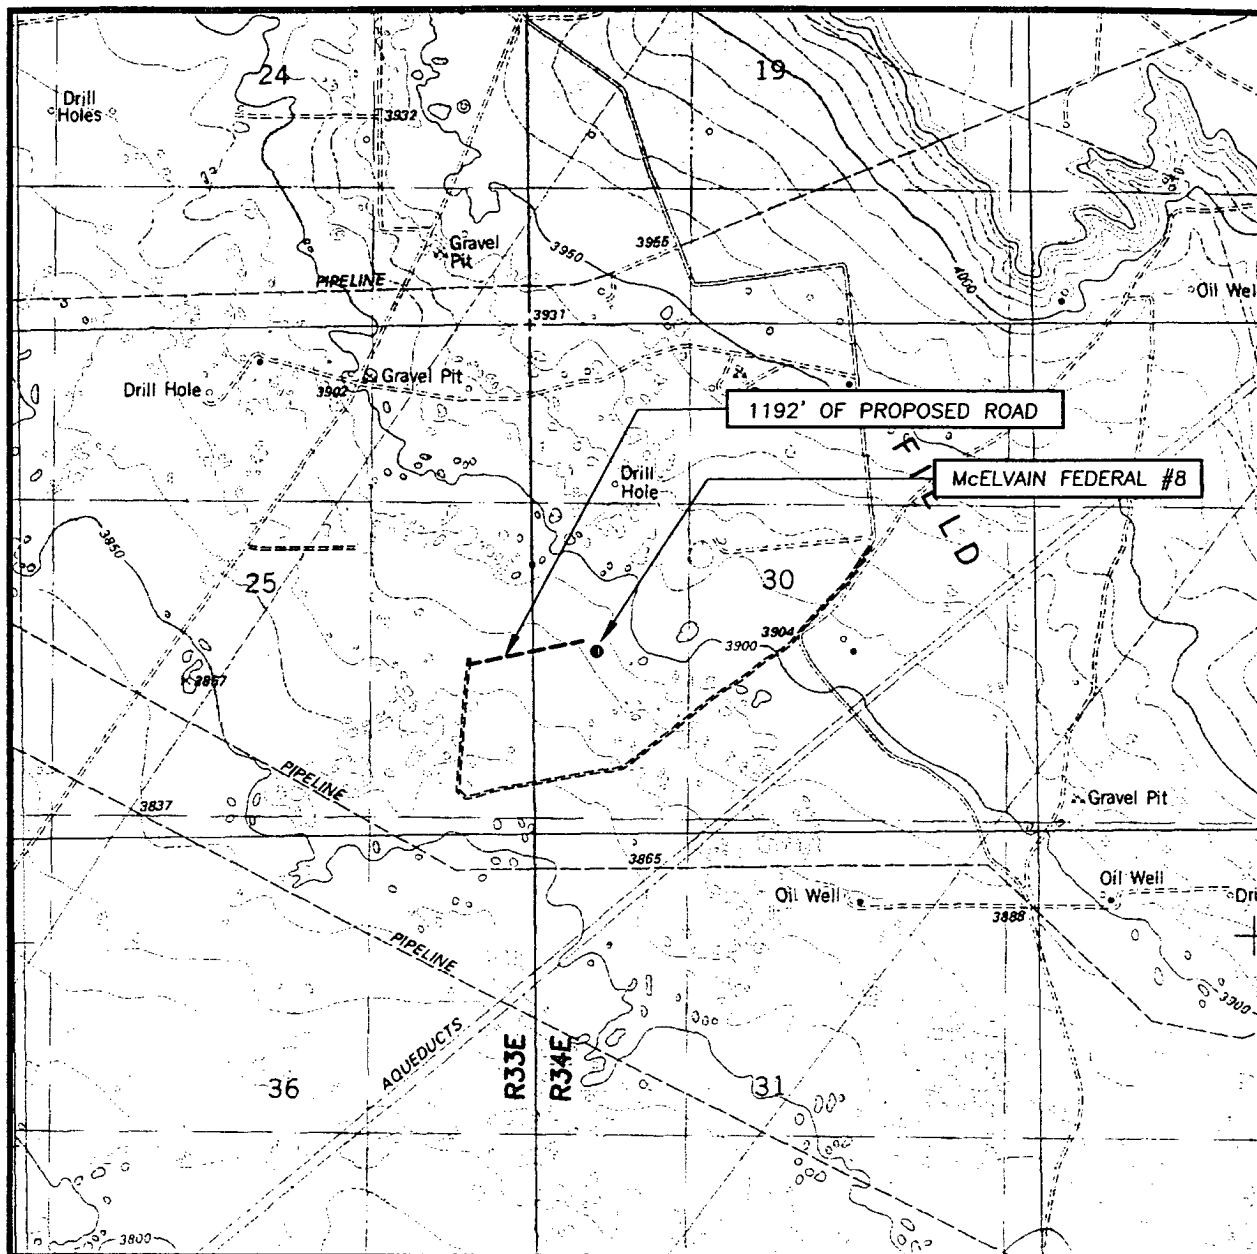

SCALE: 1" = 2000'

CONTOUR INTERVAL:
IRONHOUSE WELL, N.M. - 10'

SEC. 30 TWP. 18-S RGE. 34-E

SURVEY N.M.P.M.

COUNTY LEA STATE NEW MEXICO


DESCRIPTION 1905' FSL & 660' FWL


ELEVATION 3884'

OPERATOR McELVAIN OIL & GAS
PROPERTIES, INC.

LEASE McELVAIN FEDERAL

U.S.G.S. TOPOGRAPHIC MAP
IRONHOUSE WELL, N.M.

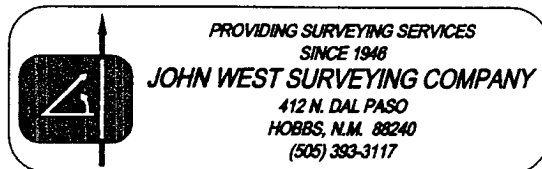


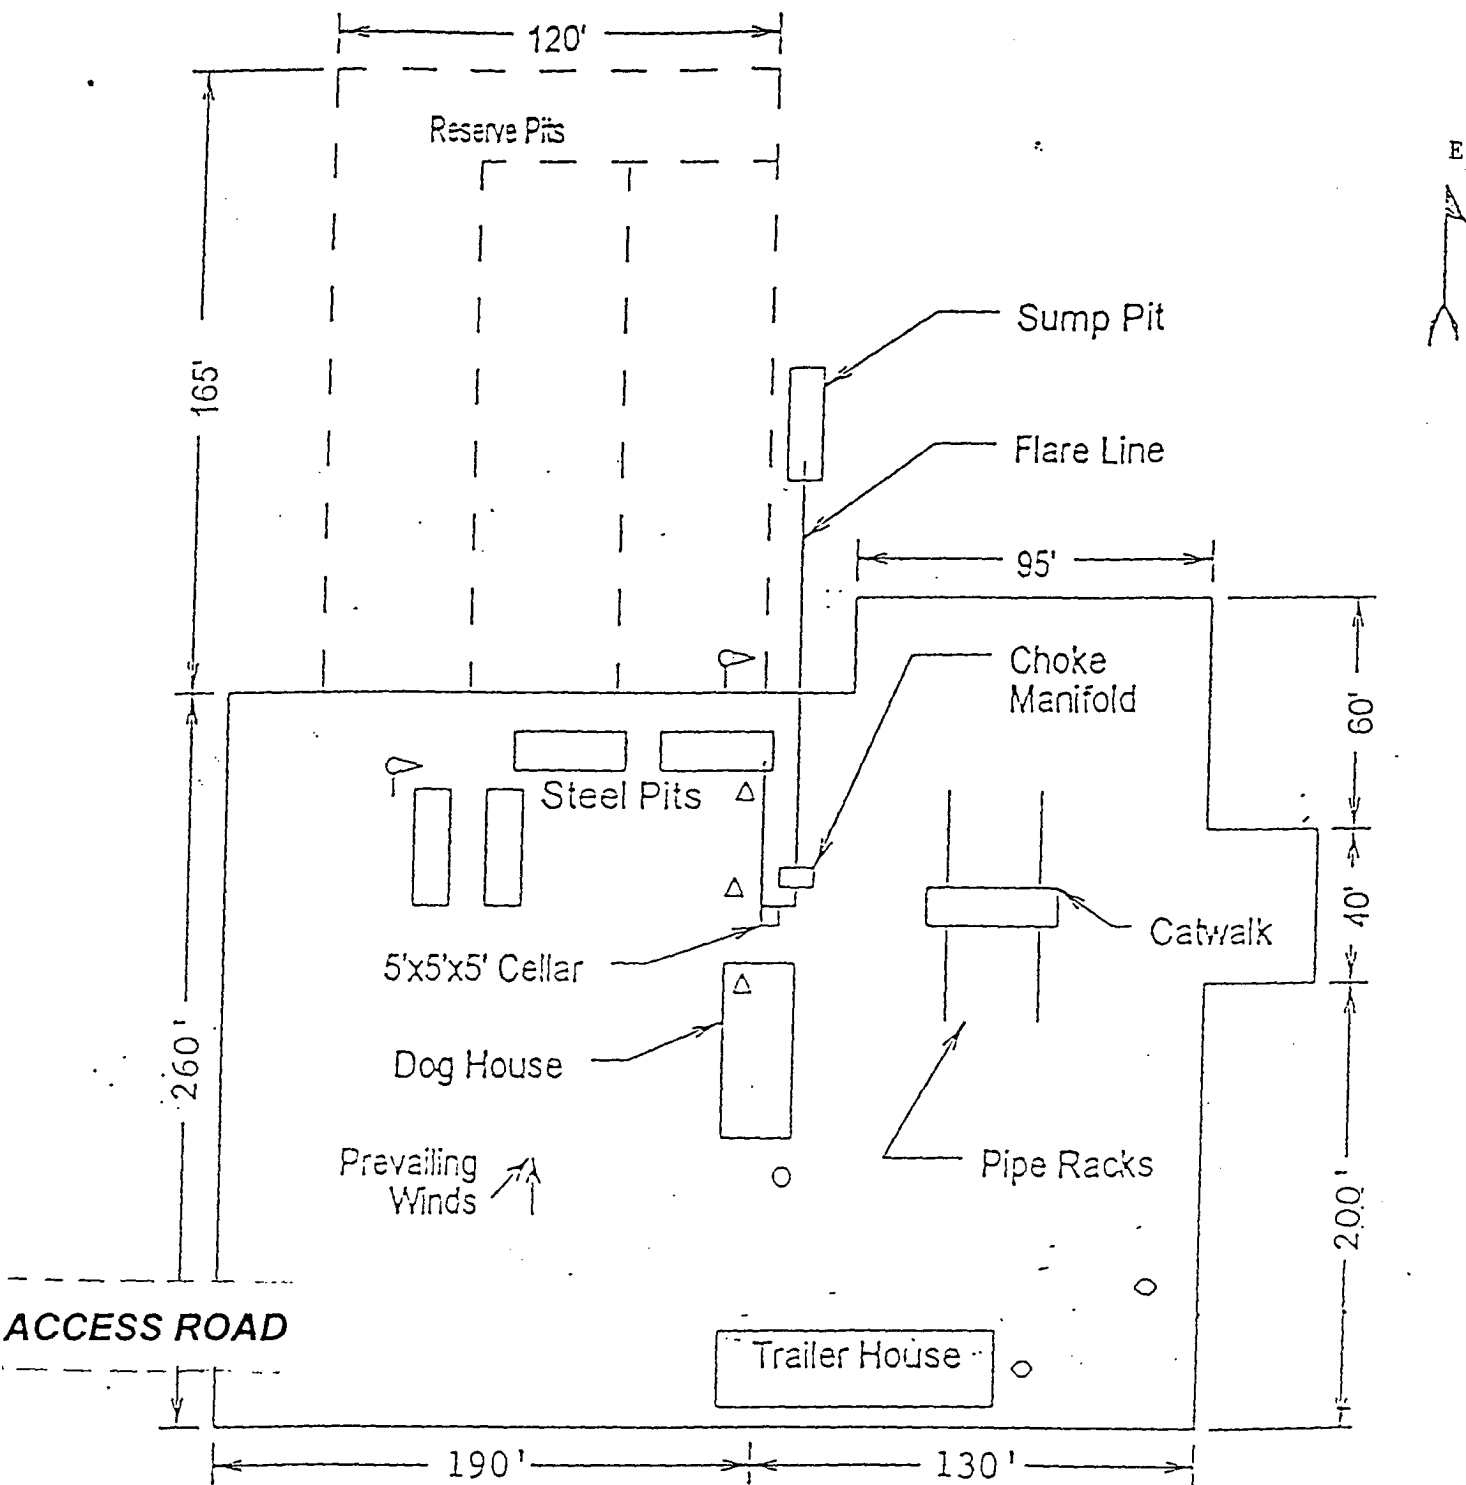

- Wind Direction Indicators (wind sock or streamers)
- △ H2S Monitors (alarms at bell nipple and shale)
- Briefing Areas
- Remote BOP Closing Unit
- Sign and Condition Flags

EXHIBIT "D"
RIG LAY OUT PLAT


McELVAIN OIL & GAS PROPERTIES
McELVAIN FEDERAL # 8
UNIT "L" SECTION 30
T18S-R34E LEA CO. NM

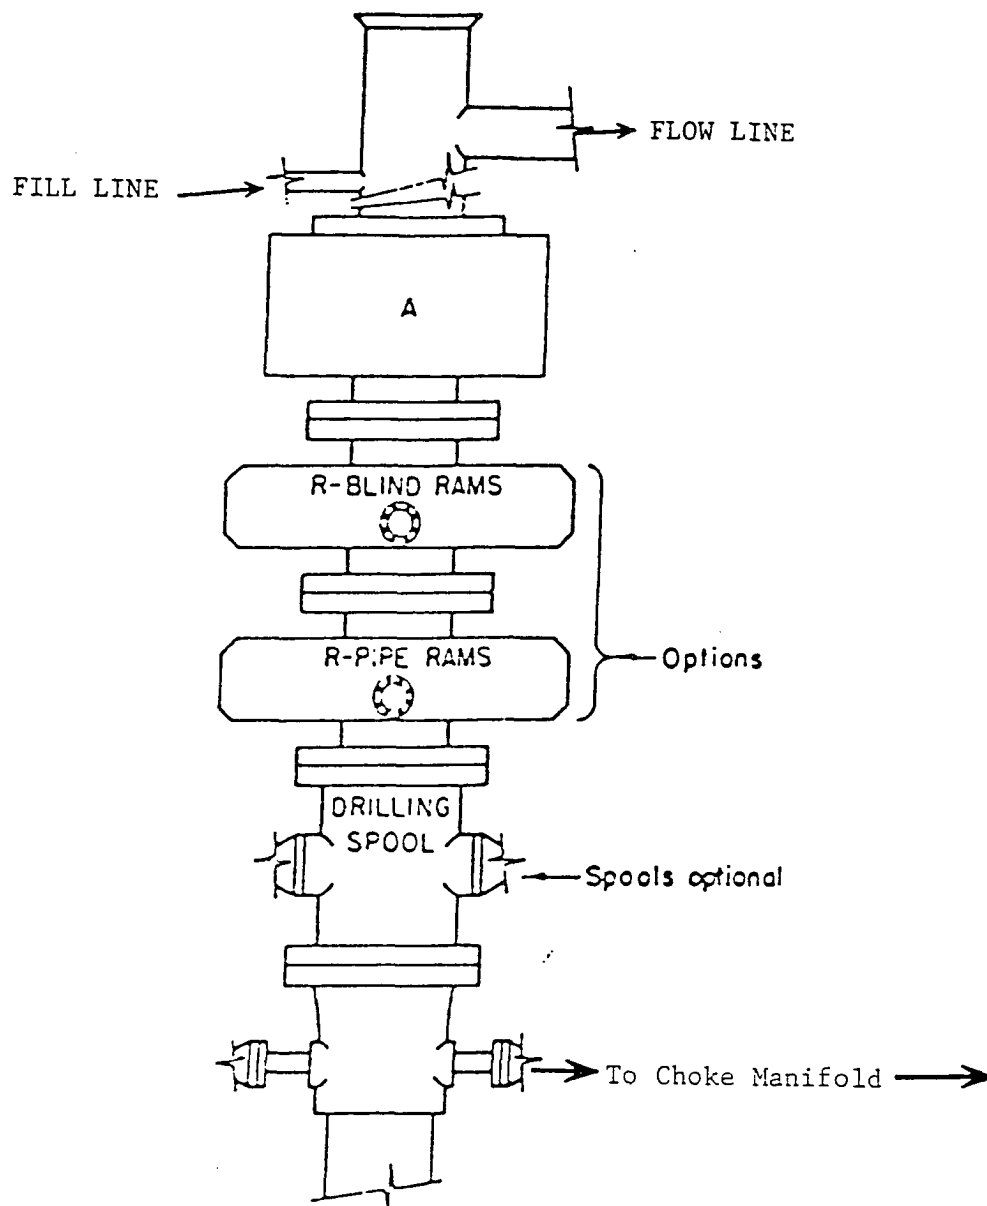

ARRANGEMENT SRRA

900 Series
3000 PSI WP

EXHIBIT "E"
SKETCH OF B.O.P. TO BE USED ON
McELVAIN OIL & GAS PROPERTIES
McELVAIN FEDERAL # 8
UNIT "L" SECTION 30
T18S-R34E LEA CO. NM

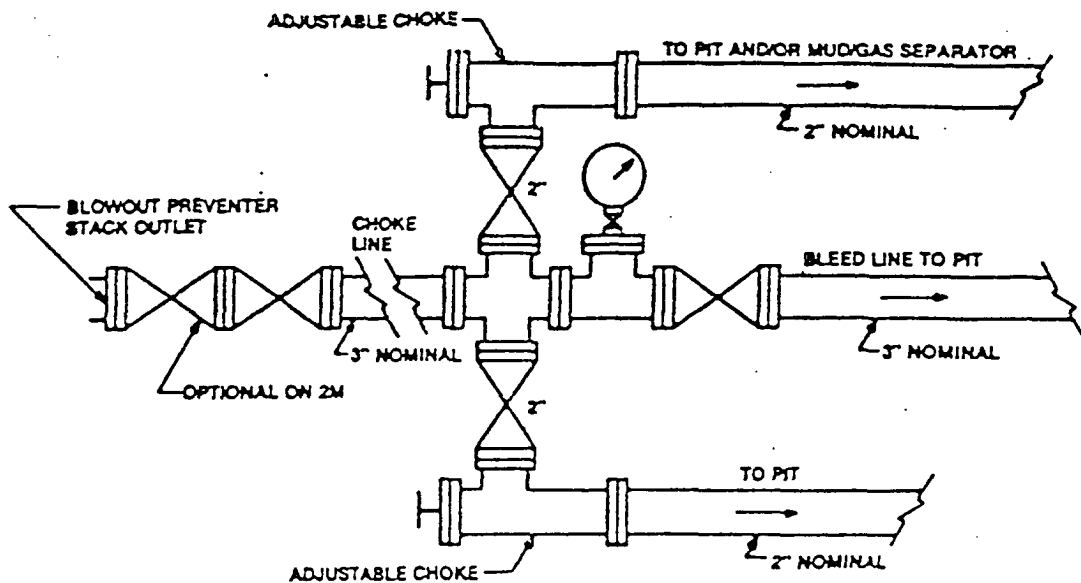

Typical choke manifold assembly for 3M WP system

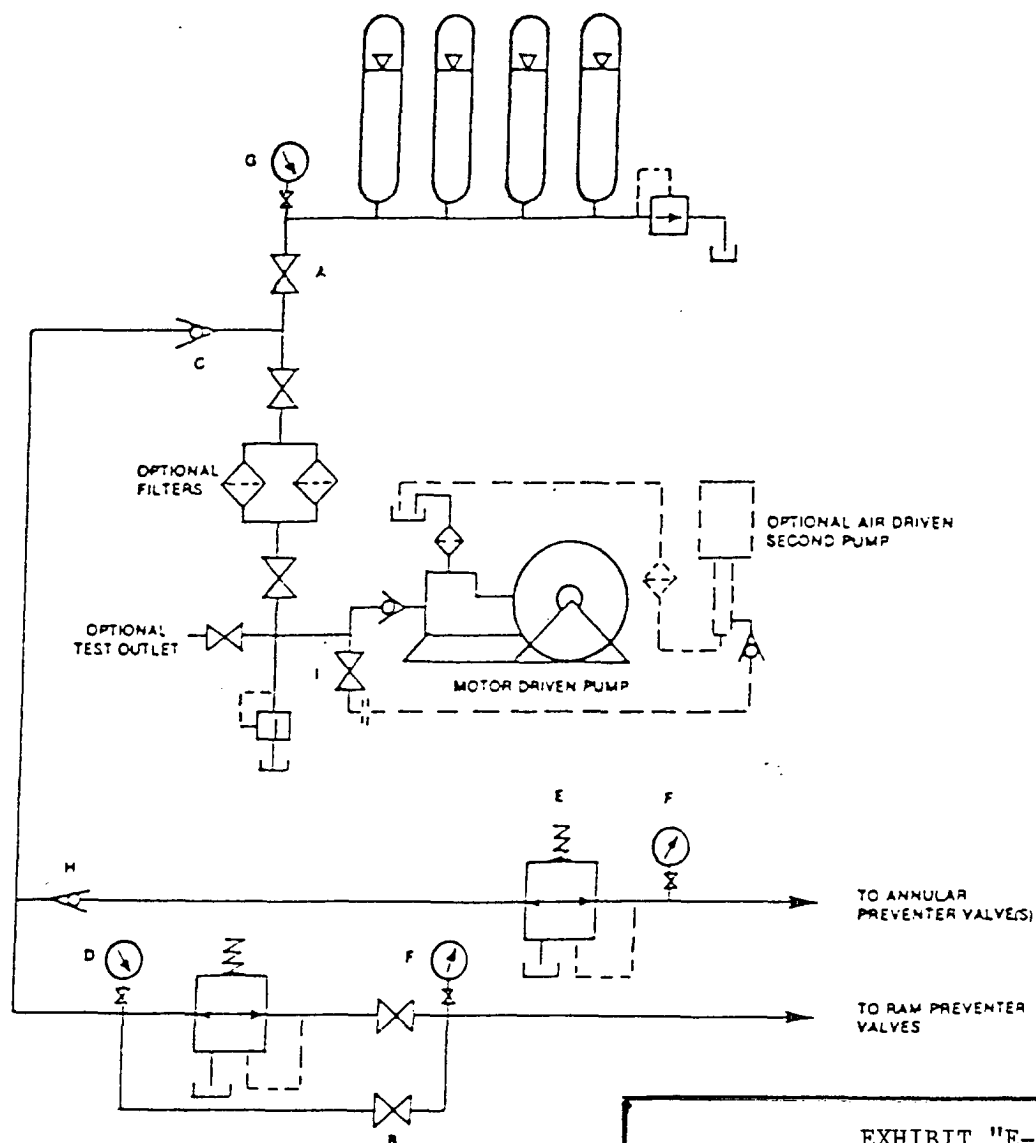


EXHIBIT "E-1"
CHOKE MANIFOLD & CLOSING UNIT

McELVAIN OIL & GAS PROPERTIES
McELVAIN FEDERAL # 8
UNIT "L" SECTION 30
T18S-R34E LEA CO. NM

APPLICATION TO DRILL

McELVAIN OIL & GAS PROPERTIES
 McELVAIN FEDERAL # 8
 UNIT "L" SECTION 30
 T18S-R34E LEA CO. NM

In response to questions asked under Section II of Bulletin NTL-6 the following information on the above well is provided for your consideration.

1. Location: 660' FWL & 1905' FSL SECTION 30 T18S-R34E LEA CO. NM
2. Elevation above Sea Level: 3884' GR.
3. Geologic name of surface formation: Quaternary Aeolian Deposits.
4. Drilling tools and associated equipment: Conventional rotary drilling rig using drilling mud as a circulating medium for solids removal from hole.
5. Proposed drilling depth: 10,500'
6. Estimated tops of geological markers:

Queen	4324'	1st Bone Spring Sd.	8784'
Delaware	5324	2nd Bone Spring Sd.	9409'
Bone Spring	7509'	3rd Bone Spring Sd.	10209'
7. Possible mineral bearing formations:

Queen	Oil
Delaware	Oil
Bone Spring	Oil
8. Casing program:

Hole size	Interval	OD of casing	Weight	Thread	Collar	Grade
26"	0-40'	20"	NA	NA	NA	Conductor
17½"	0-400'	13 3/8"	48#	8-R	ST&C	H-40
11"	0-3700'	8 5/8"	32#	8-R	ST&C	J-55
7 7/8"	0-10,500'	5½"	20#	8-R	LT&C	N-80

APPLICATION TO DRILL

McELVAIN OIL & GAS PROPERTIES
 McELVAIN FEDERAL # 8
 UNIT "L" SECTION 30
 T18S-R34E LEA CO. NM

9. CEMENTING & SETTING DEPTH:

20"	Conductor	Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
13 3/8"	Surface	Set 400' of 13 3/8" 48# H-40 ST&C Casing. Cement with 440 Sx. of Class "C" cement + 2% CaCl ₂ + 1/2# Celo Flakes/Sx, circulate cement to surface.
8 5/8"	Intermediate	Set 3700' of 8 5/8" 32# J-55 ST&C casing. Cement with 800 Sx. of 800 Sx. of Class "C" 35/65 POZ + 5% boww NACL + 1/2# Celo flakes/Sx, + 5#/Sx LCM-1, + 6% Bemntonite. tail in with 200 Sx. of Class "C". Circulate cement.
5 1/2"	Production	Set 10,500' of 5 1/2" 20# N-80 LT&C casing. Cement with 1155 Sx. of Class "H" 50/50 POZ cement + .5% boww FL-25, + .5% boww FL-52A, + 2% Bentonite, estimate top of cement 3500' from surface.

10. PRESSURE CONTROL EQUIPMENT: Exhibit "E" shows a 900 Series 3000 PSI working pressure B.O.P., consisting of an annular bag type preventor, middle blind rams and bottom pipe rams. The B.O.P. will be nipped up on the 8 5/8" casing and tested to API specifications. The B.O.P. will be operated at least once in each 24 hour period and the blind rams will be operated when drill pipe is out of hole on trips. Full opening stabbing valve and upper kelly cock will be utilized. Exhibit "E-1" shows a hydraulically operated closing unit and a 2" 3000 PSI choke manifold with dual adjustable chokes. No abnormal pressures or temperatures are expected.

11. PROPOSED MUD CIRCULATING SYSTEM:

DEPTH	MUD WT.	VISC.	FLUID LOSS	TYPE MUD SYSTEM
0-400'	8.6-9.0	34-36	NC	Fresh water spud mud add paper to control seepage.
400-3700'	8.4-10.1	28-34	NC	Brine water use paper to control seepage, use high viscosity sweeps to clean hole.
3700-8700'	8.4-9.3	28-29	Less than 15 cc	Cut Brine use paper to control seepage, use starch to control WL
8700-10,500'	9.0-9.3	30-32	15cc or less	Same as above use high viscosity sweeps to clean hole.

Sufficient mud materials will be kept on location at all times in order to combat lost circulation, or unexpected kicks. In order to run DST's, open hole logs, and casing viscosity and/or water loss may have to be adjusted to meet these needs.

APPLICATION TO DRILL

McELVAIN OIL & GAS PROPERTIES
McELVAIN FEDERAL # 8
UNIT "L" SECTION 30
T18S-R34E LEA CO. NM

12. LOGGING, CORING, AND TESTING PROGRAM:

- A. Open hole logs: Dual Induction, SNP, LDT, GAMMA RAY, CALIPER from TD back to 8 5/8" casing shoe.
- B. Gamma Ray, Neutron from 8 5/8" casing shoe back to surface.
- C. Mud logger on hole at 3700' and remain on hole to TD.
- D. No cores or DST's are planned at this time.

13. POTENTIAL HAZARDS:

No abnormal pressures or temperatures are expected. There is no known presence of H²S in this area. If H²S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated BHP 5000± PSI, and Estimated BHT 190°.

14. ANTICIPATED STARTING DATE AND DURATION OF OPERATION:

Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon after BLM approval and as soon as a rig will be available. Move in operation and drilling is expected to take 38 days. If production casing is run then an additional 30 days will be needed to complete well and construct surface facilities and/or lay flowlines in order to place well on production.

15. OTHER FACETS OF OPERATIONS:

After running casing, cased hole Gamma Ray, Neutron Collar logs will be run from TD back to all possible productive zones. The Bone Spring formation will be perforated and stimulated in order to establish production. The well will be swab tested and potentialized as an Oil well.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Proper use of safety equipment and life support systems.
 - D. Principle and operation of H₂S detectors, warning system and briefing areas.
 - E. Evacuation procedure, routes and first aid.
 - F. Proper use of 30 minute pressure demand air pack.
2. H₂S Detection and Alarm Systems
 - A. H₂S detectors and audio alarm system to be located at ball nipple, end of blosie line (mud pit) and on derrick floor or doghouse.
3. Windsock and/or wind streamers
 - A. Windsock at mudpit area should be high enough to be visible.
 - B. Windsock at briefing area should be high enough to be visible.
 - C. There should be a windsock at entrance to location.
4. Condition Flags and Signs
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag, normal safe condition. Yellow flag indicates potential pressure and danger. Red flag, danger, H₂S present in dangerous concentration. Only emergency personnel admitted to location.
5. Well control equipment
 - A. See exhibit "E"
6. Communication
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephoned will be available at most drilling foreman's trailer or living quarters.
7. Drillstem Testing
 - A. Exhausts will be watered.
 - B. Flare line will be equipped with an electric ignitor or a propane pilot light in case gas reaches the surface.
 - C. If location is near any dwelling a closed D.S.T. will be performed.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

8. Drilling contractor supervisor will be required to be familiar with the effects H_2S has on tubular goods and other mechanical equipment.
9. If H_2S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H_2S scavengers if necessary.

CONDITIONS OF APPROVAL - DRILLING

Well Name & No. 8 – McELVAIN FEDERAL
Operator's Name: McELVAIN OIL & GAS PROPERTIES, INC.
Location: 660' FWL & 1905' FSL – SEC 30 – T18S – R34E – LEA COUNTY
Lease: NM-0245247

I. DRILLING OPERATIONS REQUIREMENTS:

1. The Bureau of Land Management (BLM) is to be notified at the Roswell Field Office, 2909 West Second St., Roswell NM 88201, (505) 627-0272 for wells in Chaves and Roosevelt Counties; the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (505) 234-5909 or (505) 361-2822 (After hours) - for wells in Eddy County; and the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (505) 393-3612 for wells in Lea County, in sufficient time for a representative to witness:

- A. Spudding
- B. Cementing casing: 13-3/8 inch 8-5/8 inch 5-1/2 inch
- C. BOP tests

2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.

3. Submit a Sundry Notice (Form 3160-5, one original and five copies) for each casing string, describing the casing and cementing operations. Include pertinent information such as; spud date, hole size, casing (size, weight, grade and thread type), cement (type, quantity and top), water zones and problems or hazards encountered. The Sundry shall be submitted within 15 days of completion of each casing string. The reports may be combined into the same Sundry if they fall within the same 15 day time frame.

4. The API No. assigned to the well by NMOCD shall be included on the subsequent report of setting the first casing string.

II. CASING:

1. The 13-3/8 inch surface casing shall be set at 400 feet and cement circulated to the surface. If cement does not circulate to the surface the appropriate BLM office shall be notified and a temperature survey or cement bond log shall be run to verify the top of the cement. Remedial cementing shall be completed prior to drilling out that string. **Note: The operator will use the Alternative Conditions of Approval – Drilling (attached). Freshwater shall be used as the drilling medium from 400 ft to 1690 ft (Top Rustler Anhydrite).**

2. The minimum required fill of cement behind the 8-5/8 inch intermediate casing is **circulate cement to the surface.**

3. The minimum required fill of cement behind the 5-1/2 inch production casing is **cement shall tie back 200 ft into the 8-5/8 inch casing.**

III. PRESSURE CONTROL:

1. All BOP systems and related equipment shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2. The BOP and related equipment shall be installed and operational before drilling below the 8-5/8 inch casing shoe and shall be tested as described in Onshore Order No. 2. Any equipment failing to test satisfactorily shall be repaired or replaced.

2. Minimum working pressure of the blowout preventer and related equipment (BOPE) is 3000 psi.

3. The appropriate BLM office shall be notified in sufficient time for a representative to witness the tests.

- The tests shall be done by an independent service company.
- The results of the test shall be reported to the appropriate BLM office.
- Testing fluid must be water or an appropriate clear liquid suitable for sub-freezing temperatures. Use of drilling mud for testing is not permitted since it can mask small leaks.
- Testing must be done in a safe workman-like manner. Hard line connections shall be required.

ALTERNATIVE CONDITIONS OF APPROVAL - DRILLING

Drilling Fluids, Casing and Cementing Requirements for Most of Lea County:

Casing and Cementing

Surface casing is to be set at a sufficient depth to protect useable water zones and cement circulated to surface. In areas where the salt section (Salado) is present, surface casing should be set at least 25 feet into the top of the Rustler Anhydrite and cement circulated to the surface.

As an alternative, surface casing may be set through the Santa Rosa Formation or other potable water bearing zones and circulate cement to surface. For wells requiring an intermediate casing string, such string shall be cemented to the ground surface. In the case where intermediate casing is not required the operator shall case and cement the production hole to the ground surface.

While drilling from the surface casing to the Rustler formation it is recommended that operators periodically sweep the hole with viscous low water loss pills to help build a filter cake across useable water zones in the redbeds.

Drilling Fluid

Fresh water or fresh water spud mud shall be used to drill to surface casing depth. If surface casing is set at a lesser depth than the top of the Rustler formation., fresh water spud mud may be used to drill down to the first salt in the Rustler Formation. after which brine or fresh water may be used.

Non-toxic or biodegradable water based polymers, drilling paper, starch and gels may be used in the mud system in order to retard seepage into the redbeds.

Two to five percent diesel or crude oil may be used in the redbed section in order to control heaving shales and mudstones.

Caustics and Lime shall not be used in the red beds but may be added when the Rustler formation is reached. However, sodium carbonate maybe used for alkalinity or ph control while drilling the redbeds above the Rustler formation.

Additionally, questions of whether an additive may be used should be referred to the Roswell Field office.

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
March 12, 2004

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes ☐ No ☐

Type of action: Registration of a pit or below-grade tank ☒ Closure of a pit or below-grade tank ☐

Operator: McELVAIN OIL & GAS PROPERTIES, INC. Telephone: 303-893-0933 e-mail address: _____
Address: 1050 17th STREET SUITE 1800 DENVER, COLORADO 80265
Facility or well name: McELVAIN FEDERAL # 8 API #: 30-025-38012 U/L or Qtr/Qtr L Sec 30 T 18 S 33E
County: LEA Latitude 32°42'59.7" Longitude 103°36'19.2" NAD: 1927 ☐ 1983 ☐ Surface Owner Federal ☒ State ☐ Private ☐ Indian ☐

Pit	Below-grade tank	
Type: Drilling <input checked="" type="checkbox"/> Production <input type="checkbox"/> Disposal <input type="checkbox"/> Workover <input type="checkbox"/> Emergency <input type="checkbox"/> Lined <input checked="" type="checkbox"/> Unlined <input type="checkbox"/> Liner type: Synthetic <input checked="" type="checkbox"/> Thickness <u>12</u> mil Clay <input type="checkbox"/> Volume <u>18M</u> bbl	Volume: _____ bbl Type of fluid: _____ Construction material: _____ Double-walled, with leak detection? Yes <input type="checkbox"/> If not, explain why not. _____	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.) <u>100'+</u>	Less than 50 feet (20 points) 50 feet or more, but less than 100 feet (10 points) 100 feet or more 0 (0 points) 0	
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes (20 points) No 0 (0 points) 0	
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet (20 points) 200 feet or more, but less than 1000 feet (10 points) 1000 feet or more 0 (0 points) 0	
	Ranking Score (Total Points) 0	0

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location:

onsite ☐ offsite ☐ If offsite, name of facility: _____. (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☐ Yes ☐ If yes, show depth below ground surface _____ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐, or an (attached) alternative OCD-approved plan ☐.

Date: 06/06/06

Printed Name/Title Joe T. Janica / Agent

Signature Joe T. Janica

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval: JUL 19 2006

Date: _____

Printed Name/Title PETROLEUM ENGINEER

Signature [Signature]

