

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

2040 Pacheco St.
Santa Fe, NM 87505

WELL API NO. 30-025-07627
Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
State Oil & Gas Lease No.
Lease Name or Unit Agreement Name McKinley
Well No. 12
Pool name or Wildcat Bowers; Seven Rivers
Well Location Unit Letter <u>C</u> : <u>660</u> Feet From The <u>North</u> Line and <u>2310</u> Feet From The <u>West</u> Line Section <u>5</u> Township <u>19 S</u> Range <u>38 E</u> NMPM <u>Lea</u> County
Elevation (Show whether DF, RKB, RT, GR, etc.)

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

Type of Well: OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER TAD <input type="checkbox"/>
Name of Operator Occidental Permian LTD
Address of Operator 1017 W. Stanolind Rd. Hobbs, New Mexico
Well Location Unit Letter <u>C</u> : <u>660</u> Feet From The <u>North</u> Line and <u>2310</u> Feet From The <u>West</u> Line Section <u>5</u> Township <u>19 S</u> Range <u>38 E</u> NMPM <u>Lea</u> County
Elevation (Show whether DF, RKB, RT, GR, etc.)

11

Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ANBANDONMENT ☒
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

¹²Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

TD 3216' 9 5/8" @ 450' Circ. 5 1/2" 3140' TOC @ 950' OH 3140'-3216' CIBP @ 3090'


5-7-03 Tag existing CIBP @ 3090' Circ. well w/ M.L.F. Spot 25 sks of cement 3090'-2834' Spot 25 sks of cement 2705'-2458'
Spot 25 sks of cement 1612'-1365'

5-8-03 Perf @ 500' Pumped 240 sks of cement, lost circulation. Tagged @ 68'

5-9-03 Spot 10 sk surface plug 60'-surface

Cut off wellhead and anchors 4' BGL. Cap well. Install dry hole marker 4' underground.

Approved as to plugging of the Well Bore.
Liability under bond is retained until
surface restoration is completed.

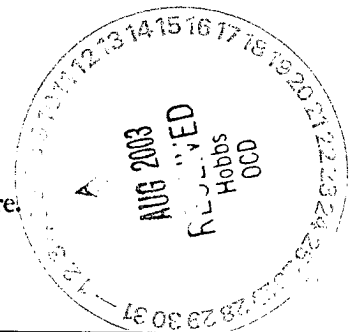

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Robert Gilbert TITLE SR. Engr. Tech DATE 5-13-03

TYPE OR PRINT NAME Robert Gilbert TELEPHONE NO.

(This space for State Use)

APPROVED BY Harry W. Wink FIELD REPRESENTATIVE II/STAFF MANAGER DATE AUG 07 2003
CONDITIONS OF APPROVAL, IF ANY